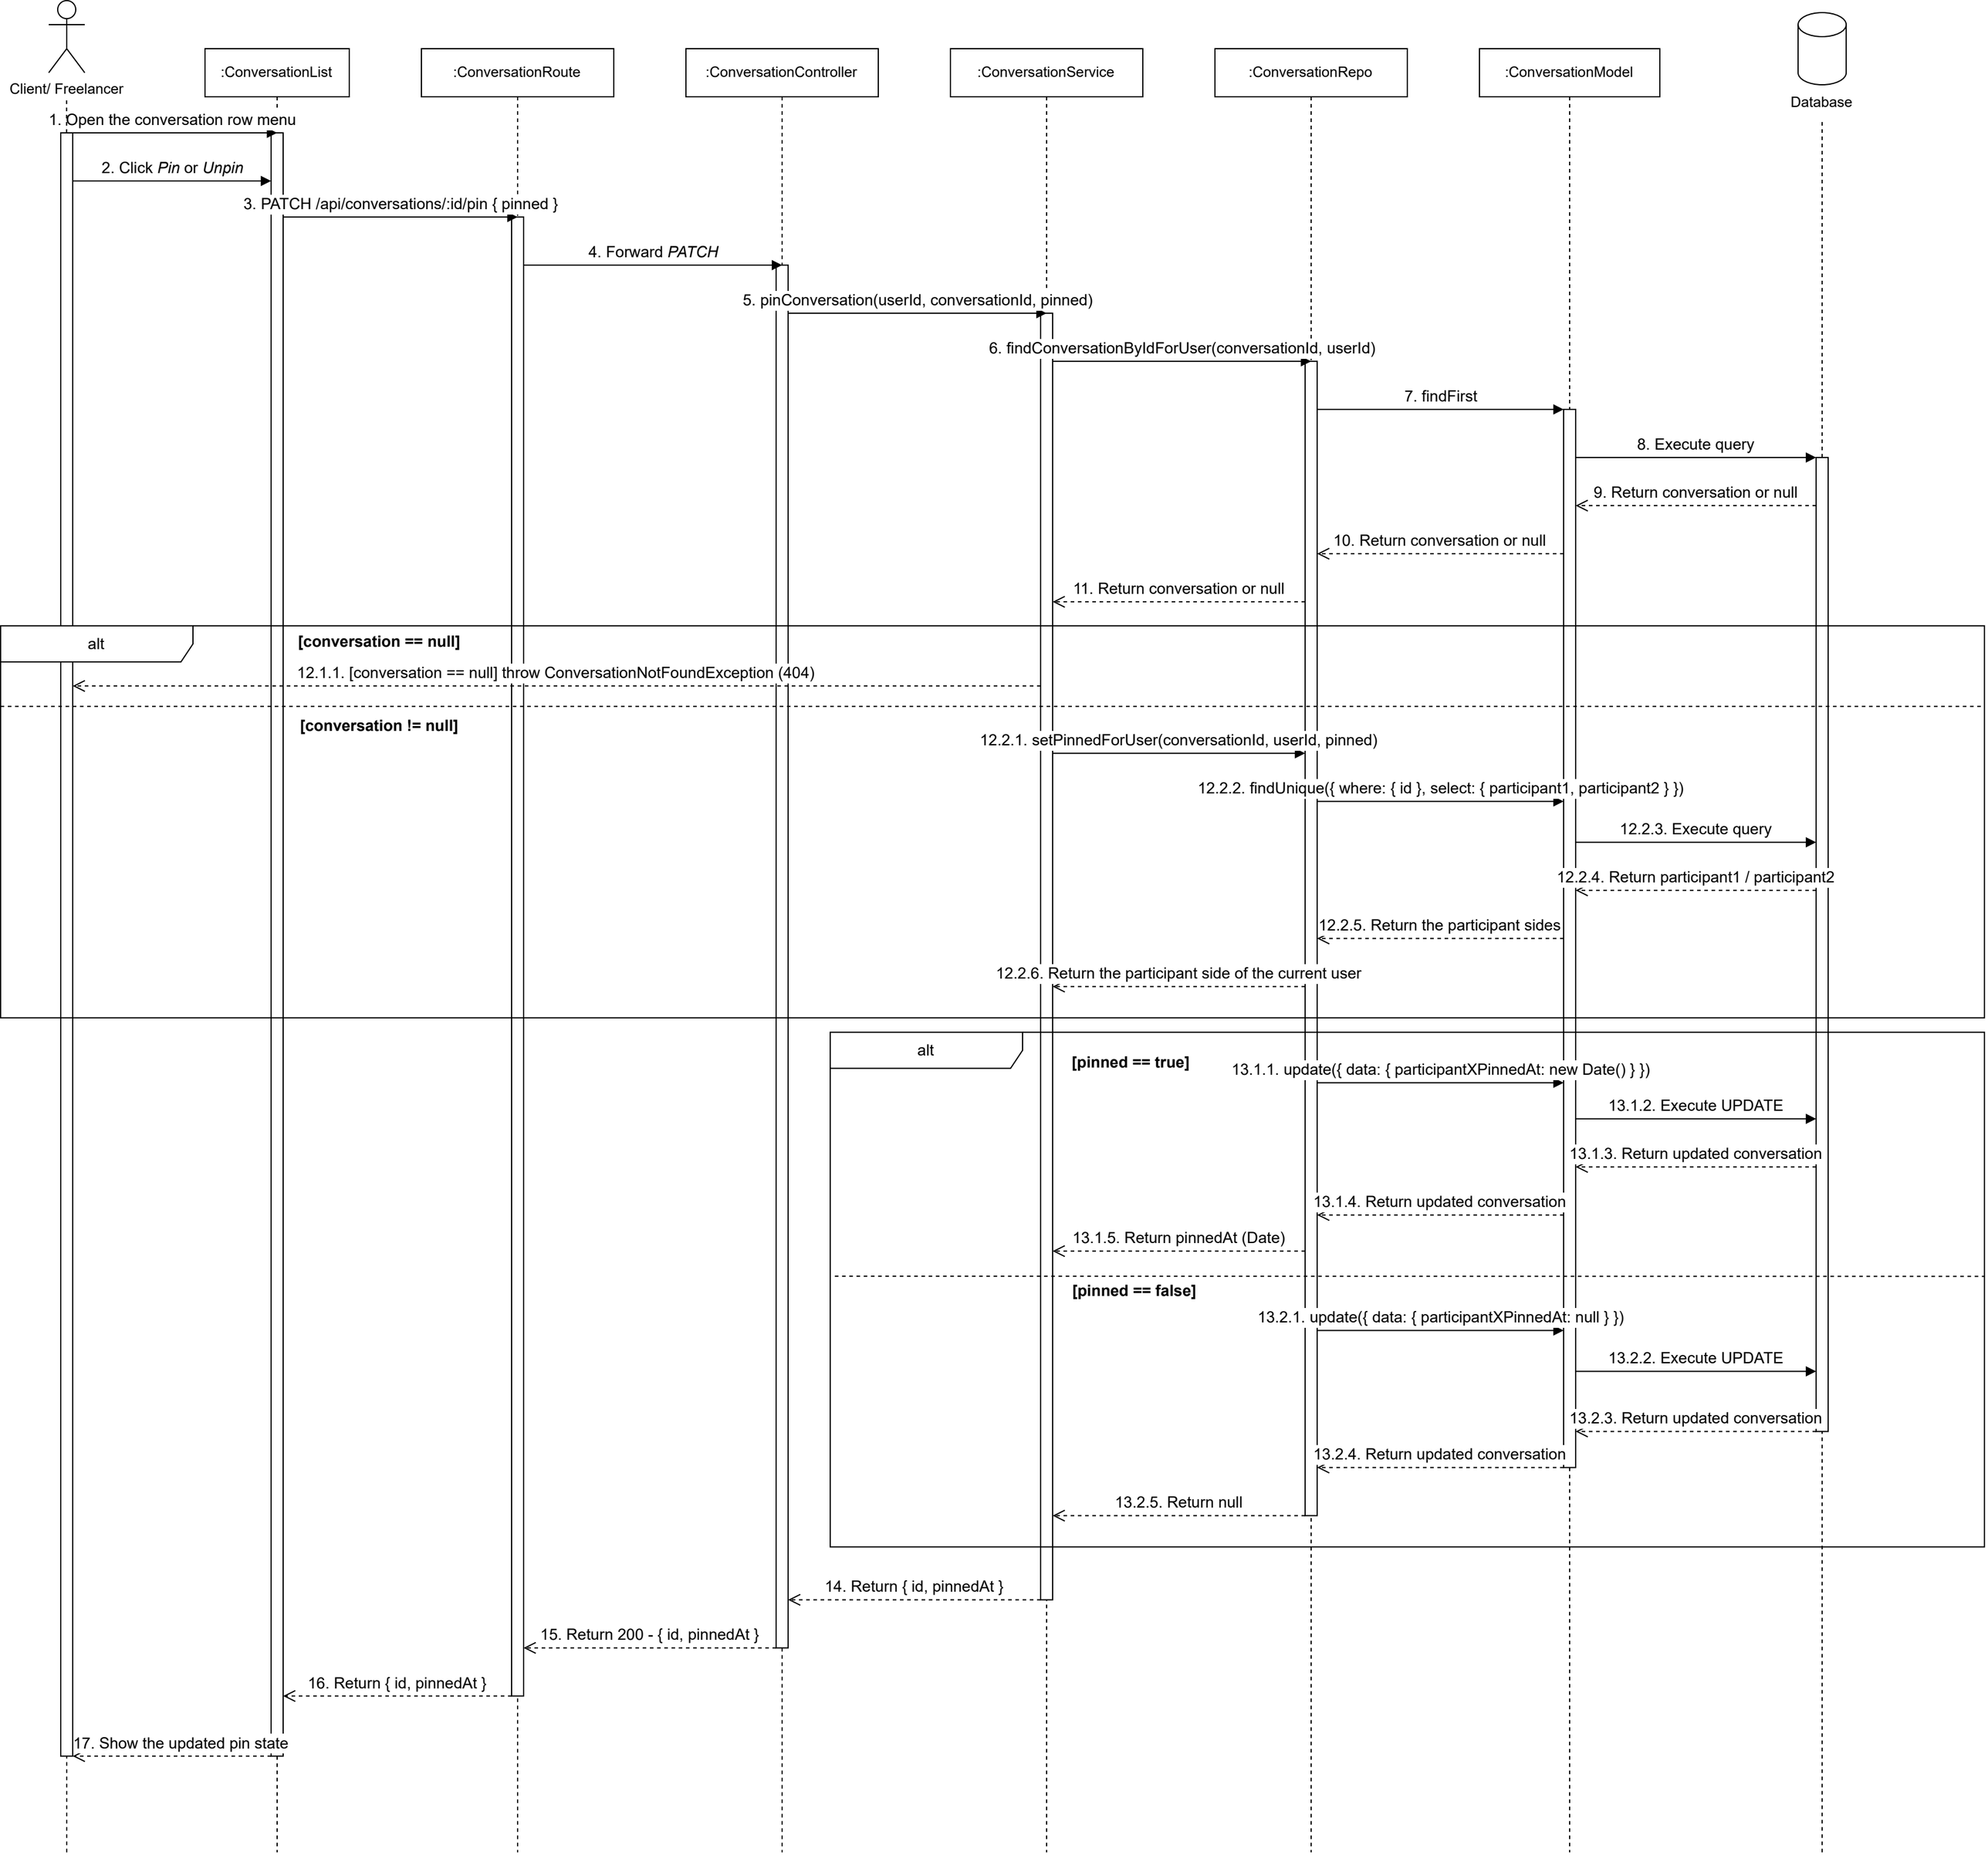

Client/ Freelancer
:ConversationList
:ConversationRoute
:ConversationController
:ConversationService
:ConversationRepo
:ConversationModel
Database
1. Open the conversation row menu
2. Click Pin or Unpin
3. PATCH /api/conversations/:id/pin { pinned }
4. Forward PATCH
5. pinConversation(userId, conversationId, pinned)
6. findConversationByIdForUser(conversationId, userId)
7. findFirst
8. Execute query
9. Return conversation or null
10. Return conversation or null
11. Return conversation or null
alt
[conversation == null]
12.1.1. [conversation == null] throw ConversationNotFoundException (404)
[conversation != null]
12.2.1. setPinnedForUser(conversationId, userId, pinned)
12.2.2. findUnique({ where: { id }, select: { participant1, participant2 } })
12.2.3. Execute query
12.2.4. Return participant1 / participant2
12.2.5. Return the participant sides
12.2.6. Return the participant side of the current user
alt
[pinned == true]
13.1.1. update({ data: { participantXPinnedAt: new Date() } })
13.1.2. Execute UPDATE
13.1.3. Return updated conversation
13.1.4. Return updated conversation
13.1.5. Return pinnedAt (Date)
[pinned == false]
13.2.1. update({ data: { participantXPinnedAt: null } })
13.2.2. Execute UPDATE
13.2.3. Return updated conversation
13.2.4. Return updated conversation
13.2.5. Return null
14. Return { id, pinnedAt }
15. Return 200 - { id, pinnedAt }
16. Return { id, pinnedAt }
17. Show the updated pin state