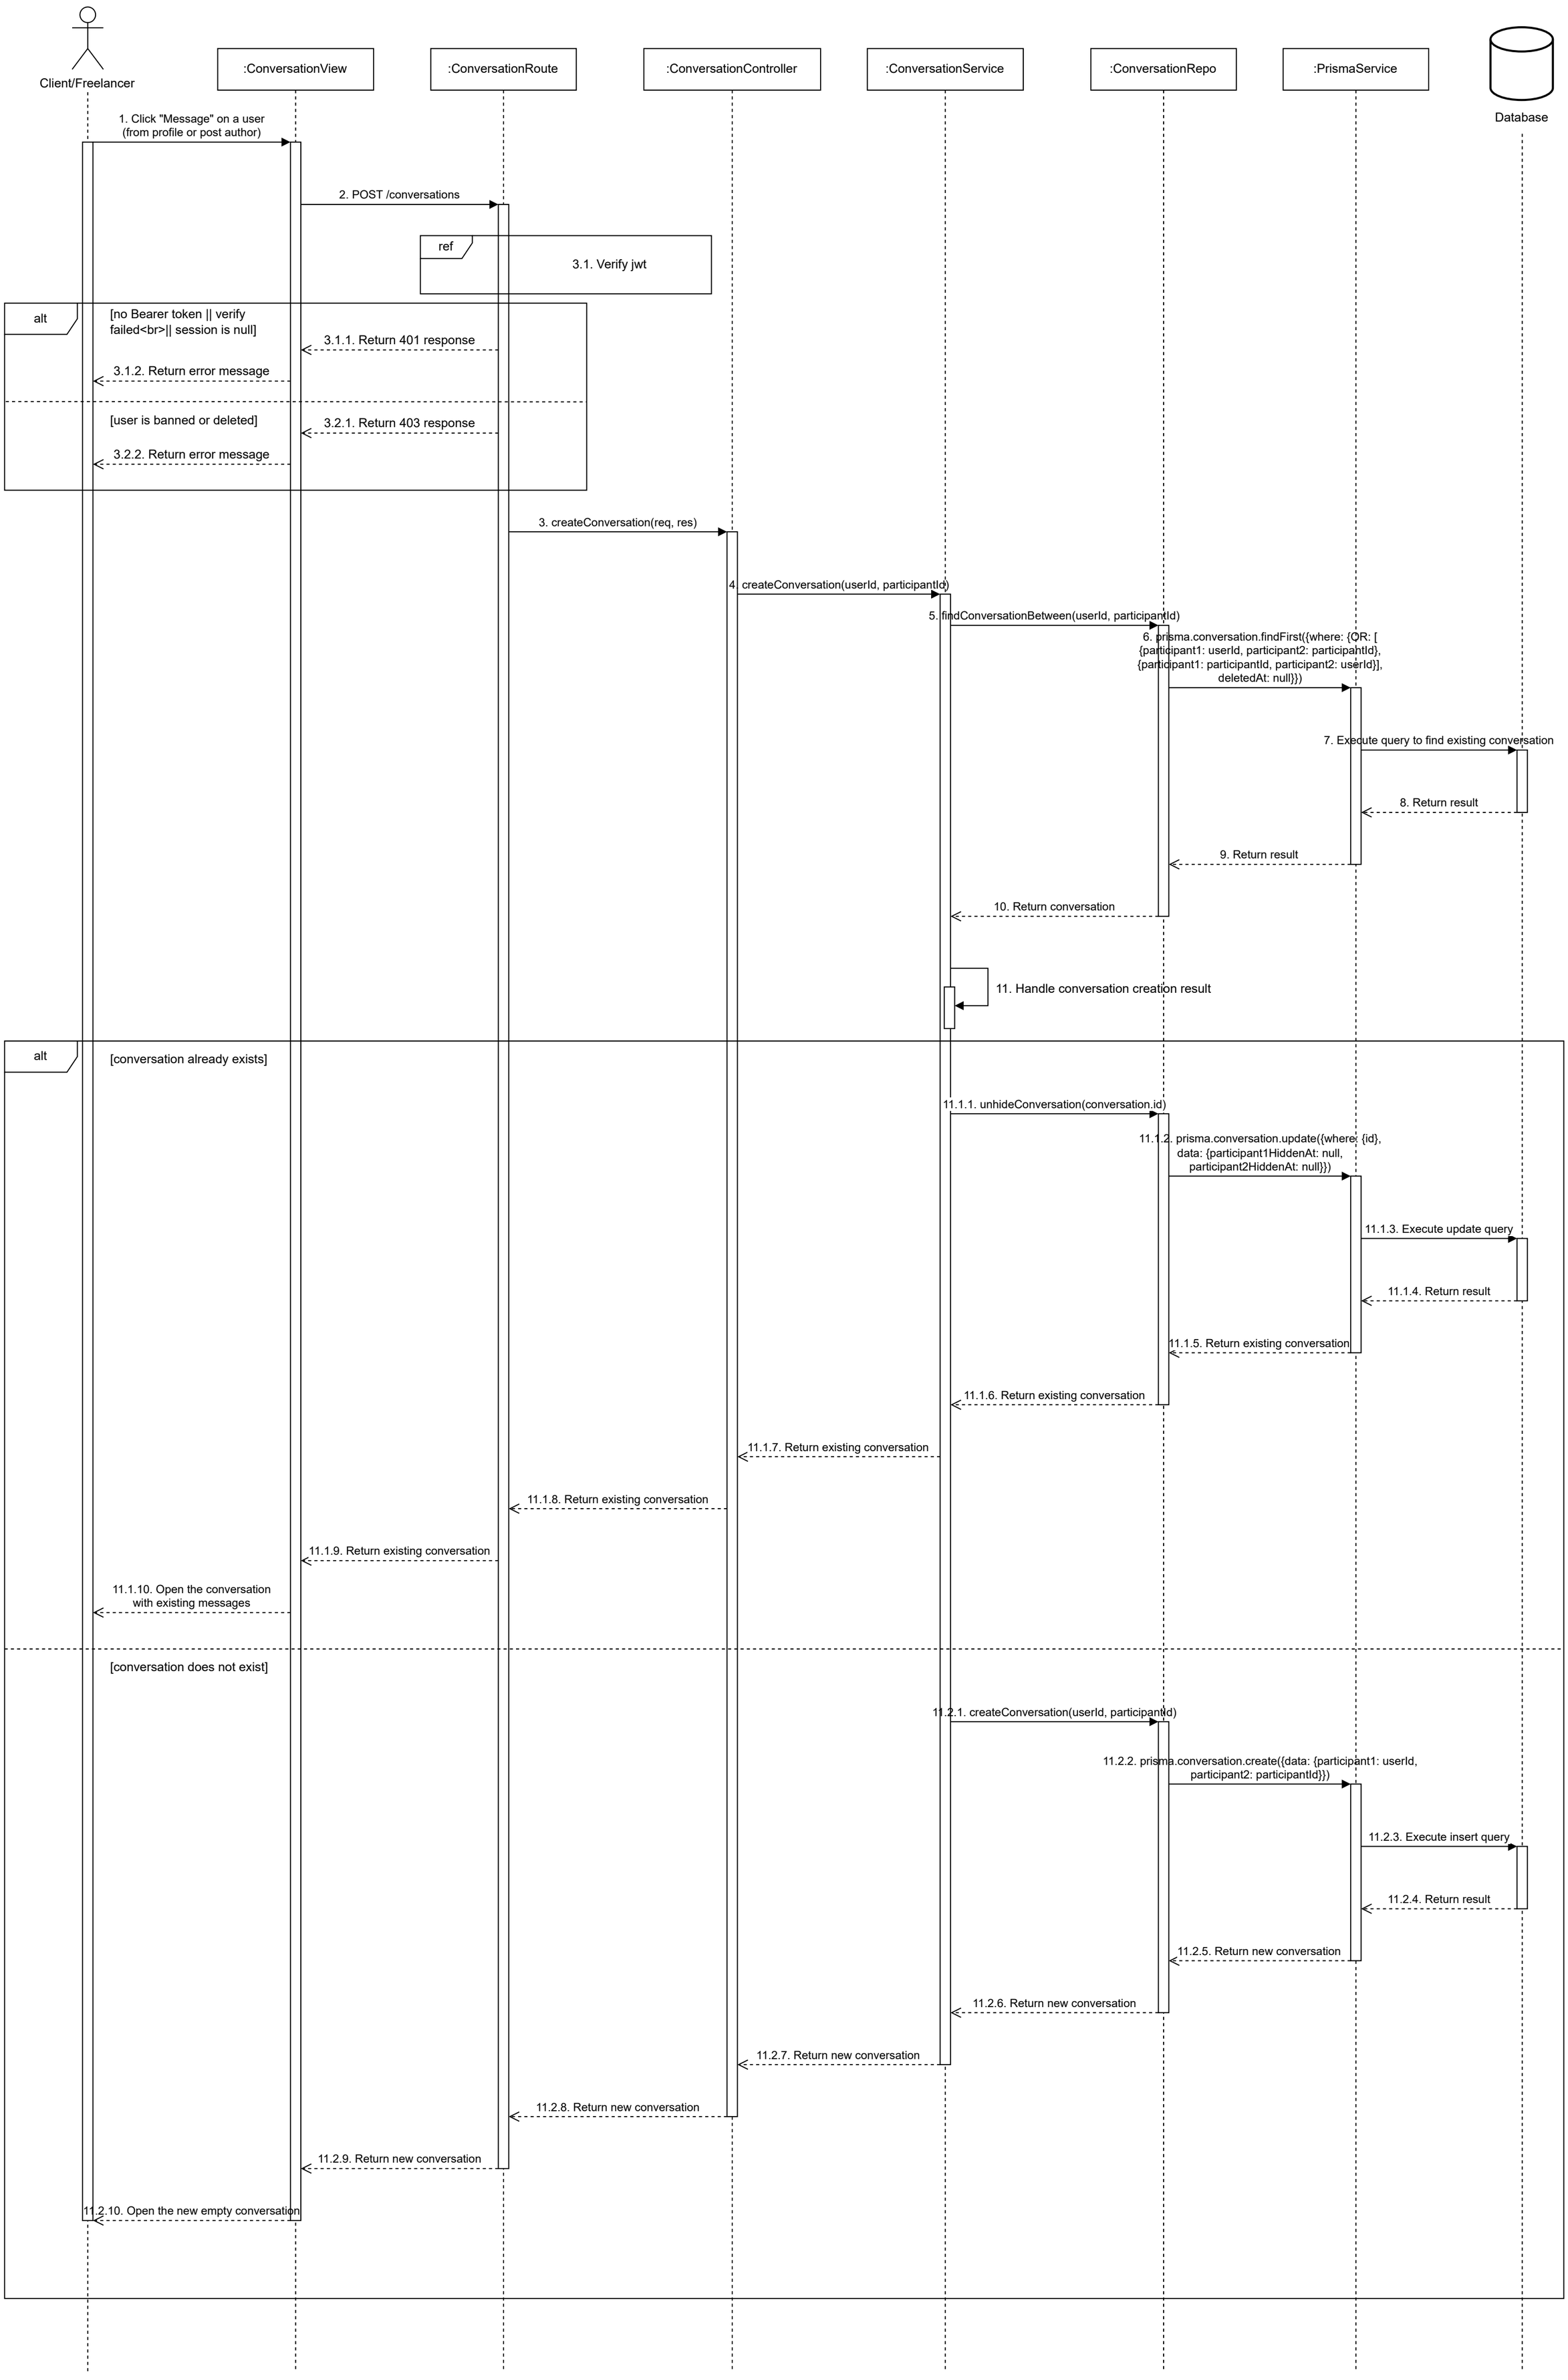

Client/Freelancer
:ConversationView
:ConversationRoute
:ConversationController
:ConversationService
:ConversationRepo
:PrismaService
Database
1. Click "Message" on a user (from profile or post author)
2. POST /conversations
ref
3.1. Verify jwt
alt
[no Bearer token || verify failed
|| session is null]
3.1.1. Return 401 response
3.1.2. Return error message
[user is banned or deleted]
3.2.1. Return 403 response
3.2.2. Return error message
3. createConversation(req, res)
4. createConversation(userId, participantId)
5. findConversationBetween(userId, participantId)
6. prisma.conversation.findFirst({where: {OR: [{participant1: userId, participant2: participantId}, {participant1: participantId, participant2: userId}], deletedAt: null}})
7. Execute query to find existing conversation
8. Return result
9. Return result
10. Return conversation
11. Handle conversation creation result
alt
[conversation already exists]
11.1.1. unhideConversation(conversation.id)
11.1.2. prisma.conversation.update({where: {id}, data: {participant1HiddenAt: null, participant2HiddenAt: null}})
11.1.3. Execute update query
11.1.4. Return result
11.1.5. Return existing conversation
11.1.6. Return existing conversation
11.1.7. Return existing conversation
11.1.8. Return existing conversation
11.1.9. Return existing conversation
11.1.10. Open the conversation with existing messages
[conversation does not exist]
11.2.1. createConversation(userId, participantId)
11.2.2. prisma.conversation.create({data: {participant1: userId, participant2: participantId}})
11.2.3. Execute insert query
11.2.4. Return result
11.2.5. Return new conversation
11.2.6. Return new conversation
11.2.7. Return new conversation
11.2.8. Return new conversation
11.2.9. Return new conversation
11.2.10. Open the new empty conversation