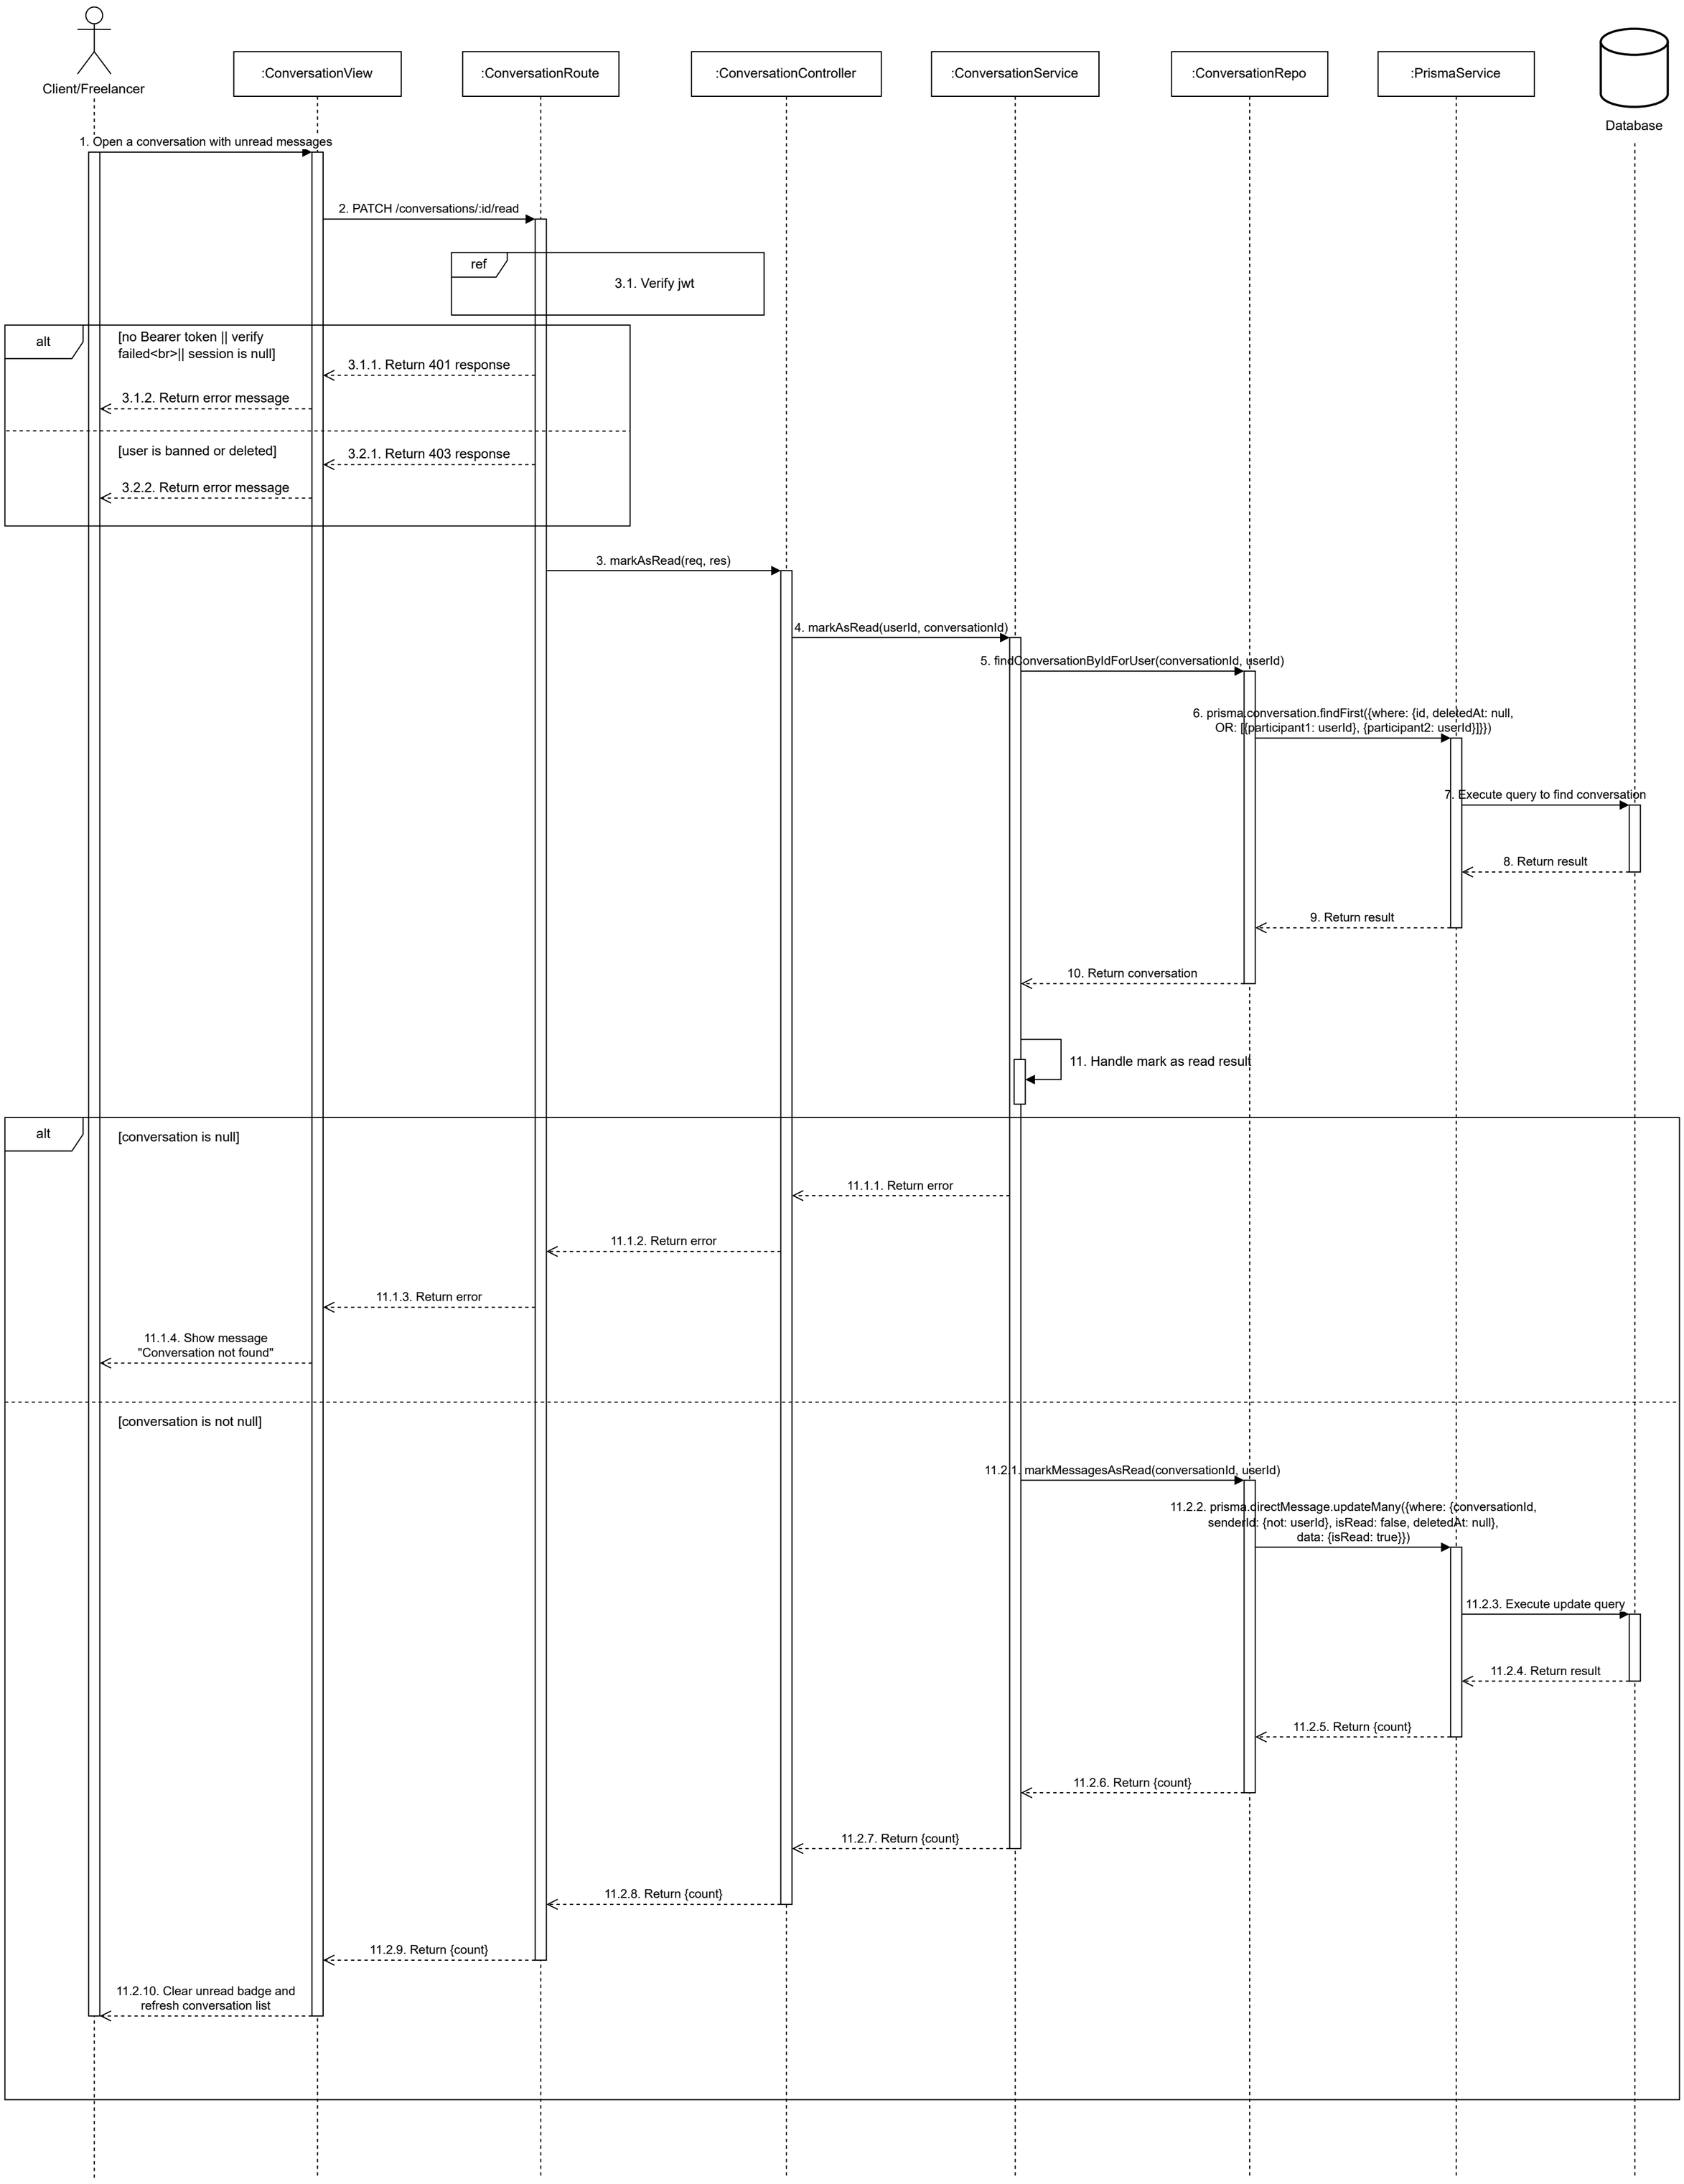

Client/Freelancer
:ConversationView
:ConversationRoute
:ConversationController
:ConversationService
:ConversationRepo
:PrismaService
Database
1. Open a conversation with unread messages
2. PATCH /conversations/:id/read
ref
3.1. Verify jwt
alt
[no Bearer token || verify failed
|| session is null]
3.1.1. Return 401 response
3.1.2. Return error message
[user is banned or deleted]
3.2.1. Return 403 response
3.2.2. Return error message
3. markAsRead(req, res)
4. markAsRead(userId, conversationId)
5. findConversationByIdForUser(conversationId, userId)
6. prisma.conversation.findFirst({where: {id, deletedAt: null,
OR: [{participant1: userId}, {participant2: userId}]}})
7. Execute query to find conversation
8. Return result
9. Return result
10. Return conversation
11. Handle mark as read result
alt
[conversation is null]
11.1.1. Return error
11.1.2. Return error
11.1.3. Return error
11.1.4. Show message
"Conversation not found"
[conversation is not null]
11.2.1. markMessagesAsRead(conversationId, userId)
11.2.2. prisma.directMessage.updateMany({where: {conversationId,
senderId: {not: userId}, isRead: false, deletedAt: null},
data: {isRead: true}})
11.2.3. Execute update query
11.2.4. Return result
11.2.5. Return {count}
11.2.6. Return {count}
11.2.7. Return {count}
11.2.8. Return {count}
11.2.9. Return {count}
11.2.10. Clear unread badge and
refresh conversation list