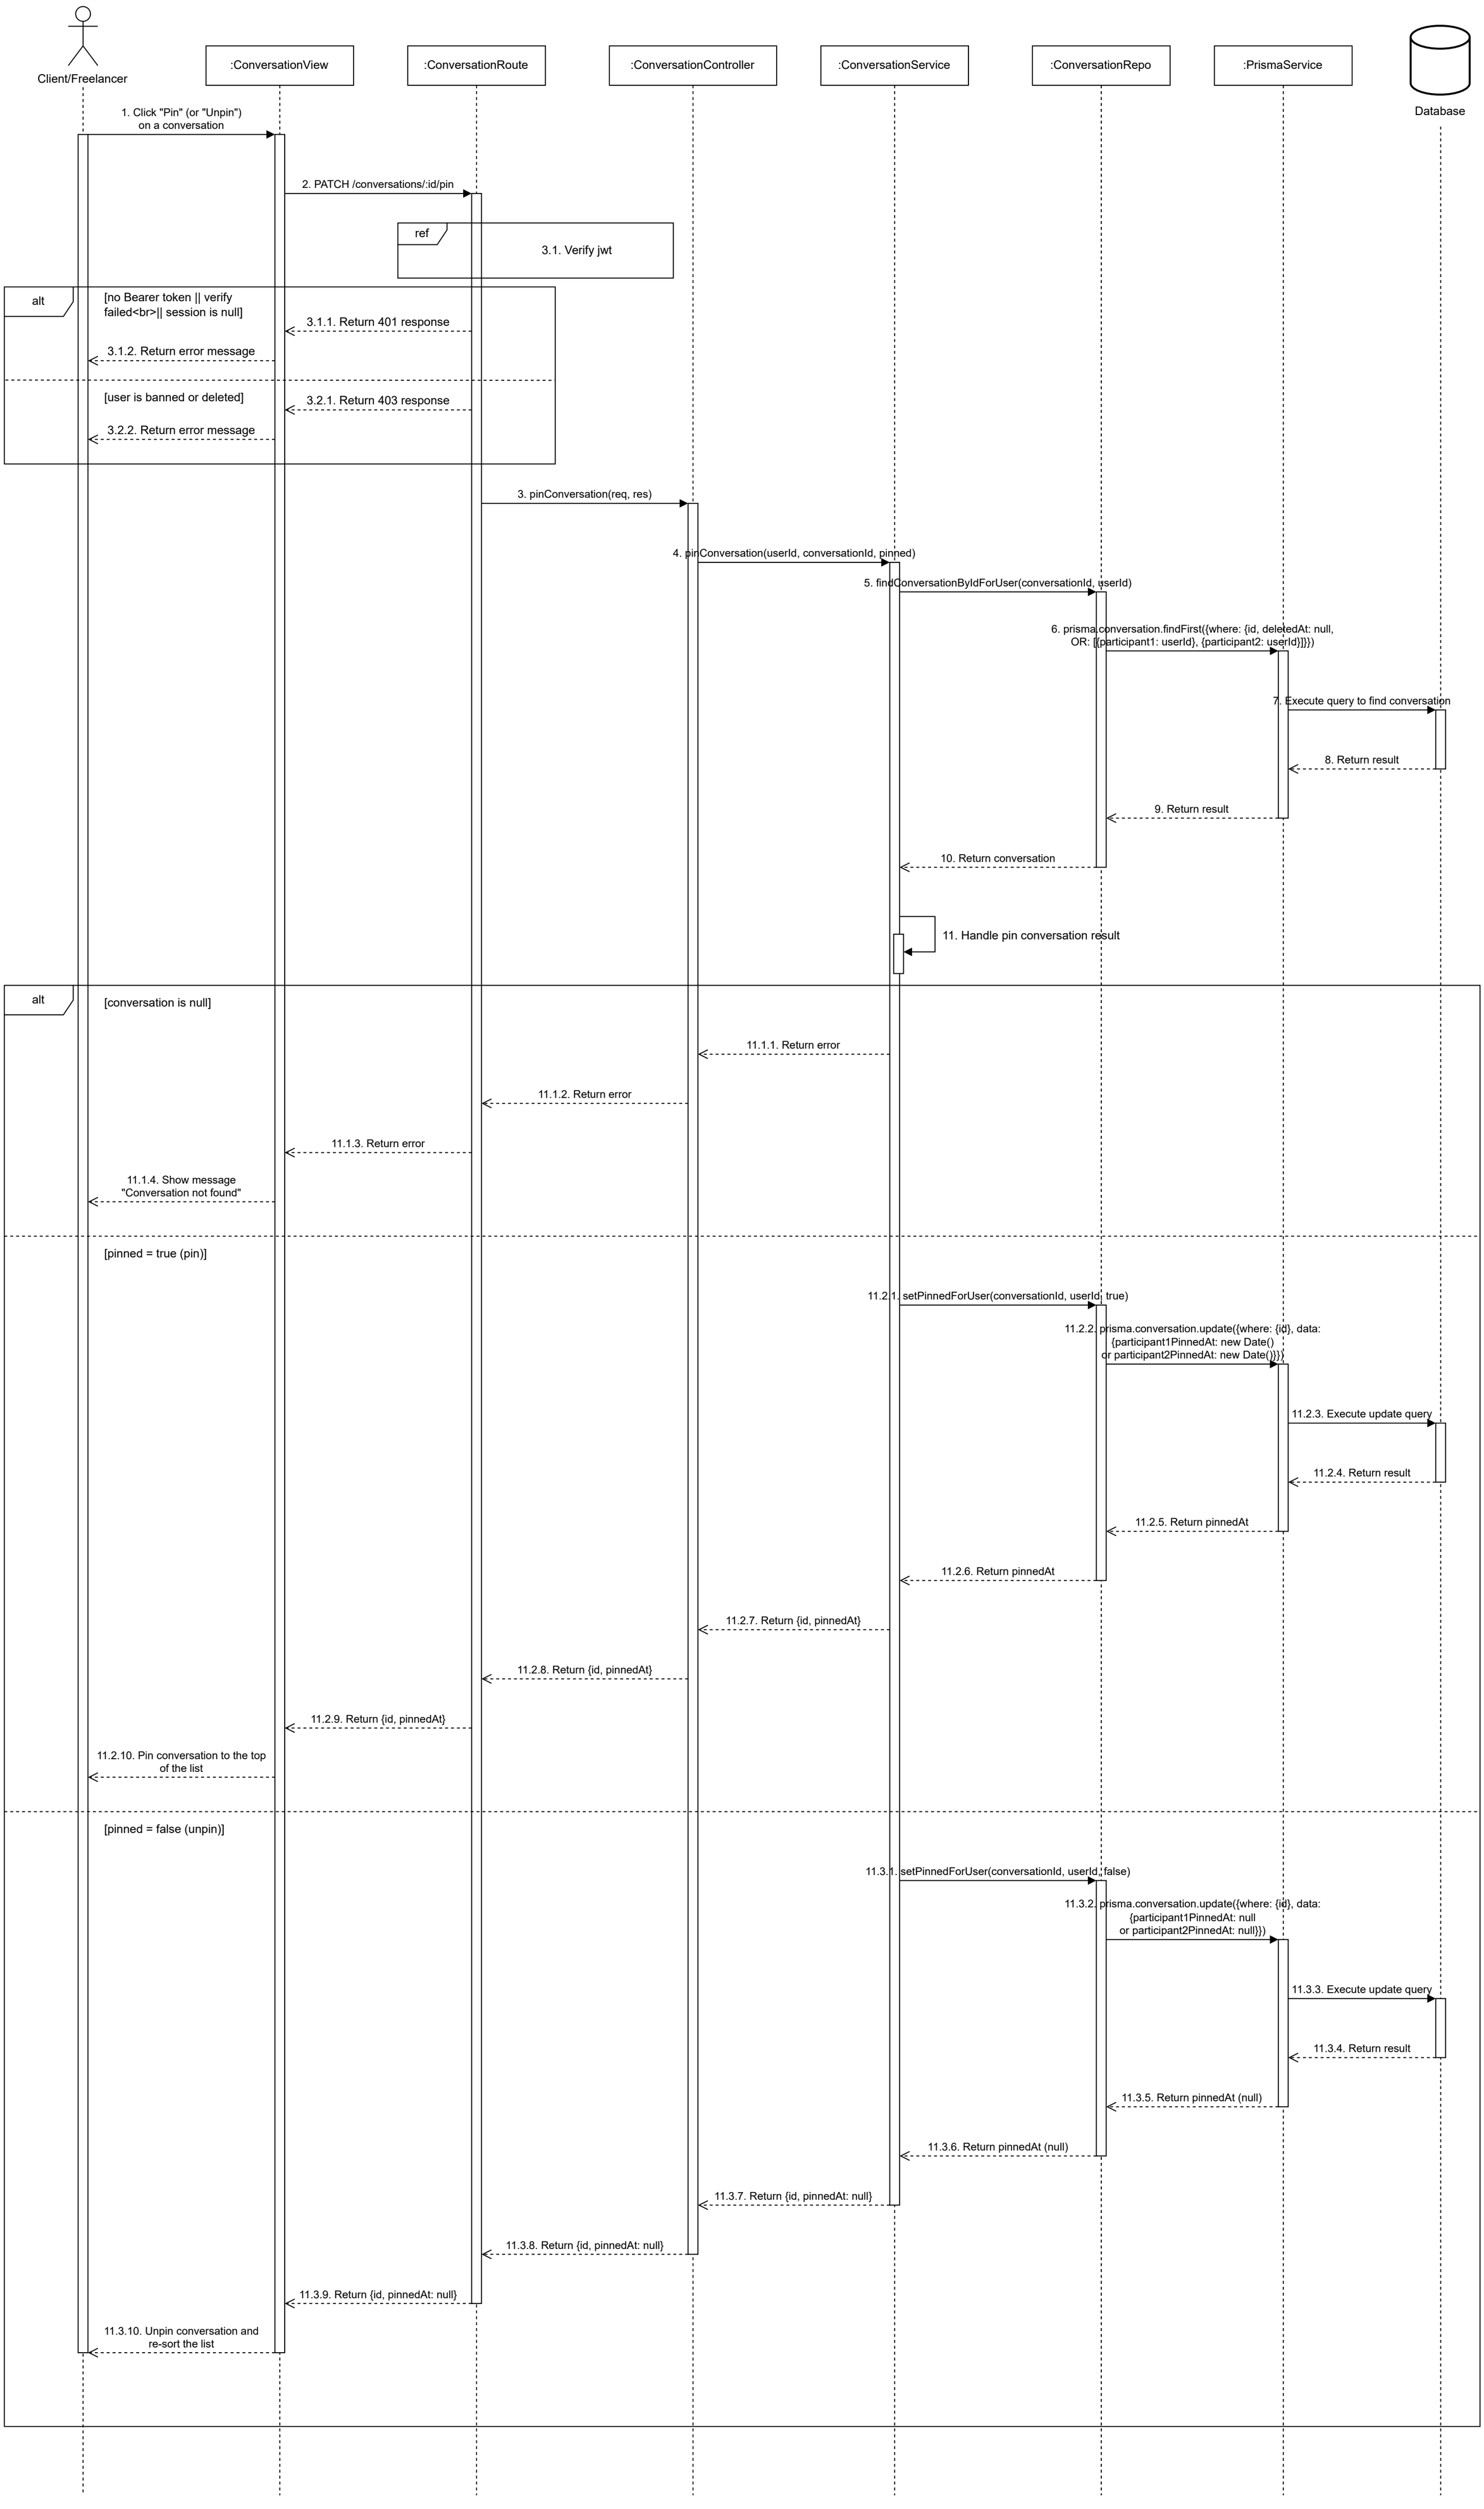

Client/Freelancer
:ConversationView
:ConversationRoute
:ConversationController
:ConversationService
:ConversationRepo
:PrismaService
Database
1. Click "Pin" (or "Unpin") on a conversation
2. PATCH /conversations/:id/pin
ref
3.1. Verify jwt
alt
[no Bearer token || verify failed
|| session is null]
3.1.1. Return 401 response
3.1.2. Return error message
[user is banned or deleted]
3.2.1. Return 403 response
3.2.2. Return error message
3. pinConversation(req, res)
4. pinConversation(userId, conversationId, pinned)
5. findConversationByIdForUser(conversationId, userId)
6. prisma.conversation.findFirst({where: {id, deletedAt: null, OR: [{participant1: userId}, {participant2: userId}]}})
7. Execute query to find conversation
8. Return result
9. Return result
10. Return conversation
11. Handle pin conversation result
alt
[conversation is null]
11.1.1. Return error
11.1.2. Return error
11.1.3. Return error
11.1.4. Show message "Conversation not found"
[pinned = true (pin)]
11.2.1. setPinnedForUser(conversationId, userId, true)
11.2.2. prisma.conversation.update({where: {id}, data: {participant1PinnedAt: new Date() or participant2PinnedAt: new Date()}})
11.2.3. Execute update query
11.2.4. Return result
11.2.5. Return pinnedAt
11.2.6. Return pinnedAt
11.2.7. Return {id, pinnedAt}
11.2.8. Return {id, pinnedAt}
11.2.9. Return {id, pinnedAt}
11.2.10. Pin conversation to the top of the list
[pinned = false (unpin)]
11.3.1. setPinnedForUser(conversationId, userId, false)
11.3.2. prisma.conversation.update({where: {id}, data: {participant1PinnedAt: null or participant2PinnedAt: null}})
11.3.3. Execute update query
11.3.4. Return result
11.3.5. Return pinnedAt (null)
11.3.6. Return pinnedAt (null)
11.3.7. Return {id, pinnedAt: null}
11.3.8. Return {id, pinnedAt: null}
11.3.9. Return {id, pinnedAt: null}
11.3.10. Unpin conversation and re-sort the list