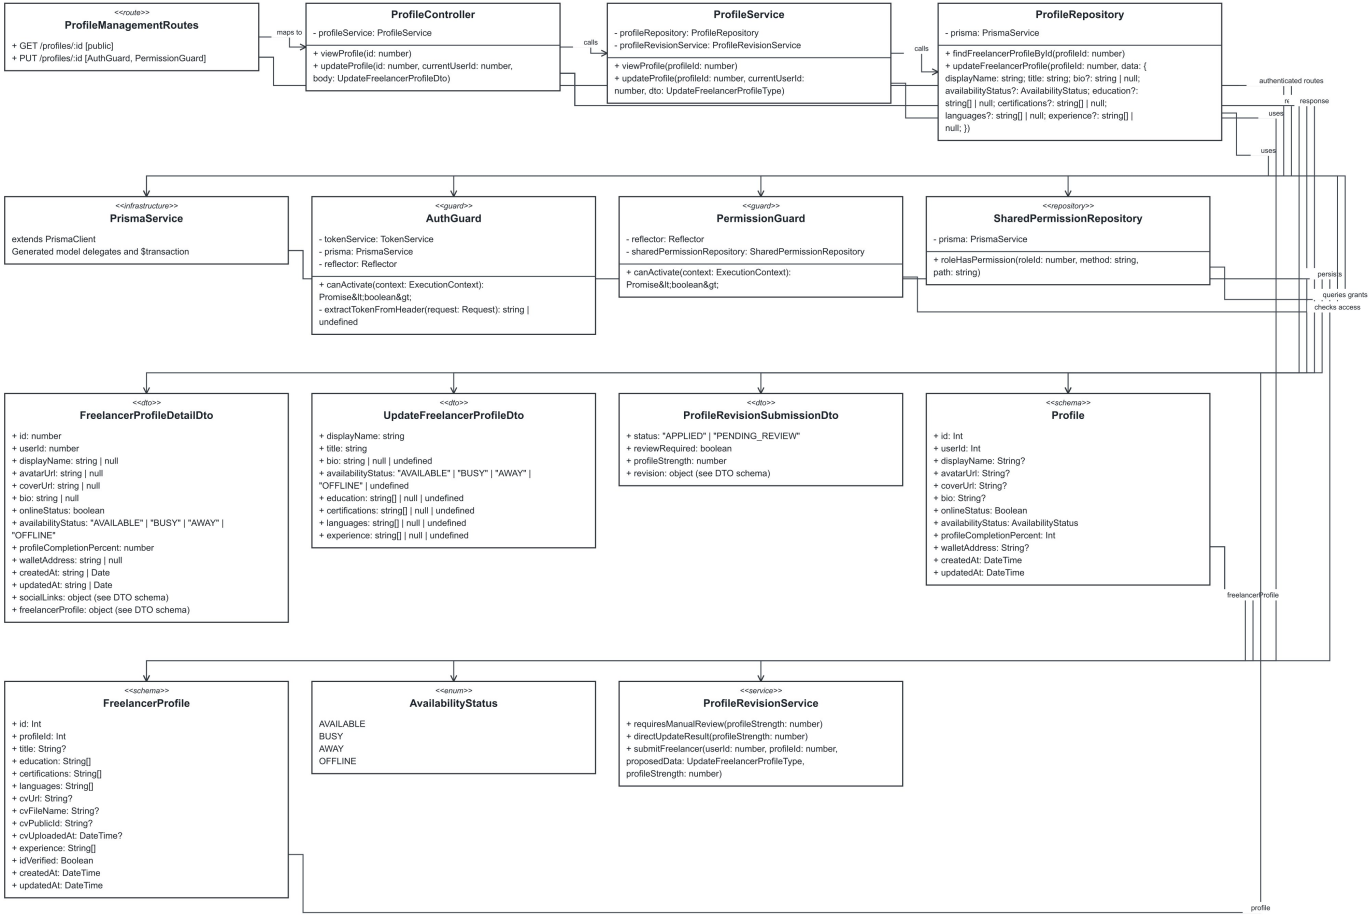

<<route>>
ProfileManagementRoutes
+ GET /profiles/:id [public]
+ PUT /profiles/:id [AuthGuard, PermissionGuard]
maps to
ProfileController
- profileService: ProfileService
+ viewProfile(id: number)
+ updateProfile(id: number, currentUserId: number, body: UpdateFreelancerProfileDto)
calls
ProfileService
- profileRepository: ProfileRepository
- profileRevisionService: ProfileRevisionService
+ viewProfile(profileId: number)
+ updateProfile(profileId: number, currentUserId: number, dto: UpdateFreelancerProfileType)
calls
ProfileRepository
- prisma: PrismaService
+ findFreelancerProfileById(profileId: number)
+ updateFreelancerProfile(profileId: number, data: { displayName: string; title: string; bio?: string | null; availabilityStatus?: AvailabilityStatus; education?: string[] | null; certifications?: string[] | null; languages?: string[] | null; experience?: string[] | null; })
authenticated routes
in
response
uses
uses
<<infrastructure>>
PrismaService
extends PrismaClient
Generated model delegates and $transaction
<<guard>>
AuthGuard
- tokenService: TokenService
- prisma: PrismaService
- reflector: Reflector
+ canActivate(context: ExecutionContext): Promise<boolean>;
- extractTokenFromHeader(request: Request): string | undefined
<<guard>>
PermissionGuard
- reflector: Reflector
- sharedPermissionRepository: SharedPermissionRepository
+ canActivate(context: ExecutionContext): Promise<boolean>
<<repository>>
SharedPermissionRepository
- prisma: PrismaService
+ roleHasPermission(roleId: number, method: string, path: string)
persists
queries grants
checks access
<<dto>>
FreelancerProfileDetailDto
+ id: number
+ userId: number
+ displayName: string | null
+ avatarUrl: string | null
+ coverUrl: string | null
+ bio: string | null
+ onlineStatus: boolean
+ availabilityStatus: "AVAILABLE" | "BUSY" | "AWAY" | "OFFLINE"
+ profileCompletionPercent: number
+ walletAddress: string | null
+ createdAt: string | Date
+ updatedAt: string | Date
+ socialLinks: object (see DTO schema)
+ freelancerProfile: object (see DTO schema)
<<dto>>
UpdateFreelancerProfileDto
+ displayName: string
+ title: string
+ bio: string | null | undefined
+ availabilityStatus: "AVAILABLE" | "BUSY" | "AWAY" | "OFFLINE" | undefined
+ education: string[] | null | undefined
+ certifications: string[] | null | undefined
+ languages: string[] | null | undefined
+ experience: string[] | null | undefined
<<dto>>
ProfileRevisionSubmissionDto
+ status: "APPLIED" | "PENDING_REVIEW"
+ reviewRequired: boolean
+ profileStrength: number
+ revision: object (see DTO schema)
<<schema>>
Profile
+ id: Int
+ userId: Int
+ displayName: String?
+ avatarUrl: String?
+ coverUrl: String?
+ bio: String?
+ onlineStatus: Boolean
+ availabilityStatus: AvailabilityStatus
+ profileCompletionPercent: Int
+ walletAddress: String?
+ createdAt: DateTime
+ updatedAt: DateTime
freelancerProfile
<<schema>>
FreelancerProfile
+ id: Int
+ profileId: Int
+ title: String?
+ education: String[]
+ certifications: String[]
+ languages: String[]
+ cvUrl: String?
+ cvFileName: String?
+ cvPublicId: String?
+ cvUploadedAt: DateTime?
+ experience: String[]
+ idVerified: Boolean
+ createdAt: DateTime
+ updatedAt: DateTime
<<enum>>
AvailabilityStatus
AVAILABLE
BUSY
AWAY
OFFLINE
<<service>>
ProfileRevisionService
+ requiresManualReview(profileStrength: number)
+ directUpdateResult(profileStrength: number)
+ submitFreelancer(userId: number, profileId: number, proposedData: UpdateFreelancerProfileType, profileStrength: number)
profile