

Final Project

Final project report

Introduction

Instruction tuning allows language models to adapt their behavior by training on curated prompt-response pairs. In addition to improving task completion, instruction tuning can also influence stylistic characteristics such as vocabulary, tone, and response structure. This project investigates whether instruction-tuning datasets can produce distinct conversational personas in a language model. Using the TinyStories GPT-style model as the base model, two persona-specific instruction datasets were constructed: a Pirate assistant and a Technical Writer assistant. To isolate the effect of persona data, a control model trained for additional epochs without persona instructions was also included. The experiment compares these models to determine whether stylistic behavior emerges primarily from instruction data rather than training duration.

Model and Training Setup

All experiments are based on the TinyStories GPT-style language model provided in the course framework. The base model was first trained on the TinyStories dataset and then instruction-tuned using conversation-style datasets. Training was performed using the provided script `train_tinystories_chat_model.py`, which fine-tunes a pretrained model using conversation pairs in the format: `text: user prompt, text: assistant response` per conversation. The training objective is next-token prediction over the conversation sequence, allowing the model to learn both task completion and stylistic response patterns. The only differences across models were the instruction dataset used and the number of training epochs.

Persona Dataset Construction


Two instruction-tuning datasets were constructed to induce different response styles. The Pirate dataset encourages the model to respond using pirate-themed language while still completing the user's task. Responses contain characteristic pirate vocabulary and informal tone while maintaining clear answers. The Technical Writer dataset represents the opposite style, emphasizing clarity, structure, and professional language. Responses typically provide concise explanations, structured reasoning, or step-by-step guidance. To ensure stylistic effects are consistent across tasks, prompts were divided into three categories: storytelling, explanation and practical advice. Each dataset contains approximately 3000 examples, balanced across these prompt types. Prompt templates and vocabulary pools were used to generate diverse examples while preserving consistent task structure.

Experimental Design


Four models were evaluated: Default, Pirate, Techwriter and Moreepochs. The MoreEpochs model acts as a control experiment to test whether stylistic changes arise from longer training rather

than persona-specific data. To ensure fair comparison, all models were evaluated using the same set of 20 prompts, covering storytelling, explanation, and advice tasks. During training, loss curves were monitored to confirm stable optimization and comparable convergence behavior across models.


Foundation model instruct tuning loss

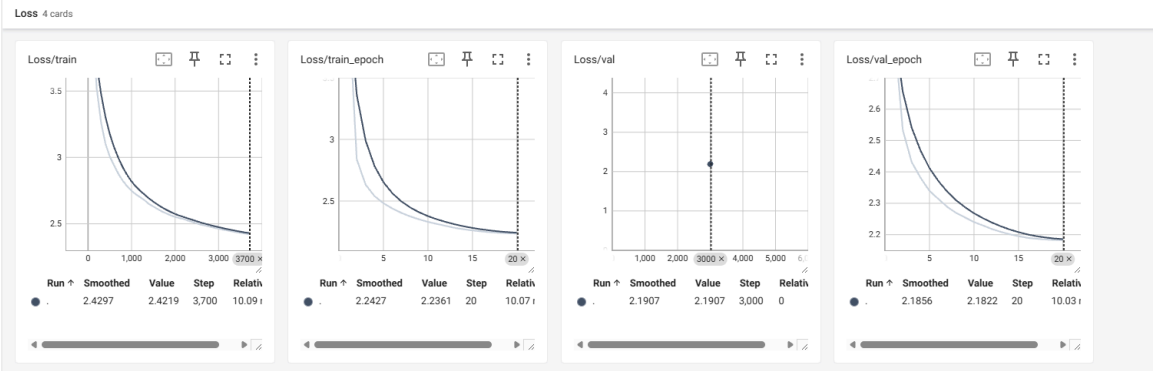

Pirate dataset instruction tuning

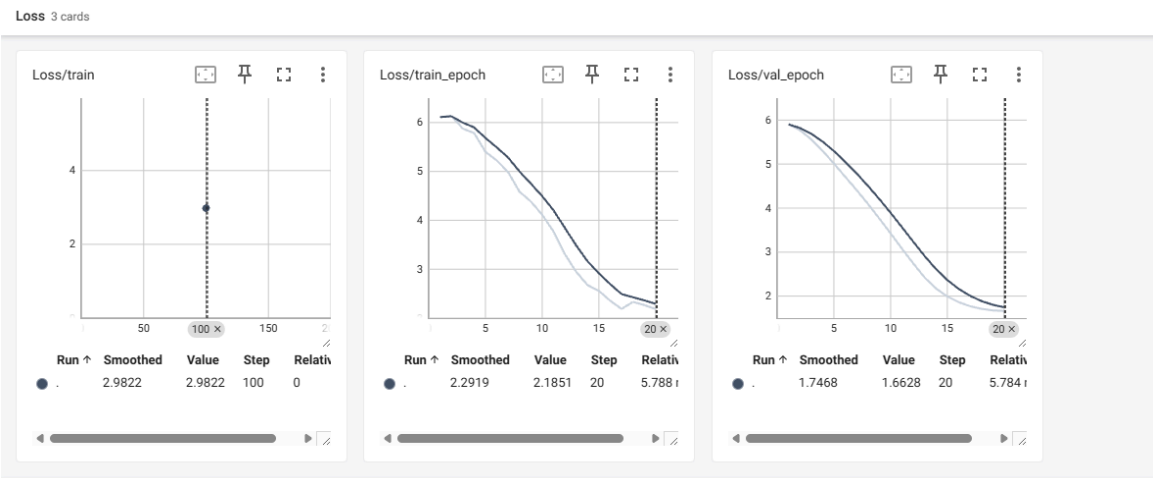

Technical writer loss curve

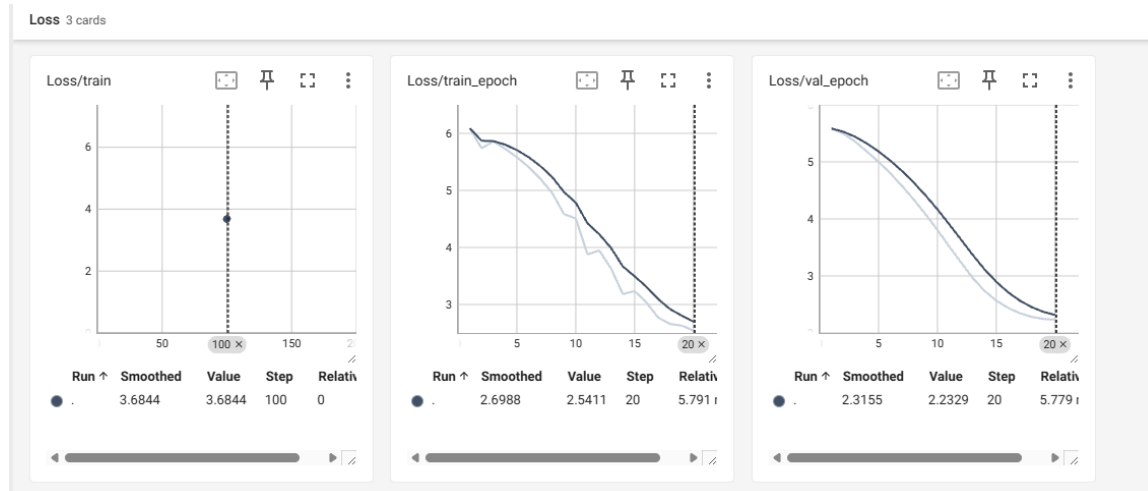

During instruction tuning, training and validation losses decreased steadily across all models, indicating stable convergence. For the Technical Writer model, training loss decreased from approximately 6.0 to 2.54 while validation loss declined from about 5.8 to 2.23. The Pirate model showed a similar trend, with training loss dropping from roughly 6.1 to 2.19 and validation loss decreasing from about 5.9 to 1.66. For the default model, training loss decreased from approximately 3.6 to 2.24 while validation loss declined from around 2.7 to 2.18 over the training period. In all cases, validation loss remains close to or slightly lower than training loss at the end of training, suggesting stable optimization and no clear evidence of overfitting.

Evaluate model performance

example output

Welcome to TinyStories Chat! Type 'exit' to quit.

You: Tell a bedtime story about a friendly whale.

Assistant: How can I hear the whale?

Across the same prompt, the four models exhibit clearly differentiated behaviors. The default chat model fails to follow the instruction properly, often responding with a meta-style or short conversational reply rather than producing a coherent story, indicating weak instruction alignment. The “more epochs” version of the default model shows slight improvement in fluency and narrative continuation, but it still does not consistently adhere to the requested structure or content constraints, suggesting that simply increasing training time does not meaningfully strengthen instruction-following ability. In contrast, the pirate persona model strongly conditions on stylistic cues (“Ahoy,” “Yo-ho-ho”) and reliably produces story-like outputs, demonstrating that instruction data can significantly shift both tone and structural compliance. The tech-writer model generates more formal and explanatory language, showing clearer structural intent, though sometimes at the expense of narrative creativity. Overall, these examples support the project hypothesis that changing instruction data (persona engineering) has a larger behavioral impact than merely extending training epochs or change any training setting under the same data distribution.

keyword frequency ratio & AVG length

	Model	Total Words	Avg Sentence Length	\
0	Default	3966	6.31	
1	Default (More Epochs)	3902	6.32	
2	Pirate	8724	7.72	
3	TechWriter	9123	9.51	
	Pirate Keyword Ratio	Tech Keyword Ratio		
0	0.0003	0.0050		
1	0.0003	0.0051		
2	0.0454	0.0045		
3	0.0004	0.0195		

To measure stylistic differences between models, we computed the frequency ratio of persona-specific keywords within generated outputs. Pirate-related vocabulary (e.g., “arr”, “matey”) and technical writing vocabulary (e.g., “definition”, “explain”, “concept”) were counted and normalized by the total number of generated words. The results are shown in Table. The Pirate model shows a substantially higher pirate keyword ratio (0.0454) compared with the baseline models, which exhibit almost no pirate-style vocabulary (0.0003). Similarly, the Technical Writer model produces the highest technical keyword ratio (0.0195), significantly exceeding the baseline models. Importantly, the model trained with additional epochs but without persona data shows nearly identical keyword ratios to the default model. This suggests that stylistic vocabulary does not emerge simply from longer training, but rather from targeted instruction datasets.

Compliance_test

	Model	Compliance Rate	Compliant / Total
0	Default	0.15	3/20
1	Default (More Epochs)	0.25	5/20
2	Pirate	1.00	20/20
3	TechWriter	0.75	15/20

To evaluate whether the generated responses follow the intended task instructions, we measure the compliance rate, defined as the proportion of prompts for which the model output satisfies predefined task requirements. The evaluation rules are implemented programmatically and vary by prompt category. The first seven prompts correspond to story generation tasks. A response is considered compliant if it produces a sufficiently long narrative, defined as either at least three sentences or at least 35 words. Prompts 8–14 correspond to explanation tasks. For these prompts, a response is labeled compliant if it contains at least two sentences and at least 20 words, ensuring that the model provides a meaningful explanation rather than a short or incomplete statement. Prompts 15–20 correspond to advice tasks. A response is considered compliant if it contains at least two sentences and includes advice-related keywords, indicating that the response provides actionable suggestions rather than unrelated text. The compliance results are summarized in Table X. The baseline model achieves a compliance rate of 15% (3/20 prompts), indicating that it frequently fails to produce outputs that satisfy the task requirements. Training the same

model for additional epochs slightly improves the compliance rate to 25%, but the improvement remains limited. In contrast, the persona-tuned models show substantially higher compliance. The Pirate model achieves perfect compliance (20/20), while the Technical Writer model successfully completes 75% of the prompts. These results suggest that instruction-tuning datasets not only influence stylistic vocabulary but also significantly improve the model’s ability to produce task-relevant responses.

Embedding similarity

	Model	Average Embedding Similarity
0	Default	0.075809
1	Pirate	0.351289
2	TechWriter	0.153872
3	Default (More Epochs)	0.089439

To measure how closely each model’s responses align with the intended persona style, we compute embedding similarity between generated outputs and reference descriptions of each persona. Specifically, each response is converted into a sentence embedding using the all-MiniLM-L6-v2 model from the SentenceTransformers library. The cosine similarity between the response embedding and a reference embedding describing the target persona style is then calculated. The reported value represents the average cosine similarity across all prompts for each model.

The Pirate model achieves the highest similarity score (0.3513), indicating that its generated responses align most strongly with the pirate-style reference description. The Technical Writer model also shows increased similarity to its corresponding reference style compared with the baseline model. In contrast, the default model exhibits very low similarity (0.0758), suggesting that its responses remain largely neutral and do not strongly reflect any specific persona. The model trained for additional epochs without persona data shows only a small increase in similarity (0.0894) relative to the default model. This result reinforces the earlier findings that stylistic behavior does not emerge simply from longer training. Instead, the instruction-tuning datasets appear to play a primary role in shaping the model’s response style. Overall, the embedding similarity results provide additional evidence that persona-specific instruction data can meaningfully influence the semantic characteristics of generated responses.