# Cambodia Rice Yield Prediction

## A Comparative Study of Machine Learning Models

TE Tikea

Robotic Pathway
ECAM LaSalle / ITC

2026

# Outline


1. Introduction
2. Dataset
3. Proposed Methods
4. Results
5. Conclusion

# Introduction

## Why Cambodia rice yield?

- Rice is Cambodia's staple crop and largest agricultural export
- Yield fluctuations directly impact food security and rural livelihoods
- Country-aggregated annual data is publicly available from FAOSTAT and the World Bank

## Objectives

- Build a merged dataset from FAOSTAT + World Bank climate data
- Train and compare 3 ML models
- Evaluate under both chronological and cross-validation protocols

### Tasks

**Regression:** Predict exact yield (kg/ha)

**Classification:** Predict High or Low yield (above/below median)

# Dataset

**3 sources merged on year (1990–2024):**

- **FAOSTAT** — area harvested, production, yield
- **World Bank** — annual mean temperature (°C)
- **World Bank** — annual precipitation (mm)

*Production was dropped: yield = production / area, so it would leak the target.*

| Feature | Unit |
|---|---|
| Area harvested | ha |
| Mean temperature | °C |
| Precipitation | mm |
| **Target (reg.)** | kg/ha |
| **Target (cls.)** | High / Low |

## Dataset size

**35 rows** · 3 features · 1 target | Chronological split: 28 train (1990–2017) / 7 test (2018–2024)

Classification threshold: median computed on **training set only** (no leakage)

# Data overview

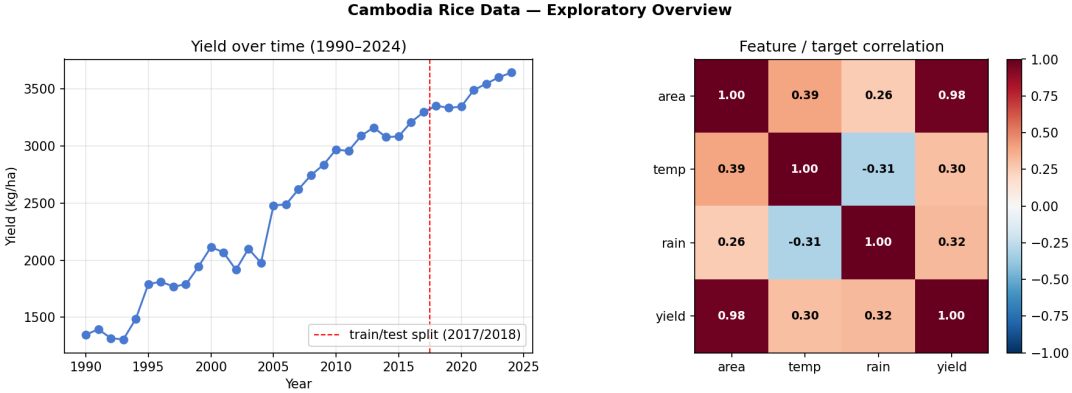


Figure: Yield grew strongly from 1990 to 2024; area-harvested has the highest correlation with yield ($r = 0.98$).

# Method 1 — Linear Regression

- Predicts yield as a weighted sum of features:

$$\hat{y} = \mathbf{w}^\top \mathbf{x} + b$$

- Fitted via Ordinary Least Squares (sklearn)
- Simple, interpretable baseline for regression
- No hyperparameters to tune

**Why this model?**

With only 35 samples, a simple model is less likely to overfit. Provides a strong baseline to compare against more complex approaches.

# Method 2 — Logistic Regression

- Classifies yield as High (1) or Low (0):

$$\hat{p} = \sigma(\mathbf{w}^\top \mathbf{x} + b)$$

- Decision threshold: $\hat{p} > 0.5 \Rightarrow$ High
- Implemented with sklearn `LogisticRegression`
- Baseline for the classification task

**Why this model?**

Natural extension of linear regression to binary classification. Directly comparable to the neural network on the same task.

# Method 3 — Neural Network (PyTorch)

**Architecture:** $3 \rightarrow 8 \rightarrow 1$

- Input: 3 features
- Hidden: 8 neurons, ReLU activation
- Output: 1 neuron
  - Regression: no activation, MSE loss
  - Classification: Sigmoid, BCE loss
- Optimiser: Adam (lr = 0.1)
- Epochs: 500, seed = 42

**Why this model?**

Can learn non-linear patterns. Kept small (3→8→1) to limit overfitting on 35 samples. Directly comparable to linear baselines.

# Results — Regression (Chronological Split)

Table: Test = 2018–2024

| Model | RMSE | $R^2$ |
|---|---|---|
| Predict train mean | 1188 | −96.86 |
| Linear Regression | **250.5** | −3.35 |
| Neural Network | 452.9 | −13.22 |

- Linear Regression beats the naive baseline by ∼5×
- But both models still have negative $R^2$

**Why negative $R^2$?**

Test years (2018–2024) yield 3335–3644 kg/ha; train max is 3297. Test points sit **outside** the training range — models extrapolate. This is distribution shift, not a model-capacity failure.

# Results — Regression (5-fold Cross-Validation)

Table: Mean $\pm$ std over 5 random folds

| **Model** | **RMSE** | **$R^2$** |
|---|---|---|
| Linear Reg. | $\mathbf{164 \pm 30}$ | $\mathbf{0.92 \pm 0.05}$ |
| Neural Net | $214 \pm 92$ | $0.87 \pm 0.08$ |

- When test points are interleaved with train: both models work very well
- Linear Regression edges out NN

**Take-away**

Same data, two protocols, opposite stories. The chronological gap was about *extrapolation*, not the models. Under fair CV, $R^2 \approx 0.92$.

# Results — Classification

Table: Chronological split (test = 7/7 positive)

| Model | P | R | F1 |
|---|---|---|---|
| Logistic Reg. | 1.00 | 1.00 | 1.00 |
| Neural Net | 1.00 | 1.00 | 1.00 |

Table: 5-fold stratified CV

| Model | F1 (mean ± std) |
|---|---|
| Logistic Reg. | **0.933 ± 0.133** |
| Neural Net | 0.905 ± 0.131 |

**Why the chronological perfect score is meaningless**

All 7 test years are above-median (yield grew steadily). "Always predict High" = F1 1.0. Models can't be distinguished on this split.

**What CV shows**

Logistic Regression slightly ahead, but within one std — difference is not significant.

# Results — Comparison Plot

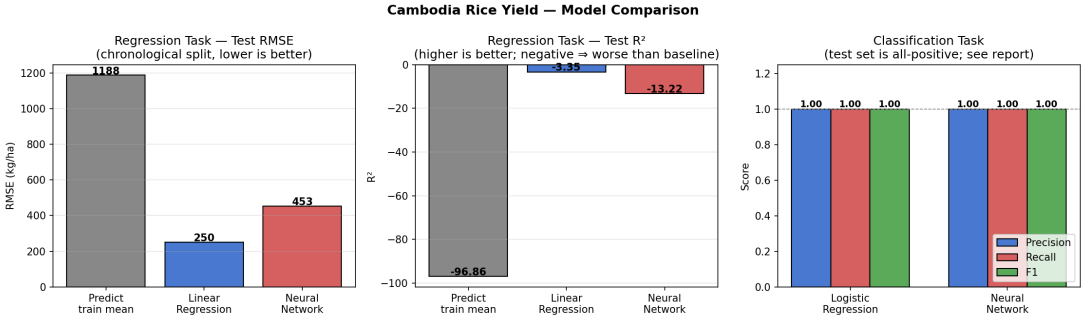


Figure: Chronological-split metrics. Left: regression RMSE; centre: regression $R^2$ (negative bars descend below 0); right: classification metrics (degenerate test set, see report).

# Results — Cross-Validation

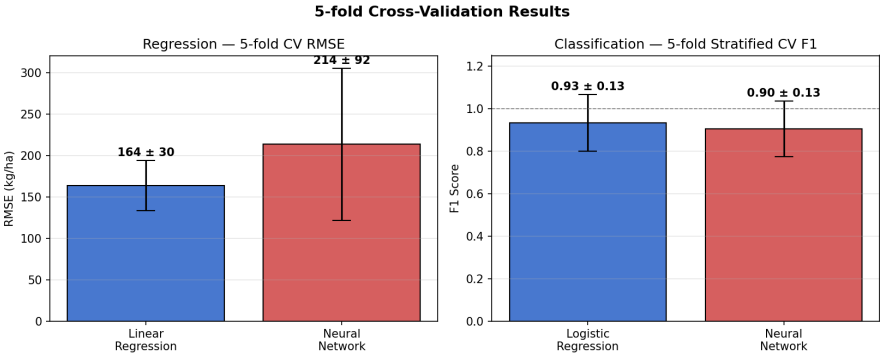


Figure: 5-fold CV gives the meaningful comparison: LR slightly ahead on both tasks; NN has higher variance.

# Neural Network — Training Curve



# Conclusion

**Key findings:**

- Under cross-validation: Linear Regression $R^2 = 0.92$, beats NN
- Chronological negative $R^2$ = distribution shift, not capacity
- Classification on chronological split is degenerate; CV gives the real comparison (LR $\approx$ NN)
- Linear Reg. coefficients: *area harvested* dominates (mechanisation effect)

**Take-away**

On a 35-row dataset, the simpler model wins under fair evaluation, and how you split matters more than which model you pick.

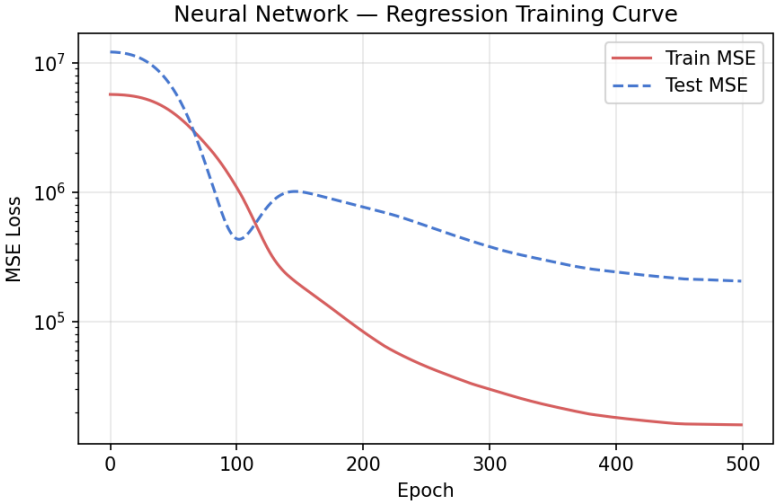**Future work:**

- Province-level data $\Rightarrow$ $\sim$25$\times$ more rows
- Add fertiliser, irrigation, flood data
- LSTM once data volume supports it