10

- Ledger-styled Structure

- Table as a class

- Column as a property

- Row as an entity

- Use foreign key constraints to represent relationships

Relational Database

Common Database Models

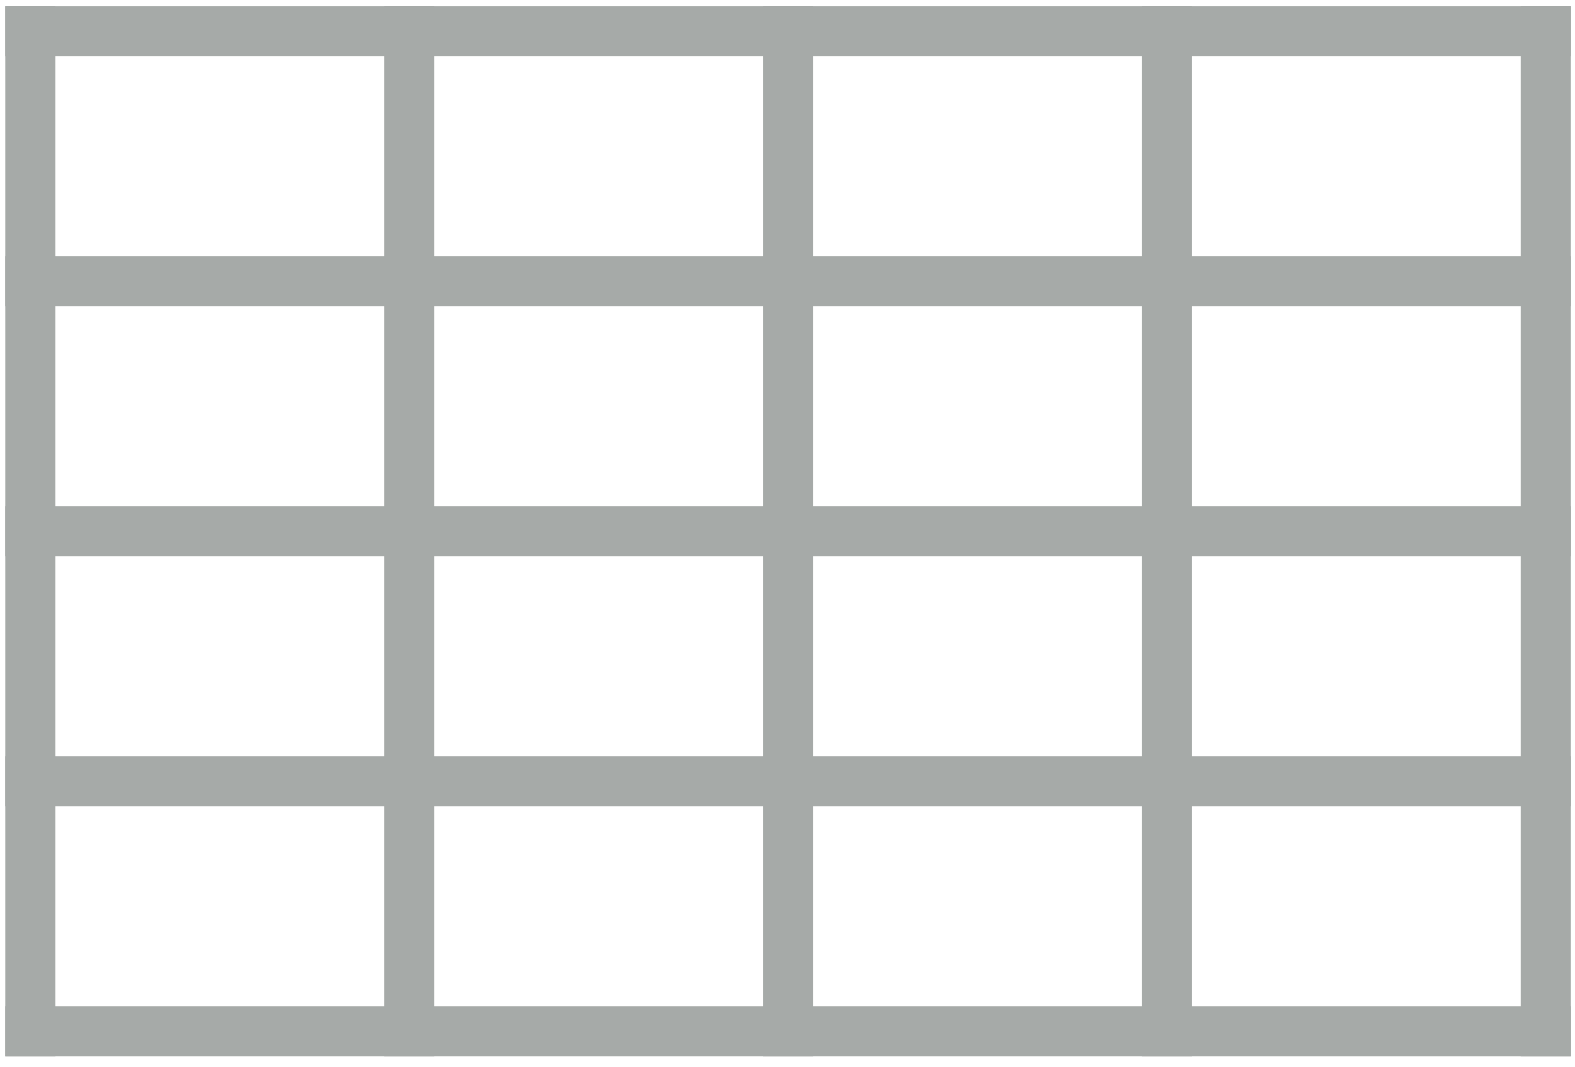

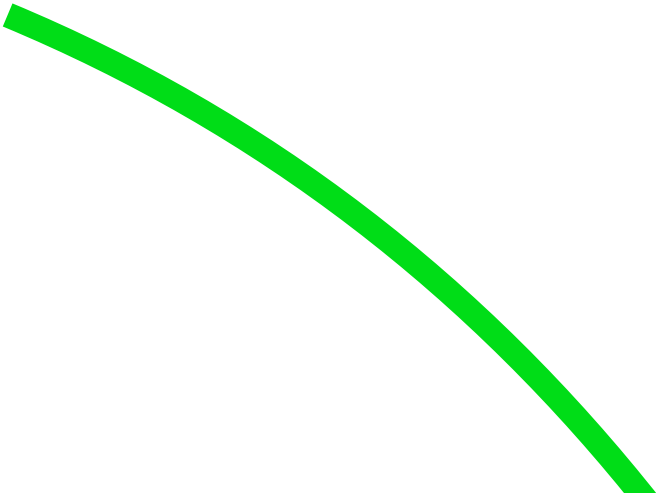

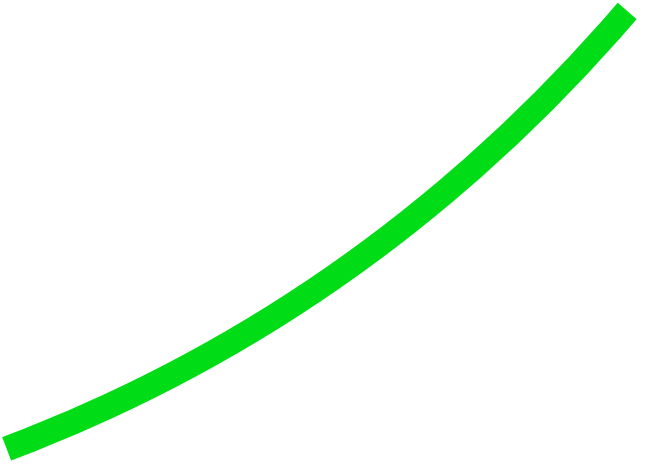

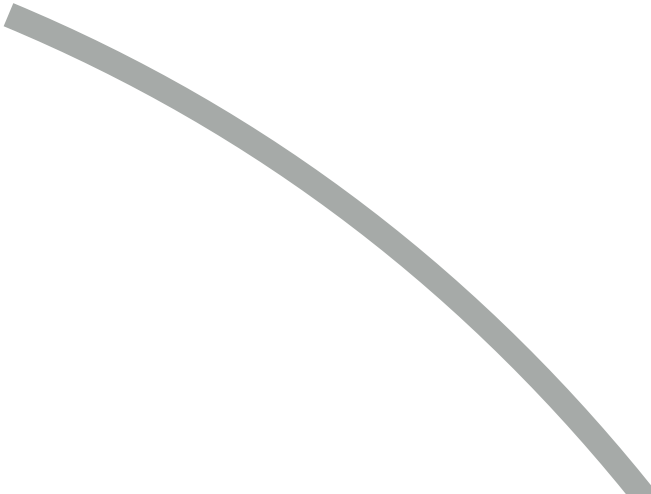

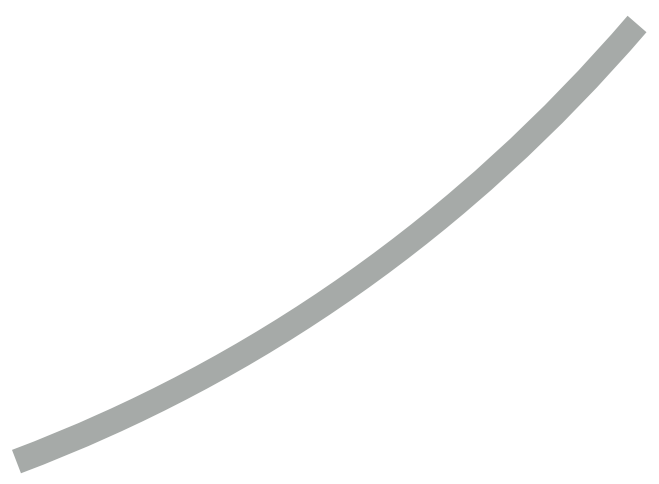

```
type: “colors”,
```

```
key: “colors-gn”,
```

```
name: “GN Colors”,
```

colors: [

key: “26EE2C”,

```
type: “color”,
```



name: “Fluorescent Green”

key: “59DA46”,

name: “Malachite”

key: “0074FF”,

name: “Blue”

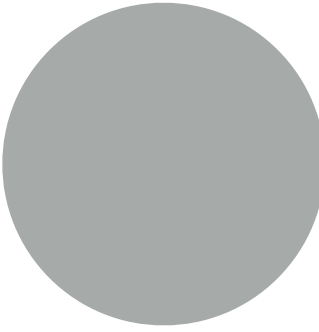

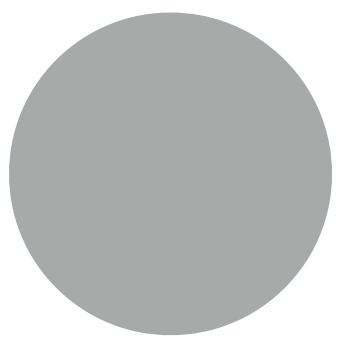

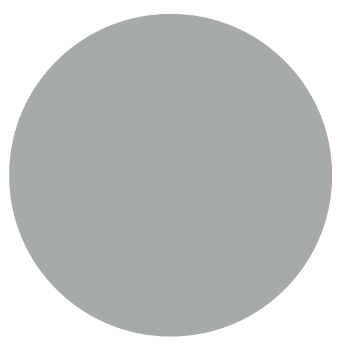

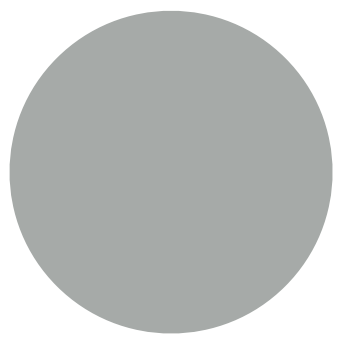

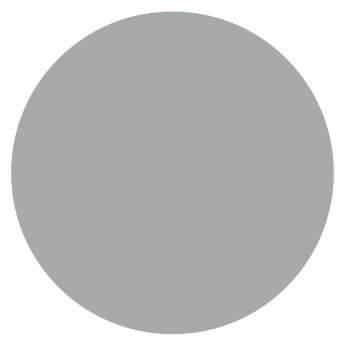

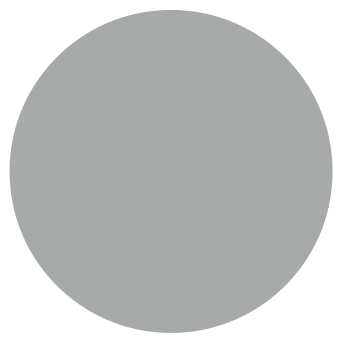

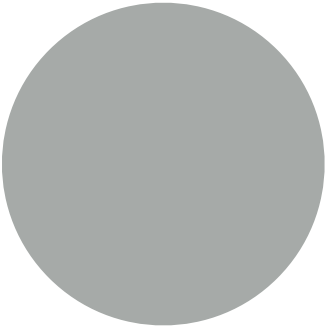

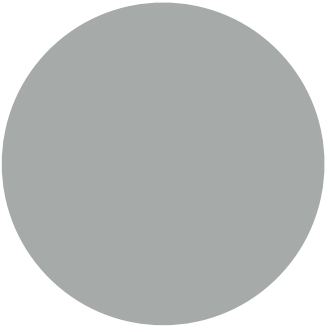

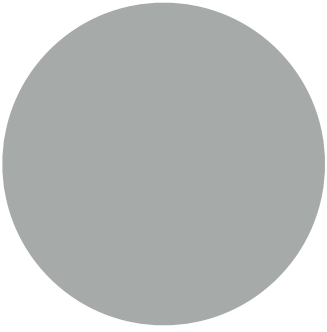

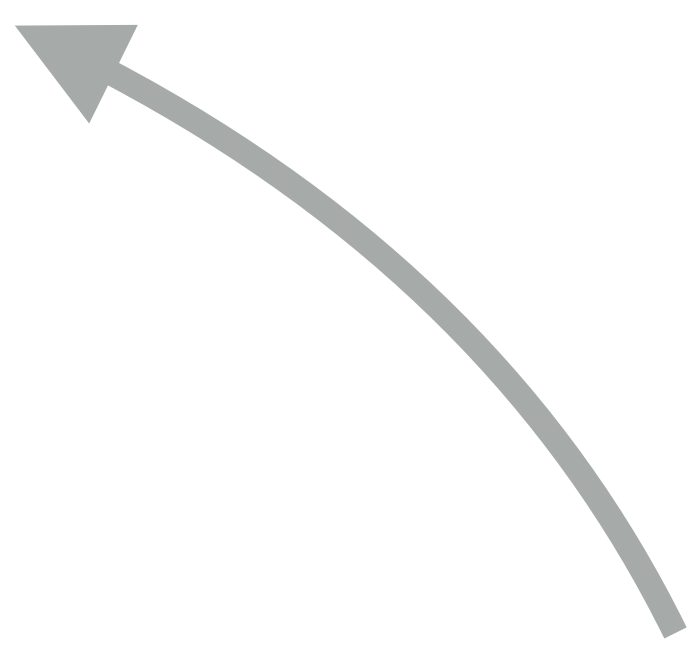

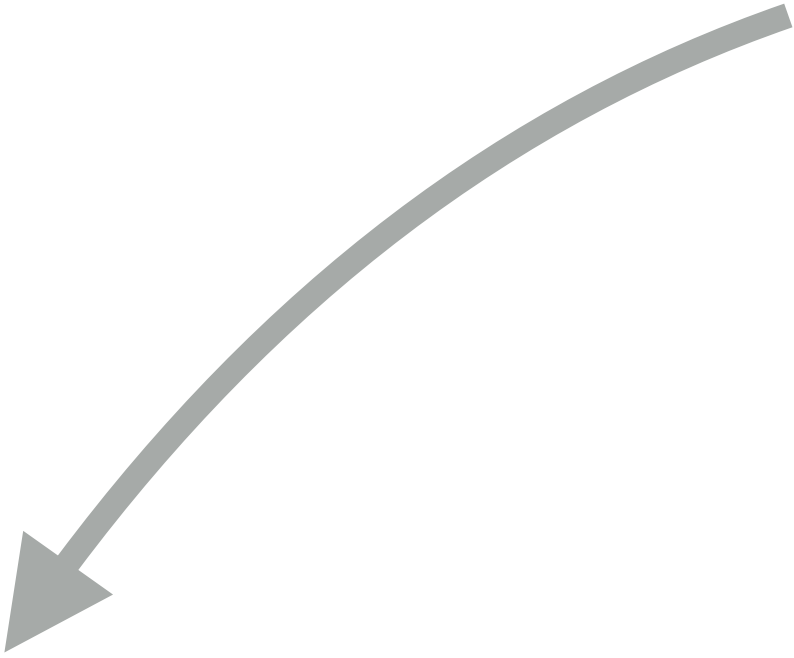

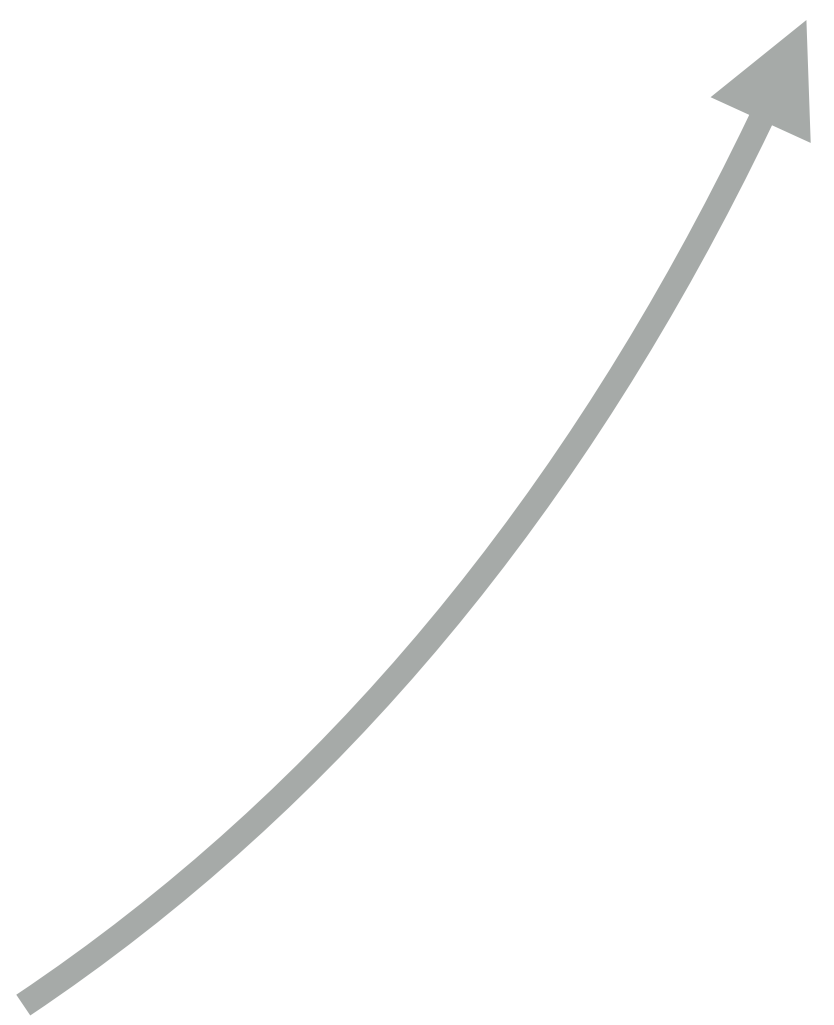

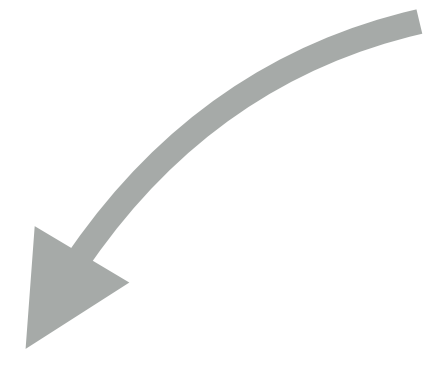

Database Models

11