

# Consistency, Robustness and Sparsity for Learning Algorithms

Konsistenz, Robustheit und Dünnbesetztheit von Lern-Algorithmen

zur Erlangung des Doktorgrades

**Dr. rer. nat.**

**im Studiengang Mathematik**

am Department Mathematik der  
Friedrich-Alexander-Universität Erlangen-Nürnberg

vorgelegt am **13.Juli 2023**

von **Tim Roith**

Prüfer: Martin Burger  
Betreuer: M.Sc. C

Für eine besondere Person,  
ohne sie hätte ich es nie geschafft.

## Acknowledgement

I would like to thank my supervisors for helping me finish this thesis and supporting me with their profound knowledge..

# Contents

<b>Preface</b>	<b>vi</b>
<b>I. Exposition</b>	<b>1</b>
<b>1. Robust and Sparse Supervised Learning</b>	<b>2</b>
1.1. Setting . . . . .	2
1.1.1. Gradient Computation and Stochastic Gradient Descent . . . . .	3
1.2. Adversarial Stability via Lipschitz Training: [CLIP] . . . . .	5
1.2.1. Cheap Lipschitz Training . . . . .	9
1.2.2. Analysis of Lipschitz Regularization . . . . .	10
1.2.3. Numerical Results . . . . .	12
1.3. Sparsity via Bregman Iterations: [BREG-I] . . . . .	13
1.3.1. Preliminaries on Convex Analysis and Bregman Iterations . . . . .	14
1.3.2. Linearized Bregman Iterations and Mirror Descent . . . . .	21
1.3.3. Stochastic and Momentum Variants . . . . .	22
1.3.4. Convergence of Stochastic Bregman Iterations . . . . .	23
1.3.5. Numerical Results and Practical Considerations . . . . .	27
1.4. Resolution Stability . . . . .	31
1.4.1. Fourier Neural Operators . . . . .	33
1.4.2. Analysis . . . . .	36
1.4.3. Numerical Results . . . . .	39
<b>II. Prints</b>	<b>41</b>

# List of Figures

- 1.1. Visualization of the Bregman distance. . . . . 16
- 1.2. Bregman iterations for image denoising in [Example 1.18](#) . . . . . 20
- 1.3. Effects of applying convolutional filters with different resolutions . . . . . 35

# Preface

This work is structured into two main parts, **Part I** the presentation and explanation of the topics and results presented in **Part II**, the peer-reviewed articles.

Part I: Exposition	Part II: Prints
??: ??	
??: ??	????
Chapter 1: Robust and Sparse Supervised Learning	????

**Part I** consists of three chapters, of which the first explains the paradigms, *unsupervised*, *semi-supervised* and *supervised* learning. The other chapters are the split up thematically, concerning the topics semi-supervised and supervised learning respectively. In each of these chapters a short introduction provides the necessary framework allowing us to explain the main contributions. The following publications are reprinted in **Part II**:

[LIP-I] T. Roith and L. Bungert. “Continuum limit of Lipschitz learning on graphs.” In: *Foundations of Computational Mathematics* (2022), pp. 1–39.

[LIP-II] L. Bungert, J. Calder, and T. Roith. “Uniform convergence rates for Lipschitz learning on graphs.” In: *IMA Journal of Numerical Analysis* (Sept. 2022). DOI: [10.1093/imanum/drac048](https://doi.org/10.1093/imanum/drac048).

[CLIP] L. Bungert et al. “CLIP: Cheap Lipschitz training of neural networks.” In: *Scale Space and Variational Methods in Computer Vision: 8th International Conference, SSVM 2021, Virtual Event, May 16–20, 2021, Proceedings*. Springer. 2021, pp. 307–319.

[BREG-I] L. Bungert et al. “A bregman learning framework for sparse neural networks.” In: *Journal of Machine Learning Research* 23.192 (2022), pp. 1–43.

[FNO] S. Kabri et al. “Resolution-Invariant Image Classification based on Fourier Neural Operators.” In: *Scale Space and Variational Methods in Computer Vision: 9th International Conference, SSVM 2023, Proceedings*. Springer. 2023, pp. 307–319.

The following two works that are not part of this thesis but provide an additional insight.

[BREG-II] L. Bungert et al. “Neural Architecture Search via Bregman Iterations.” In: (2021). arXiv: [2106.02479](#) [cs.LG].

## TR’s Contribution

Here we list TR’s contribution to the publications included in the thesis.

**[LIP-I]:** This work builds upon the findings in TR’s master thesis [Roi21]. It is however important to note that the results constitute a significant extension and are conceptually stronger than the ones in [Roi21], see ???. TR adapted the continuum limit framework to the  $L^\infty$  case, worked out most of the proofs and wrote a significant part of the paper. In collaboration with LB, he identified the crucial domain assumptions that allow to work on non-convex domains and proved convergence for approximate boundary conditions.

**[LIP-II]:** In collaboration with LB, TR worked on the convergence proofs building upon the ideas of JC. He contributed to both the numeric and the analysis conducted in the paper.

**[CLIP]:** TR worked out the main algorithm proposed in the paper together with LB, based on LB’s idea. Together with LS and RR he conducted the numerical examples and also wrote most of the source code. Furthermore, he wrote large parts of the paper.

**[BREG-I]:** TR expanded LB’s ideas of employing Bregman iteration for sparse training. Together with MB and LB he worked out the convergence analysis of stochastic Bregman iterations. Here, he also proposed a profound sparse initialization strategy. Furthermore, he conducted the numerical examples and wrote most of the source code.

**[FNO]:** This work is based on SK’s masters thesis, employing the initial ideas of MB for resolution invariance with FNOs. In the paper TR worked out the proofs for well-definedness and Fréchet-differentiability, together with SK. He wrote large parts of the paper and the source code. Here, he conducted the numerical studies in collaboration with SK.

Part I.

**Exposition**



# Chapter 1

## Robust and Sparse Supervised Learning

In this chapter we now focus on supervised learning as described in ?? [CLIP; BREG-II; FNO; BREG-I]

Section 1.1: Setting

Section 1.2: [CLIP]

Section 1.3: [BREG-I]

Section 1.4: [FNO]

### 1.1. Setting

We are given a finite training set  $\mathcal{T} \subset \mathcal{X} \times \mathcal{Y}$ . For a family of functions  $f_\theta : \mathcal{X} \rightarrow \mathcal{Y}$  parameterized by  $\theta \in \Theta$ . We consider the empirical minimization

$$\min_{\theta \in \Theta} \mathcal{L}(\theta)$$

where for a function  $\ell : \mathcal{Y} \times \mathcal{Y} \rightarrow \mathbb{R}$  we define

$$\mathcal{L}(\theta) := \frac{1}{|\mathcal{T}|} \sum_{(x,y) \in \mathcal{T}} \ell(f_\theta(x), y). \quad (1.1)$$

**Example 1.1 (MLE).**

**Example 1.2 (Cross-Entropy).**

Assuming that  $\mathcal{T}$  is sampled from a joint distribution  $\pi$  on  $\mathcal{X} \times \mathcal{Y}$  this approximates the infeasible population risk minimization

$$\int_{\mathcal{X} \times \mathcal{Y}} \ell(f_\theta(x), y) d\pi(x, y).$$

In this thesis we focus on feed-forward neural networks, i.e., we consider layers of the form

$$\Phi(w, W, b)(z) := wz + \sigma(Wz + b)$$

where  $w \in \mathbb{R}$  models a residual connection,  $W \in \mathbb{R}^{n \times n}$  is a weight matrix,  $b \in \mathbb{R}^n$  a bias vector and  $z \in \mathbb{R}^m$ . We consider a concatenation of  $L \in \mathbb{N}$  such layers, which then forms a neural network

$$f_\theta = \Phi^L \circ \dots \circ \Phi^1$$

with parameters  $\theta = ((W_1, b_1, w_1) \dots, (W_L, b_L, w_L)) \in \Theta$  and layers  $\Phi^i := \Phi(w_i, W_i, b_i)$ .

## MLP

## Convolutions

## ResNets

### 1.1.1. Gradient Computation and Stochastic Gradient Descent

Training a neural network requires to solve a optimization problem w.r.t. to the parameters  $\theta \in \Theta$ . In this work we only focus on first order methods, however both zero [Riedl] and second order methods [Hessian] have been successfully applied in this context. Employing first order methods, requires to evaluate the gradient  $\nabla_\theta \mathcal{L}$ , however in this scenario it is not common to compute the full gradient but rather to have a gradient estimator. This estimator is usually obtained by randomly dividing the train set  $\mathcal{T}$  into disjoint minibatches  $B_1 \cup \dots \cup B_b = \mathcal{T}$  and then successively computing the gradient of the minibatch loss

$$\mathcal{L}(\theta; B) := \frac{1}{|B_i|} \sum_{(x,y) \in B_i} \ell(f_\theta(x), y).$$

Iterating over all batches  $i = 1, \dots, b$  is referred to as one epoch. From a mathematical point of view this yields stochastic optimization methods, since in each step the true gradient is replaced by an estimator. In the abstract setting we let  $(\Omega, F, \mathbb{P})$  be a probability space and consider a function  $g : \Theta \times \Omega \rightarrow \Theta$  as an unbiased estimator of  $\nabla \mathcal{L}$ , i.e.

$$\mathbb{E}[g(\theta; \omega)] = \nabla \mathcal{L}(\theta) \text{ for all } \theta \in \Theta.$$

Most notably this method transforms the standard gradient descent update [Cau+47]

$$\theta^{(k+1)} = \theta^{(k)} - \tau^{(k)} \nabla \mathcal{L}(\theta^{(k)})$$

to *stochastic* gradient descent [RM51]

draw  $\omega^{(k)}$  from  $\Omega$  using the law of  $\mathbb{P}$ ,


$$g^{(k)} := g(\theta^{(k)}; \omega^{(k)}),$$

$$\theta^{(k+1)} := \theta^{(k)} - \tau^{(k)} g^{(k)}.$$

## 1.2. Adversarial Stability via Lipschitz Training: [CLIP]

In the following we consider classification problems with  $C \in \mathbb{N}$  different classes and functions  $f : \mathcal{X} \rightarrow \Delta^C$  for which we denote by

$$f^{\text{MAP}}(x) := \operatorname{argmax}_c f(x)_c$$

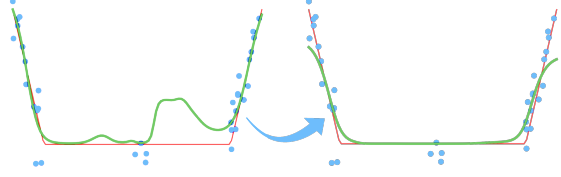

the maximum a posteriori estimation for input  $x \in \mathcal{X}$ . The capabilities of neural networks to perform classification tasks on unseen data—i.e. inputs  $x \in \mathcal{X}$  that are not part of the training data—are impressive and the reason for their popularity. However, it has been noticed in [GSS14] that is relatively easy to “fool” classification networks in the following sense:

*Given a classification network and a human classifier  $f_\theta, h : \mathcal{X} \rightarrow \Delta^C$ , and an input  $x \in \mathcal{X}$  such that  $f_\theta^{\text{MAP}}(x) = h^{\text{MAP}}(x)$ . An adversarial example is an input  $\bar{x} \in \mathcal{X}$  that is close to  $x$  and*

$$f_\theta(\bar{x}) \neq h(\bar{x}) = h(x).$$

The vague concept of a *human classifier*, bears the intuition of the classification problem as a human would solve it. Assuming that we are given data  $\mathcal{T} \subset \mathcal{X} \times \mathcal{Y}$  that is samples i.i.d. from a joint distribution  $P_{\mathcal{X}, \mathcal{Y}}$  this function could also be chosen as  $h(x)_c := P_{\mathcal{X}, \mathcal{Y}}(c|x)$ .

**Remark 1.3.** While we mostly focus on neural networks, some authors argue that these instabilities are inherent to certain classification problems [Sha+18; FFF18]. From this point of view, trying to defend against these instabilities is not necessarily desirable.  $\triangle$

**Remark 1.4 (Notational Remark).** Since we consider a classification problem, the output data is given as a label  $c \in \{1, \dots, C\}$ . In order to transform this into a corresponding vector  $y \in \Delta^C$  we employ so-called one-hot vectors  $\text{oh} : \{1, \dots, C\} \rightarrow \Delta^C$ ,

$$\text{oh}(c)_i := \begin{cases} 1 & \text{if } i = c, \\ 0 & \text{else.} \end{cases}$$

We also write  $\text{oh}(c) := c_{\text{oh}}$  in order to simplify notation.  $\triangle$

**What are Adversarial Examples Formally** In order to formalize this idea we omit any influence of the typically unavailable function  $h$  and instead consider  $\bar{x}$  adversarial if  $f_\theta(x) \neq f_\theta(\bar{x})$ , i.e. we assume  $f_\theta(x)$  to be “correct”. Furthermore, in this work we assume that  $\mathcal{X}$  models an image space  $\mathcal{X} = \mathbb{R}^{K \times N \times M}$ , with  $K, N, M \in \mathbb{N}$  and choose a distance  $d : \mathcal{X} \times \mathcal{X} \rightarrow \mathbb{R}_0^+$  to measure the distance between points in  $\mathcal{X}$ .

**Remark 1.5.** In most of our examples we choose  $d(\cdot, \cdot) = \|\cdot - \cdot\|_p$ . Employing a  $L^p$  norm in an image context—via pixel-wise comparison—can be an unfavorable choice. Images that appear very different visually, (i.e. for a human classifier) can have a smaller  $L^p$  distance, than images that visually appear similar, see e.g. [Sta+21, Fig. 16]. However, it is easy to evaluate, which is crucial for most applications. In the absence of a better criterion, having a small  $L^p$  norm, is commonly the only way to decide if  $\bar{x}$  is an admissible adversarial example.  $\triangle$

Employing these simplifications we then say that  $\bar{x} \in \mathcal{X}$  is adversarial, if

$$d(x, \bar{x}) \leq \varepsilon \quad \text{and} \quad f_\theta(x) \neq f_\theta(\bar{x}),$$

where  $\varepsilon$  is called the *adversarial budget*. This interpretation only makes sense, if we assume that  $f_\theta(x)$  is *correct*, which can only be easily checked on the training data [Bun+23].

**Types of Adversarial Examples** Typically, adversarial examples are created from the clean image  $x$  via some distortion  $\delta \in \mathbb{R}^n$ . Together with an application map  $T : \mathcal{X} \times \mathbb{R}^s \rightarrow \mathcal{X}$  one then obtains  $\bar{x} = T(x, \delta)$  as the adversarial example. In this formulation one can alternatively employ the criterion  $\|\delta\| \leq \varepsilon$  to decide, whether  $T(x, \delta)$  is an adversarial example. We only list some of the approaches below:

- **Addition:** the most well-known examples are created by  $T(x, \delta) := x + \delta$ , i.e.  $\bar{x} = x + \delta$ . Here, it is important to note that typically images are assumed to have values between 0 and 1, i.e.  $\mathcal{X} = [0, 1]^{K \times N \times M}$  for which it is important to ensure that  $\bar{x} \in \mathcal{X}$ .
- **Translation and Rotation:** Simple geometric transformations—that would be unnoticeable for a human classifier—are quite effective to fool neural networks. Employing translations  $T_t : \mathcal{X} \times \mathcal{X} \rightarrow \mathcal{X}$  one has to choose the behavior on the boundary such that one obtains a valid image. The same holds true for rotations  $T_r : \mathcal{X} \times [-\pi, \pi] \rightarrow \mathcal{X}$ . In this case  $\delta \in [-\pi, \pi]$  models the angle of the rotation and would yield an admissible adversarial example, if  $|\delta| \leq \varepsilon$ . Here, we see that this formulation loses some expressivity:
  - On the MNIST classification task, we see that only  $\varepsilon < \pi/2$  makes sense. Otherwise the number “6” could be always transformed to the number “9” and vice versa.
  - Considering the number “0” rotations above the angle  $\pi/2$  can definitely yield proper adversarial examples  $\bar{x}$ .

We refer to [Eng+18] for a study on these types of adversarial examples.

- **Change of Basis:** As explored in [Guo+17] one can consider a different orthonormal basis of the image space  $\mathbb{R}^{K \times N \times M}$  and then perform the attack w.r.t. this basis. The transform  $T : \mathcal{X} \times \mathbb{R}^{K \times N \times M} \rightarrow \mathcal{X}$  first obtains the different representation of  $x$ , then adds the coefficients of  $\delta$  and then maps back to the original basis.

This is only meaningful, if one restricts certain coefficients of  $\delta$  to be zero in the alternative basis. For example, the discrete cosine transform ([ANR74]) has been applied successfully in this context [Guo+17].

In the following we restrict ourselves to the additive case and only consider examples  $\bar{x} = x + \delta$ .

**Finding Adversarial Examples** Employing a loss function  $\ell : \mathcal{Y} \times \mathcal{Y} \rightarrow \mathbb{R}$  the task of finding an adversarial examples  $\bar{x} = x + \delta \in \mathcal{X}$  can be relaxed via solving the problem

$$\max_{\bar{x} \in \mathcal{X}: d(x, \bar{x}) \leq \varepsilon} \ell(y, f_{\theta}(\bar{x})) = \max_{\delta: \|\delta\|_d \leq \varepsilon, x + \delta \in \mathcal{X}} \ell(y, f_{\theta}(x + \delta)), \quad (1.2)$$

where  $y = f_{\theta}(x)$ . Solving this problem is referred to as *attacking* the network  $f$ . More precisely, this is a so-called *untargeted* attacks, since we do not prescribe  $\bar{x}$  to realize any special output as long as it confuses the network. Opposed to this, there are so called *targeted* attacks. Here we pick  $c^{\text{adv}} \neq f_{\theta}^{\text{MAP}}(x)$  and then want to find  $\bar{x}$  such that  $f_{\theta}^{\text{MAP}}(\bar{x}) = c^{\text{adv}}$ . Here, we then consider the problem

$$\min_{\bar{x} \in \mathcal{X}: d(x, \bar{x}) \leq \varepsilon} \ell(c_{\text{oh}}^{\text{adv}}, f_{\theta}(\bar{x})).$$

However, we see that conceptually this problem is similar to Eq. (1.2) and differs only by a change of sign and a different reference label. A popular method to solve Eq. (1.2) is the projected sign gradient ascent iteration [KGB+16],

$$\bar{x}^{(k+1)} = \text{Proj}_d(\bar{x}^{(k)} + \tau \text{sign}(\nabla_{\bar{x}} \ell(f_{\theta}(x), f_{\theta}(\bar{x}^{(k)})))).$$

Here,  $\text{Proj}_d$  denotes the projection onto the set  $\mathcal{X} \cap B_{d, \varepsilon}(x)$ , where  $B_{d, \varepsilon}(x)$  is the ball with radius  $\varepsilon$  around  $x$ , w.r.t. to the distance  $d$ . Performing only one step of this iteration yields the fast gradient sign method [GSS14]. There is a wide variety of these so-called gradient-based white-box attacks [Yua+19], i.e. methods that assume that the gradient of the model is available. In more realistic scenarios, this might not be the case. Attacks that do not employ the actual gradient of the model to attack are called *black box* attacks [Ily+18], which however not part of this thesis.

**Defending Against Adversarial Examples** We consider the question of finding parameters  $\theta \in \Theta$  such that corresponding model  $f_{\theta}$  is *adversarially robust*, i.e. is less vulnerable to attacks. Therefore, we want the attack problem in Eq. (1.2) to be hard to solve. This intuition leads to the optimization problem

$$\min_{\theta \in \Theta} \sum_{(x, y) \in \mathcal{T}} \max_{\bar{x} \in B_{d, \varepsilon}(x)} \ell(f_{\theta}(\bar{x}), y)$$

which is known as the *adversarial training* formulation [KGB16; Mad+17]. From a distributionally robust optimization point of view, this problem relates to

$$\min_{\theta \in \Theta} \max_{\tilde{P}: D(P_{\mathcal{X}, \mathcal{Y}}, \tilde{P}) \leq \varepsilon} \int_{\mathcal{X} \times \mathcal{Y}} \ell(f_{\theta}(x), y) d\tilde{P}(x, y)$$

where  $D$  denotes some distance on probability distributions, see [BGM23]. Employing a batched gradient descent type iteration, one then has to solve a problem of the form Equation (1.2) in every step, which can be interpreted as a form of data augmentation [LeC+95].

**Lipschitz Training of Neural Networks** Adversarial robustness is closely related to the Lipschitzness of a network  $f_\theta$ . Namely, for inputs  $x, \bar{x} \in \mathcal{X}$  that are close, we also want the outputs of  $f_\theta$  to be close. In other words we want to find a small constant  $L > 0$  such that

$$\|f_\theta(x) - f_\theta(\bar{x})\|_{\mathcal{Y}} \leq L \|x - \bar{x}\|_{\mathcal{X}},$$

where we typically employ an  $L^p$  norm both  $\|\cdot\|_{\mathcal{X}}$  and  $\|\cdot\|_{\mathcal{Y}}$ . The smallest constant fulfilling this inequality is the Lipschitz constant  $\text{Lip}(f_\theta)$ . Having some control over this constant can therefore relate to being adversarially robust.

**Remark 1.6.** Apart from adversarial robustness, having an upper bound on the Lipschitz constant of a neural network is also important for other applications, see e.g. [Has+20; ACB17].  $\triangle$

We employ the Lipschitz constant as a regularizer and consider the problem

$$\min_{\theta} \mathcal{L}(\theta) + \lambda \text{Lip}(f_\theta) \quad (1.3)$$

for a parameter  $\lambda$ . Unfortunately, computing the Lipschitz constant of neural networks is a NP-hard problem [SV18] for which many works employ the estimate

$$\text{Lip}(f_\theta) \leq \prod_{l=1}^L \text{Lip}(\Phi_l) \leq C_\sigma \prod_{l=1}^L \|W_l\|, \quad (1.4)$$

where here  $\|W_l\|$  denotes some matrix norm and  $C_\sigma$  depends on the Lipschitz constants of the activation functions, see [ALG19; Gou+20; KMP20; RKH19]. This inequality is not sharp and usually overestimates the Lipschitz constant, as we see in the following example taken from [CLIP].

**Example 1.7.** We consider a feed-forward neural network  $f_\theta : \mathbb{R} \rightarrow \mathbb{R}$  with one hidden layer,

$$\begin{aligned} \Phi_1(z) &:= \text{ReLU}(W_1 z) := (\max\{z, 0\}, \max\{-z, 0\})^T, & W_1 &:= (1, -1), \\ \Phi_2(z) &:= W_2 z := z_1 + z_2, & W_2 &:= (1, 1)^T, \\ f_\theta &:= \Phi_2 \circ \Phi_1. \end{aligned}$$

For  $x \in \mathbb{R}$  we have that

$$\begin{aligned} x \geq 0 &\Rightarrow \Phi_1(x) = (x, 0)^T &\Rightarrow f_\theta(x) = x, \\ x \leq 0 &\Rightarrow \Phi_1(x) = (0, -x)^T &\Rightarrow f_\theta(x) = -x, \end{aligned}$$

and therefore  $f_\theta = |\cdot|$ , for which we know that  $\text{Lip}(f_\theta) = 1$ . However employing the spectral for  $W_1$  and  $W_2$ , we see that

$$\|W_1\| \cdot \|W_2\| = \sqrt{2} \sqrt{2} = 2.$$

Plugging the estimate of Eq. (1.4) into Eq. (1.3) therefore potentially over regularizes the problem.

**Contribution in [CLIP]** In [CLIP] we propose a strategy to solve Eq. (1.3) approximately, without the estimate in Eq. (1.4). The basic idea consists of approximating the Lipschitz constant on a finite set and using this approximation as a regularizer. Furthermore, we analyse the original model in Eq. (1.3) where we study existence of solutions, the influence of the parameter  $\lambda$  and the limits  $\lambda \rightarrow 0, \lambda \rightarrow \infty$ , see Section 1.2.2. Finally, we demonstrate the efficiency of the methods by applying to some simple toy problems, see Section 1.2.3.

### 1.2.1. Cheap Lipschitz Training

As mentioned before, we approximate the Lipschitz constant on a finite set  $\mathcal{X}_{\text{Lip}} \subset \mathcal{X} \times \mathcal{X}$  via

$$\text{Lip}(f_\theta; \mathcal{X}_{\text{Lip}}) := \max_{(x, \bar{x}) \in \mathcal{X}_{\text{Lip}}} \frac{\|f_\theta(x) - f_\theta(\bar{x})\|_{\mathcal{Y}}}{\|x - \bar{x}\|_{\mathcal{X}}} \approx \text{Lip}(f_\theta).$$

Disregarding the non-differentiable points of  $\theta \mapsto \text{Lip}(f_\theta; \mathcal{X}_{\text{Lip}})$  allows us to make the above approximation in Eq. (1.3) and the solve then problem via a gradient descent variant.

**Remark 1.8.** Let  $f, g : \mathcal{X} \rightarrow \mathcal{Y}$  be two differentiable functions. If  $f(\bar{x}) > g(\bar{x})$  for some  $\bar{x} \in \mathcal{X}$  then we know that there exists some  $\epsilon > 0$  such that  $f(x) > g(x) \forall x \in B_\epsilon(\bar{x})$ . We have that  $f \vee g = \max\{f, g\} = f$  in  $B_\epsilon(\bar{x})$  and therefore  $x \mapsto f(x) \vee g(x)$  is differentiable in  $\bar{x}$ . If  $f(\bar{x}) = g(\bar{x})$  then  $f \vee g$  could be non-differentiable at  $\bar{x}$ . However, in practice we employ automatic differentiation, where in this case one of the functions is chosen, say  $f$ , and the *gradient* at  $\bar{x}$  is computed as  $\nabla f$ .  $\triangle$

The strength of this approach of course is dependent on the quality of the set  $\mathcal{X}_{\text{Lip}}$ . In [CLIP] we propose to iteratively update the set via a gradient ascent type scheme. Namely, we initialize  $\mathcal{X}_{\text{Lip}}$  as a random perturbation of a subset of the given data. In each step we then update the points as follows:

- Consider  $L(x, \bar{x}) := \|f_\theta(x) - f_\theta(\bar{x})\| / \|x - \bar{x}\|$ ,  $x, \bar{x} \in \mathcal{X}$ .
- For each  $(x, \bar{x}) \in \mathcal{X}_{\text{Lip}}$  perform the update

$$\begin{aligned} x &\leftarrow x + \tau L(x, \bar{x}) \nabla_x L(x, \bar{x}), \\ \bar{x} &\leftarrow \bar{x} + \tau L(x, \bar{x}) \nabla_{\bar{x}} L(x, \bar{x}), \end{aligned}$$

for a parameter  $\tau > 0$ .



This scheme performs a gradient ascent on the Lipschitz constant, see [CLIP, Alg. 1]. For each mini batch  $B \subset \mathcal{T}$  we first update the set  $\mathcal{X}_{\text{Lip}}$  and then update the parameters via

$$\theta \leftarrow \theta - \eta \nabla_{\theta} (\mathcal{L}(\theta; B) + \lambda \text{Lip}(f_{\theta}, \mathcal{X}_{\text{Lip}}))$$

which yields the algorithm presented in [CLIP, Alg. 2]. Similar to [Sha+19] one can reuse the gradients computed for  $\nabla_x$  for the computation of  $\nabla_{\theta}$ . This fact yields the attribute *cheap* in the Lipschitz training algorithm.

### 1.2.2. Analysis of Lipschitz Regularization

In [CLIP] we analyse some basic properties of the original regularization problem in Eq. (1.3). We repeat the assumptions we made therein, in order to refer to them in the following.

**Assumption 1.** We assume that the loss function  $\ell : \mathcal{Y} \times \mathcal{Y} \rightarrow \mathbb{R} \cup \{\infty\}$  satisfies:

- a)  $\ell(y, \bar{y}) \geq 0$  for all  $y, \bar{y} \in \mathcal{Y}$ ,
- b)  $y \mapsto \ell(y, \bar{y})$  is lower semi-continuous for all  $\bar{y} \in \mathcal{Y}$ .

**Assumption 2.** We assume that the map  $\theta \mapsto f_{\theta}(x)$  is continuous for all  $x \in \mathcal{X}$ .

**Assumption 3.** We assume that there exists  $\theta \in \Theta$  such that

$$\frac{1}{|\mathcal{T}|} \sum_{(x,y) \in \mathcal{T}} \ell(f_{\theta}(x), y) + \lambda \text{Lip}(f_{\theta}) < \infty.$$

Employing only Assumption 2 one can show that the map  $\theta \mapsto \text{Lip}(f_{\theta})$  is lower semi-continuous, [CLIP, Lem. 1].

**Existence** If  $\Theta$  is compact or finite, one can show that there exist solutions of (1.3). In the general case one needs to add a norm term, that ensures boundedness of a minimizing sequence. The following is the main existence result, which can be proven by the direct method in the calculus of variations [Dac07].

**Proposition 1.1 ([CLIP, Prop. 1]).** Under Assumptions 1 to 3 the problem

$$\min_{\theta \in \Theta} \frac{1}{|\mathcal{T}|} \sum_{(x,y) \in \mathcal{T}} \ell(f_{\theta}(x), y) + \lambda \text{Lip}(f_{\theta}) + \mu \|\theta\|_{\Theta}$$

has a solution for all values  $\lambda, \mu > 0$ . Here,  $\|\cdot\|_{\Theta}$  denotes a norm on  $\Theta$ .

**Dependency on the Regularization Parameter** Assuming that for every  $\lambda > 0$  we have a solution  $\theta_\lambda \in \Theta$  of Eq. (1.3) one can show that

$$\begin{aligned} \lambda \mapsto \frac{1}{|\mathcal{T}|} \sum_{(x,y) \in \mathcal{T}} \ell(f_{\theta_\lambda}(x), y) & \text{ is non-decreasing,} \\ \lambda \mapsto \text{Lip}(f_{\theta_\lambda}) & \text{ is non-increasing.} \end{aligned}$$

This statement is the content of [CLIP, Prop. 2], however, the argument is exactly the same as in [BO13]. The intuition behind this result is that with increasing parameter  $\lambda$  solutions of Eq. (1.3)—more precisely the corresponding networks—have smaller Lipschitz constants, i.e. tend to be more constant, which however also diminishes their expressivity. We formalize the limit cases in the following.

Assuming the realizability condition of [SB14] we know that there exists parameters  $\theta \in \Theta$  such that  $\mathcal{L}(\theta) = 0$ . This means there are parameters that fit the data perfectly. Considering the limit  $\lambda \rightarrow 0$  we obtain convergence to a solution of the unregularized problem with the smallest Lipschitz constant.

**Proposition 1.2 ([CLIP, Prop. 3]).** Let Assumptions 1 to 3 and the realizability assumption [SB14] be satisfied. If  $\theta_\lambda \rightarrow \theta^\dagger \in \Theta$  as  $\lambda \searrow 0$ , then

$$\theta^\dagger \in \operatorname{argmin} \left\{ \text{Lip}(f_\theta) : \theta \in \Theta, \frac{1}{|\mathcal{T}|} \sum_{(x,y) \in \mathcal{T}} \ell(f_\theta(x), y) = 0 \right\}$$

if this problem admits a solution with  $\text{Lip}(f_\theta) < \infty$ .

Furthermore, we study the effect of sending  $\lambda \rightarrow \infty$ , where we see that the network  $f_{\theta_\lambda}$  indeed tends to be constant as expected. We can explicitly characterize this constant as the closest point to barycenter of the output data, that is realizable by a neural network.

**Proposition 1.3 ([CLIP, Prop. 4]).** Let Assumptions 1 to 3 be satisfied and assume that

$$\mathcal{M} := \{y \in \mathcal{Y} : \exists \theta \in \Theta, f_\theta(x) = y, \forall x \in \mathcal{X}\} \neq \emptyset.$$

If  $\theta_\lambda \rightarrow \theta_\infty \in \Theta$  as  $\lambda \rightarrow \infty$ , then  $f_{\theta_\infty}(x) = \hat{y}$  for all  $x \in \mathcal{X}$  where

$$\hat{y} \in \operatorname{argmin}_{y' \in \mathcal{M}} \frac{1}{|\mathcal{T}|} \sum_{y \in \mathcal{T}_Y} \ell(y', y).$$

### 1.2.3. Numerical Results

We briefly comment on the numerical results [CLIP]. All the experiments were implemented in Python [VD95] employing—among others—the PyTorch [Pas+19] package. We conduct experiments on the MNIST [LC10] and FashionMNIST [XRV17] datasets.

**Qualitative Example** We first apply the CLIP scheme to regularize a one-dimensional regression problem. In Fig.2 therein, one observes can observe qualitatively the effect of the regularization. Namely, we are given noisy data from a ground truth function for which the unregularized problem tend to overfit the data. The resulting network has fluctuations and therefore a large Lipschitz constant in certain regions, where the ground truth function has a small Lipschitz constant. With increasing parameter  $\lambda$  we observe that the networks  $f_{\theta_\lambda}$  are smoothed out and better approximate the ground truth function.




The code for all the experiments is available at [github.com/TimRoith/CLIP](https://github.com/TimRoith/CLIP).

**Quantitative Evaluation of Adversarial Robustness** We additionally evaluate how robust a CLIP trained network is against adversarial attacks. Next to a standard learning rate scheduler, we also update the regularization parameter  $\lambda$  throughout the training process. Namely, we choose a target accuracy  $\text{acc}_t$  and evaluate the loss on a validation set after the epoch. If this accuracy is less than the target we decrease  $\lambda$  and increase it if the accuracy is higher. In Table 1 of [CLIP] we compare ourselves against a weight regularization scheme that is based on the estimate in Eq. (1.4). We see that CLIP outperforms this method in most cases.

### 1.3. Sparsity via Bregman Iterations: [BREG-I]

Starting from the first simple neural architectures (e.g. [Ros58]) the size of typical architectures has grown significantly in the last years [Hoe+21]. While this development allowed to solve increasingly difficult tasks with neural networks, it also lead to immense computational requirements, both for the training and evaluation of the net. Therefore it seems natural, how the weights of neural networks can be compressed or more general how evaluation and training can be made more efficient. Some of the approaches here include (see [Gho+21] for a comprehensive overview):



- **Architecture Optimization:** Designing an architecture that can be trained to have the same performance as a comparable one, while having less parameters, e.g. [EMH19; How+17].
- **Quantization:** Lowering the precision of the machine numbers of the parameters, e.g. [Ban+18; CBD14].
- **Knowledge distillation:** Employing a trained larger network to learn a smaller network in a student-teacher approach, e.g. [Sch92; HVD15].
- **Pruning:** Parameters with small saliency, i.e., parameters that contribute little to the effective output of the network are removed or set to zero, in order to obtain a sparse weight matrix or a smaller architecture, see e.g. [LDS89; HSW93].

From the above methods, the pruning approach is most influential to our work in [BREG-I]. Namely, the concept of compressing the neural network by sparsifying the weight matrices is similarly employed. However, there are a few deviations from the classical pruning framework, which we remark in the following.

**Sparsity via Optimization** In [LDS89; HSW93] one assumes to be given a trained neural network, which is then compressed after training based on some criterion. The authors in [CFP97] employ an iterative pruning scheme, where a similar criterion is employed in order to throw away certain network weights after each step. In our work we want to employ a  $L^1$  type penalty on weight matrices  $W \in \mathbb{R}^{n \times m}$ ,

$$\|W\|_1 = \sum_{i=1}^n \sum_{j=1}^m |W_{ij}|$$

which has been widely employed to obtain sparse solution, e.g. [CM73]. In [Tib96] this yields to the so-called Lasso problem

$$\min_{\theta} \mathcal{L}(\theta) + \lambda \|\theta\|_1, \quad \lambda > 0,$$

where we extend the  $L^1$  norm to  $\Theta$  as discussed in [Section 1.3.5](#). This problem can for example be solved by a proximal gradient descent iteration

$$\theta^{(k+1)} = \text{soft shrinkage}(\theta - \tau \nabla \mathcal{L}(\theta^{(k)})) \quad (1.5)$$

where the shrinkage operator from [Example 1.15](#). This iteration was employed in [\[Nit14; RVV20; Red+16\]](#) to train sparse neural networks.

**Sparse-to-Sparse Training** All of the sparsity-based methods mentioned before start with dense weight matrices and only decrease the number of parameters during or at the end of the training process. Our approach yields an iteration, where the network is sparse throughout the iteration. In fact we start with only very few non-zero parameters and only activate necessary weights during training. This paradigm is known as sparse-to-sparse or evolutionary training [\[Moc+18; DZ19; Evc+20; DYJ19; Fu+22; Hua+16; Liu+21\]](#).

**Contribution in [\[BREG-I\]](#)** Our work falls into the regime of sparse-to-sparse training. However, instead of relying on some heuristic growth strategy, we employ the concept of inverse scale flows (see [Section 1.3.1](#)) which allows us to obtain an optimization-driven framework, with a time-continuous interpretation. We propose a stochastic variant of linearized Bregman iterations ([Section 1.3.3](#)) and employ it to train a sparse neural network. We show monotonic decrease of the loss in the stochastic setting—which is not possible in the case of proximal gradient descent [Eq. \(1.5\)](#)—and convergence of the iterates under additional convexity assumptions, see [Section 1.3.4](#). Finally, we demonstrate the numerical efficiency of the method (see [Section 1.3.5](#)) and provide an interesting applications for neural architecture search, which was further developed in [\[BREG-II\]](#).

### 1.3.1. Preliminaries on Convex Analysis and Bregman Iterations

We first review some necessary concepts from convex analysis that allow us to introduce the framework in [\[BREG-I\]](#). We refer to [\[BB18; Roc97; BC11\]](#) for a more exhaustive introduction to the topics. The functional  $J$  is called lower semicontinuous if  $J(u) \leq \liminf_{n \rightarrow \infty} J(u_n)$  holds for all sequences  $(u_n)_{n \in \mathbb{N}} \subset \Theta$  converging to  $u$ .

**Definition 1.9.** Given a Hilbert space  $\Theta$  and a functional  $J : \Theta \rightarrow (-\infty, \infty]$ .

1. The functional  $J$  is called convex, if

$$J(\lambda \bar{\theta} + (1 - \lambda)\theta) \leq \lambda J(\bar{\theta}) + (1 - \lambda)J(\theta), \quad \forall \lambda \in [0, 1], \bar{\theta}, \theta \in \Theta. \quad (1.6)$$

2. The effective domain of  $J$  is defined as  $\text{dom}(J) := \{\theta \in \Theta : J(\theta) \neq \infty\}$  and  $J$  is called proper if  $\text{dom}(J) \neq \emptyset$ .

In the following we want to consider functionals  $J$  that are convex, but not necessarily differentiable. Therefore, we define the subdifferential.

**Definition 1.10.** of a convex and proper functional  $J : \Theta \rightarrow (-\infty, \infty]$  at a point  $\theta \in \Theta$  as

$$\partial J(\theta) := \left\{ p \in \Theta : J(\theta) + \langle p, \bar{\theta} - \theta \rangle \leq J(\bar{\theta}), \forall \bar{\theta} \in \Theta \right\}. \quad (1.7)$$

If  $J$  is differentiable, then the subdifferential coincides with the classical gradient (or Fréchet derivative). We denote  $\text{dom}(\partial J) := \{\theta \in \Theta : \partial J(\theta) \neq \emptyset\}$  and observe that  $\text{dom}(\partial J) \subset \text{dom}(J)$ .

The main algorithm in this section are so-called Bregman iterations, for which we first define the Bregman distance.

**Definition 1.11 (Bregman Distance).** Let  $J : \Theta \rightarrow (-\infty, \infty]$  be a proper, convex functional. Then we define for  $\theta \in \text{dom}(\partial J), \bar{\theta} \in \Theta$

$$D_J^p(\bar{\theta}, \theta) := J(\bar{\theta}) - J(\theta) - \langle p, \bar{\theta} - \theta \rangle, \quad p \in \partial J(\theta). \quad (1.8)$$

For  $p \in \partial J(\theta)$  and  $\bar{p} \in \partial J(\bar{\theta})$  we define the *symmetric* Bregman distance as

$$D_J^{\text{sym}}(\bar{\theta}, \theta) := D_J^p(\bar{\theta}, \theta) + D_J^{\bar{p}}(\theta, \bar{\theta}). \quad (1.9)$$

Intuitively, the Bregman distance  $D_J^p(\bar{\theta}, \theta)$ , measures the distance of  $J$  to its linearization around  $\theta$ , see Fig. 1.1. If  $J$  is differentiable, then the subdifferential is single valued—we can suppress the sup script  $p$ —and we have

$$D_J(\bar{\theta}, \theta) = J(\bar{\theta}) - J(\theta) - \langle \nabla J(\theta), \bar{\theta} - \theta \rangle.$$

**Example 1.12.** For  $\Theta = \mathbb{R}^n$  and  $J = \frac{1}{2} \|\cdot\|_2^2$  we see that  $\partial J(\theta) = \{\theta\}$  and therefore

$$\begin{aligned} D_J^p(\bar{\theta}, \theta) &= \frac{1}{2} \langle \bar{\theta}, \bar{\theta} \rangle - \frac{1}{2} \langle \theta, \theta \rangle - \langle \theta, \bar{\theta} - \theta \rangle \\ &= \frac{1}{2} \langle \bar{\theta}, \bar{\theta} \rangle + \frac{1}{2} \langle \theta, \theta \rangle - \langle \theta, \bar{\theta} \rangle \\ &= \frac{1}{2} \|\bar{\theta} - \theta\|_2^2 = J(\bar{\theta} - \theta). \end{aligned}$$

We can easily see that in general it is neither definite, symmetric nor fulfills the triangle inequality, hence it is not a metric. However, it fulfills the two distance axioms

$$D_J^p(\bar{\theta}, \theta) \geq 0, \quad D_J^p(\theta, \theta) = 0, \quad \forall \bar{\theta} \in \Theta, \theta \in \text{dom}(\partial J). \quad (1.10)$$

The same holds for the symmetric Bregman distance, where additionally—as the name suggests—the symmetry property is fulfilled. The last concept that is crucial in [BREG-I] is the so-called proximal operator.

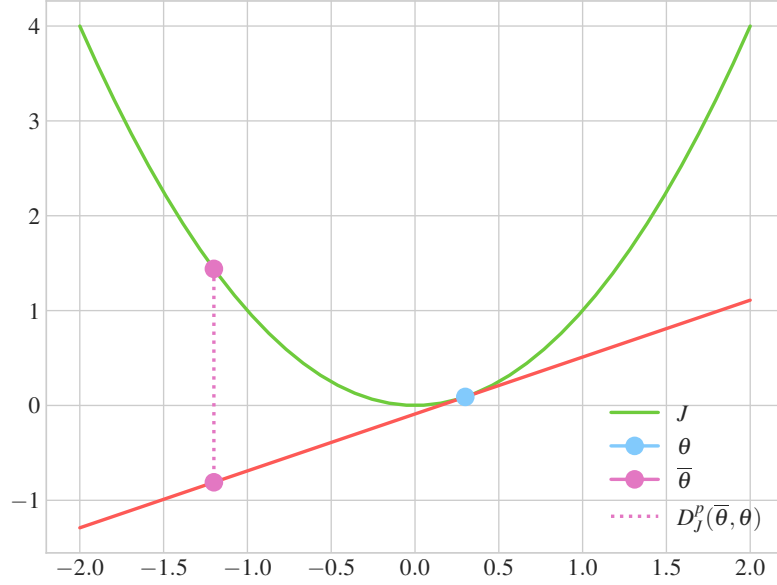


Figure 1.1.: Visualization of the Bregman distance.

**Definition 1.13.** Let  $J : \Theta \rightarrow (-\infty, \infty]$  be convex, proper and lower semicontinuous functional, then we define the *proximal operator* as

$$\text{prox}_J(\bar{\theta}) := \operatorname{argmin}_{\theta \in \Theta} \frac{1}{2} \|\theta - \bar{\theta}\|^2 + J(\theta).$$

If  $J$  is additionally a closed function, i.e., its sublevel sets

$$N_\alpha = \{\theta \in \operatorname{dom} J : J(\theta) \leq \alpha\}$$

are closed for every  $\alpha \in \mathbb{R}$  then we have that the function  $\tilde{J} = \frac{1}{2} \|\theta - \cdot\|^2 + J(\theta)$  is closed, proper and *strongly* convex and therefore has a unique minimizer, see [Roc97, Thm. 27.1]. Additionally, one often considers a regularization parameter  $\lambda > 0$  and is then interested in  $\text{prox}_{\lambda J}$ .

**Remark 1.14.** The optimality conditions for  $\theta = \text{prox}_{\lambda J}(\bar{\theta})$  yield

$$\bar{\theta} - \theta \in \lambda \partial J(\theta).$$

For a proper, closed and convex function we obtain

$$\theta = (I + \lambda \partial J)^{-1}(\bar{\theta})$$

where  $(I + \lambda \partial J)^{-1}$  is called the *resolvent* and is a one-to-one mapping (see [PB+14, Ch. 3.2]) which justifies the equality in the above equation. If  $J$  is differentiable, then we have  $\partial J = \{\nabla J\}$  and therefore,

$$\text{prox}_{\lambda J} = (I + \lambda \nabla J)^{-1}.$$

$\triangle$ 

In the following we list two relevant examples for the application in [BREG-I; BREG-II].

**Example 1.15.** If  $J = \|\cdot\|$  is a norm and  $\lambda > 0$  then we have that (see e.g. [PB+14])

$$\text{prox}_{\lambda J}(\bar{\theta}) = \bar{\theta} - \text{Proj}_{\|\cdot\|^*}(\bar{\theta}/\lambda)$$

where  $\text{Proj}_{\|\cdot\|^*}$  denotes the projection operator w.r.t. the dual norm  $\|\theta\|^* = \sup\{|\langle f, \theta \rangle| : f \in \Theta^*\}$ . In the case of  $\ell^p$  norms on  $\mathbb{R}^n$  we know that that

$$\|\theta\|_p^* = \|\theta\|_q$$

with  $1/p + 1/q = 1$  with the notational convention of  $1/\infty = 0$ . Especially relevant are the cases  $p \in \{1, 2\}$ . Here, we then have that

$$\text{prox}_{\lambda \|\cdot\|_2}(\bar{\theta}) = \bar{\theta} \begin{cases} 1 - \min\left\{\frac{\lambda}{\|\bar{\theta}\|_2}, 1\right\} & \text{if } \|\bar{\theta}\|_2 \geq \lambda \\ 0 & \text{else} \end{cases}$$

and for  $i = 1, \dots, n$

$$\text{prox}_{\lambda \|\cdot\|_1}(\bar{\theta})_i = \text{sign}(\bar{\theta}_i) \max\left\{|\bar{\theta}_i| - \lambda, 0\right\} = \begin{cases} \bar{\theta}_i - \lambda & \text{if } \bar{\theta} > \lambda \\ 0 & \text{if } |\bar{\theta}_i| \leq \lambda \\ \bar{\theta}_i + \lambda & \text{if } \bar{\theta} < -\lambda \end{cases}$$

the so called *soft shrinkage operator*.

**Example 1.16 (Group Norms).** Another relevant functional  $J$  is the group norm  $\ell_{1,2}$  that—in the context of sparse neural networks—was first employed by [Sca+17]. Here, we assume that the parameters in  $\Theta$  can be grouped in a collection of parameters  $\mathcal{G}$ , for which we then choose

$$J(\theta) = \sum_{g \in \mathcal{G}} \sqrt{\#\mathcal{G}} \|g\|_2$$

In this case the proximal operator is given as

$$\text{prox}_{\lambda J}(\bar{\theta})_g = g \max\left\{1 - \min\left\{\frac{\lambda \sqrt{\#\mathcal{G}}}{\|g\|_2}, 1\right\}, 0\right\}$$

**Bregman Iterations** Our goal is to minimize a function  $\mathcal{L}$  while simultaneously obtaining a low value w.r.t. the functional  $J$ . One popular approach considers the regularized problem

$$\min_{\theta} \mathcal{L}(\theta) + \lambda J(\theta) \quad \lambda > 0,$$



see e.g. [Tik43; CP08; DDD04; FS06; FNW07; Cha04; CP11], which however influences the minimizers of the original problem  $\min_{\theta} \mathcal{L}(\theta)$ . In the derivation of the Bregman iterations one can take a different viewpoint. Assume that we want to employ an iterative scheme, where in each step we want minimize  $\mathcal{L}$  while penalizing the distance to the previous iterate. For a stepping parameter  $\tau$  and starting from some  $\theta^{(0)} \in \Theta$  this yields the update

$$\theta^{(k+1)} = \operatorname{argmin}_{\theta} \tau \mathcal{L}(\theta) + \frac{1}{2} \|\theta - \theta^{(k)}\|^2 = \operatorname{prox}_{\tau \mathcal{L}}(\theta^{(k)}). \quad (1.11)$$

At first sight this is either known as the proximal point algorithm [Bre67] or a minimizing movement scheme [De 93]. If  $\mathcal{L}$  is differentiable, this update can be rewritten as

$$\theta^{(k+1)} = (I + \tau \nabla \mathcal{L})^{-1} \theta^{(k)} \Leftrightarrow \frac{1}{\tau} (\theta^{(k+1)} - \theta^{(k)}) = -\nabla \mathcal{L}(\theta^{(k+1)})$$

which is a implicit Euler discretization ([Eul24]) of the time-continuous gradient flow

$$\partial_t \theta_t = -\nabla \mathcal{L}(\theta_t).$$

We see that the penalization term in Eq. (1.11) is in fact the Bregman distance of the functional  $\frac{1}{2} \|\cdot\|^2$ . In order to incorporate an arbitrary convex functional  $J$ —and therefore allow each iterate to only slightly deviate w.r.t. the Bregman distance of  $J$  to the previous iterate—we employ  $D_J^{p^{(k)}}(\cdot, \theta^{(k)})$  as a penalization term. In order to obtain a update scheme for the subgradients, we observe

$$\theta = \operatorname{argmin}_{\theta \in \Theta} D_J^{p^{(k)}}(\theta, \theta^{(k)}) + \tau \mathcal{L}(\theta) \quad (1.12)$$

$$\Leftrightarrow p^{(k)} + \tau \nabla \mathcal{L}(\theta) \in \partial J(\theta). \quad (1.13)$$

This finally yields *Bregman iteration* of [Osh+05]

$$\theta^{(k+1)} = \operatorname{argmin}_{\theta \in \Theta} D_J^{p^{(k)}}(\theta, \theta^{(k)}) + \tau \mathcal{L}(\theta), \quad (1.14a)$$

$$p^{(k+1)} = p^{(k)} - \tau \nabla \mathcal{L}(\theta^{(k+1)}) \in \partial J(\theta^{(k+1)}). \quad (1.14b)$$

The very nature of Bregman iterations means starting with a iterate  $\theta^{(0)}$  that has a low value in  $J$ —preferably  $J(\theta^{(0)}) = 0$ —and only increase  $J(\theta^{(k)})$  gradually as  $k$  increases.

**Remark 1.17.** Originally, the iterations were employed for solving inverse problems. Here, we are given a forward operator  $A : \Theta \rightarrow \tilde{\Theta}$  and a noisy measurement  $f = A\theta + \delta$  where  $\delta \in \tilde{\Theta}$  is additive noise. The loss function is then of the form

$$\mathcal{L} = \frac{1}{2} \|A \cdot - f\|_2^2$$

for which one can show that the Bregman iterations converge to a solution of

$$\min \{J(\theta) : A\theta = f\}, \quad (1.15)$$

see e.g. [Osh+05]. In comparison the concept of adding a regularizing term with parameter  $\lambda > 0$ , i.e. considering the problem

$$\min_{\theta} \mathcal{L}(\theta) + \lambda J(\theta)$$

actually modifies the minimizers. In this sense Bregman iterations do not introduce a bias.  $\triangle$

**Example 1.18.** In order to get an intuition about the behavior of Bregman iterations, we consider an image denoising task. I.e. we are given a noisy image  $\mathbb{R}^{n \times m} \ni f = u + \delta$  where  $\delta \in \mathbb{R}^{n \times m}$  is additive noise. In order to obtain  $u \in \mathbb{R}^{n \times n}$  from  $f$  we employ the TV functional [ROF92]

$$J(u) = TV(u) := \sum_{i,j} \sqrt{|u_{i+1,j} - u_{i,j}|^2 + |u_{i,j+1} - u_{i,j}|^2}$$

together with the loss function  $\mathcal{L}(u) := \frac{1}{2} \|u - f\|_2^2$ . We start with an image  $u^{(0)}$  such that  $TV(u^{(0)}) = 0$ , i.e. a constant image. In Fig. 1.2 we visualize the iteration. At lower iterations  $u^{(k)}$  only displays features on a larger scale, while at the end, the iteration converges back to smallest possible scale, the noisy data. In order to obtain an appropriate denoising, one needs to employ a early stopping here. This fits well to the insight from Eq. (1.15) since here the forward operator is the identity, i.e.

$$\left\{ u : \frac{1}{2} \|u - f\|^2 = 0 \right\} = \{f\}.$$

It should also be noted that this example only serves a explanatory purpose. In practice directly applying Eq. (1.14) for  $J = TV$  can become infeasible since the first minimization problem is expensive.

If  $J = \frac{1}{2} \|\cdot\|_2^2$  as in Example 1.12 then this amounts to the step

$$\theta^{(k+1)} = \operatorname{argmin}_{\theta \in \Theta} \frac{1}{2} \|\theta - \theta^{(k)}\|_2^2 + \tau \mathcal{L}(\theta),$$

where the optimality conditions then yield

$$\theta^{(k+1)} - \theta^{(k)} + \tau \nabla \mathcal{L}(\theta^{(k+1)}) = 0 \Leftrightarrow \theta^{(k+1)} = \theta^{(k)} - \tau \nabla \mathcal{L}(\theta^{(k+1)})$$

which is a standard implicit Euler iteration. The time continuous flow for  $\tau \rightarrow 0$  is known as the *inverse scale space* flow [Bur+06; Bur+07],

$$\begin{cases} \dot{p}_t = -\nabla \mathcal{L}(\theta_t), \\ p_t \in \partial J(\theta_t), \end{cases}$$

where again for  $J = \frac{1}{2} \|\cdot\|_2^2$  we obtain that  $\partial J(\theta_t) = \theta_t$  and therefore obtain the standard gradient flow. Hence we see, that the inverse scale space flow is a generalization of the standard gradient flow.

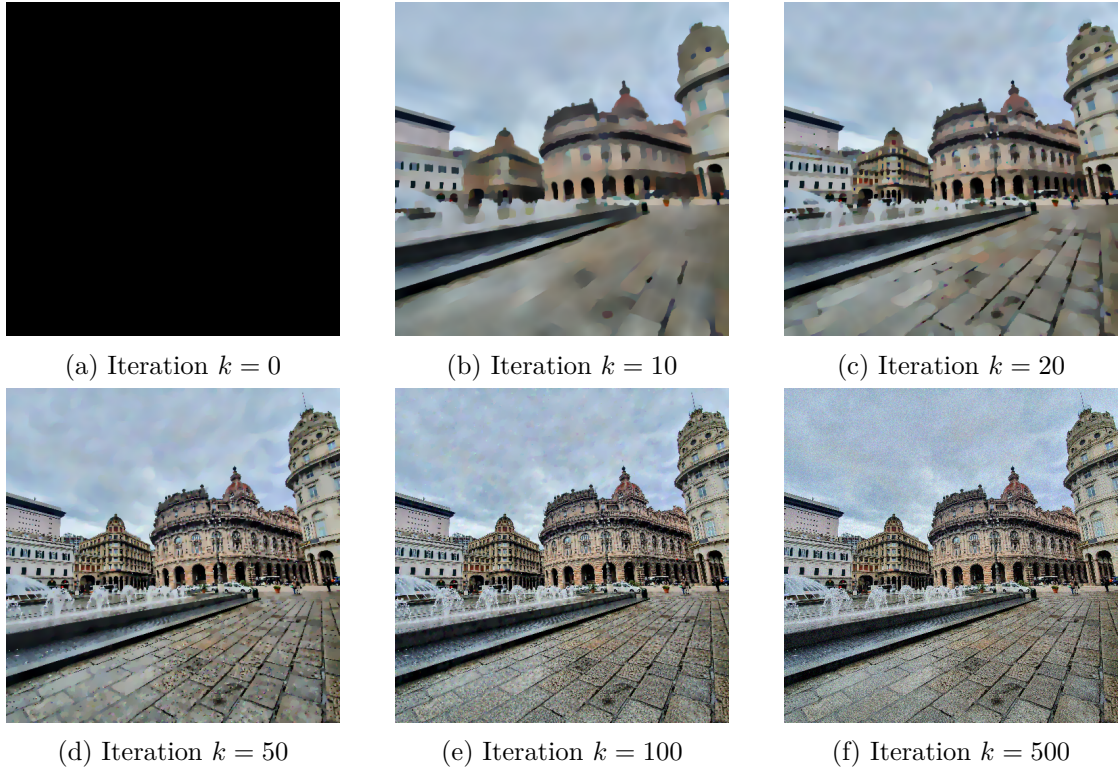


Figure 1.2.: Bregman iterations for image denoising in [Example 1.18](#)

### 1.3.2. Linearized Bregman Iterations and Mirror Descent

The minimization step in Eq. (1.14) is infeasible for large scale applications, especially in our setting of neural networks. Therefore, we employ the idea introduced in [Yin+08; COS09]. Here, we first linearize the loss function around the previous iterate,

$$\mathcal{L}(\theta) \approx \mathcal{L}(\theta^{(k)}) + \langle \nabla \mathcal{L}(\theta^{(k)}), \theta - \theta^{(k)} \rangle.$$

The next step is to replace  $J$  with the strongly convex elastic net regularization

$$J_\delta := J + \frac{1}{2\delta} \|\cdot\|_2^2. \quad (1.16)$$

The minimization step then transforms to

$$\begin{aligned} & \operatorname{argmin}_{\theta \in \Theta} D_{J_\delta}^{p^{(k)}}(\theta, \theta^{(k)}) + \tau \langle \nabla \mathcal{L}(\theta^{(k)}), \theta \rangle \\ &= \operatorname{argmin}_{\theta \in \Theta} J(\theta) + \frac{1}{2\delta} \|\theta\|_2^2 - \langle p^{(k)}, \theta \rangle + \tau \langle \nabla \mathcal{L}(\theta^{(k)}), \theta \rangle \\ &= \operatorname{argmin}_{\theta \in \Theta} J(\theta) + \frac{1}{2\delta} \|\theta - \delta(p^{(k)} - \tau \nabla \mathcal{L}(\theta^{(k)}))\|_2^2 - \underbrace{\|p^{(k)} - \tau \nabla \mathcal{L}(\theta^{(k)})\|_2^2}_{\text{constant in } \theta} \\ &= \operatorname{prox}_{\delta J}(\delta(p^{(k)} - \tau \nabla \mathcal{L}(\theta^{(k)}))). \end{aligned} \quad (1.17)$$

Note that here  $p^{(k)}$  is a subgradient of  $J_\delta$  at  $\theta$  therefore we derive the subgradient update rule

$$p^{(k+1)} := p^{(k)} - \tau \nabla \mathcal{L}(\theta^{(k)}).$$

This finally yields the linearized Bregman iterations

$$p^{(k+1)} = p^{(k)} - \tau \nabla \mathcal{L}(\theta^{(k)}), \quad (1.18a)$$

$$\theta^{(k+1)} = \operatorname{prox}_{\delta J}(\delta p^{(k+1)}). \quad (1.18b)$$

The last line is equivalent to  $p^{(k+1)} \in \partial J_\delta(\theta^{(k+1)})$  for which we obtain the continuous linearized flow

$$\begin{aligned} \dot{p}_t &= -\nabla \mathcal{L}(\theta_t), \\ p_t &\in \partial J_\delta(\theta_t), \end{aligned}$$

see [Bur+06; Bur+07].

**Connections To Mirror Descent** As already noticed by [Vil+23] linearized Bregman iteration are equivalent to mirror descent in some situations. We show the equivalence in the following, where we employ similar arguments as in [BT03]. One assumes to be given a differentiable and strongly convex function  $h : \Theta \rightarrow \mathbb{R}$ , i.e.,

$$h(\bar{\theta}) - h(\theta) - \langle \nabla h(\theta), \bar{\theta} - \theta \rangle \geq \frac{1}{2} \|\bar{\theta} - \theta\|_2^2$$

for all  $\theta, \bar{\theta} \in \Theta$ . The mirror descent update then reads ([NY83; BT03])

$$\theta^{(k+1)} = \nabla h^* \left( \nabla h \left( \theta^{(k)} \right) - \tau \mathcal{L}(\theta^{(k)}) \right) \quad (1.19)$$

where  $h^*$  denotes the Fenchel conjugate

$$h^*(p) = \sup_{\theta} \langle p, \theta \rangle - h(\theta)$$

with the gradient (see [BV04])

$$\nabla h^*(p) = \operatorname{argmax}_{\theta} \{ \langle p, \theta \rangle - h(\theta) \}.$$

Therefore, we see that Eq. (1.19) can be written as

$$\begin{aligned} \theta^{(k+1)} &= \operatorname{argmax}_{\theta} \left\{ \left\langle \nabla h \left( \theta^{(k)} \right) - \tau \mathcal{L}(\theta^{(k)}), \theta \right\rangle - h(\theta) \right\} \\ &= \operatorname{argmax}_{\theta} \left\{ -D_h(\theta, \theta^{(k)}) - \tau \left\langle \mathcal{L}(\theta^{(k)}), \theta \right\rangle \right\} \\ &= \operatorname{argmin}_{\theta} \left\{ D_h(\theta, \theta^{(k)}) + \tau \left\langle \mathcal{L}(\theta^{(k)}), \theta \right\rangle \right\} \end{aligned}$$

which was our starting point to derive linearized Bregman iterations for  $h = J_{\delta}$  in Eq. (1.17). In fact, we can always find a convex functional  $J : \Theta \rightarrow \mathbb{R}$  such that  $h = J + \frac{1}{2} \|\cdot\|_2^2$  for which we see, that Eq. (1.18) is a more general formulation of Eq. (1.19).

### 1.3.3. Stochastic and Momentum Variants

We want to employ linearized Bregman iterations to train a neural network. As mentioned in Section 1.1.1 we therefore do not compute the full gradient of  $\mathcal{L}$  but rather a minibatched variant. This yields stochastic Bregman Iterations

$$\begin{aligned} &\text{draw } \omega^{(k)} \text{ from } \Omega \text{ using the law of } \mathbb{P}, \\ &g^{(k)} := g(\theta^{(k)}; \omega^{(k)}), \\ &v^{(k+1)} := v^{(k)} - \tau^{(k)} g^{(k)}, \\ &\theta^{(k+1)} := \operatorname{prox}_{\delta J}(\delta v^{(k+1)}), \end{aligned} \quad (1.20)$$

which we also abbreviate as the *LinBreg* algorithm in the following. The basic update scheme is given as the linearized Bregman iterations from [Osh+05], however the presence of a stochastic gradient estimator significantly complicates the convergence analysis, as observed in Section 1.3.4. However, this algorithm can now be efficiently employed to train a neural network. For the analogous stochastic mirror descent algorithm we refer to [Nem+09].

**Momentum Variant** Typically, the learning process of a neural network can be improved by introducing a momentum term (see e.g. [Nes83; Qia99]) in the optimizer. In our case this can be achieved, by replacing the gradient update on the subgradient variable. In [BREG-I] we first consider the inertia version of the gradient flow as

$$\begin{cases} \gamma \ddot{v}_t + \dot{v}_t = -\nabla \mathcal{L}(\theta_t), \\ v_t \in \partial J_\delta(\theta_t). \end{cases}$$

for which the discretization then reads

$$\begin{aligned} m^{(k+1)} &= \beta^{(k)} m^{(k)} + (1 - \beta^{(k)}) \tau^{(k)} g^{(k)}, \\ v^{(k+1)} &= v^{(k)} - m^{(k+1)}, \\ \theta^{(k+1)} &= \text{prox}_{\delta J}(\delta v^{(k+1)}). \end{aligned} \tag{1.21}$$

**Adamized Bregman Iteration** We shortly remark that one can replace the momentum update in Eq. (1.21) with a Adam update [KB14]. This then yields an Adamized version of linearized Bregman iterations as employed in [BREG-I].

### 1.3.4. Convergence of Stochastic Bregman Iterations

While various previous works prove convergence of linearized Bregman iterations (see e.g. [Osh+05; COS09]), the stochastic setting requires special treatment. In [BREG-I] the first guarantees for the algorithm in Eq. (1.20) were proven. Other work on convergence of stochastic Bregman iterations, or mirror descent [DEH21; HR21; ZH18; DOr+21; AKL22] requires a differentiable functional  $J$ . However, since our main motivation is to a functional in the flavor of the  $\ell^1$  norm this is not applicable. Therefore, we present the novel convergence analysis of [BREG-I].

**Assumptions on the Gradient Estimator** In order to obtain convergence guarantees, we need to assume mainly two properties on the gradient estimator  $g(\cdot, \cdot)$ . First we assume unbiasedness, which means

$$\mathbb{E}[g(\theta; \omega)] = \nabla \mathcal{L}(\theta) \text{ for all } \theta \in \Theta.$$

The second assumption we need in the following is referred to as *bounded variance* of the estimator.

**Assumption 1.19 (Bounded variance).** There exists a constant  $\sigma > 0$  such that for any  $\theta \in \Theta$  it holds

$$\mathbb{E}[\|g(\theta; \omega) - \nabla \mathcal{L}(\theta)\|^2] \leq \sigma^2. \tag{1.22}$$

**Remark 1.20.** We want to remark, that this property is weaker than the bounded gradient assumption

$$\mathbb{E} \left[ \|g(\theta; \omega)\|^2 \right] \leq C$$

for some constant  $C > 0$ . In fact this condition can not be enforced together with a strong convexity assumption—which we employ in ??—as shown in [Ngu+18].  $\triangle$

**Assumptions on the Regularizer and on the Loss Function** The assumptions on the regularization functional  $J$  are mild and merely ensure the well-definedness of the proximal mapping,

**Assumption 1.21 (Regularizer).** We assume that  $J : \Theta \rightarrow (-\infty, \infty]$  is a convex, proper, and lower semicontinuous functional on the Hilbert space  $\Theta$ .

Our assumptions on the loss function  $\mathcal{L}$  are more restrictive. We require it to be bounded from below and differentiable, which are both standard assumptions. Additionally, we require Lipschitz continuity of the gradient, which also commonly employed in optimization literature.

**Assumption 1.22 (Loss function).** We assume the following conditions on the loss function:

- The loss function  $\mathcal{L}$  is bounded from below and without loss of generality we assume  $\mathcal{L} \geq 0$ .
- The function  $\mathcal{L}$  is continuously differentiable.
- The gradient of the loss function  $\theta \mapsto \nabla \mathcal{L}(\theta)$  is  $L$ -Lipschitz for  $L \in (0, \infty)$ :

$$\|\nabla \mathcal{L}(\tilde{\theta}) - \nabla \mathcal{L}(\theta)\| \leq L \|\tilde{\theta} - \theta\|, \quad \forall \theta, \tilde{\theta} \in \Theta. \quad (1.23)$$

If the loss function  $\mathcal{L}$  fulfills the previous assumptions we are able to prove loss decay of the iterates in Theorem 1.26. However, in order to show convergence of the iterates we additionally need a convexity assumption. For a differentiable functional  $J$ , the authors in [DEH21] assumed

$$\nu D_J(\bar{\theta}, \theta) \leq D_{\mathcal{L}}(\bar{\theta}, \theta)$$

which for twice differentiable  $J, \mathcal{L}$  transfers to

$$\nu \nabla^2 J \lesssim \nabla^2 \mathcal{L}, \quad \forall \bar{\theta}, \theta \in \Theta.$$

Plugging in the definition of the Bregman dist  $D_{\mathcal{L}}$  we obtain

$$\nu D_J(\bar{\theta}, \theta) \leq \mathcal{L}(\bar{\theta}) - \mathcal{L}(\theta) - \langle \nabla \mathcal{L}(\theta), \bar{\theta} - \theta \rangle.$$

In this form one observes that this is in fact a convexity assumption on  $\mathcal{L}$  in a  $J$  dependent distance, as employed in [BREG-I].

**Assumption 1.23 (Strong convexity).** For a proper convex function  $H : \Theta \rightarrow \mathbb{R}$  and  $\nu \in (0, \infty)$ , we say that the loss function  $\theta \mapsto \mathcal{L}(\theta)$  is  $\nu$ -strongly convex w.r.t.  $H$ , if

$$\mathcal{L}(\bar{\theta}) \geq \mathcal{L}(\theta) + \langle \nabla \mathcal{L}(\theta), \bar{\theta} - \theta \rangle + \nu D_J^p(\bar{\theta}, \theta), \quad \forall \theta, \bar{\theta} \in \Theta, p \in \partial H(\theta). \quad (1.24)$$

**Remark 1.24.** We have two relevant cases for the choice of  $H$ . For  $H = \frac{1}{2} \|\cdot\|^2$  Assumption 1.23 reduces to standard strong  $\nu$ -convexity. The other relevant case, is  $H = J_\delta$ , i.e. we consider convexity w.r.t. to the functional  $J_\delta$ .  $\triangle$

**Remark 1.25.** In the setting of training a neural network, where we employ the empirical loss Eq. (1.1), this convexity assumption usually fails. While it is possible to enforce this conditions only locally around the minimum, this does not significantly improve the applicability. For future work, it would be desirable to enforce a Kurdyka–Łojasiewicz inequality, as in [Ben+21] for the deterministic case.  $\triangle$

**Loss Decay** The first convergence result considers the loss decay of the iterates. Here, we do not assume convexity of the loss function. Under this assumptions [Ben+21; BB18] were able to show the inequality

$$\begin{aligned} \mathbb{E} [\mathcal{L}(\theta^{(k+1)})] + \frac{1}{\tau^{(k)}} \mathbb{E} [D_J^{\text{sym}}(\theta^{(k+1)}, \theta^{(k)})] + \frac{C}{2\delta\tau^{(k)}} \mathbb{E} [\|\theta^{(k+1)} - \theta^{(k)}\|^2] \\ \leq \mathbb{E} [\mathcal{L}(\theta^{(k)})]. \end{aligned}$$

In our setting, employing a stochastic gradient estimator, we are able to prove a similar estimate. Here, we obtain an additional term scaled  $\sigma$  which controls the expected squared difference between the gradient estimator and the actual gradient. It should however be noted, that the proof is not only a trivial extension.

**Theorem 1.26 ([BREG-I, Th. 2]: Loss decay).** Assume that Assumptions 1.19, 1.21 and 1.22 hold true, let  $\delta > 0$ , and let the step sizes satisfy  $\tau^{(k)} \leq \frac{2}{\delta L}$ . Then there exist constants  $c, C > 0$  such that for every  $k \in \mathbb{N}$  the iterates of (1.20) satisfy

$$\begin{aligned} \mathbb{E} [\mathcal{L}(\theta^{(k+1)})] + \frac{1}{\tau^{(k)}} \mathbb{E} [D_J^{\text{sym}}(\theta^{(k+1)}, \theta^{(k)})] + \frac{C}{2\delta\tau^{(k)}} \mathbb{E} [\|\theta^{(k+1)} - \theta^{(k)}\|^2] \\ \leq \mathbb{E} [\mathcal{L}(\theta^{(k)})] + \tau^{(k)} \delta \frac{\sigma^2}{2c}, \end{aligned} \quad (1.25)$$

**Convergence of the Iterates** Here, we have two cases respectively proving convergence w.r.t. the  $L^2$  distance and the Bregman distance of  $J_\delta$ . The first assumes strong convexity with  $H = \frac{1}{2} \|\cdot\|^2$  in Assumption 1.23.



**Theorem 1.27 ([BREG-I, Th. 6]: Convergence in norm).** Assume that Assumptions 1.19, 1.21 and 1.22 and Assumption 1.23 for  $H = \frac{1}{2}\|\cdot\|^2$  hold true and let  $\delta > 0$ . Furthermore, assume that the step sizes  $\tau^{(k)}$  are such that for all  $k \in \mathbb{N}$ :

$$\tau^{(k)} \leq \frac{\mu}{2\delta L^2}, \quad \tau^{(k+1)} \leq \tau^{(k)}, \quad \sum_{k=0}^{\infty} (\tau^{(k)})^2 < \infty, \quad \sum_{k=0}^{\infty} \tau^{(k)} = \infty.$$

The function  $\mathcal{L}$  has a unique minimizer  $\theta^*$  and if  $J(\theta^*) < \infty$  the stochastic linearized Bregman iterations (1.20) satisfy the following:

- Letting  $d_k := \mathbb{E} \left[ D_{J_\delta}^{v^{(k)}}(\theta^*, \theta^{(k)}) \right]$  it holds

$$d_{k+1} - d_k + \frac{\mu}{4} \tau^{(k)} \mathbb{E} \left[ \|\theta^* - \theta^{(k+1)}\|^2 \right] \leq \frac{\sigma}{2} \left( (\tau^{(k)})^2 + \mathbb{E} \left[ \|\theta^{(k)} - \theta^{(k+1)}\|^2 \right] \right). \quad (1.26)$$

- The iterates possess a subsequence converging in the  $L^2$ -sense of random variables:

$$\lim_{j \rightarrow \infty} \mathbb{E} \left[ \|\theta^* - \theta^{(k_j)}\|^2 \right] = 0. \quad (1.27)$$

Here,  $J_\delta$  is defined as in (1.16).

For the second result we assume convexity w.r.t. the Bregman distance, i.e. we choose  $H = J_\delta$  in Assumption 1.23. This induces a relation between the Bregman distance of  $J$  and the loss function  $\mathcal{L}$ , which has been similarly employed in [DEH21].

**Theorem 1.28 ([BREG-I, Th. 11]: Convergence in the Bregman distance).**

Assume that Assumptions 1.19, 1.21 and 1.22 and Assumption 1.23 for  $H = J_\delta$  hold true and let  $\delta > 0$ . The function  $\mathcal{L}$  has a unique minimizer  $\theta^*$  and if  $J(\theta^*) < \infty$  the stochastic linearized Bregman iterations (1.20) satisfy the following:

- Letting  $d_k := \mathbb{E} \left[ D_{J_\delta}^{v^{(k)}}(\theta^*, \theta^{(k)}) \right]$  it holds

$$d_{k+1} \leq \left[ 1 - \tau^{(k)} \nu \left( 1 - \tau^{(k)} \frac{2\delta^2 L^2}{\nu} \right) \right] d_k + \delta (\tau^{(k)})^2 \sigma^2. \quad (1.28)$$

- For any  $\varepsilon > 0$  there exists  $\tau > 0$  such that if  $\tau^{(k)} = \tau$  for all  $k \in \mathbb{N}$  then

$$\limsup_{k \rightarrow \infty} d_k \leq \varepsilon. \quad (1.29)$$

- If  $\tau^{(k)}$  is such that

$$\lim_{k \rightarrow \infty} \tau^{(k)} = 0 \quad \text{and} \quad \sum_{k=0}^{\infty} \tau^{(k)} = \infty \quad (1.30)$$

then it holds

$$\lim_{k \rightarrow \infty} d_k = 0. \quad (1.31)$$

Here,  $J_\delta$  is defined as in (1.16).

### 1.3.5. Numerical Results and Practical Considerations

Before briefly reviewing the numerical results in [BREG-I, Sec. 4], we remark on some practical considerations. In particular we comment on the parameter initialization strategy. All the experiments were implemented in Python [VD95] employing—among others—the PyTorch [Pas+19].

**Parameter Initialization** As already noticed in [GB10] parameter initialization has a significant impact on the training of the neural network. Here, in contrast to standard Bregman methods, we are not able to initialize the parameters of the neural network as  $\theta = 0$ . This is due to that fact, that a zero initialization induces symmetries in the network weights, for which one cannot utilize the full expressivity of the architecture [GBC16, Ch. 6]. Therefore, we rather employ the approach from [Liu+21; DZ19; Mar10] of sparsifying weight matrices  $\tilde{W}^l \in \mathbb{R}^{n_{l+1} \times n_l}$  up to a certain level, by a pointwise multiplication with a binary mask  $M^l \in \{0, 1\}^{n_{l+1} \times n_l}$

$$W^l := \tilde{W}^l \odot M^l.$$

Each entry in  $M^l$  is i.i.d. sampled from a Bernoulli distribution

$$M_{i,j}^l \sim \mathcal{B}(r).$$


where the parameter  $r$  determines the sparsity,

$$N(W^l) := \frac{\|W^l\|_0}{n_l \cdot n_{l-1}} = 1 - S(W^l)$$

with  $N$  denoting the percentage of used parameters and  $S$  the sparsity. In [GB10] the authors advise to especially control to the variance of the parameter initialization distribution, for which in [BREG-I] we derive

$$\text{Var} [\tilde{W}^l] = \frac{1}{r} \text{Var} [\tilde{W}^l \odot M^l] \quad (1.32)$$

and therefore scale the weights with the sparsity parameter  $r$  at initialization.

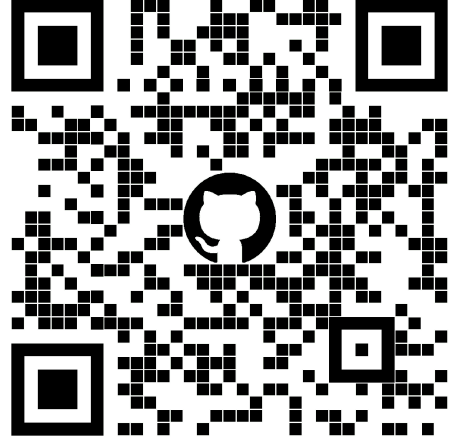

The code for all the experiments is available at [github.com/TimRoith/BregmanLearning](https://github.com/TimRoith/BregmanLearning).

**Choice of Regularizers** In all our experiments we choose a  $L^1$  type sparsity promoting regularization function functional  $J$ . We do not employ any coupling between weight matrices of different layers, and therefore for  $\theta = ((W^1, b^1), \dots, (W^L, b^L))$  we have

$$J(\theta) = \sum_{l=1}^L J^l(W^l)$$

where  $J^l$  is chosen according to the layer type. In the easiest case of a fully connected layer, we can choose

$$J^l(W^l) := \|W^l\|_1.$$

In the case of a convolutional layer we have that  $W^l$  is determined by convolutional kernels  $K_{i,j} \in \mathbb{R}^{k \times k}$ , see [Section 1.1](#). Here, we typically employ a group sparsity term in the form

$$J^l(W^l) = \|W^l\|_{2,1} = \sum_{i,j} \|K_{i,j}\|_2.$$

The outer sum acts as a  $L^1$  regularizer on the instances  $\|K_{i,j}\|$ . Sparsity in this sense, then amounts to having indices  $(i, j)$  for which  $\|K_{i,j}\|_2 = 0 \Leftrightarrow K_{i,j} = 0$ , i.e., we prune away whole convolutional filters. This effect is displayed in [\[BREG-I, Fig. 1\]](#). We can also employ group sparsity on fully connected layers, by considering row sparsity of  $W^l \in \mathbb{R}^{n_{l+1}, n_l}$

$$J^l(W^l) = \sum_{i=1}^{n_{l+1}} \|W_{i,:}\|_2 = \sum_{i=1}^{n_{l+1}} \sqrt{\sum_{j=1}^{n_l} W_{i,j}^2}.$$

In this setting we have a  $L^1$  penalty on the row norms  $\|W_{i,:}\|_2$  which therefore enforces whole rows to be zero. This is relevant, if we employ a layer architecture with  $\Psi^l(0) = 0$ , e.g., using no bias vectors and the ReLU activation function. In this setting, if the  $i$ th row of  $W^l$  is zero this effectively means, that the  $i$ th neuron in layer  $l+1$  is inactive. This observation allows the neural architecture search in one of the following paragraphs.

**Comments on the Numerical Results** We briefly remark on the numerical results as displayed in [\[BREG-I, Sec. 4\]](#). In the experiments we employed feed-forward networks with simple linear, convolutional and residual layers and tested on the three datasets [\[Kri09; XRV17; LC10\]](#).

The basic comparison between the algorithms SGD, ProxGD and LinBreg shows the qualitative behaviour of each iterations. Infantilizing sparse does not have any effect on SGD, since it does not preserve the sparsity in any way. ProxGD rather starts with many active parameters and reduces the this number during the iteration. Only the discretization of the inverse scale space flow—via Bregman iterations—shows the desired behaviour of gradually adding active parameters. Furthermore, in [\[BREG-I, Fig. 2\]](#) we can see, that the choice of  $\lambda$  in the regularizer  $J = \lambda \|\cdot\|_1$  changes the results

significantly. In the light of Eq. (1.15) this is not expected for the standard Bregman iterations with a convex loss. It is therefore interesting to see, that in our non-convex and stochastic situation this effect changes.

The momentum variants, as discussed in Section 1.3.3 yield the desired effect of enhancing the validation accuracy, and respectively converging faster. However in each of the experiments, one can also observe that adding a momentum term has the effect that more parameters are added faster. On the one hand this could mean that the network actually requires more parameters to have a higher accuracy, for which a momentum variant is more likely to increase the number of needed parameters. However, the quantitative evaluation on the CIFAR10 dataset [Kri09] shows, that especially the Adamized version tends to increase the number of used parameters rather aggressively, while only slightly increasing the performance of the net. The performance here is very similar to the one of proximal gradient descent. However, the training of a residual network seems to be slightly better with a standard Lasso implementation. Here, one neglects the non-differentiability of the  $L^1$  norm and computes a derivate via automatic differentiation [Ral81; MDA15] (we employed the `autograd` library of the `PyTorch` package [Pas+19]). In order to obtain true zeros in the weight matrix one then has to employ a thresholding operation after the training. In some sense this method is not a proper sparse training approach, but rather a regularization method with an added pruning step at the end.

**Comments on Efficiency** One of the major advantages of the Bregman approach, is that the network is sparse already during the training time. As with all sparse-to-sparse training approaches this yields a very small number of active parameters over all training step. This sparsity can be easily exploited in each forward pass. However, it is not directly possible to achieve performance gains during the backward pass of the network, since in general

$$W_{ij}^l = 0 \nRightarrow \partial_{W_{ij}^l} \mathcal{L}(\theta) = 0.$$


In [BREG-I; BREG-II] there are no evaluation on the training time and memory consumption of the Bregman algorithm. Since the complexity does not increase in comparison to the standard SGD, one hopes to obtain a faster training time here. This is an interesting open question for future work. It should however be remarked that the computational complexity of the LinBreg algorithm does not increase significantly, compared to SGD, since the evaluation of the proximal operator is very efficient for  $L^1$  type functionals.

**Neural Architecture Search** An interesting aspect hinted in [BREG-I] is optimizing the architecture of a neural network via sparsity. In the example provided in [BREG-I, Fig. 4] one defines a super-architecture as multi-layer perceptron with an equal number of neurons in each layer. Training this task with the LinBreg algorithm reveals the well-known autoencoder structure [HZ93]. This idea was developed further in [BREG-II], where also skip connection of a residual architecture were learned. Here, the super-architecture was given by a dense net [Hua+17], where a each skip connection was scaled

by a parameter, which was penalized with a sparsity term. The driving question here, if it is possible also learn an architecture similar to the U-Net as proposed in [RFB15].

## 1.4. Resolution Stability

We frequently employ the  $\mathcal{X} = [0, 1]^{K \times N \times M}$  to represent images. However, from a modeling point of view it is more natural to assume that images are functions  $u : \Omega \rightarrow [0, 1]^K$  where  $\Omega \subset \mathbb{R}^2$  is some domain. In this sense, the space  $\mathcal{X}$  only constitutes a discretization of the space of all functions from  $\Omega$  to  $[0, 1]^K$ . The number of pixels, i.e.  $N \cdot M$ , relates to the *resolution* of the image, where a higher number of pixels yields a higher resolution. In this sense the resolution is merely an artifact of the restriction to finite dimensions in computer vision and not relevant for the classification. Therefore, one wants to obtain a resolution-independent classifier.

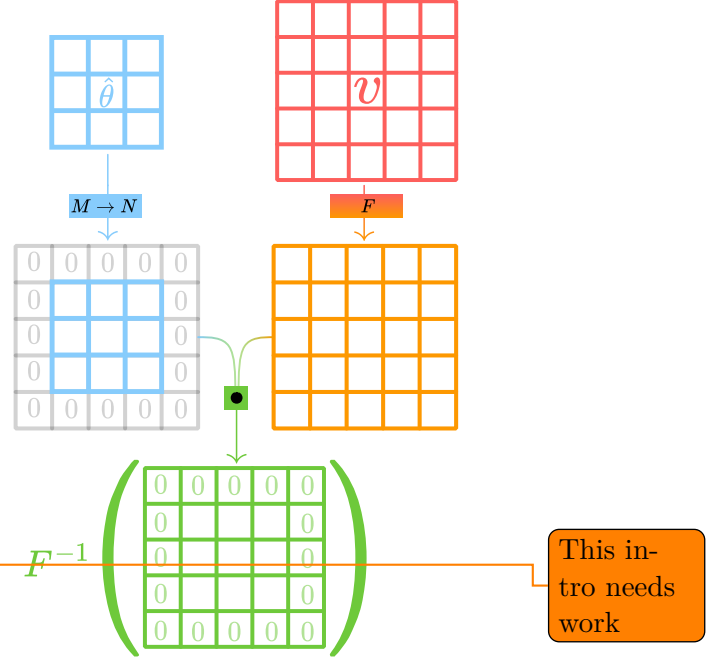

**Images, Resolution and Scale** For the continuum domain we consider the  $d$ -dimensional torus  $\Omega = \mathbb{R}^d / \mathbb{Z}^d$ . An image is a function

$$u : \Omega \rightarrow [0, 1]^K$$

where  $K \in \mathbb{N}$  denotes the number of color channels, see [GW87]. In order to represent images on a computer we discretize the domain  $\Omega$ , via a regular grid  $\Omega_N = \{x_0, \dots, x_N\}$  indexed by the set

$$\mathcal{J}_N := \{0, \dots, N-1\}^d$$

with grid points  $x_j = j/(N-1)$ , see e.g. [Kab22; KLM21]. For simplicity we assume an equal number of discretization points in each dimension. Therefore,  $N^d$  is the resolution of an image discretized w.r.t.  $\mathcal{J}_N$ .

It is important to notice the differences to the concept of *scale*. A change in scale would be a change in the original image domain, for example by zooming in on a certain area. For our image classification examples, we usually assume that the image  $u$  contain a certain entity to be classified. The scale roughly describes how “big” the entity is, or what percentage of the image it fills. We assume that the scale is fixed. Therefore, changing  $N$  directly influences the resolution of discretization.

**How do Neural Networks react to Resolution Changes?** In many machine learning application one assumes a fixed input size and therefore a fixed resolution, assuming the same scale throughout the data. Formally, networks are defined as mappings

$f_\theta : \mathbb{R}^{K \times N \times N} \rightarrow \Delta^C$ , i.e. they only accept inputs for the fixed resolution  $N$ . In order to understand how this constraint can be weakened, we need to consider the concrete structure of our networks, which was similarly done in [KLM21; Kab22]. The architectures we consider are feed-forward networks of the form

$$f_\theta = \Phi^{\text{class}} \circ \mathcal{S} \circ \Phi^{\text{feature}}$$

where

- $\Phi^{\text{feature}}$  is the so-called feature extractor, which should be applicable independently from the input dimension,
- $\mathcal{S}$  is a function that maps inputs of any size to a fixed output dimension  $\mathbb{R}^s$ ,
- $\Phi^{\text{class}} : \mathbb{R}^s \rightarrow \Delta^C$  denotes the classification layer.

The feature extractor usually consists of convolutional layers. As in [Kab22, Ch. 2] we consider the discrete convolution of two discretized images  $u_N, v_N$  defined as

$$(u_N * v_N)(x_j) := \sum_{k \in \mathcal{J}_N} u_N(x_k) \cdot v_N(x_{j-k})$$

where for negative indices  $j - k$  we set  $x_{j-k} := x_{j-k+N}$ . This assumes that both  $u_N, v_N$  live on the same discretization  $\mathcal{J}_N$ . Modeling spatial locality—and therefore a small support of the kernel—one usually chooses  $M$  much smaller than the resolution. See e.g. the study in [HW62] which explores a similar methodology for the visual cortex of cats. In order to account for this dimension mismatch we consider so-called *spatial zero-padding* for kernels  $\theta \in \mathbb{R}^{\mathcal{J}_M}$

$$\theta_k^{M \rightarrow N} = \begin{cases} \theta_k & \text{for } k \in \mathcal{J}_N \cap \mathcal{J}_M, \\ 0 & \text{for } k \in \mathcal{J}_N \setminus \mathcal{J}_M. \end{cases}$$

Using this method, one can define the convolution for inputs  $u_N$  of arbitrary input resolution  $N$  via

$$C(\theta)(u_N) = \theta^{M \rightarrow N} * u_N.$$

In [FNO] we refer to this as the *spatial implementation* of convolution. Up to the behavior on the boundary this is in fact the standard implementation in most libraries, especially in `PyTorch`. Therefore, a feature extractor consisting of convolutional layers can take inputs of variable resolution. In fact, ignoring possible resolution changes within the extractor—i.e. via pooling or strided convolutions—we have that  $\Phi^{\text{feature}}(u_N) \in \mathbb{R}_N^{\mathcal{J}}$  for any  $N \in \mathbb{N}$ .

The mapping  $\mathcal{S}$  can be realized as an adaptive pooling layer, see [Pas+19], which ensures a fixed output size. This methodology yields an *discretization invariant architecture*, see [Kab22; KLM21; Li+20], which means that from a technical point of view the network is able to produce outputs for inputs with arbitrary discretization. However, we are actually interested in *discretization invariant functionality* (see [Kab22; KLM21; Li+20]), which also requires that the output is the same over different resolutions.

**Input Interpolation** The technical possibility to handle different input sizes as described above, usually does not perform well in practice. This is due to the fact that in the standard spatial implementation of convolution the support of the kernel changes with varying input dimension, for which its output differs, see Fig. 1.3. If a network is trained on a fixed input size, the filters are adapted to this size and therefore only create meaningful responses on this size.

A simple attempt to create a network, where not only the architecture, but also the functionality is discretization independent—at least up to a certain degree—is input interpolation. In this case our architecture is modified to

$$\tilde{f}_\theta = f_\theta \circ I$$

where  $I : \bigcup_{M \in \mathbb{N}} \mathbb{R}^{\mathcal{J}_M} \rightarrow \mathbb{R}^{\mathcal{J}_N}$  is an interpolation function, that maps inputs of arbitrary sizes to a fixed output discretization  $\mathcal{I}_N$ . Typical choices here include nearest neighbor, bilinear or bicubic interpolation, see e.g. [GW87]. Especially relevant in our case, is so-called *trigonometric interpolation*, where for  $v_M \in \mathbb{R}^{\mathcal{J}}$  we define

$$I^{\text{trigo}}(v_M) := v_M^M \xrightarrow{\Delta}^N := F^{-1} \left( (Fv)^{M \rightarrow N} \right).$$

**Contribution** In [FNO] we study the connection between FNOs and CNNs for classification problems. We identify under which assumption the architectures are equivalent (see Lemma 1.29), but also where they are not, see Fig. 1.3. Here, we are especially interested in the multi-resolution case, we show that one layer of an FNO is equivariant with respect to trigonometric interpolation, Corollary 1.31. This is also underlined by numerical experiments, where we compare the FNO implementation to interpolation methods and a naive CNN implementation. Furthermore, we show that training equivalent CNN and FNO layers lead to different results, i.e., while they have the same forward pass, the gradients w.r.t. their parameters might differ, Lemma 1.30. Furthermore, we show continuity and Fréchet-differentiability of abstract neural layers as operators between  $L^p$  spaces, see Section 1.4.2. Finally we conduct numerical experiments supporting our theoretical findings Section 1.4.3.

### 1.4.1. Fourier Neural Operators

We want to obtain neural networks whose output does not depend on the discretization of an image  $u : \Omega \rightarrow \mathbb{R}^K$ . This raises the question whether it is possible to find a formulation that allows us to work in the infinite dimensional setting. In [Kov+21] this issue was addressed in the setting of parametric PDEs for which the authors introduced the concept of *neural operators*. One layer of a neural operator is given as a mapping  $\mathcal{G} : L^p(\Omega) \rightarrow L^q(\Omega)$

$$\mathcal{G}(u)(x) = \sigma(\Psi(u)(x)) \quad \text{for a.e. } x \in \Omega, \quad (1.33)$$

with the affine linear part given by

$$\Psi(u) = Wu + \mathcal{K}u + b, \quad (1.34)$$



where

- $\mathcal{K} : u \mapsto \int_{\Omega} \kappa(\cdot, y) u(y) dy$  is a kernel integral operator with kernel  $\kappa : \Omega \times \Omega \rightarrow \mathbb{R}$ ,
- $W \in \mathbb{R}$  models a residual component,
- and  $b : \Omega \rightarrow \mathbb{R}$  models a bias.

By a slight abuse of notation, the activation function  $\sigma : \mathbb{R} \rightarrow \mathbb{R}$  acts as a Nemytskii-operator

$$\sigma : v \mapsto \sigma(v(\cdot)), \quad (1.35)$$

see e.g. [Trö10].

In Section 1.4.2 we analyze continuity and differentiability of a layer in this abstract form. However, the most relevant case for us, is when  $\mathcal{K}$  is a convolution operator, i.e.  $\kappa(x, y) = \kappa(x - y)$  is a translation invariant kernel. In this special case  $\mathcal{G}$  is then known as layer of a *Fourier Neural Operator* (FNO) as introduced in [Li+20], by parameterizing the kernel via its Fourier coefficients  $\hat{\theta}_k \in \mathbb{C}$

$$\kappa_{\hat{\theta}}(x) = \sum_{k \in \mathcal{I}} \hat{\theta}_k b_k(x), \quad (1.36)$$

where  $b_k(x) = \exp(2\pi i k x)$  denote the Fourier basis functions. In practice we assume that  $\kappa_{\hat{\theta}}$  only has a finite amount of non-zero Fourier coefficients, in fact we choose the set  $\mathcal{I}_N := \{-\lceil (N-1)/2 \rceil, \dots, 0, \dots, \lfloor (N-1)/2 \rfloor\}^d$  as the index set, as done in [Li+20]. Employing this set with odd  $N \in \mathbb{N}$ , we can easily enforce Hermitian symmetry  $\hat{\theta}_k = \overline{\hat{\theta}_{-k}}$ , which ensures that  $\mathcal{K}_{\hat{\theta}}$  outputs real-valued functions. For now we assume an odd number here and deal with the even case later. We note that assuming a finite number  $N$  of Fourier coefficients is completely independent from the input discretization, which is the main advantage of FNOs.

**How to Perform Convolutions with FNOs?** In [FNO] we consider the discrete Fourier transform and its inverse

$$(Fv)_k = \frac{1}{\lambda} \sum_{j \in \mathcal{J}_N} v_j e^{-2\pi i \langle k, \frac{j}{N} \rangle}, k \in \mathcal{I}_N,$$

$$(F^{-1}\hat{v})_j = \frac{\lambda}{|\mathcal{J}_N|} \sum_{k \in \mathcal{I}_N} \hat{v}_k e^{2\pi i \langle k, \frac{j}{N} \rangle} j \in \mathcal{J}_N,$$

with a normalization constant  $\lambda \in \{1, \sqrt{|\mathcal{J}_N|}, |\mathcal{J}_N|\}$ . We only consider parameters  $\hat{\theta} \in \mathbb{C}_{\text{sym}}^{\mathcal{I}_N} := F(\mathbb{R}^{\mathcal{J}_N})$  for which can employ the convolution theorem (see e.g. [Gra14]) to define

$$K(\hat{\theta})(v) = F^{-1}(\hat{\theta} \cdot Fv) \quad \text{for } v \in \mathbb{R}^{\mathcal{J}_N} \quad (1.37)$$

which is referred to as the FNO- or spectral-implementation of convolution.

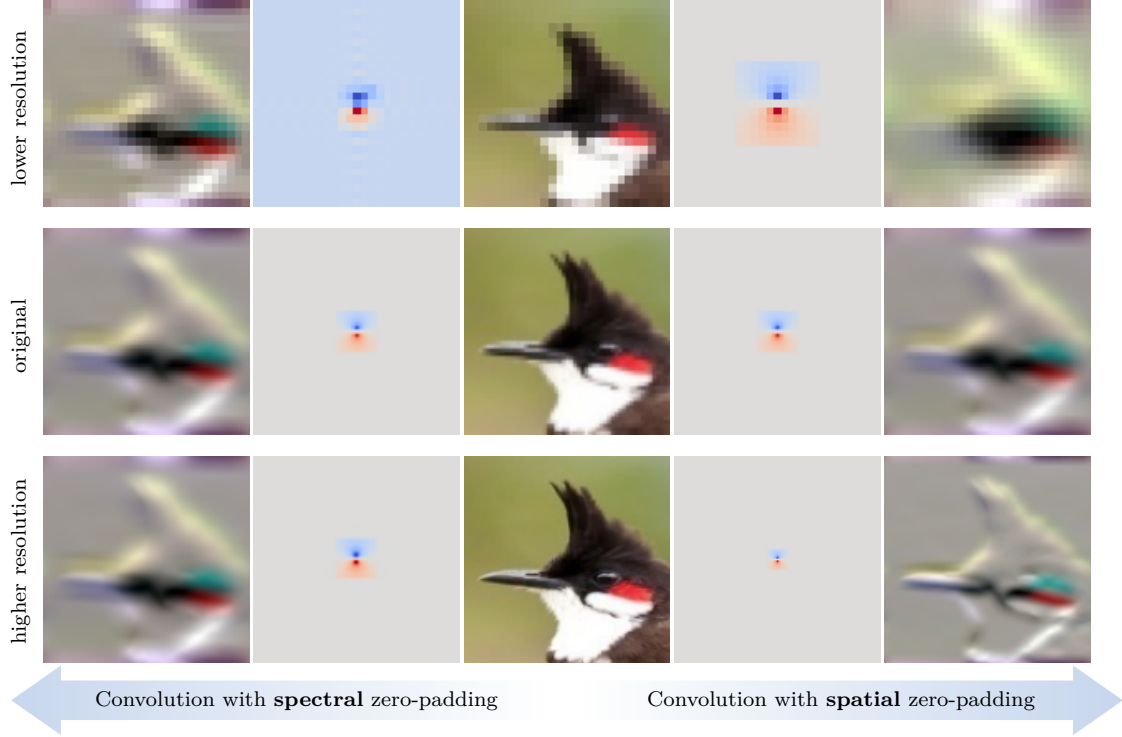


Figure 1.3.: The image is taken from [Kab22, Fig. 1]—depicting a red whiskered bulbul taken from the Birds500 dataset [Pio21]—and visualize the different effects of spectral and spatial zero-padding.

**How do FNOs React to Resolution Changes?** We already mentioned that the number of Fourier coefficients of  $\hat{\theta} \in \mathbb{C}_{\text{sym}}^{\mathcal{I}_M}$  is independent of the input resolution. Nevertheless, the point-wise multiplication in Eq. (1.37) is only defined for inputs  $v \in \mathbb{R}^{\mathcal{I}_M}$ , for which the question arises how FNOs can be adapted to dimension mismatch. Here, we apply a conceptually similar idea, by employing zero-padding. However, the important and major difference is that this zero-padding is performed in the spectral domain. Assuming that  $N > M$  is odd and that  $v_N \in \mathbb{R}^{\mathcal{I}_N}$  we define

$$\hat{\theta}_k^{M \rightarrow N} = \begin{cases} \hat{\theta}_k & \text{for } k \in \mathcal{I}_N \cap \mathcal{I}_M, \\ 0 & \text{for } k \in \mathcal{I}_N \setminus \mathcal{I}_M, \end{cases}$$

and the spectral implementation of convolution as

$$K(\hat{\theta})(v_N) := K(\hat{\theta}^{M \rightarrow N})(v_N).$$

**What Is The Difference Between Standard and FNO Implementation?** The difference between the spectral and spatial implementation is best explained with [FNO, Fig. 1], which we repeat in Fig. 1.3 for convenience. We are given a kernel  $\theta \in \mathbb{R}^{\mathcal{I}_M}$ , its unnormalized Fourier transform  $\hat{\theta} = \lambda F(\theta)$  and an input  $v_N \in \mathbb{R}^{\mathcal{I}_N}$ . If  $M = N$ , i.e. all

dimension match, we observe that spectral and spatial implementation are equivalent, see the middle row of Fig. 1.3. However, if we consider higher resolution variant of the image with  $N > M$ , spatial zero-padding results in the kernel being localized in space and therefore the effect of convolving it with  $v_N$  changes. On the other hand for the spectral implementation we observe an equivariant behaviour. The resolution of the output changes but qualitatively the effect of the filter stay the same.

**Connection to Interpolation** As hinted in Fig. 1.3, when changing the resolution, the spectral implementation of convolution can be interpreted as a standard convolution with an interpolated kernel. In fact we observe that for  $\theta \in \mathbb{R}^{\mathcal{J}_M}$ ,  $\hat{\theta} = \lambda F(\theta)$  and  $v_N \in \mathbb{R}^{\mathcal{J}_N}$  we have that

$$\begin{aligned} K(\hat{\theta})(v_N) &= K(\hat{\theta}^{M \rightarrow N})(v_N) = F^{-1} \left( \hat{\theta}^{M \rightarrow N} \cdot F v_N \right) \\ &= F^{-1} \left( F F^{-1} \hat{\theta}^{M \rightarrow N} \cdot F v_N \right) \\ &= F^{-1} \left( F \theta^{M \xrightarrow{\Delta} N} \cdot F v_N \right) = \theta^{M \xrightarrow{\Delta} N} * v_N \\ &= C(\theta^{M \xrightarrow{\Delta} N})(v_N). \end{aligned}$$

Therefore, applying one FNO layer is equivalent to trigonometric interpolation of the kernel.

**Adaption to Even Dimensions** Zero-padding of the spectral coefficients only fulfills Hermitian symmetry in the case where  $M, N$  are odd. In order to adapt this to the even case, we employ so-called Nyquist splitting, see [Bri19]. In all our experiments the implementation carefully employs this method, which ensures that the output of the spectral convolution is real valued.

### 1.4.2. Analysis

In this section, we comment on the theoretical findings in [FNO]. We first consider the abstract neural layer as in Eq. (1.33) for which we show continuity and Fréchet-differentiability.

**Continuity of Neural Layers** The results for neural layers in [FNO] mostly fall back to the theory of Nemytskii operators, see e.g. [Trö10; AP93]. In order to show that the layer  $\mathcal{G}$  is a well defined mapping from  $L^p$  to  $L^q$  one first needs to identify an exponent  $r \in [1, \infty]$  such that the affine part is a mapping  $\Psi : L^p \rightarrow L^r$ . For example if  $\kappa \in L^s$  with  $1/r + 1 = 1/p + 1/s$  it follows from Young's convolution inequality that  $\mathcal{K}$  maps to  $L^r$ , see [Gra14, Th. 1.2.12]. If then  $W = 0$  and  $b \in L^r$  we know that  $\Psi$  maps to  $L^r$ .

To ensure that the Nemytskii operator defines a mapping  $\sigma : L^r \rightarrow L^q$  one needs to assume a growth condition on  $\sigma : \mathbb{R} \rightarrow \mathbb{R}$ , see [FNO, Eq. 4] and originally [Trö10]. Under these assumptions, we have the following result. The prove is trivial and the

main content is buried in the assumptions, however it still summarizes the situation in a convenient way. Concrete examples fulfilling these assumptions are given in [FNO] borrowing concepts from [AP93; Trö10]. The most important activation function that is valid in this setting is the ReLU function

$$\text{ReLU}(x) = \max\{x, 0\}.$$

**Proposition 1.4 ([FNO, Prop. 1]).** For  $1 \leq p, q \leq \infty$  let  $\mathcal{L}$  be an operator layer given by (1.33) with an activation function  $\sigma : \mathbb{R} \rightarrow \mathbb{R}$ . If there exists  $r \geq 1$  such that

- (i) the affine part defines a mapping  $\Psi : L^p(\Omega) \rightarrow L^r(\Omega)$ ,
- (ii) the activation function  $\sigma$  generates a Nemytskii operator  $\sigma : L^r(\Omega) \rightarrow L^q(\Omega)$ ,

then it holds that  $\mathcal{L} : L^p(\Omega) \rightarrow L^q(\Omega)$ . If additionally  $\Psi$  is a continuous operator on the specified spaces and the function  $\sigma$  is continuous, or uniformly continuous in the case  $q = \infty$ , the operator  $\mathcal{L} : L^p(\Omega) \rightarrow L^q(\Omega)$  is also continuous.

**Differentiability of Neural Layers** We furthermore consider Fréchet differentiability of a neural layer w.r.t. to the input variable. This can also be transferred to differentiability w.r.t. the parameters as we provide in [FNO, Ex. 4]. Conceptually the main result we repeat here is similar to the one on continuity of the last paragraph. Namely, we put certain assumptions on the affine part and the activation function  $\sigma : \mathbb{R} \rightarrow \mathbb{R}$  that allow us to employ the classical theory on Nemytskii operators. The major difference is that we also need to assume differentiability of the activation function, were we also assume a growth condition on the derivative. The ReLU function can therefore not be chosen in this setting, however the smooth approximation called GELU ([HG16])

$$\text{GELU}(x) := x \Phi(x)$$

where  $\Phi$  is the CDF of the standard normal distribution, can be employed.

**Proposition 1.5 ([FNO, Prop. 2]).** For  $1 \leq p, q \leq \infty$ , let  $\mathcal{L}$  be an operator layer given by (1.33) with affine part  $\Psi$  as in (1.34). If there exists  $r > q$ , or  $r = q = \infty$  such that

- (i) the affine part is a continuous operator  $\Psi : L^p(\Omega) \rightarrow L^r(\Omega)$ ,
- (ii) the activation function  $\sigma : \mathbb{R} \rightarrow \mathbb{R}$  is continuously differentiable
- (iii) and the derivative of the activation function generates a Nemytskii operator  $\sigma' : L^r(\Omega) \rightarrow [L^r(\Omega) \rightarrow L^s(\Omega)]$  with  $s = rq/(r - q)$ ,

then it holds that  $\mathcal{L} : L^p(\Omega) \rightarrow L^q(\Omega)$  is Fréchet-differentiable in any  $v \in L^p(\Omega)$  with Fréchet-derivative  $D\mathcal{L}(v) : L^p(\Omega) \rightarrow L^q(\Omega)$

$$D\mathcal{L}(v)(h) = \sigma'(\Psi(v)) \cdot \tilde{\Psi}(h),$$

where  $\tilde{\Psi}$  denotes the linear part of  $\Psi$ , i.e.,  $\tilde{\Psi} = \Psi - b$ .

**Convertibility Between FNOs and CNNs** The following lemma formalizes the intuition that FNOs and CNNs are equivalent in certain settings. Given inputs of a fixed discretization  $\mathcal{J}_N$  and parameters  $\theta \in \mathbb{R}^{\mathcal{J}_M}$  the standard convolution implementation is equivalent to the spectral one w.r.t. the parameters  $\hat{\theta} = \lambda F(\theta^{M \rightarrow N})$ . The subtle but important point here, is that the number of spectral parameters needs to be equal to the input size in order to achieve equivalence. In [FNO, Fig.3] we observe numerically that the number of used spectral coefficients actually needs to match the input size in order to achieve equivalence.

**Lemma 1.29 ([FNO, Lem. 3]).** Let  $M \leq N$  both be odd and let  $T : \mathbb{R}^{J_N} \rightarrow \mathbb{C}^{I_N}$  be defined for  $\theta \in \mathbb{R}^{J_N}$  as  $T(\theta) = \lambda F(\theta)$ . For any  $\theta \in \mathbb{R}^{J_M}$  and  $v \in \mathbb{R}^{J_N}$  it holds true that

$$C(\theta)(v) = K(T(\theta^{M \rightarrow N}))(v)$$

and for any  $\hat{\theta} \in \mathbb{C}_{\text{sym}}^{I_M}$  and  $v \in \mathbb{R}^{J_N}$  it holds true that

$$K(\hat{\theta})(v) = C(T^{-1}(\hat{\theta}^{M \rightarrow N}))(v).$$

From this and from [FNO, Fig. 3] we obtain the negative result that in order to convert a CNN to a FNO we need a large number of spectral parameters. This also connected to the fact that spatial locality can usually only expressed using more spectral coefficients. Therefore, one might think that FNOs are infeasible due to memory requirements. However, it turns out that directly optimizing over the spectral parameters leads to a comparable performance, already for a low number of Fourier coefficients. This is reported in the blue curve in [FNO, Fig. 3]. This hints, that while the forward pass can be equivalent, computing the gradient w.r.t. their parameters is not. This is formalized in the following lemma.

**Lemma 1.30 ([FNO, Lem. 4]).** For odd  $N \in \mathbb{N}$  and  $v, \theta \in \mathbb{R}^{J_N}$  and  $\hat{\theta} = T(\theta)$  it holds true that

$$\nabla_{\hat{\theta}} K(\hat{\theta})(v) = \frac{1}{|J_N|} T \left( \nabla_{\theta} C(\theta)(v) \right).$$


**Interpolation Equivariance** The last result considers the main motivation for the topic. Namely, the resolution in-variance of an FNO layer. However, here we can not allow an arbitrary resizing operation. Since it is most natural to our approach, we can show equivariance w.r.t. trigonometric interpolation of the input.

**Corollary 1.31.** For  $\hat{\theta} \in \mathbb{C}_{\text{sym}}^{I_M}$ ,  $v \in \mathbb{R}^{J_N}$ ,  $M \leq N$  it holds true for any  $L \geq M$  that

$$K(\hat{\theta})(v^{N \xrightarrow{\Delta} L}) = \left(K(\hat{\theta})(v)\right)^{N \xrightarrow{\Delta} L}.$$

### 1.4.3. Numerical Results

In the numerical section of [FNO] we study the convertibility of CNNs to FNOs as discussed in Section 1.4.2 and the resolution invariance of the different proposed approaches. Again we employ—among others—the PyTorch package [Pas+19]. The experiments are conducted on the Fashion-MNIST [XRV17] and a former version of the BIRDS500 [Pio21] dataset. We remark that our implementation carefully treats the case of even kernel or input sizes, via Nyquist splitting. This allows us to apply all the derived results for the odd and also the even case.

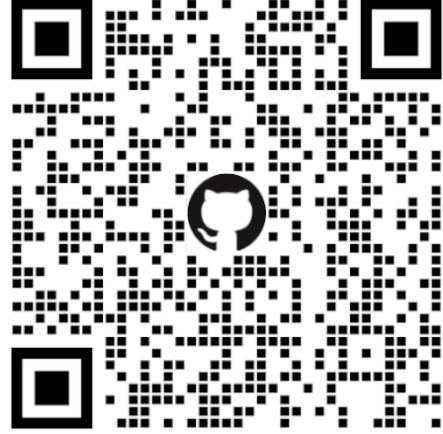

The code for all the experiments is available at <https://github.com/samirak98/FourierImaging>.

**Convertibility and Training Differences** As already described in Section 1.4.2 the first experiment, displayed in [FNO, Fig. 3], studies how CNNs can be converted to FNOs. Here, we employ a network with two convolutional layers for feature extraction and a linear classification layer. We train this network—in the spatial implementation—on the FashionMNIST dataset employing varying spatial kernel sizes. Here, we see that for  $M = 5$  the spatial implementation already has the best performance and adding more parameters does not increase the performance. We then convert a set of spatial parameters to the Fourier formulation, employing again a varying number of spectral coefficients. It turns out that the requirement of [FNO, Lem. 3], that the number of coefficients must match the input dimension is indeed relevant. We only obtain the full performance of the CNN if we use all spectral parameters. However, the example also visualizes [FNO, Lem. 4], namely that training a FNO conceptually leads to a different set of parameters. Optimizing over the spectral parameters yields a comparable performance already for a smaller number of coefficients.

**Resolution Invariance** In the second experiment we study the resolution invariance of the three discretization independent architectures we considered, namely the naive CNN adaptation, input interpolation and the FNO implementation. We first train the convolutional architecture as in the previous paragraph on the FashionMNIST dataset, that has an input size of  $28 \times 28$ . We resize the input data via trigonometric and bilinear

interpolation—referred to as data sizing—to simulate multi-resolution data. One expects that the classification performance drops when the data is resized to a smaller size, since this step loses information. However, resizing the images to higher resolutions should yield the same performance.

In [FNO, Fig. 4] see that the simple adaption does not perform well both in the lower and the higher resolution setting. Employing input interpolation improves the performance in the lower resolution setting. In the higher resolution regime, we obtain a constant performance which is expected. Finally we see that the FNO—which was converted from the CNN—performs as well as input interpolation, which justifies the resolution independence of this architecture.

In the second experiments we trained a ResNet18 [He+16] on a former version of the BIRDS500 dataset, which has an input size of  $224 \times 224$ . Concerning the naive adaption and the input interpolation we observe the same behavior as in the previous example. However, the FNO variant performs slightly worse, which is surprising, especially in the higher resolution regime. In [FNO] we conclude that this is due the dimension changes within the ResNet architectures. These changes occur due to strided convolutions or pooling operations between the layers. In fact in order to achieve the performance as displayed in [FNO, Fig. 4 (b)] we replaced every striding by a trigonometric interpolation, which fits better into the FNO framework and vastly improves the performance. Therefore, we summarize that architecture intern dimension changes—which are very common in practice—can potentially hinder resolution invariance.

Part II.

Prints



# Bibliography

## Books

- [Dac07] B. Dacorogna. *Direct methods in the calculus of variations*. Vol. 78. Springer Science & Business Media, 2007.
- [SB14] S. Shalev-Shwartz and S. Ben-David. *Understanding machine learning: From theory to algorithms*. Cambridge university press, 2014.
- [VD95] G. Van Rossum and F. L. Drake Jr. *Python reference manual*. Centrum voor Wiskunde en Informatica Amsterdam, 1995.
- [Roc97] R. Rockafellar. *Convex analysis*. Princeton, N.J: Princeton University Press, 1997.
- [BC11] H. Bauschke and P. Combettes. *Convex analysis and monotone operator theory in Hilbert spaces*. New York: Springer, 2011.
- [Eul24] L. Euler. *Institutionum calculi integralis*. Vol. 1. impensis Academiae imperialis scientiarum, 1824.
- [BV04] S. P. Boyd and L. Vandenberghe. *Convex optimization*. Cambridge university press, 2004.
- [GBC16] I. Goodfellow, Y. Bengio, and A. Courville. *Deep Learning*. <http://www.deeplearningbook.org>. MIT Press, 2016.
- [Ral81] L. B. Rall. *Automatic differentiation: Techniques and applications*. Springer, 1981.
- [GW87] R. C. Gonzales and P. Wintz. *Digital image processing*. Addison-Wesley Longman Publishing Co., Inc., 1987.
- [Trö10] F. Tröltzsch. *Optimal Control of Partial Differential Equations: Theory, Methods, and Applications*. Vol. 112. Graduate Studies in Mathematics. American Mathematical Society, Providence, Rhode Island, 2010.
- [Gra14] L. Grafakos. *Classical Fourier Analysis*. 3rd ed. Graduate Texts in Mathematics. Springer, New York, NY, 2014.
- [AP93] A. Ambrosetti and G. Prodi. *A Primer of Nonlinear Analysis*. Cambridge University Press, 1993.

## Articles

- [LIP-I] T. Roith and L. Bungert. “Continuum limit of Lipschitz learning on graphs.” In: *Foundations of Computational Mathematics* (2022), pp. 1–39.
- [LIP-II] L. Bungert, J. Calder, and T. Roith. “Uniform convergence rates for Lipschitz learning on graphs.” In: *IMA Journal of Numerical Analysis* (Sept. 2022). DOI: [10.1093/imanum/drac048](https://doi.org/10.1093/imanum/drac048).
- [BREG-I] L. Bungert et al. “A bregman learning framework for sparse neural networks.” In: *Journal of Machine Learning Research* 23.192 (2022), pp. 1–43.
- [BREG-II] L. Bungert et al. “Neural Architecture Search via Bregman Iterations.” In: (2021). arXiv: [2106.02479](https://arxiv.org/abs/2106.02479) [cs.LG].
- [Cau+47] A. Cauchy et al. “Méthode générale pour la résolution des systemes d’équations simultanées.” In: *Comp. Rend. Sci. Paris* 25.1847 (1847), pp. 536–538.
- [RM51] H. Robbins and S. Monro. “A stochastic approximation method.” In: *The annals of mathematical statistics* (1951), pp. 400–407.
- [GSS14] I. J. Goodfellow, J. Shlens, and C. Szegedy. “Explaining and harnessing adversarial examples.” In: *arXiv preprint arXiv:1412.6572* (2014).
- [Sha+18] A. Shafahi et al. “Are adversarial examples inevitable?” In: *arXiv preprint arXiv:1809.02104* (2018).
- [FFF18] A. Fawzi, H. Fawzi, and O. Fawzi. “Adversarial vulnerability for any classifier.” In: *Advances in neural information processing systems* 31 (2018).
- [Sta+21] J. Stanczuk et al. “Wasserstein GANs work because they fail (to approximate the Wasserstein distance).” In: *arXiv preprint arXiv:2103.01678* (2021).
- [Bun+23] L. Bungert et al. “It begins with a boundary: A geometric view on probabilistically robust learning.” In: *arXiv preprint arXiv:2305.18779* (2023).
- [Eng+18] L. Engstrom et al. “A rotation and a translation suffice: Fooling cnns with simple transformations.” In: (2018).
- [Guo+17] C. Guo et al. “Countering adversarial images using input transformations.” In: *arXiv preprint arXiv:1711.00117* (2017).
- [ANR74] N. Ahmed, T. Natarajan, and K. R. Rao. “Discrete cosine transform.” In: *IEEE transactions on Computers* 100.1 (1974), pp. 90–93.
- [Yua+19] X. Yuan et al. “Adversarial examples: Attacks and defenses for deep learning.” In: *IEEE transactions on neural networks and learning systems* 30.9 (2019), pp. 2805–2824.
- [KGB16] A. Kurakin, I. Goodfellow, and S. Bengio. “Adversarial machine learning at scale.” In: *arXiv preprint arXiv:1611.01236* (2016).
- [Mad+17] A. Madry et al. “Towards deep learning models resistant to adversarial attacks.” In: *arXiv preprint arXiv:1706.06083* (2017).

- [BGM23] L. Bungert, N. García Trillos, and R. Murray. “The geometry of adversarial training in binary classification.” In: *Information and Inference: A Journal of the IMA* 12.2 (2023), pp. 921–968.
- [LeC+95] Y. LeCun et al. “Learning algorithms for classification: A comparison on handwritten digit recognition.” In: *Neural networks: the statistical mechanics perspective* 261.276 (1995), p. 2.
- [Has+20] M. Hasannasab et al. “Parseval proximal neural networks.” In: *Journal of Fourier Analysis and Applications* 26 (2020), pp. 1–31.
- [Gou+20] H. Gouk et al. “Regularisation of neural networks by enforcing Lipschitz continuity.” In: *Machine Learning* (2020), pp. 1–24.
- [KMP20] V. Krishnan, A. A. A. Makdah, and F. Pasqualetti. “Lipschitz Bounds and Provably Robust Training by Laplacian Smoothing.” In: *arXiv preprint arXiv:2006.03712* (2020).
- [Sha+19] A. Shafahi et al. “Adversarial training for free!” In: *Advances in Neural Information Processing Systems* 32 (2019).
- [LC10] Y. LeCun and C. Cortes. “MNIST handwritten digit database.” In: (2010).
- [XRV17] H. Xiao, K. Rasul, and R. Vollgraf. “Fashion-MNIST: a Novel Image Dataset for Benchmarking Machine Learning Algorithms.” In: *CoRR* abs/1708.07747 (2017).
- [Ros58] F. Rosenblatt. “The perceptron: a probabilistic model for information storage and organization in the brain.” In: *Psychological review* 65.6 (1958), p. 386.
- [Hoe+21] T. Hoeffler et al. “Sparsity in Deep Learning: Pruning and growth for efficient inference and training in neural networks.” In: *J. Mach. Learn. Res.* 22.241 (2021), pp. 1–124.
- [Gho+21] A. Gholami et al. “A survey of quantization methods for efficient neural network inference.” In: *arXiv preprint arXiv:2103.13630* (2021).
- [EMH19] T. Elsken, J. H. Metzen, and F. Hutter. “Neural architecture search: A survey.” In: *The Journal of Machine Learning Research* 20.1 (2019), pp. 1997–2017.
- [How+17] A. G. Howard et al. “Mobilenets: Efficient convolutional neural networks for mobile vision applications.” In: *arXiv preprint arXiv:1704.04861* (2017).
- [Ban+18] R. Banner et al. “Scalable methods for 8-bit training of neural networks.” In: *Advances in neural information processing systems* 31 (2018).
- [CBD14] M. Courbariaux, Y. Bengio, and J.-P. David. “Training deep neural networks with low precision multiplications.” In: *arXiv preprint arXiv:1412.7024* (2014).
- [Sch92] J. Schmidhuber. “Learning complex, extended sequences using the principle of history compression.” In: *Neural Computation* 4.2 (1992), pp. 234–242.

- [HVD15] G. Hinton, O. Vinyals, and J. Dean. “Distilling the knowledge in a neural network.” In: *arXiv preprint arXiv:1503.02531* (2015).
- [LDS89] Y. LeCun, J. Denker, and S. Solla. “Optimal brain damage.” In: *Advances in neural information processing systems 2* (1989).
- [CFP97] G. Castellano, A. M. Fanelli, and M. Pelillo. “An iterative pruning algorithm for feedforward neural networks.” In: *IEEE transactions on Neural networks* 8.3 (1997), pp. 519–531.
- [CM73] J. F. Claerbout and F. Muir. “Robust modeling with erratic data.” In: *Geophysics* 38.5 (1973), pp. 826–844.
- [Tib96] R. Tibshirani. “Regression shrinkage and selection via the lasso.” In: *Journal of the Royal Statistical Society: Series B (Methodological)* 58.1 (1996), pp. 267–288.
- [Nit14] A. Nitanda. “Stochastic proximal gradient descent with acceleration techniques.” In: *Advances in Neural Information Processing Systems* 27 (2014), pp. 1574–1582.
- [RVV20] L. Rosasco, S. Villa, and B. C. Vũ. “Convergence of stochastic proximal gradient algorithm.” In: *Applied Mathematics & Optimization* 82.3 (2020), pp. 891–917.
- [Moc+18] D. C. Mocanu et al. “Scalable training of artificial neural networks with adaptive sparse connectivity inspired by network science.” In: *Nature communications* 9.1 (2018), pp. 1–12.
- [DZ19] T. Dettmers and L. Zettlemoyer. “Sparse networks from scratch: Faster training without losing performance.” In: *arXiv preprint arXiv:1907.04840* (2019).
- [DYJ19] X. Dai, H. Yin, and N. K. Jha. “NeST: A neural network synthesis tool based on a grow-and-prune paradigm.” In: *IEEE Transactions on Computers* 68.10 (2019), pp. 1487–1497.
- [Fu+22] Y. Fu et al. “Exploring structural sparsity of deep networks via inverse scale spaces.” In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* (2022).
- [Liu+21] S. Liu et al. “Sparse evolutionary deep learning with over one million artificial neurons on commodity hardware.” In: *Neural Computing and Applications* 33.7 (2021), pp. 2589–2604.
- [BB18] M. Benning and M. Burger. “Modern regularization methods for inverse problems.” In: *Acta Numerica* 27 (2018), pp. 1–111.
- [PB+14] N. Parikh, S. Boyd, et al. “Proximal algorithms.” In: *Foundations and trends® in Optimization* 1.3 (2014), pp. 127–239.
- [Sca+17] S. Scardapane et al. “Group sparse regularization for deep neural networks.” In: *Neurocomputing* 241 (2017), pp. 81–89.

- [CP08] P. L. Combettes and J.-C. Pesquet. “Proximal thresholding algorithm for minimization over orthonormal bases.” In: *SIAM Journal on Optimization* 18.4 (2008), pp. 1351–1376.
- [DDD04] I. Daubechies, M. Defrise, and C. De Mol. “An iterative thresholding algorithm for linear inverse problems with a sparsity constraint.” In: *Communications on Pure and Applied Mathematics: A Journal Issued by the Courant Institute of Mathematical Sciences* 57.11 (2004), pp. 1413–1457.
- [FNW07] M. A. Figueiredo, R. D. Nowak, and S. J. Wright. “Gradient projection for sparse reconstruction: Application to compressed sensing and other inverse problems.” In: *IEEE Journal of selected topics in signal processing* 1.4 (2007), pp. 586–597.
- [Cha04] A. Chambolle. “An algorithm for total variation minimization and applications.” In: *Journal of Mathematical imaging and vision* 20 (2004), pp. 89–97.
- [CP11] A. Chambolle and T. Pock. “A first-order primal-dual algorithm for convex problems with applications to imaging.” In: *Journal of mathematical imaging and vision* 40 (2011), pp. 120–145.
- [Bre67] L. M. Bregman. “The relaxation method of finding the common point of convex sets and its application to the solution of problems in convex programming.” In: *USSR computational mathematics and mathematical physics* 7.3 (1967), pp. 200–217.
- [De 93] E. De Giorgi. “New problems on minimizing movements.” In: *Ennio de Giorgi: Selected Papers* (1993), pp. 699–713.
- [Osh+05] S. Osher et al. “An iterative regularization method for total variation-based image restoration.” In: *Multiscale Modeling & Simulation* 4.2 (2005), pp. 460–489.
- [ROF92] L. I. Rudin, S. Osher, and E. Fatemi. “Nonlinear total variation based noise removal algorithms.” In: *Physica D: nonlinear phenomena* 60.1-4 (1992), pp. 259–268.
- [Bur+06] M. Burger et al. “Nonlinear inverse scale space methods.” In: *Communications in Mathematical Sciences* 4.1 (2006), pp. 179–212.
- [Bur+07] M. Burger et al. “Inverse total variation flow.” In: *Multiscale Modeling & Simulation* 6.2 (2007), pp. 366–395.
- [Yin+08] W. Yin et al. “Bregman iterative algorithms for  $\ell_1$ -minimization with applications to compressed sensing.” In: *SIAM Journal on Imaging sciences* 1.1 (2008), pp. 143–168.
- [COS09] J.-F. Cai, S. Osher, and Z. Shen. “Convergence of the linearized Bregman iteration for  $\ell_1$ -norm minimization.” In: *Mathematics of Computation* 78.268 (2009), pp. 2127–2136.

- [Vil+23] S. Villa et al. “Implicit regularization with strongly convex bias: Stability and acceleration.” In: *Analysis and Applications* 21.01 (2023), pp. 165–191.
- [BT03] A. Beck and M. Teboulle. “Mirror descent and nonlinear projected sub-gradient methods for convex optimization.” In: *Operations Research Letters* 31.3 (2003), pp. 167–175.
- [NY83] A. S. Nemirovskij and D. B. Yudin. “Problem complexity and method efficiency in optimization.” In: (1983).
- [Nem+09] A. Nemirovski et al. “Robust stochastic approximation approach to stochastic programming.” In: *SIAM Journal on optimization* 19.4 (2009), pp. 1574–1609.
- [Nes83] Y. Nesterov. “A method for unconstrained convex minimization problem with the rate of convergence  $o(1/k^2)$ .” In: *Doklady ANSSSR* 269.3 (1983), pp. 543–547.
- [Qia99] N. Qian. “On the momentum term in gradient descent learning algorithms.” In: *Neural networks* 12.1 (1999), pp. 145–151.
- [KB14] D. Kingma and J. Ba. “Adam: A Method for Stochastic Optimization.” In: *arXiv preprint arXiv:1412.6980* (2014).
- [HR21] F. Hanzely and P. Richtárik. “Fastest rates for stochastic mirror descent methods.” In: *Computational Optimization and Applications* 79 (2021), pp. 717–766.
- [ZH18] S. Zhang and N. He. “On the convergence rate of stochastic mirror descent for nonsmooth nonconvex optimization.” In: *arXiv preprint arXiv:1806.04781* (2018).
- [DO+21] R. D’Orazio et al. “Stochastic mirror descent: Convergence analysis and adaptive variants via the mirror stochastic Polyak stepsize.” In: *arXiv preprint arXiv:2110.15412* (2021).
- [AKL22] P.-C. Aubin-Frankowski, A. Korba, and F. Léger. “Mirror descent with relative smoothness in measure spaces, with application to sinkhorn and em.” In: *Advances in Neural Information Processing Systems* 35 (2022), pp. 17263–17275.
- [Ben+21] M. Benning et al. “Choose your path wisely: gradient descent in a Bregman distance framework.” In: *SIAM Journal on Imaging Sciences* 14.2 (2021), pp. 814–843.
- [HZ93] G. E. Hinton and R. Zemel. “Autoencoders, minimum description length and Helmholtz free energy.” In: *Advances in neural information processing systems* 6 (1993).
- [KLM21] N. Kovachki, S. Lanthaler, and S. Mishra. “On universal approximation and error bounds for Fourier neural operators.” In: *The Journal of Machine Learning Research* 22.1 (2021), pp. 13237–13312.

- [HW62] D. H. Hubel and T. N. Wiesel. “Receptive fields, binocular interaction and functional architecture in the cat’s visual cortex.” In: *The Journal of physiology* 160.1 (1962), p. 106.
- [Li+20] Z. Li et al. “Fourier neural operator for parametric partial differential equations.” In: *arXiv preprint arXiv:2010.08895* (2020).
- [Kov+21] N. B. Kovachki et al. “Neural Operator: Learning Maps Between Function Spaces.” In: *arXiv:2108.08481* (2021).
- [Bri19] T. Briand. “Trigonometric Polynomial Interpolation of Images.” In: *Image Processing On Line* 9 (Oct. 2019), pp. 291–316.
- [HG16] D. Hendrycks and K. Gimpel. “Gaussian Error Linear Units (GELUs).” In: *arXiv:1606.08415* (2016).

## Theses

- [Roi21] T. Roith. “Master thesis: Continuum limit of Lipschitz learning on graphs.” MA thesis. Friedrich-Alexander-Universität Erlangen-Nürnberg, 2021.
- [Kab22] S. Kabri. “Fourier Neural Operators for Image Classification.” MA thesis. Friedrich-Alexander-Universität Erlangen-Nürnberg, 2022.

## Online

- [Pio21] G. Piosenka. *BIRDS 500 - SPECIES IMAGE CLASSIFICATION*. 2021. URL: <https://www.kaggle.com/datasets/gpiosenka/100-bird-species%7D>.

## Erklärung

Hiermit versichere ich, dass ich die vorliegende Arbeit selbstständig verfasst und keine anderen als die angegebenen Quellen und Hilfsmittel benutzt habe, dass alle Stellen der Arbeit, die wörtlich oder sinngemäß aus anderen Quellen übernommen wurden, als solche kenntlich gemacht sind und dass die Arbeit in gleicher oder ähnlicher Form noch keiner Prüfungsbehörde vorgelegt wurde.

Erlangen, den 13.Juli 2023

.....

Tim Roith