

Media

Your Tasks

- ☐ Define key vocabulary
- ☐ Write code to implement an image on an HTML page
- ☐ Write code to implement a video on an HTML page
- ☐ Receive credit for the group portion of this lab

☐ Define key vocabulary

attribute

words used inside a tag to control how the element works.

src attribute

specifies the URL of the image to use as a submit button

alt attribute

specifies an alternate text for an area, if the image cannot be displayed.

self-closing tag

kind of HTML tag that does not need to be closed manually by its closing tag

url

Uniform Resource Locator, the address of a webpage.

□ Write code to implement an image on an HTML page

All of the elements you've learned about so far (headings, paragraphs, lists, and spans) share one thing in common: they're composed entirely of text! What if you want to add content to your web page that isn't composed of text, like images?

The `` tag allows you to add an image to a web page. Most elements require both opening and closing tags, but the `` tag is a *self-closing tag*. Note that the end of the `` tag has a forward slash `/`. Self-closing tags may include or omit the final slash — both will render properly.

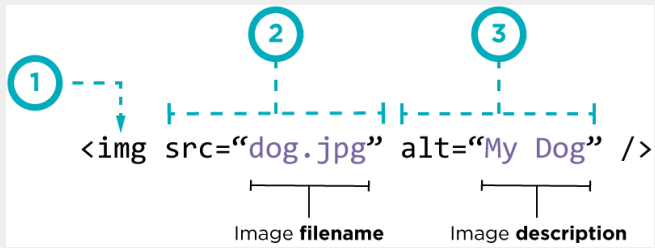

```

```

The `` tag has a required *attribute* called `src`. The `src` attribute must be set to the image's *source*, or the location of the image. In this case, the value of `src` must be the *uniform resource locator* (URL) of the image. A URL is the web address or local address where a file is stored.

An additional attribute, called `alt`, provides backup text in case your image doesn't download properly or for visually impaired users.

A complete description of the `` tag is provided below,

Media	
Index.html dog.jpg	 <pre></pre> <p>Image filename Image description</p>
<ol style="list-style-type: none">1. Creates an image tag using the abbreviation <code>img</code>. This is considered a self-closing tag, since it doesn't need to wrap text as many other tags do. The <code>/</code> right before the ending <code>></code> is optional, but helps remind us that this tag doesn't need a closing tag.2. The <code>src</code> attribute is short for source. This tells the tag which image to load. In this case, the page will look for an image with the filename <code>dog.jpg</code> in the same directory as the page. Image file names include extensions that tell the computer which type of image they are working with. Common extensions are <code>.jpg</code>, <code>.jpeg</code>, <code>.gif</code>, <code>.png</code>. Make sure to put quotation marks around your image filename.3. The <code>alt</code> attribute is short for alternative text. While you won't see this text on your web page, it provides a backup in case your image doesn't download properly or for visually impaired users. In this example, if your browser failed to load the image you would see 	

Now consider an example where the image we are trying to reference is stored in a directory that is different than *Index.html*. In the file structure below, we have created a directory called *Images* inside the *Media* folder and placed the *Frog.jpg* image inside of it. The following code could be used to reference the *Frog.jpg* image from the *Index.html* page.

Media	<code></code>
Index.html	
Images	
Frog.jpg	

Now consider the situation below. *Media* and *Images* are both separate directories in the *MyWebsite* directory. Inside the *Media* directory we have an *Index.html* page and inside the *Images* directory we have our image *Frog.jpg* we want to reference. To do this, we must first “backout” of the *Media* directory, then enter the *Images* directory. The “.” syntax is used to backout of a directory.

MyWebsite	<code></code>
Media	
Images	
Index.html	Frog.jpg

Write code that could be used to display the *Wolf.jpg* image on the *Index.html* page. Be sure to also include the *alt* attribute to indicate the alternative text.

File Structure	Code								
<table><tr><th>MyWebsite</th></tr><tr><td>Index.html Wolf.jpg</td></tr></table>	MyWebsite	Index.html Wolf.jpg	<code></code>						
MyWebsite									
Index.html Wolf.jpg									
<table><tr><th>MyWebsite</th></tr><tr><td>Index.html <table><tr><th>Media</th></tr><tr><td><table><tr><th>Images</th><th>Videos</th></tr><tr><td>Wolf.jpg</td><td>Dog.mp4</td></tr></table></td></tr></table></td></tr></table>	MyWebsite	Index.html <table><tr><th>Media</th></tr><tr><td><table><tr><th>Images</th><th>Videos</th></tr><tr><td>Wolf.jpg</td><td>Dog.mp4</td></tr></table></td></tr></table>	Media	<table><tr><th>Images</th><th>Videos</th></tr><tr><td>Wolf.jpg</td><td>Dog.mp4</td></tr></table>	Images	Videos	Wolf.jpg	Dog.mp4	<code></code>
MyWebsite									
Index.html <table><tr><th>Media</th></tr><tr><td><table><tr><th>Images</th><th>Videos</th></tr><tr><td>Wolf.jpg</td><td>Dog.mp4</td></tr></table></td></tr></table>	Media	<table><tr><th>Images</th><th>Videos</th></tr><tr><td>Wolf.jpg</td><td>Dog.mp4</td></tr></table>	Images	Videos	Wolf.jpg	Dog.mp4			
Media									
<table><tr><th>Images</th><th>Videos</th></tr><tr><td>Wolf.jpg</td><td>Dog.mp4</td></tr></table>	Images	Videos	Wolf.jpg	Dog.mp4					
Images	Videos								
Wolf.jpg	Dog.mp4								

MyWebsite	
AboutMe	Media
Index.html	Images
	Wolf.jpg

❑ Write code to implement a *video* on an HTML page

The *video* tag allows you to add videos to your webpage. The video tag includes several attributes which allow you to customize how your video displays. These are described below.

Media	
Index.html movie.mp4	<pre> <video width="320" height="240" controls> <source src="movie.mp4" type="video/mp4"> <source src="movie.ogg" type="video/ogg"> Your browser does not support the video tag. </video> </pre>
<ol style="list-style-type: none"> 1. The video tag is needed to tell the browser to load a video. Notice the video tag also requires a closing tag. 2. width and height are attributes define the size of the video. 3. Controls attribute adds controls like, play, stop, pause. If the word <i>controls</i> is replaced with <i>autoplay</i>, the video will play automatically when the page loads. 4. The <source> element allows you to specify alternative video files which the browser may choose from. The browser will use the first recognized format. 5. The src attribute indicates the location and name of the video file to be played. 6. The type attribute is the type of video format. 	

Write code that could be used to display the video on the Index.html page. For each video, indicate the controls attribute.

File Structure	Code
<div><div>MyWebsite</div><div>Index.html<div>Media<div><div>ImagesVideos</div><div>Cat.pngDog.mp4</div></div></div></div></div>	<div><video width = '500' height = '300' controls> <source src = ' Media/Videos/Dog.mp4' type = 'video/mp4' Your browser does not support videos </video></div>
<div><div>MyWebsite</div><div><div>AboutMeMedia</div><div>Index.html<div><div>Images</div><div>Dog.mp4</div></div></div></div></div>	<div><video width = '500' height = '300' controls> <source src = ' ../Media/Videos/Dog.mp4' type = 'video/mp4' Your browser does not support videos </video></div>

□ Receive Credit for this lab guide

Submit this portion of the lab to Pluska to receive credit for the lab guide.