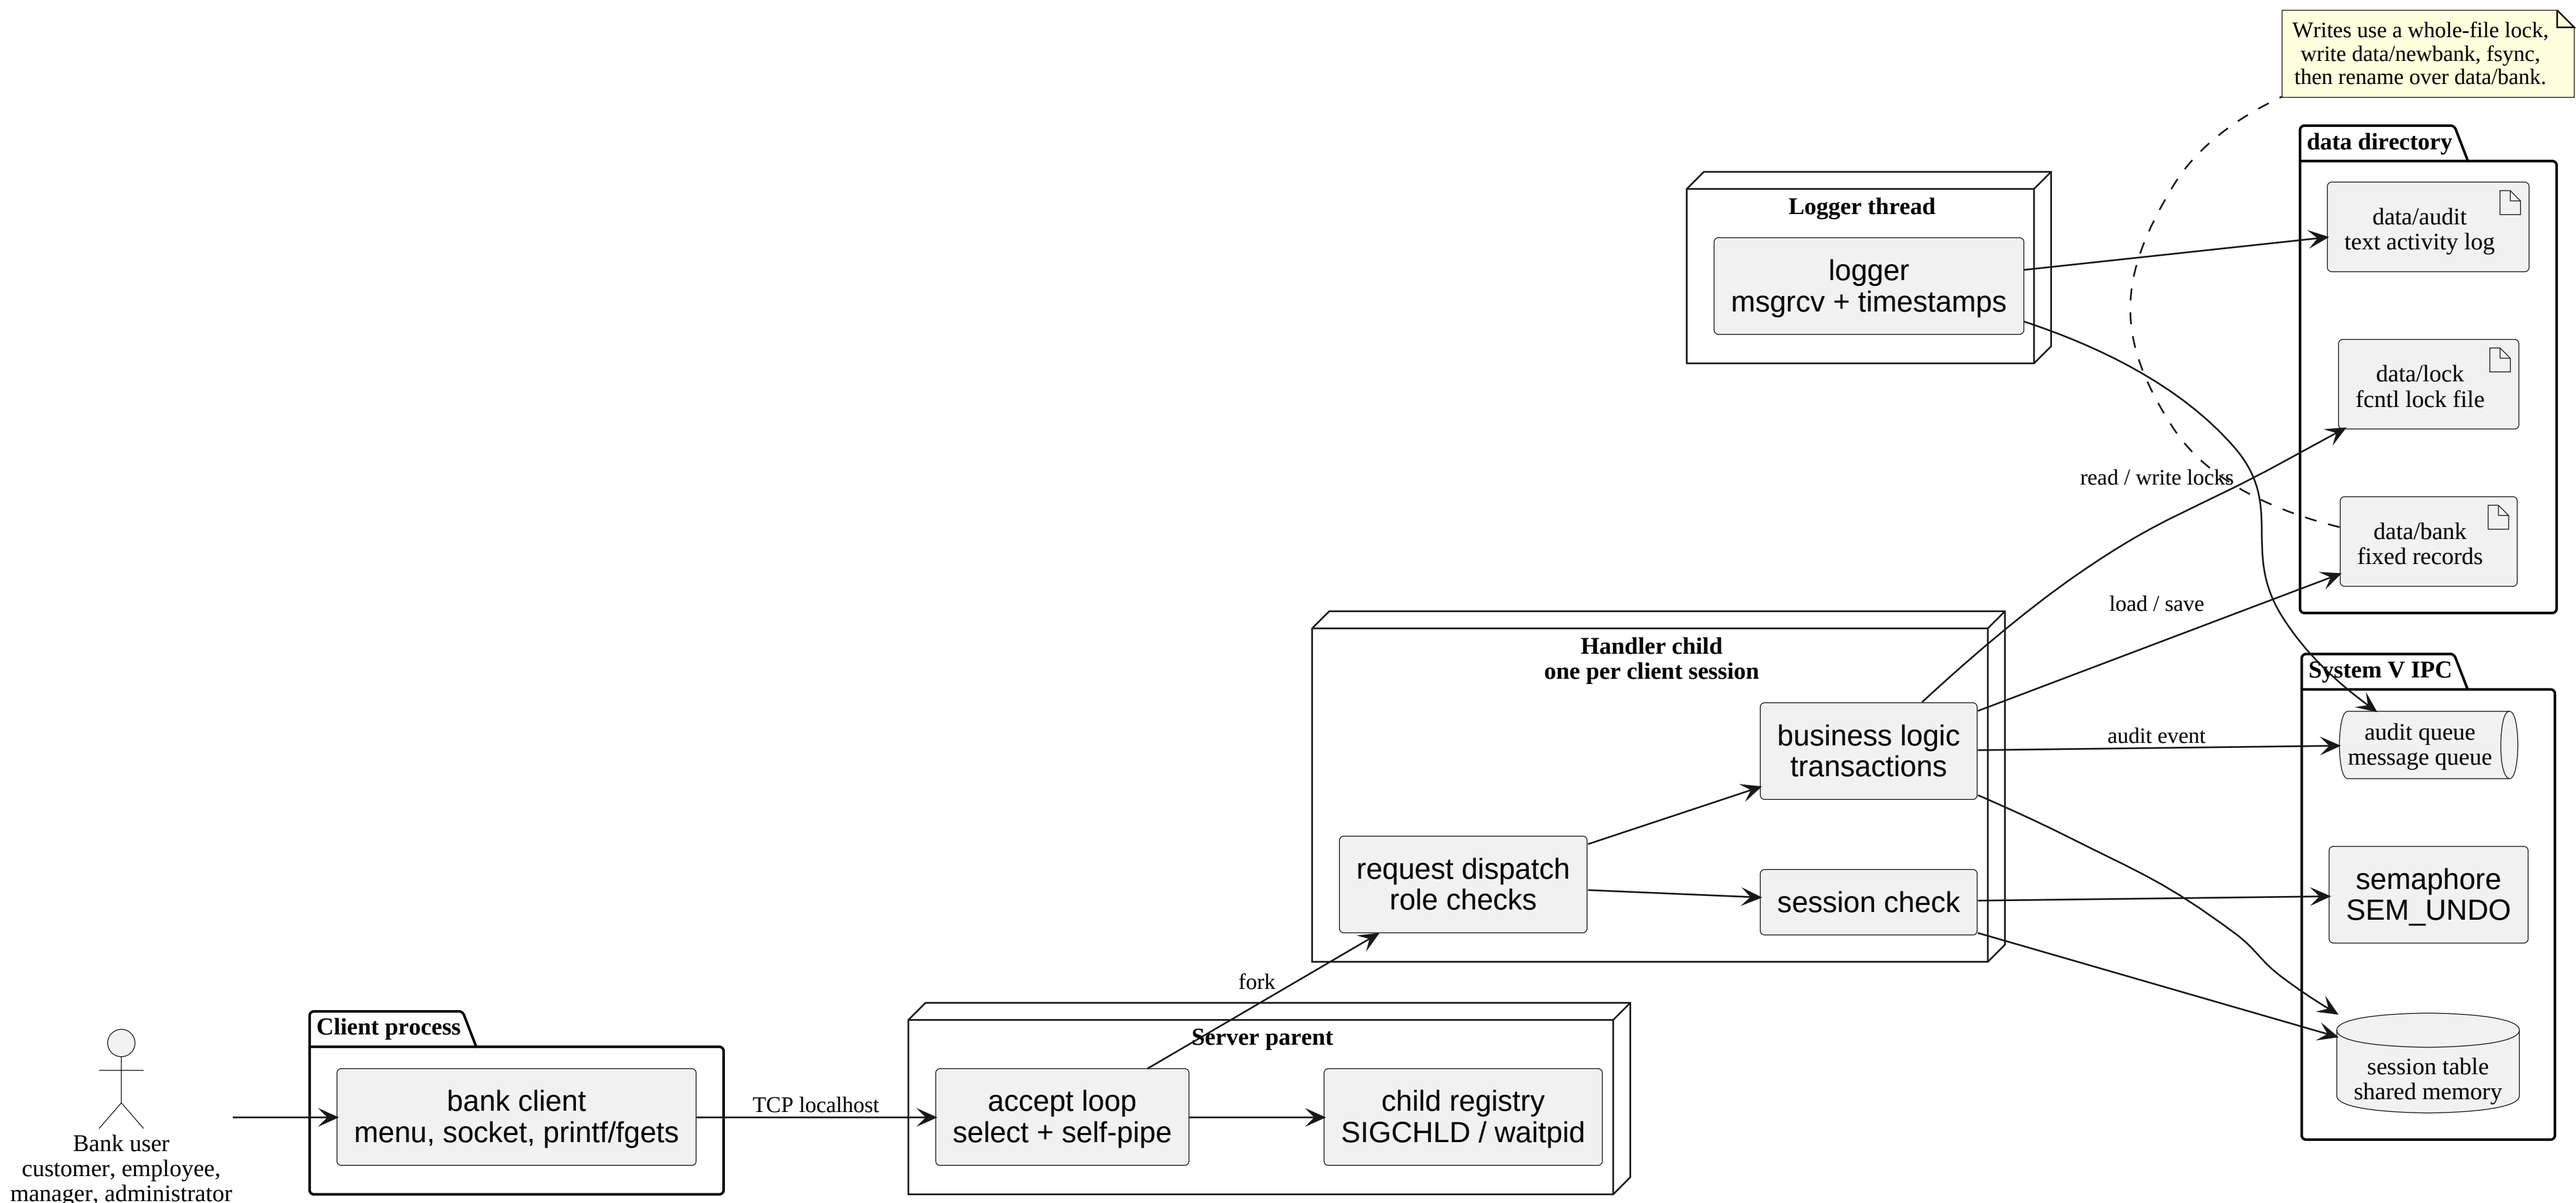
Writes use a whole-file lock, write data/newbank, fsync, then rename over data/bank.
data directory
Logger thread
logger
msgrcv + timestamps
data/audit
text activity log
data/lock
fcntl lock file
data/bank
fixed records
read / write locks
load / save
Handler child
one per client session
business logic
transactions
request dispatch
role checks
session check
System V IPC
audit event
audit queue
message queue
semaphore
SEM_UNDO
session table
shared memory
fork
Server parent
accept loop
select + self-pipe
child registry
SIGCHLD / waitpid
TCP localhost
Client process
bank client
menu, socket, printf/fgets
Bank user
customer, employee,
manager, administrator