

TiLiA – TimeLineAnnotator

Felipe D. Martins ^{1*}, Anne R. E. Foo ^{2*}, and Mark R. H. Gotham ^{3*}

¹ Universidade Federal do Rio de Janeiro, Brazil ² École Polytechnique Fédérale de Lausanne, Digital and Cognitive Musicology Lab, Switzerland ³ King's College London, United Kingdom * These authors contributed equally.

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

‘TiLiA’ (TimeLine Annotator) is an open-source, cross-platform network of tools and resources designed to facilitate real-time creating, displaying and interacting with timeline-style annotations of audio, video and musical scores. Developed in Python with the PySide UI framework, TiLiA is available primarily as a desktop Graphical User Interface (GUI), supported by a Command Line Interface (CLI) as well as a free and open online platform where users may upload, view and query existing analyses.

Statement of need

Visual analyses of music have proven to be an enduringly popular, effective, and versatile tool for conveying a variety of musical ideas.¹ As the famous adage goes: ‘a picture is worth a thousand words’. A comprehensive analysis of music requires being able to summarise the relationships between events that are happening concurrently and through time. Furthermore, whatever potential a *static* image has, an *interactive* one offers considerably more. Form analysis, for instance, can be hard to parse (especially in real-time) but is often easy to understand through visual summaries.

In today’s digital age, we have come to expect certain basic interactive features across visual interfaces, such as resizing content to fit the window, keyboard shortcuts, undo/redo functionality, and so on. Musical contexts extend this with additional expectations, such as real-time synchronisation (a.k.a., audio or score following).

Despite several emergent initiatives (see below), musical scholarship has not yet made the leap into this technological space with any degree of decisiveness or consistency. Even most visually minded music analyses are consigned to static images embedded in print (or in e-copies at best) and not subject to the expectations for *fair*, open-source data sharing that are now *de rigueur* in other fields.

State of the field

While one *can* appropriate score and audio editors for visual analysis (Peebles, 2013), they are limited in their annotating capabilities. Dedicated tools fall into a few groups, according to their focus. Audio-analysis tools such as Sonic Visualiser (Cannam et al., 2010) and Partiels (Guillot, 2025) centre on audio and plug-in features, and lack score integration. Score-annotation platforms such as *Edirom Online* (Röwenstrunk, 2014), *Listen Here!* (Weigl et al., 2023) and *mei-friend* (Goebel & Weigl, 2024) anchor annotations to notated elements rather than to time and lack dedicated types for analytical structures such as form, while others, such as the MPM Toolbox (Berndt, 2021), are tied to specific file formats. “Timeline-based” annotators such as

¹See Isaacson (2023) for a survey of this long history.

39 *Audio Timeliner* (Notess & Swan, 2004; Yorgason, 2018), *iAnalyse* (Couprie, 2019), *BriFormer*
 40 (Jarvis, 2020) and *Dezrann* (Giraud et al., 2018) tend to focus more on providing tools for
 41 rich hand-made analysis.² While each group excels at particular tasks, there remains space for
 42 a solution that caters to more cross-cutting needs.

43 Platform support, for instance, is often narrow (Table 1): *Dezrann* and *BriFormer* run only
 44 in the browser, where local files are impractical and media face copyright restrictions, while
 45 *iAnalyse* runs only on macOS. Few of the tools are scriptable, and most store analyses in
 46 tool-specific formats, constraining interoperability and work at scale.

47 Most software focuses on a subset of the many guises analytical annotations can take
 48 (e.g. hierarchical groupings, metre, overlapping time spans, score elements, harmony, text).
 49 *Audio Timeliner* and *BriFormer* allow only nested spans, whereas *Sonic Visualiser* and *iAnalyse*
 50 allow overlaps, but only on a flat surface. Datasets need all of them: *SALAMI* (Smith et
 51 al., 2011) and the *Wagner Ring Dataset* (Weiß et al., 2023) encode hierarchical structure,
 52 itself an active research topic (McFee & Ellis, 2014); the *ABC* (Neuwirth et al., 2018) and
 53 the *Annotated Mozart Sonatas* (Hentschel et al., 2021) layer harmony, phrase and cadence
 54 labels; *BPSD* (Zeitler et al., 2024) and the *Harmonix Set* (Nieto et al., 2019) align formal
 55 structure with beats and measures; and the *Schubert Winterreise Dataset* (Weiß et al., 2021)
 56 links harmony annotations to scores and several recordings.

57 Input formats and multimodality have varied support. Symbolic-focused platforms, for instance,
 58 rarely support video. The *Walküre* (Balke et al., 2017), *Freischütz Digital* (Müller et al., 2013),
 59 *Erkomaishvili* (Rosenzweig et al., 2020) and *Lohengrin TimeMachine* (Lewis et al., 2021)
 60 interfaces show what multimodal, synchronised and richly interactive access can offer, but are
 61 tied to specific corpora.

62 In response to this challenge, we present ‘TiLiA’: a timeline annotator for all. It provides an
 63 open-source, cross-platform desktop tool that aligns annotations with audio, video, YouTube,
 64 PDFs and scores on shared timelines, offers dedicated types for musical structure, harmony
 65 and metre, and can be scripted and exchanged through CSV and JSON.

Table 1: Comparison of music annotation tools.

Tool	Annotation types	Media	Open source	Scripting & interop	Platforms
TiLiA	H I O B C (E)	A V Y S P	GPLv3	CLI; CSV, JSON	W L M (web)
Audio Timeliner	H I T	A	—	CLI	W M
BriFormer	H I (O)	A Y	—	—	web
Dezrann	(H) I O C E	A Y S P	GPLv3	JSON	web
iAnalyse	I O E T	A V S P	—	—	M
mei-friend	I C E T	S P	AGPLv3	MEI	web
Sonic Visualiser	I O B C T	A	GPLv2	CSV, CLI	W L M

66 *Annotations*: **H** hierarchical · **I** instant · **O** overlapping · **B** beat · **C** harmony · **E** score
 67 elements · **T** text

68 *Media*: **A** audio · **V** video · **Y** YouTube · **S** score · **P** PDF

69 *Platforms*: **W** Windows · **L** Linux · **M** macOS

70 Parentheses mark partial support.

²Commercial platforms such as *Hookpad* and *SoundSlice*, which are closed-source and subscription-based, are omitted, as well as *SyncPlayer* (Fremerey et al., 2007; Kurth et al., 2005), which is no longer available.

Specifications

TiLiA consists of an organisation of digital tools, primarily of its [open-source desktop application](#) and [command-line interface](#), but also of a supporting online platform. The desktop application is developed in Python using the PySide binding for the Qt UI framework. Automated testing is done with pytest, and fully-automated deployment is available via GitHub Actions. The code base is loosely organised around a Model-View-Controller (MVC) pattern, which allows both the CLI and the GUI to benefit from the same backend logic. We provide object-oriented base classes such as Timeline, TimelineUI and TimelineComponent as a means to promote extensibility and support an evergrowing range of annotation needs.

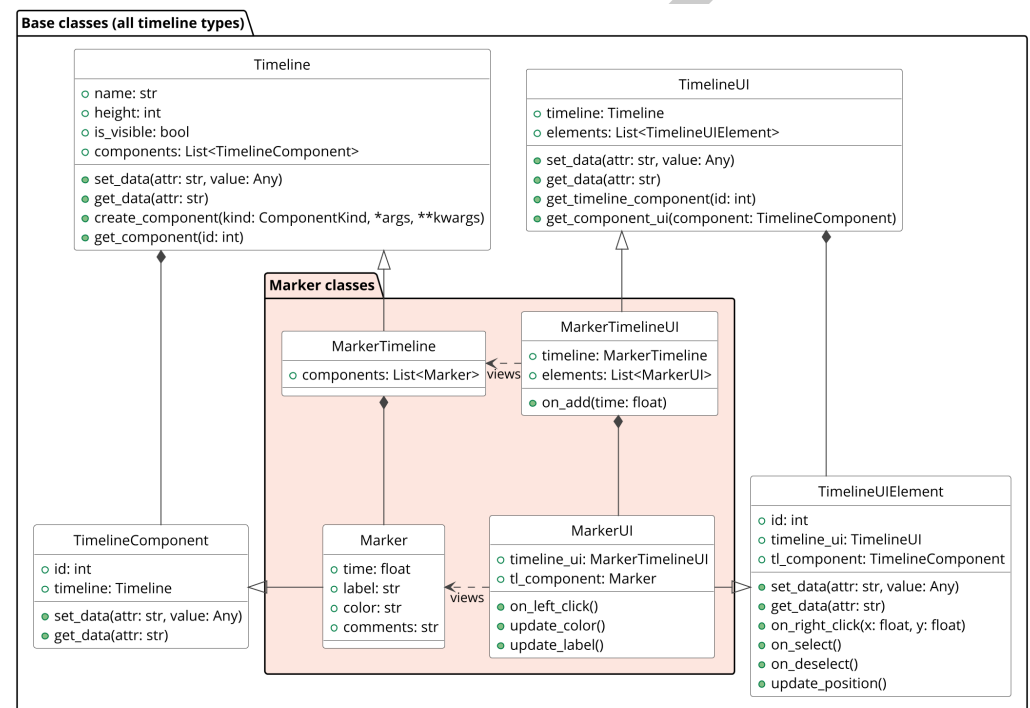


Figure 1: A simplified diagram for the main timeline base classes.

Figure 1 is a simplified diagram for the main timeline base classes. The outer box shows the base classes shared by all timeline types; the inner box shows the concrete subclasses for the marker timeline type, one example among the various timeline types. Timeline acts as container for TimelineComponents. Both act as models of TimelineUI and TimelineUIElement, which are views; in the marker example, MarkerTimelineUI and MarkerUI view MarkerTimeline and Marker respectively.

TiLiA is designed both for the manual creation of analyses — particularly where this requires complex alignment with audio/video sources — and for the large-scale conversion and import of external analyses. While the .tla format may still change as functionality grows, data can be imported from CSV and exported to JSON in stable, documented formats ([import](#), [export](#)), and both steps can be fully automated with the CLI. The [tilia-dcml](#) repository demonstrates this by integrating an external corpus of musical analyses.

The desktop application

The main part of TiLiA is a cross-platform *What-You-See-Is-What-You-Get* GUI ([Figure 2](#)), designed to feel intuitive to anyone who has worked with audiovisual editing software. A

95 TiLiA analysis consists of timelines, each containing annotations that can be aligned to an
96 audio, video, YouTube stream or musical score. Each *timeline type* is designed to support
97 conventional formal annotations, with the affordance to work with a variety of other analytical
98 styles. These timelines each contain one or more *component types* (e.g., markers for marker
99 timelines), each with different *properties* to convey information including comments, colour and
100 labels.

101 We connect timelines and their components by using the loaded media as a “base layer” to
102 which all timelines refer. Timeline components have either time or start_time and end_time
103 timestamps which position them in relation to the underlying media. If a different media is
104 loaded, the user has the option to either uniformly scale timelines to the new media or to keep
105 them at their original position (deleting out-of-bounds components if necessary). If a beat
106 timeline is present, the software can map timestamps to metric positions, also providing a
107 metric-based interface for importing, exporting and interacting with timelines.



Figure 2: Excerpt of a TiLiA analysis on the desktop application.

108 Currently, there are eight types of timelines:

Timeline type	Purpose
Audiowave	Displaying amplitude graphs
Beat	Marking beats/measures, synchronising metrical and absolute time
Harmony	Chord symbols and roman numeral analysis
Hierarchy	Representing hierarchical relations and sequences
Marker	Annotating discrete timepoints
PDF	Synchronising external PDF documents with playback
Range	Representing non-hierarchical relations and sequences
Score	Synchronising digitised scores with playback

109 **Command-line interface**

110 In addition to the desktop GUI and the web app, a **command line interface** allows the
111 automation of file and timeline creation and edition, media loading and external data importing.
112 Sequences of commands can be loaded by the CLI from scripts written in plain text files,
113 enabling programmatic conversion from various data formats to TiLiA files.

```

114 metadata set-media-length 120
115 timelines add hierarchy --name "Form"
116 timelines add marker --name "Formal closures"
117 timelines add hierarchy --name "Harmonic segments"
118 timelines add beat --name "Measures" --beat-pattern 1
119 timelines add marker --name "Harmony"
120 timelines add marker --name "Harm. functions"
121 timelines add marker --name "Keys"
122
123 load-media <path to audio> --scale-timelines yes
124 metadata set title "Title"
125 save <path to TiLiA file> --overwrite
126 export <path to JSON file> --overwrite

```

127 Online platform

128 The TiLiA desktop application is supported by an [online platform](#) that lets users store, share,
 129 visualise and even query existing analyses. Registration is free and is only required for uploading
 130 content. This reflects a goal of TiLiA to support not only the modernised creation and storage
 131 of analyses, but also to support the still-rare practice of analytical *collaboration* and structured
 132 *searches* on the corpora; both which benefit from network effects facilitated by the lowered
 133 entry barrier.

134 Outlook

135 The TiLiA desktop application aims to provide a user-friendly annotation tool both for MIR
 136 researchers and musicologists. It can be used to create large annotation datasets or detailed,
 137 interactive analyses of individual pieces. It can also be used in the classroom to better
 138 connect theoretical concepts with audiovisual material or as a common interface for analytical
 139 assignments.

140 In the future we hope to convert existing open-source datasets and integrate them into the
 141 web platform, providing a centralised hub where diversified audiovisual data can be queried
 142 and interacted with in a uniform manner. We also plan to improve audio processing and score
 143 displaying capabilities and to add more timeline types (e.g. a 2-dimensional graph timeline) to
 144 offer more diversified visualisations.

145 References

- 146 Balke, S., Hiemer, M., Schwab, P., Arifi-Müller, V., Meyer-Wegener, K., & Müller, M. (2017).
 147 Die Oper als Multimediaszenario – Wagners Walküren gehen online. *INFORMATIK 2017*,
 148 75–86. https://doi.org/10.18420/in2017_04
- 149 Berndt, A. (2021). The Music Performance Markup Format and Ecosystem. *Proceedings*
 150 *of the 22nd International Society for Music Information Retrieval Conference*. <https://archives.ismir.net/ismir2021/paper/000005.pdf>
- 152 Cannam, C., Landone, C., & Sandler, M. (2010). Sonic Visualiser: An Open Source Application
 153 for Viewing, Analysing, and Annotating Music Audio Files. *Proceedings of the 18th ACM*
 154 *International Conference on Multimedia*. <https://doi.org/10.1145/1873951.1874248>
- 155 Couprie, P. (2019). iAnalyse 5 : Le développement d'un logiciel pour la musicologie numérique.
 156 *Journées d'informatique Musicale (JIM 2019)*. <https://hal.science/hal-02133538>
- 157 Fremerey, C., Kurth, F., Müller, M., & Clausen, M. (2007). A Demonstration of the SyncPlayer
 158 System. *Proceedings of the 8th International Conference on Music Information Retrieval*,

- 159 131–132. https://ismir2007.ismir.net/proceedings/ISMIR2007_p131_fremerey.pdf
- 160 Giraud, M., Groult, R., & Leguy, E. (2018). Dezzrann, a Web Framework to Share Music
161 Analysis. In S. Bhagwati & J. Bresson (Eds.), *Proceedings of the International Conference*
162 *on Technologies for Music Notation and Representation – TENOR'18* (pp. 104–110).
163 Concordia University. ISBN: 978-1-5251-0551-7
- 164 Goebl, W., & Weigl, D. M. (2024). Mei-friend: An interactive web-based editor for digital
165 music encodings. *Journal of Open Source Software*, 9(98), 6002. [https://doi.org/10.](https://doi.org/10.21105/joss.06002)
166 [21105/joss.06002](https://doi.org/10.21105/joss.06002)
- 167 Guillot, P. (2025). Partiels – Exploring, Analyzing and Understanding Sounds. *Proceedings*
168 *of the 28th International Conference on Digital Audio Effects (DAFx25)*, 298–303. [https://](https://www.dafx.de/paper-archive/2025/DAFx25_paper_66.pdf)
169 www.dafx.de/paper-archive/2025/DAFx25_paper_66.pdf
- 170 Hentschel, J., Neuwirth, M., & Rohrmeier, M. (2021). The Annotated Mozart Sonatas: Score,
171 Harmony, and Cadence. *Transactions of the International Society for Music Information*
172 *Retrieval*, 4(1), 67–80. <https://doi.org/10.5334/tismir.63>
- 173 Isaacson, E. (2023). *Visualizing Music*. Indiana University Press. [https://www.barnesandnoble.](https://www.barnesandnoble.com/w/visualizing-music-eric-isaacson/1140906228?ean=9780253064738)
174 [com/w/visualizing-music-eric-isaacson/1140906228?ean=9780253064738](https://www.barnesandnoble.com/w/visualizing-music-eric-isaacson/1140906228?ean=9780253064738)
- 175 Jarvis, B. E. (2020). *BriFormer*. Web application, version 1.2. [https://www.brianedwardjarvis.](https://www.brianedwardjarvis.com/MusicTheoryWebApps/BriFormer/briformer.html)
176 [com/MusicTheoryWebApps/BriFormer/briformer.html](https://www.brianedwardjarvis.com/MusicTheoryWebApps/BriFormer/briformer.html)
- 177 Kurth, F., Müller, M., Damm, D., Fremerey, C., Ribbrock, A., & Clausen, M. (2005).
178 SyncPlayer – An Advanced System for Multimodal Music Access. *Proceedings of the 6th*
179 *International Conference on Music Information Retrieval*. [https://ismir2005.ismir.net/](https://ismir2005.ismir.net/proceedings/1025.pdf)
180 [proceedings/1025.pdf](https://ismir2005.ismir.net/proceedings/1025.pdf)
- 181 Lewis, D., Page, K., & Dreyfus, L. (2021). Narratives and Exploration in a Musicology
182 App: Supporting Scholarly Argument with the Lohengrin TimeMachine. *Proceedings*
183 *of the 8th International Conference on Digital Libraries for Musicology*, 50–58. [https://](https://doi.org/10.1145/3469013.3469020)
184 doi.org/10.1145/3469013.3469020
- 185 McFee, B., & Ellis, D. P. W. (2014). Analyzing song structure with spectral clustering.
186 *Proceedings of the 15th International Society for Music Information Retrieval Conference*.
187 <https://archives.ismir.net/ismir2014/paper/000319.pdf>
- 188 Müller, M., Prätzlich, T., Bohl, B., & Veit, J. (2013). Freischütz Digital: A Multimodal
189 Scenario for Informed Music Processing. *Proceedings of the 14th International Workshop*
190 *on Image Analysis for Multimedia Interactive Services (WIAMIS)*, 1–4. [https://doi.org/10.](https://doi.org/10.1109/WIAMIS.2013.6616168)
191 [1109/WIAMIS.2013.6616168](https://doi.org/10.1109/WIAMIS.2013.6616168)
- 192 Neuwirth, M., Harasim, D., Moss, F. C., & Rohrmeier, M. (2018). The Annotated Beethoven
193 Corpus (ABC): A Dataset of Harmonic Analyses of All Beethoven String Quartets. *Frontiers*
194 *in Digital Humanities*, 5, 16. <https://doi.org/10.3389/fdigh.2018.00016>
- 195 Nieto, O., McCallum, M., Davies, M. E. P., Robertson, A., Stark, A., & Egozy, E. (2019).
196 The Harmonix Set: Beats, Downbeats, and Functional Segment Annotations of Western
197 Popular Music. *Proceedings of the 20th International Society for Music Information*
198 *Retrieval Conference*, 565–572. <https://doi.org/10.5281/zenodo.3527870>
- 199 Notess, M., & Swan, M. (2004). Timeliner: Building a learning tool into a digital music library.
200 In L. Cantoni & C. McLoughlin (Eds.), *Proceedings of EdMedia + innovate learning 2004*
201 (pp. 603–609). Association for the Advancement of Computing in Education (AACE).
202 <https://www.learntechlib.org/p/12995>
- 203 Peebles, C. (2013). Using Audacity to Participate in Active Musical Listening. *Engaging*
204 *Students: Essays in Music Pedagogy*. <http://flipcamp.org/engagingstudents/peebles.html>
- 205 Rosenzweig, S., Scherbaum, F., Shugliashvili, D., Arifi-Müller, V., & Müller, M. (2020).

- 206 Erkomaishvili Dataset: A Curated Corpus of Traditional Georgian Vocal Music for
207 Computational Musicology. *Transactions of the International Society for Music Information*
208 *Retrieval*, 3(1), 31–41. <https://doi.org/10.5334/tismir.44>
- 209 Rösenstrunk, D. (2014). *Markieren, Codieren, Annotieren – Arbeiten an und mit digitalen*
210 *Musikeditionen mit Edirom und MEI*.
- 211 Smith, J. B. L., Burgoyne, J. A., Fujinaga, I., De Roure, D., & Downie, J. S. (2011). Design
212 and creation of a large-scale database of structural annotations. *Proceedings of the 12th*
213 *International Society for Music Information Retrieval Conference*, 555–560.
- 214 Weigl, D. M., VanderHart, C., Rammler, D., Pescoller, M., & Goebel, W. (2023). Listen
215 here! A web-native digital musicology environment for machine-assisted close listening.
216 *Proceedings of the 10th International Conference on Digital Libraries for Musicology*,
217 109–118. <https://doi.org/10.1145/3625135.3625144>
- 218 Weiß, C., Arifi-Müller, V., Krause, M., Zalkow, F., Klauk, S., Kleinertz, R., & Müller, M.
219 (2023). Wagner Ring Dataset: A Complex Opera Scenario for Music Processing and
220 Computational Musicology. *Transactions of the International Society for Music Information*
221 *Retrieval*, 6(1), 135–149. <https://doi.org/10.5334/tismir.161>
- 222 Weiß, C., Zalkow, F., Arifi-Müller, V., Müller, M., Koops, H. V., Volk, A., & Grohgan, H.
223 G. (2021). Schubert Winterreise Dataset: A Multimodal Scenario for Music Analysis.
224 *ACM Journal on Computing and Cultural Heritage*, 14(2), 1–18. [https://doi.org/10.1145/](https://doi.org/10.1145/3429743)
225 [3429743](https://doi.org/10.1145/3429743)
- 226 Yorgason, B. (2018). Teaching with Timelines. *Engaging Students*, 6. [http://flipcamp.org/](http://flipcamp.org/engagingstudents6/essays/yorgason.html)
227 [engagingstudents6/essays/yorgason.html](http://flipcamp.org/engagingstudents6/essays/yorgason.html)
- 228 Zeitler, J., Weiß, C., Arifi-Müller, V., & Müller, M. (2024). BPSD: A Coherent Multi-Version
229 Dataset for Analyzing the First Movements of Beethoven's Piano Sonatas. *Transactions of*
230 *the International Society for Music Information Retrieval*, 7(1), 195–212. [https://doi.org/](https://doi.org/10.5334/tismir.196)
231 [10.5334/tismir.196](https://doi.org/10.5334/tismir.196)