

bw_timex: A Python Package for Time-Explicit Life Cycle Assessment

Timo Diepers¹, Amelie Müller^{2,3}, and Arthur Jakobs⁴

¹ Institute of Technical Thermodynamics, RWTH Aachen University, Germany ² Institute of Environmental Sciences (CML), Leiden University, The Netherlands ³ Flemish Institute for Technology Research (VITO), EnergyVille, Belgium ⁴ Technology Assessment Group, Laboratory for Energy Analysis, Center for Nuclear Engineering and Sciences & Center for Energy and Environmental Sciences, Paul Scherrer Institut (PSI), Villigen PSI, Switzerland

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Open Journals](#)

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

bw_timex is a Python package for time-explicit Life Cycle Assessment (LCA). Time-explicit LCA enables the quantification of environmental impacts of products and processes over time, considering their temporal distribution and evolution. As such, bw_timex allows to account simultaneously for:

- the timing of processes throughout the supply chain (e.g., end-of-life treatment occurs 20 years after production),
- variable and/or evolving supply chains and technologies (e.g., increasing shares of renewable electricity in the future), and
- the timing of emissions (enabling dynamic characterization).

To achieve this, bw_timex uses graph traversal to convolute process-relative temporal distributions through the supply chain. From the resulting timeline of technosphere exchanges, Life Cycle Inventories (LCIs) are automatically linked across time-specific background databases. The resulting time-explicit LCI reflects the current technology status within the product system at the actual time of each process. Moreover, bw_timex preserves the timing of emissions, enabling both dynamic and static Life Cycle Impact Assessment.

Statement of need

LCA traditionally assumes a static system, where all processes occur simultaneously and do not change over time (Heijungs & Suh, 2002). To add a temporal dimension in LCA, the fields of dynamic LCA (dLCA) and prospective LCA (pLCA) have emerged. While dLCA focuses on when processes and emissions occur and how impacts are distributed over time (*temporal distribution*), it typically assumes that the underlying product system remains the same (Beloïn-Saint-Pierre et al., 2020). Conversely, while pLCA tracks how processes evolve (*temporal evolution*) using future scenarios, it generally only assesses a single (future) point in time, ignoring that processes occur at different times across a product's life cycle (Arvidsson et al., 2024). Both fields have seen open-source tool development in recent years, including Temporalis (Cardellini et al., 2018) for dLCA and premise (Sacchi et al., 2022), Futura (Joyce & Björklund, 2022) and pathways (Sacchi & Hahn-Menacho, 2024) for pLCA. However, a comprehensive open-source package that supports consideration of both temporal distribution and evolution is currently lacking.

bw_timex addresses this gap by providing a framework for time-explicit LCA calculations within the Brightway ecosystem (Mutel, 2017). It combines considerations of temporal distribution and evolution by accounting for both the timing of processes and emissions as well as the

state of the product system at the respective points in time. This makes `bw_timex` particularly useful for studies involving variable or strongly evolving product systems, long-lived products, biogenic carbon and scenario analyses.

45 Workflow

A time-explicit LCA with `bw_tindex` follows four main steps, as illustrated in Figure 1. First, a conventional product system model is temporalized by adding process-relative temporal distributions (rTDs) to the exchanges (c.f. Cardellini et al. (2018)). These rTDs describe how the amount of a technosphere or biosphere exchange is distributed over time relative to the consuming or emitting process. In Step 2, a timeline of technosphere exchanges is constructed by convolving rTDs along the supply chain, starting from the absolute reference time for the demand, which is defined by the user. In Step 3, the exchanges in the timeline are re-linked to time-specific background databases that reflect the technology landscape at specific points in time. Based on the temporally re-linked product system, a time-explicit LCI is calculated, preserving the timing of processes and emissions. The inventory is calculated following the conventional matrix-based LCA formulation (Heijungs & Suh, 2002), with the time dimension embedded in the matrices through additional row/column pairs. In Step 4, these emissions can be characterized, either using standard characterization factors or by applying dynamic characterization functions that take the emissions' timing into account.

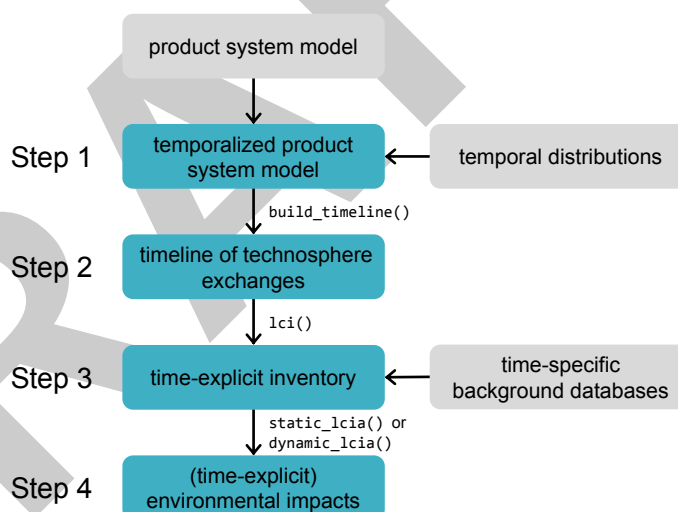


Figure 1: Workflow of a time-explicit LCA with bw timex.

60 Further reading

61 The documentation of the `bw_timex` package, including installation instructions, extensive
example notebooks and detailed API reference, can be found at [https://docs.brightway.dev/
63 projects/bw-timex](https://docs.brightway.dev/projects/bw-timex). For a detailed explanation of the framework of time-explicit LCA, please
64 refer to our accompanying publication (Müller et al., 2025).

65 Acknowledgements

66 We want to thank Chris Mutel his help adapting the graph traversal algorithms. This
67 work received funding from the European Union’s Horizon Europe Research and Innovation
68 Programme ForestPaths (ID No 101056755) and from the ETH Board in the framework of the
69 Joint Initiative SCENE, Swiss Center of Excellence on Net Zero Emissions.

References

- Arvidsson, R., Svanström, M., Sandén, B. A., Thonemann, N., Steubing, B., & Cucurachi, S. (2024). Terminology for future-oriented life cycle assessment: Review and recommendations. *The International Journal of Life Cycle Assessment*, 29(4), 607–613. <https://doi.org/10.1007/s11367-023-02265-8>
- Beloin-Saint-Pierre, D., Albers, A., Hélias, A., Tiruta-Barna, L., Fantke, P., Levasseur, A., Benetto, E., Benoist, A., & Collet, P. (2020). Addressing temporal considerations in life cycle assessment. *Science of The Total Environment*, 743, 140700. <https://doi.org/10.1016/j.scitotenv.2020.140700>
- Cardellini, G., Mutel, C. L., Vial, E., & Muys, B. (2018). Temporalis, a generic method and tool for dynamic Life Cycle Assessment. *Science of The Total Environment*, 645, 585–595. <https://doi.org/10.1016/j.scitotenv.2018.07.044>
- Heijungs, R., & Suh, S. (2002). *The Computational Structure of Life Cycle Assessment* (A. Tukker, Ed.; Vol. 11). Springer Netherlands. <https://doi.org/10.1007/978-94-015-9900-9>
- Joyce, P. J., & Björklund, A. (2022). Futura: A new tool for transparent and shareable scenario analysis in prospective life cycle assessment. *Journal of Industrial Ecology*, 26(1), 134–144. <https://doi.org/10.1111/jiec.13115>
- Müller, A., Diepers, T., Jakobs, A., Cardellini, G., Assen, N. von der, Guinée, J., & Steubing, B. (2025). Time-explicit life cycle assessment: A flexible framework for coherent consideration of temporal dynamics. *The International Journal of Life Cycle Assessment*, (submitted).
- Mutel, C. (2017). Brightway: An open source framework for Life Cycle Assessment. *Journal of Open Source Software*, 2(12), 236. <https://doi.org/10.21105/joss.00236>
- Sacchi, R., & Hahn-Menacho, A. J. (2024). Pathways: Life cycle assessment of energy transition scenarios. *Journal of Open Source Software*, 9(103), 7309. <https://doi.org/10.21105/joss.07309>
- Sacchi, R., Terlouw, T., Siala, K., Dirnaichner, A., Bauer, C., Cox, B., Mutel, C., Daioglou, V., & Luderer, G. (2022). PROspective EnvironMental Impact asSEment (premise): A streamlined approach to producing databases for prospective life cycle assessment using integrated assessment models. *Renewable and Sustainable Energy Reviews*, 160. <https://doi.org/10.1016/j.rser.2022.112311>