


NAMA : TIRTA RIZKI RAMADHAN

NPM : 22312163

membuat label forgot password dan menambahkan teks masukan email yang terkait (yang ingin di reset password

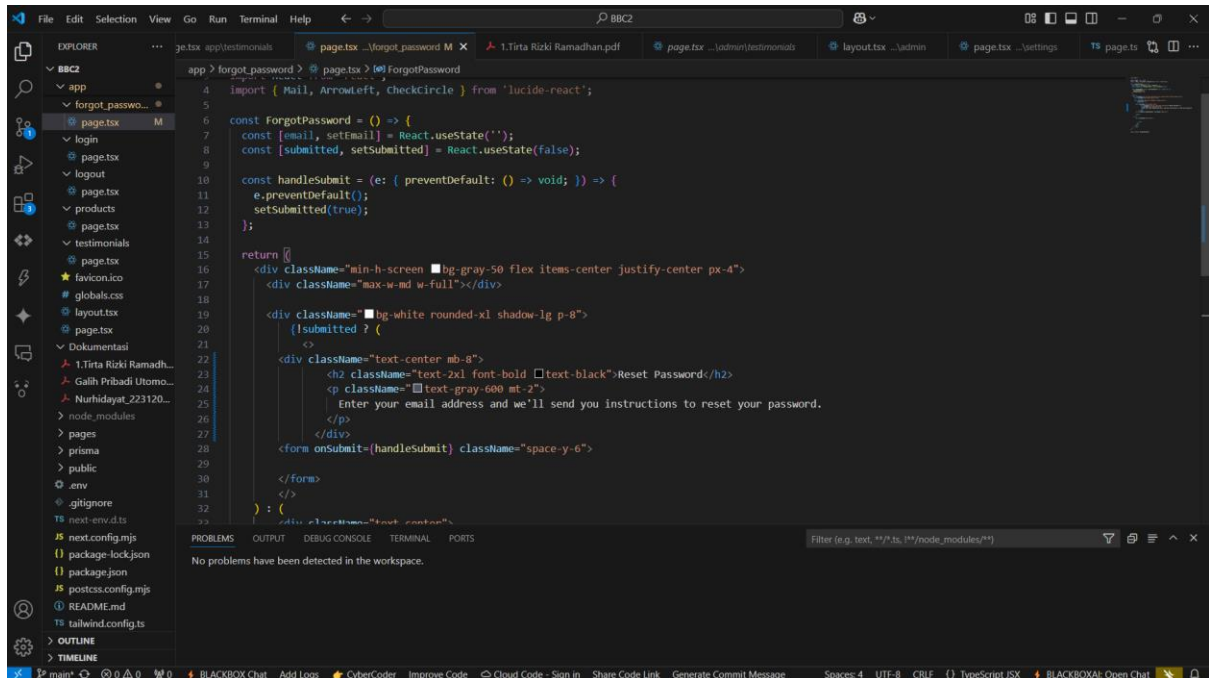

The screenshot shows a VS Code editor with a file explorer on the left and a code editor in the center. The file explorer shows a project structure with folders like 'app', 'login', 'logout', 'products', 'testimonials', and 'pages'. The code editor displays the 'ForgotPassword' component in 'page.tsx'. The code includes imports for 'Mail', 'ArrowLeft', and 'CheckCircle' from 'lucide-react'. It defines a 'ForgotPassword' function that uses 'useState' for 'email' and 'submitted'. A 'handleSubmit' function is defined to handle the form submission. The component returns a JSX element with a form that includes a text input for email and a submit button. The form is styled with Tailwind CSS classes.

```
import { Mail, ArrowLeft, CheckCircle } from 'lucide-react';

const ForgotPassword = () => {
  const [email, setEmail] = React.useState('');
  const [submitted, setSubmitted] = React.useState(false);

  const handleSubmit = (e: { preventDefault: () => void; }) => {
    e.preventDefault();
    setSubmitted(true);
  };

  return (
    <div className="min-h-screen bg-gray-50 flex items-center justify-center px-4">
      <div className="max-w-md w-full">
        <div className="bg-white rounded-xl shadow-lg p-8">
          <div className="text-center mb-8">
            <h2 className="text-2xl font-bold text-black">Reset Password</h2>
            <p className="text-gray-600 mt-2">Enter your email address and we'll send you instructions to reset your password.
          </p>
          </div>
          <form onSubmit={handleSubmit} className="space-y-6">
            <input type="email" value={email} onChange={e => setEmail(e.target.value)} />
          </form>
        </div>
      </div>
    </div>
  );
};
```

