Test API

Get:https://jsonplaceholder.typicode.com/posts

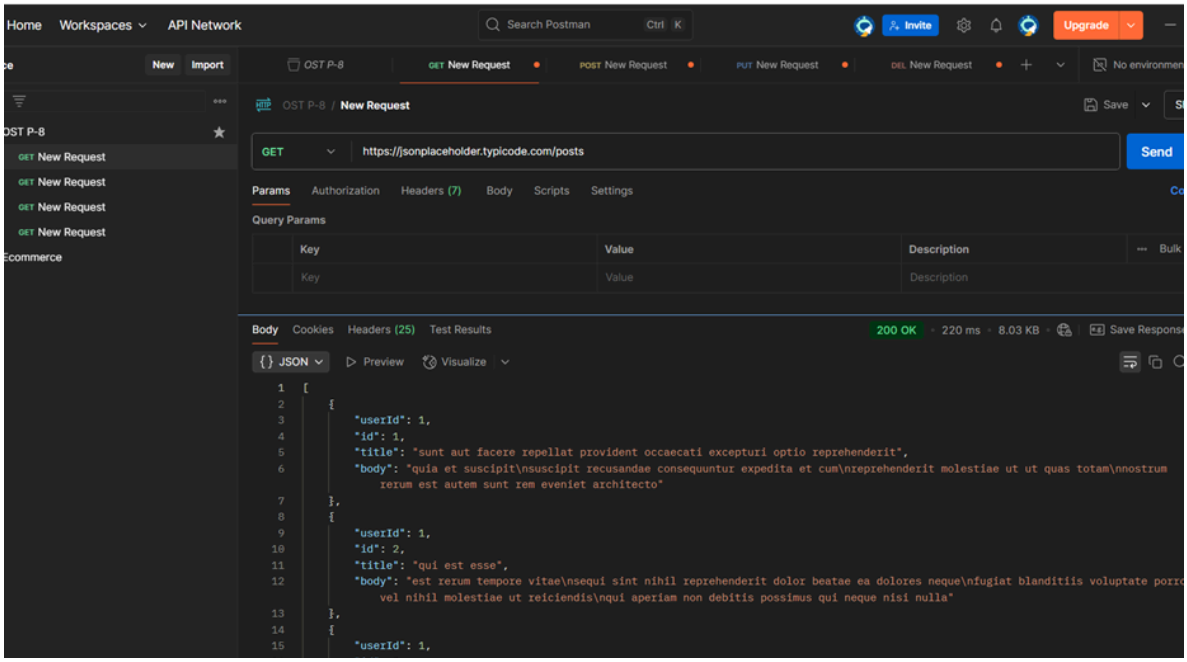


Post:https://jsonplaceholder.typicode.com/posts

{

"title": "Tirth-093",

"body": "This is a sample post",

"userId": 1

}

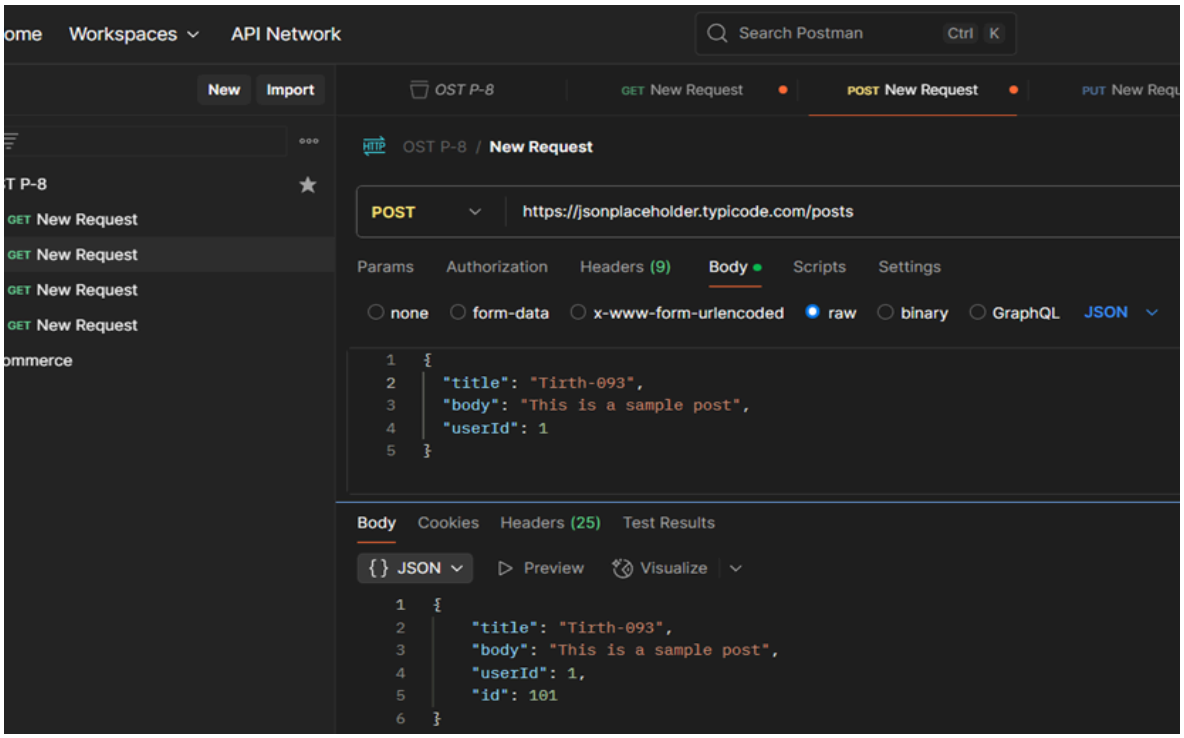

Put:https://jsonplaceholder.typicode.com/posts/1

{
"id": 1,
"title": "Updated Title",
"body": "Tirth Bhut-3093",
"userId": 1
}

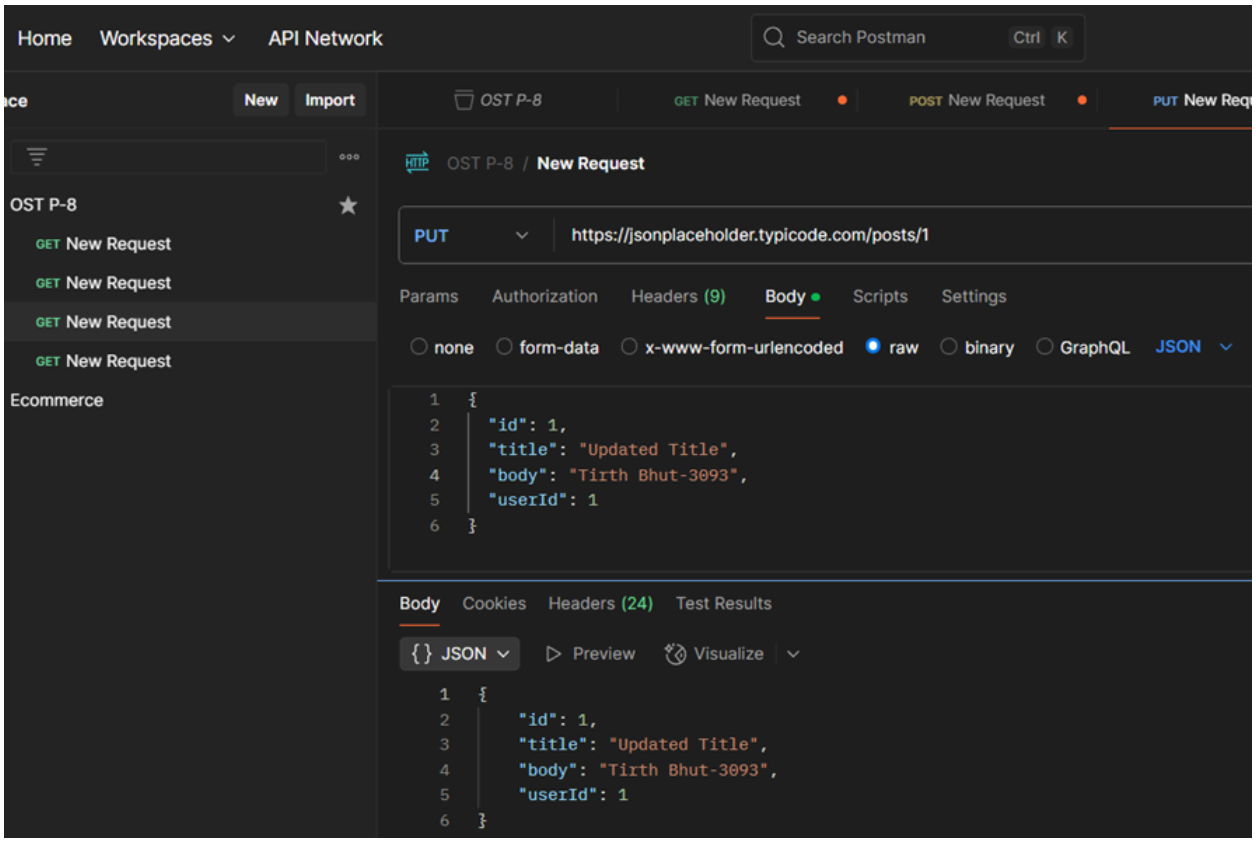


Delete:https://jsonplaceholder.typicode.com/posts/1

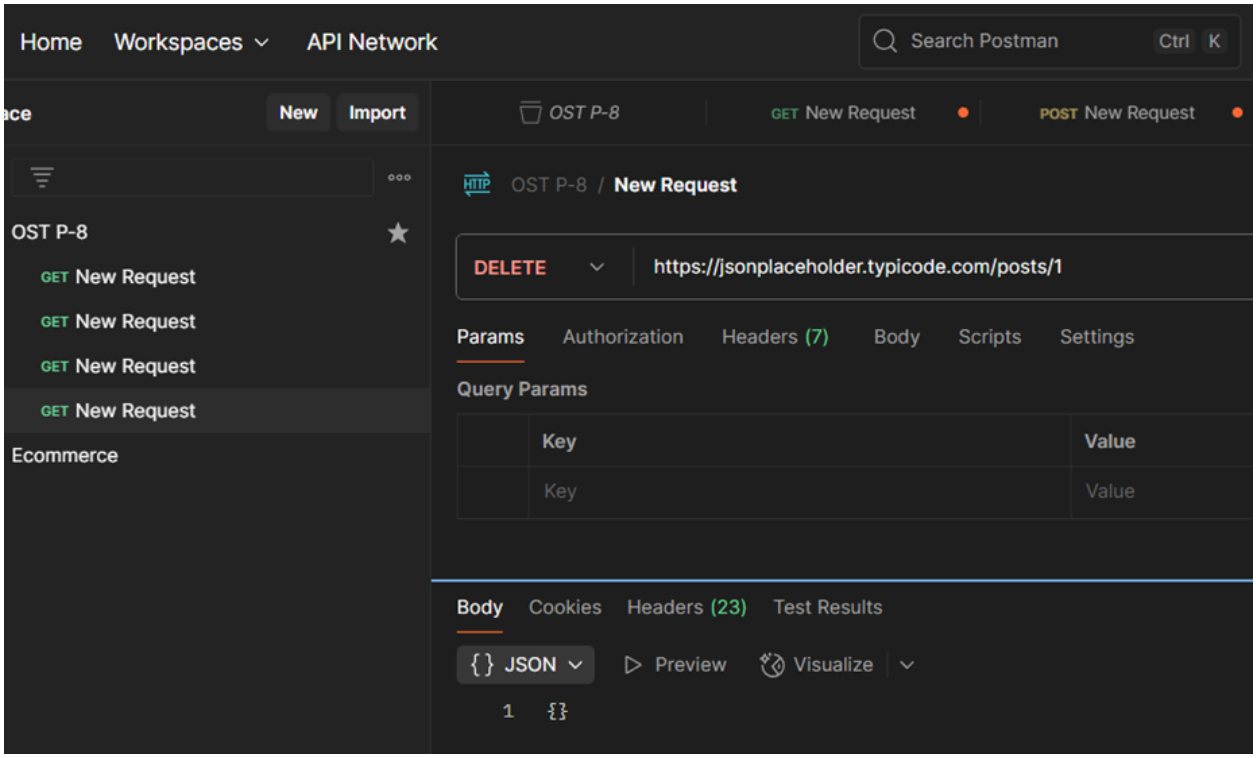


Create node.js API

C:\Users\tirth\OneDrive\Desktop\tirth-3093>mkdir simple-api

C:\Users\tirth\OneDrive\Desktop\tirth-3093>cd simple-api

C:\Users\tirth\OneDrive\Desktop\tirth-3093\simple-api>npm init -y
Wrote to C:\Users\tirth\OneDrive\Desktop\tirth-3093\simple-api\package.json:

```
{
  "name": "simple-api",
  "version": "1.0.0",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "description": ""
}
```

C:\Users\tirth\OneDrive\Desktop\tirth-3093\simple-api>npm install express

added 65 packages, and audited 66 packages in 4s

```
22 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

C:\Users\tirth\OneDrive\Desktop\tirth-3093\simple-api>notepad server.js

const express = require('express');
const app = express();

// Middleware to parse JSON bodies
app.use(express.json());

// In-memory data (acts like our database)
let students = [
  { id: 1, name: "Viraj", branch: "CE" },
  { id: 2, name: "Ravi", branch: "CE" }
];

// 1. GET all students
app.get('/students', (req, res) => {
  res.json(students);
});

// 2. GET single student
app.get('/students/:id', (req, res) => {
  const student = students.find(s => s.id == req.params.id);
  res.json(student);
});

// 3. POST - Add student
app.post('/students', (req, res) => {
  const newStudent = {
    id: students.length + 1,
    name: req.body.name,
    branch: req.body.branch
  };
  students.push(newStudent);
  res.status(201).json(newStudent);
});

// 4. PUT - Update student
app.put('/students/:id', (req, res) => {
  const student = students.find(s => s.id == req.params.id);
```

```
  if (student) {
    student.name = req.body.name;
    student.branch = req.body.branch;
    res.json(student);
  } else {
    res.status(404).json({ message: "Student not found" });
  }
});

// 5. DELETE - Remove student
app.delete('/students/:id', (req, res) => {
  students = students.filter(s => s.id != req.params.id);
  res.json({ message: "Student deleted" });
});

// Start server
app.listen(3000, () => {
  console.log("Server running on http://localhost:3000");
});
```

```
C:\Users\tirth\OneDrive\Desktop\tirth-3093\simple-api>node server.js
Server running on http://localhost:3000
```

Procedure TEST using postman

1.GetAll:

Get:http://localhost:3000/students

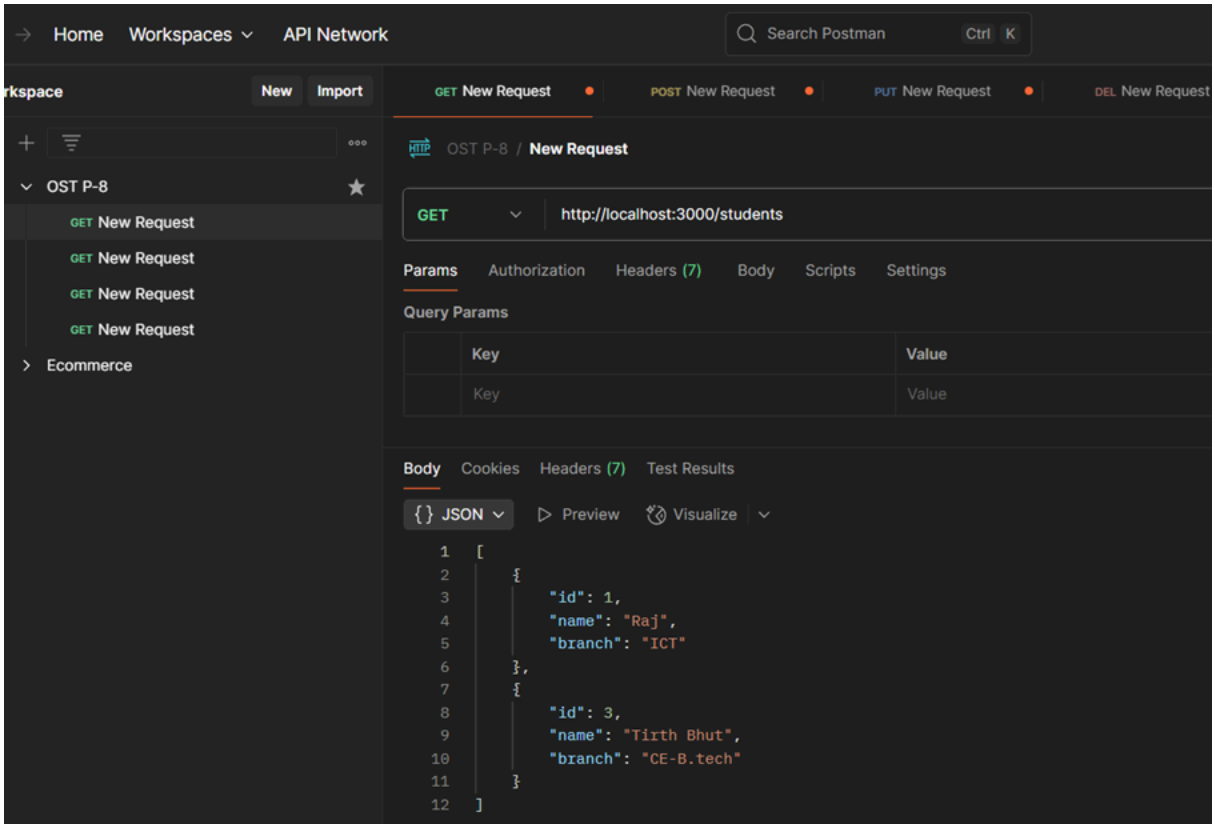


2. Post:http://localhost:3000/students

Body:

{

"name": "Tirth Bhut",

"branch": "CE-B.tech"

}

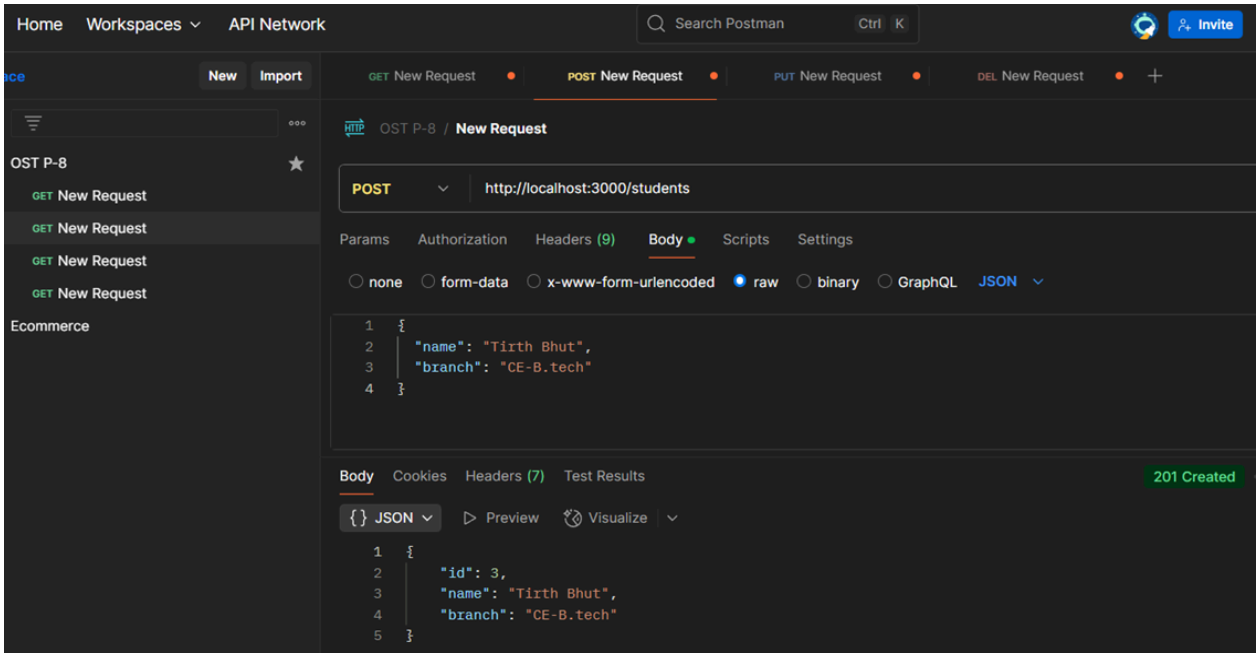

3. Put request:http://localhost:3000/students/1
Body:
{
"name": "Raj",
"branch": "ICT"
}

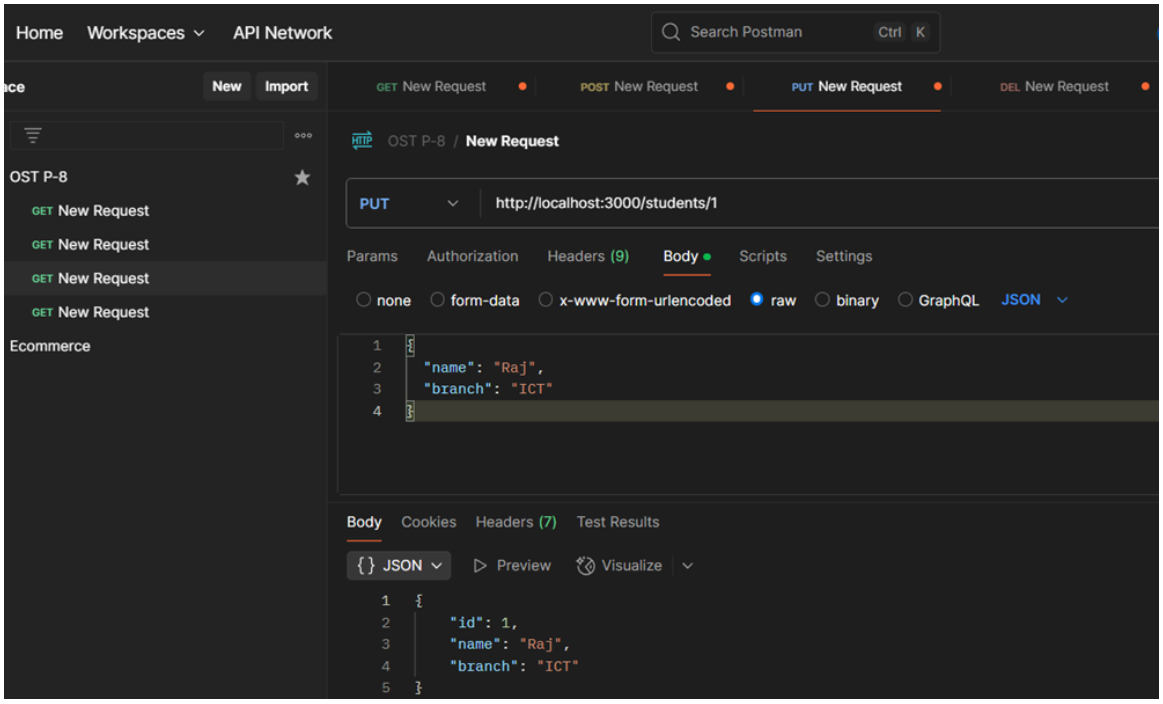

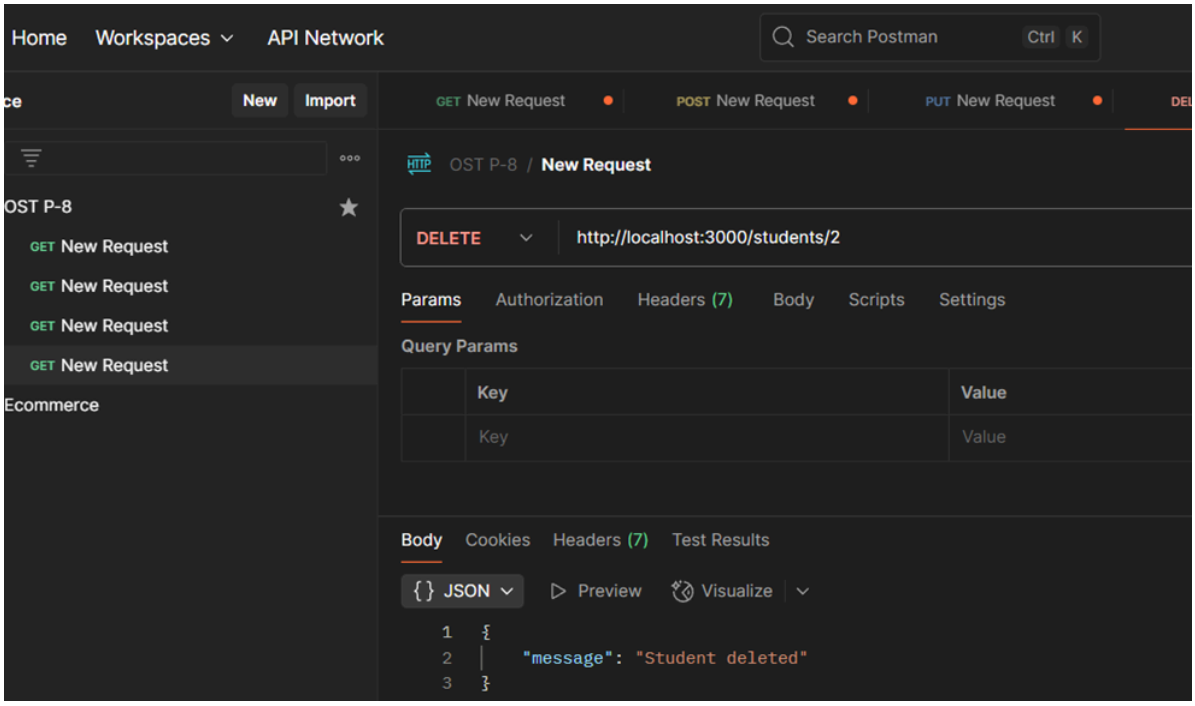
4. Delete request:http://localhost:3000/students/2