




The observation
LOSVD, 8 radii x 8 speeds (m = 64)

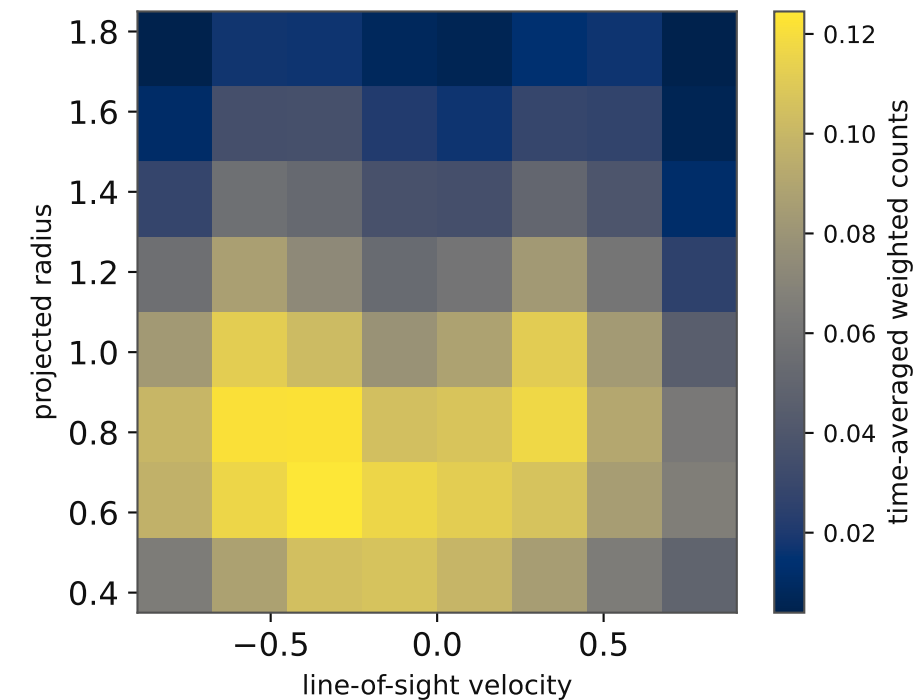

Which pixels know about orbit 14
radius = 0.52 (total $H_{kk} = 2.62\text{e}+05$)

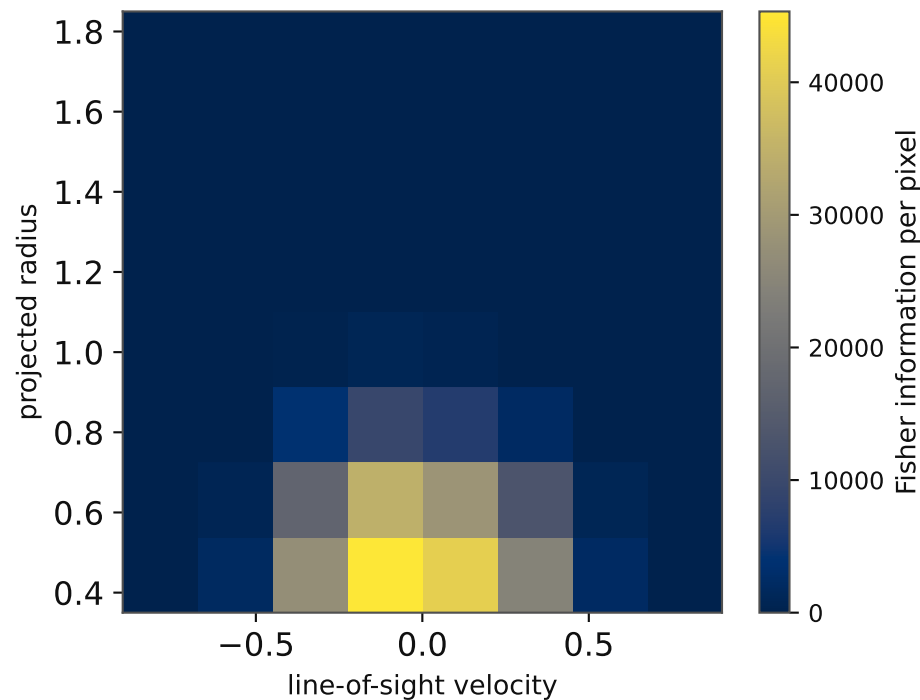

Which pixels know about orbit 5
radius = 1.90 (total $H_{kk} = 4.35\text{e}+06$)

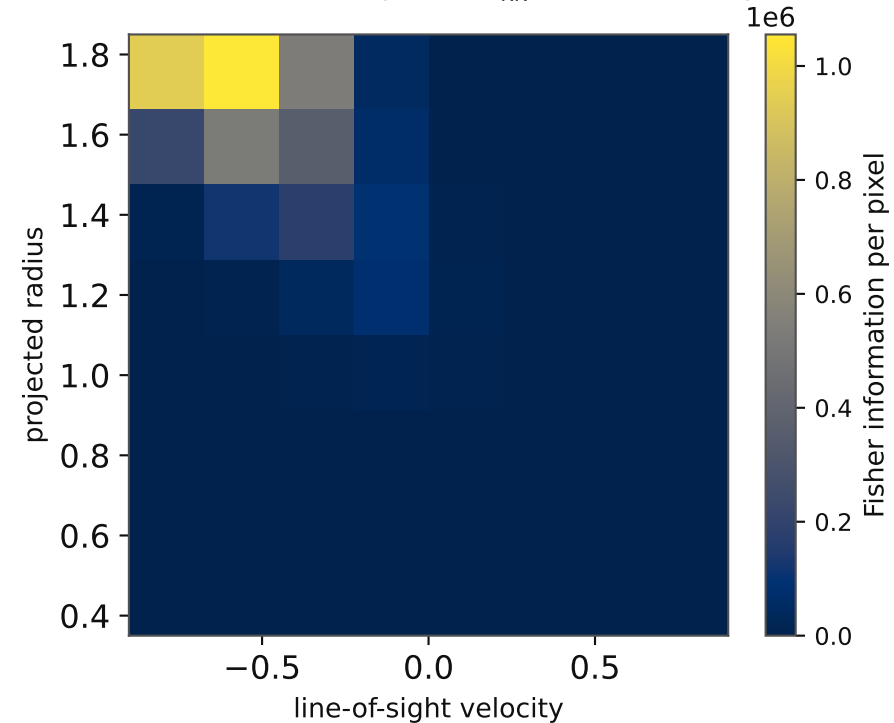

Per-pixel contribution to the Fisher information about one orbit weight, $l_{jk} = (d_j / d_{w_k})^2 / \sigma_j^2$, so that the pixels of a panel sum to that orbit's H_{kk} .

This is the diagonal term: it says what each pixel contributes on its own, and does not show how pixels trade off against each other.

The two orbits are the innermost and outermost by radius, chosen by index rather than by eye. The information panels have independent colour scales -- the outer orbit carries 17x the total of the inner one -- so compare the colour-bar numbers, not the brightness.

Mock tracer orbits in a softened point mass -- not a galaxy, not an instrument, not data. $N = 32$ orbits, softening = 0.2, 48 steps of $dt = 0.12$. cividis is used because it is monotonic in greyscale and safe under common colour-vision deficiencies.