


DebyePipeline::initialise

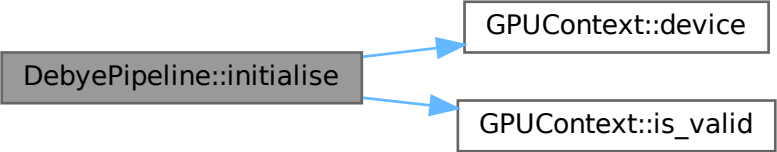

```
graph LR; A[DebyePipeline::initialise] --> B[GPUContext::device]; A --> C[GPUContext::is_valid];
```

The diagram illustrates a function call sequence. A grey rectangular box on the left contains the text 'DebyePipeline::initialise'. Two blue arrows originate from the right side of this box. The top arrow points to a white rectangular box containing 'GPUContext::device'. The bottom arrow points to another white rectangular box containing 'GPUContext::is_valid'. All boxes have a thin black border.

GPUContext::device

GPUContext::is_valid