


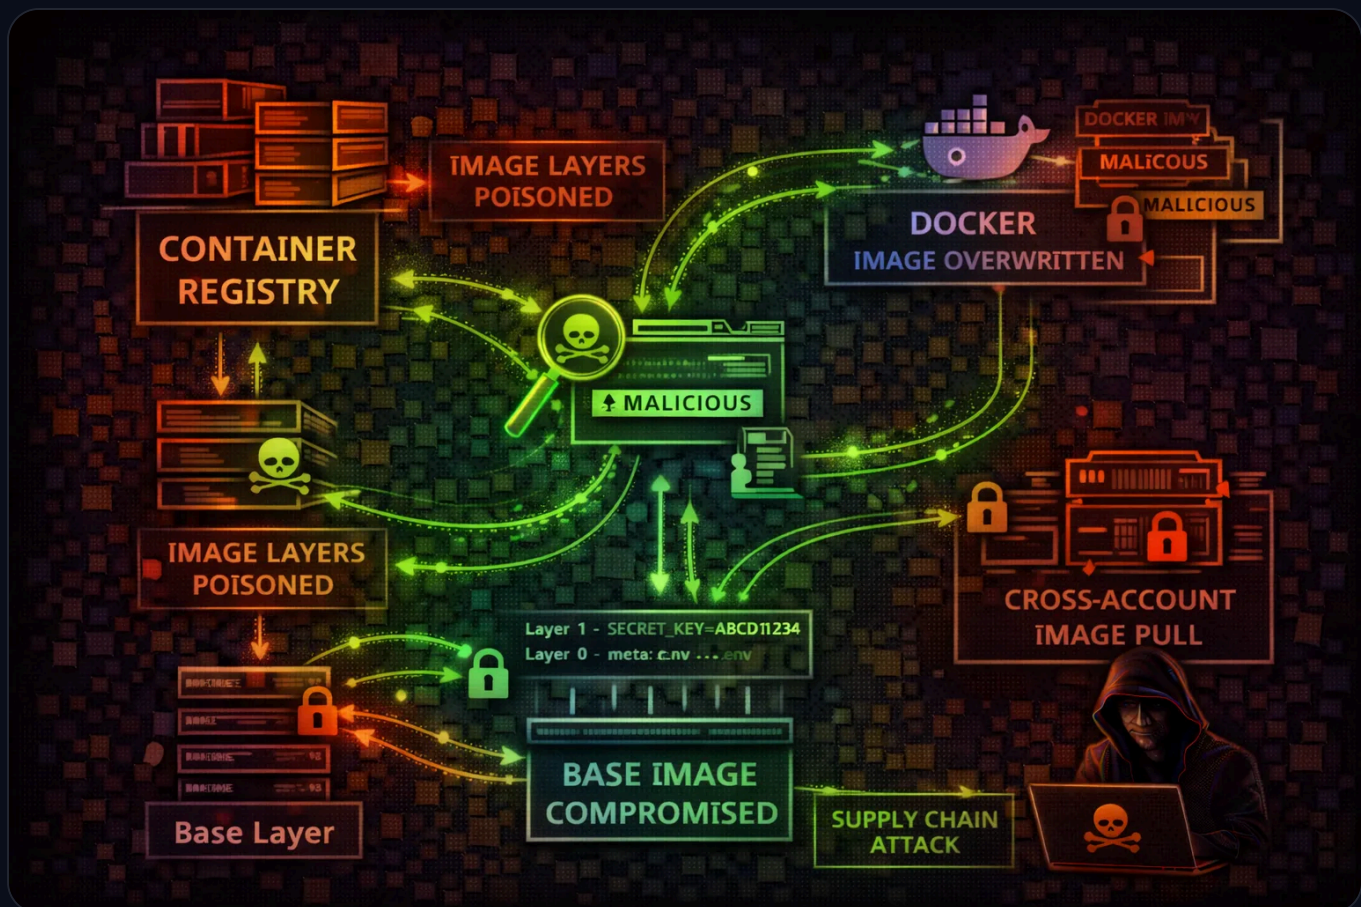

AWS ECR Security

CONTAINER

Elastic Container Registry stores Docker container images used by ECS, EKS, and Lambda. Attackers exploit repository policies, image pull access, and push permissions for supply chain attacks, credential theft, and persistent backdoors.

CRITICAL

Supply Chain Risk

Images

Poisoning Target

Secrets

In Image Layers

RCE

Via Deployed
Images



Service Overview

Repositories & Images

ECR stores Docker and OCI container images in private or public repositories. Each repository has its own resource policy controlling push/pull access. Images are identified by tags or SHA256 digests — mutable tags allow image replacement attacks if not protected by tag immutability.

Lifecycle & Replication

Lifecycle policies automatically clean up old images, but misconfigured rules can delete production images. Cross-region and cross-account replication distributes images for availability — each replica inherits the destination repository's access policy, not the source's.

Image Scanning & Signing

ECR offers basic scanning (Amazon-native, formerly Clair-based) and enhanced scanning (Amazon Inspector) for CVE detection. Image signing via AWS Signer or Notation validates image provenance. Without signing verification, any image pushed to a repository can be deployed to production.

Security Risk Assessment



8.5

Risk Score

ECR is a critical supply chain component. Compromised images get deployed to production via ECS/EKS. Image layers may contain hardcoded secrets. Cross-account pull permissions can expose images to attackers.

✂ Attack Vectors

Image Exploitation

- Push malicious image (same tag)
- Overwrite :latest tag
- Cross-account image pull
- Layer history secrets extraction
- Dockerfile command injection

⚠ Misconfigurations

Common Issues

- Public repository access
- ecr:* permissions
- No image scanning enabled
- Missing image immutability
- Cross-account pull allowed

💀 Exploitation

Techniques

- Replace trusted image with backdoor
- Extract secrets from layers
- Inject cryptominer in base image
- Add reverse shell to entrypoint
- Modify application binaries

🎯 High-Value Targets

Repositories

- Base images (node, python, java)
- Production app images
- Lambda container images
- Internal tooling images
- CI/CD build images

Secrets in Images

Common Locations

- Environment variables in layers
- Config files (application.yml)
- SSH keys in .ssh directories
- AWS credentials in .aws/
- Build-time ARG secrets

Detection

CloudTrail Events

- PutImage (image push)
- BatchGetImage (pull)
- GetDownloadUrlForLayer
- SetRepositoryPolicy
- DeleteRepository

List Repositories

```
aws ecr describe-repositories
```

List Images in Repository

```
aws ecr list-images --repository  
-name my-app
```

Describe Image (Manifest)

```
aws ecr batch-get-image --reposit  
ory-name my-app --image-ids ima  
geTag=latest
```

Get Repository Policy

```
aws ecr get-repository-policy --  
repository-name my-app
```

Get Image Scan Findings

```
aws ecr describe-image-scan-find  
ings --repository-name my-app --  
image-id imageTag=latest
```

Get Login Token

```
aws ecr get-login-password | doc  
ker login --username AWS --passw  
ord-stdin 123456789012.dkr.ecr.u  
s-east-1.amazonaws.com
```

Pull Image

```
docker pull 123456789012.dkr.ecr.us-east-1.amazonaws.com/my-app:latest
```

Push Backdoored Image

```
docker push 123456789012.dkr.ecr.us-east-1.amazonaws.com/my-app:latest
```

View Image History

```
docker history --no-trunc 123456789012.dkr.ecr.us-east-1.amazonaws.com/my-app:latest
```

Extract Secrets from Layers

```
docker save my-app:latest | tar -xvf - && grep -r 'password\\|secret\\|key' */layer.tar
```



Policy Examples

✗ Dangerous - Public Repository

```
{
  "Version": "2012-10-17",
  "Statement": [{
    "Sid": "PublicAccess",
    "Effect": "Allow",
    "Principal": "*",
    "Action": [
      "ecr:GetDownloadUrlForLayer",
      "ecr:BatchGetImage"
    ]
  }]
}
```

Anyone can pull images - exposes application code and potentially secrets

✓ Secure - Restricted Pull Access

```
{
  "Version": "2012-10-17",
  "Statement": [{
    "Sid": "AllowProdECS",
    "Effect": "Allow",
    "Principal": {
      "Service": "ecs-tasks.amazonaws.com"
    },
    "Action": [
      "ecr:GetDownloadUrlForLayer",
      "ecr:BatchGetImage"
    ],
    "Condition": {
      "StringEquals": {
        "aws:SourceAccount": "123456789012"
      }
    }
  }]
}
```

Only ECS tasks in the same account can pull images

✗ Dangerous - Cross-Account Push

```
{
  "Statement": [{
    "Effect": "Allow",
    "Principal": {
      "AWS": "arn:aws:iam::*:root"
    },
    "Action": [
      "ecr:PutImage",
      "ecr:InitiateLayerUpload"
    ]
  }]
}
```

Any AWS account can push images - enables supply chain attacks

✓ Secure - CI/CD Only Push

```
{
  "Statement": [{
    "Effect": "Allow",
    "Principal": {
      "AWS": "arn:aws:iam::123456789012:role/CodeBuildRole"
    },
    "Action": [
      "ecr:PutImage",
      "ecr:InitiateLayerUpload",
      "ecr:UploadLayerPart",
      "ecr:CompleteLayerUpload"
    ]
  }]
}
```

Only the designated CI/CD role can push new images



Defense Recommendations



Enable Image Tag Immutability

Prevent tag overwrites to protect against image replacement attacks.

```
aws ecr put-image-tag-mutability --repository-name my-app --image-tag  
-mutability IMMUTABLE
```



Enable Image Scanning

Scan images on push for known vulnerabilities.

```
aws ecr put-image-scanning-configuration --repository-name my-app --i  
mage-scanning-configuration scanOnPush=true
```



Restrict Push Permissions

Only allow CI/CD roles to push images. Deny manual pushes.



Use Image Digest References

Reference images by digest (@sha256:...) instead of mutable tags.

```
image: 123456.dkr.ecr.region.amazonaws.com/app@sha256:abc123...
```



Sign Images with Notation/Cosign

Cryptographically sign images and verify signatures before deployment.



Monitor ECR API Calls

Alert on PutImage, SetRepositoryPolicy, and DeleteRepository events.

Always obtain proper authorization before testing