


Components


Sort by Name

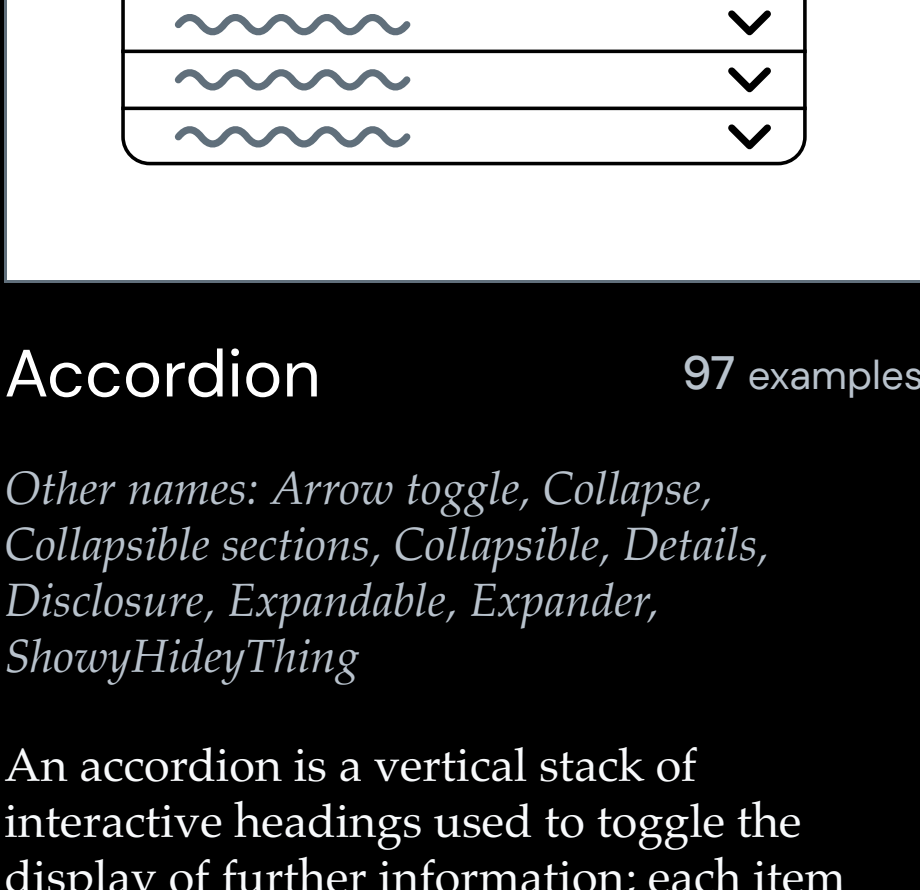

Accordion 97 examples

Other names: Arrow toggle, Collapse, Collapsible sections, Collapsible, Details, Disclosure, Expandable, Expander, Show/Hide/Thing


An accordion is a vertical stack of interactive headings used to toggle the display of further information; each item can be 'collapsed' with just a short label visible or 'expanded' to show the full content.

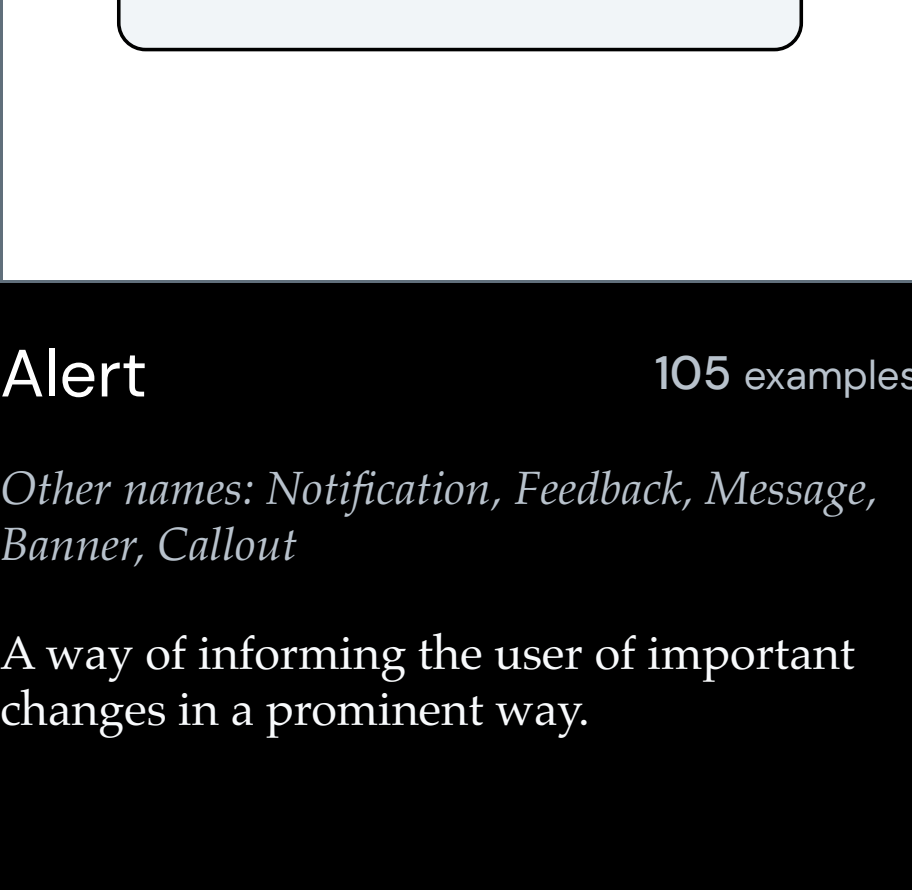

Alert 105 examples

Other names: Notification, Feedback, Message, Banner, Callout

A way of informing the user of important changes in a prominent way.

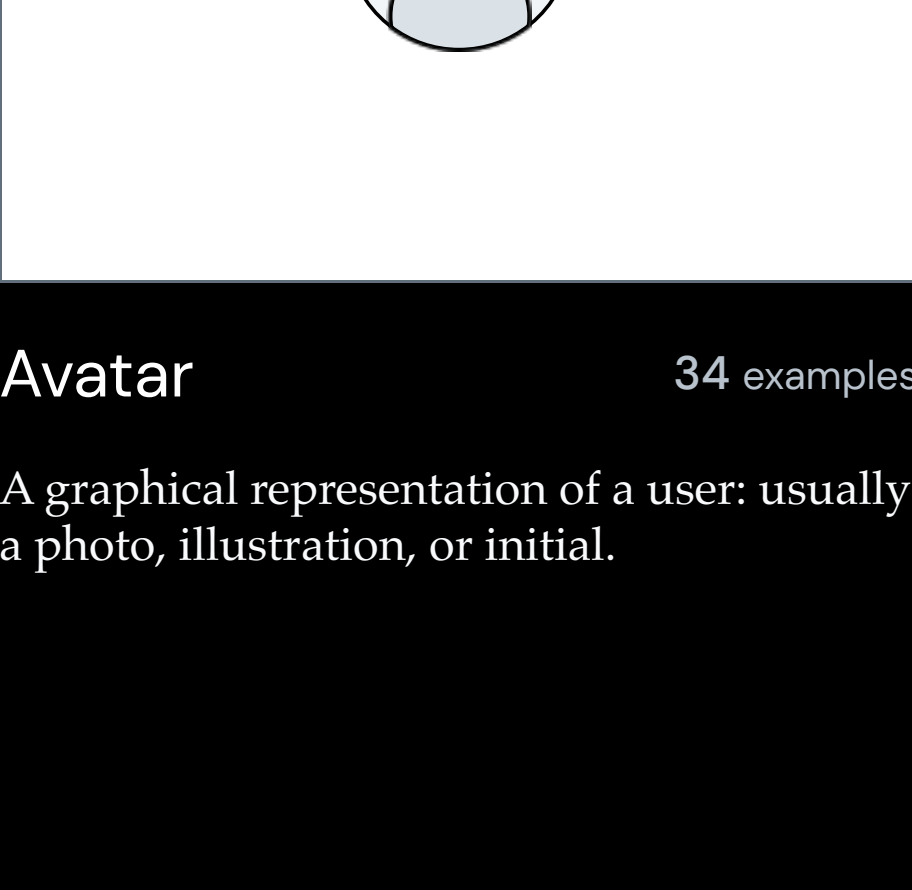

Avatar 34 examples


A graphical representation of a user: usually a photo, illustration, or initial.



Badge 114 examples

Other names: Tag, Label, Chip


A small label, generally appearing inside or in close proximity to another larger interface component, representing a status, property, or some other metadata.

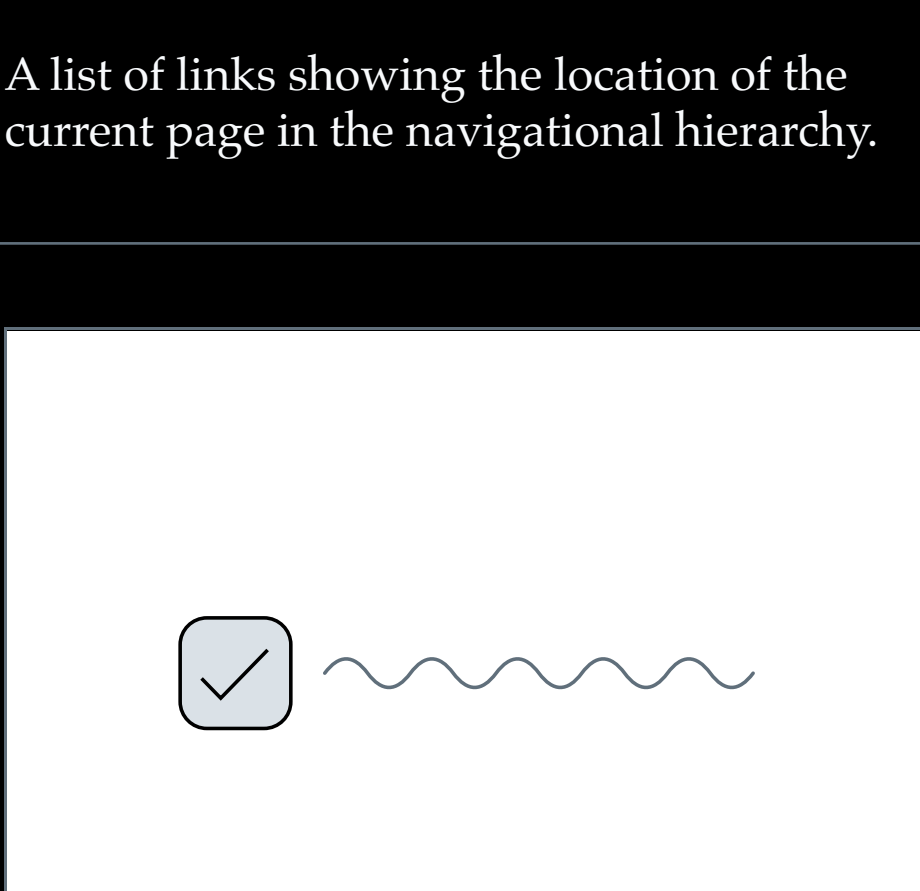

Breadcrumbs 48 examples


Other names: Breadcrumb trail

A list of links showing the location of the current page in the navigational hierarchy.

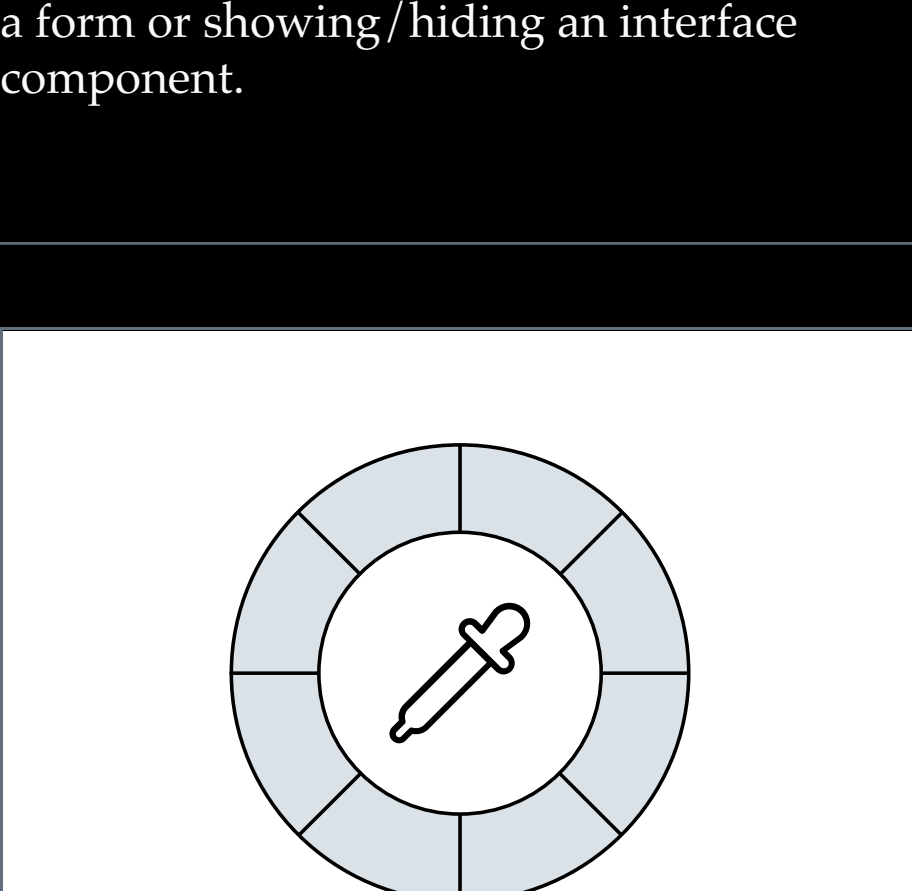

Button 128 examples


Buttons trigger an action such as submitting a form or showing/hiding an interface component.

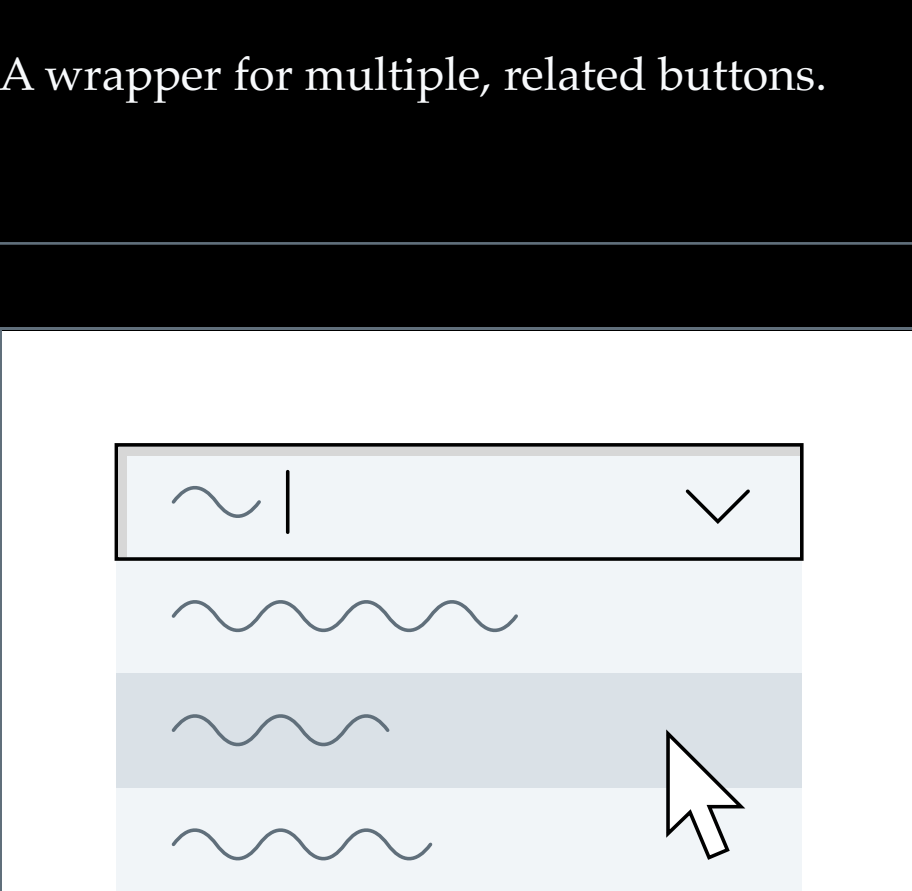

Button group 44 examples


Other names: Toolbar

A wrapper for multiple, related buttons.

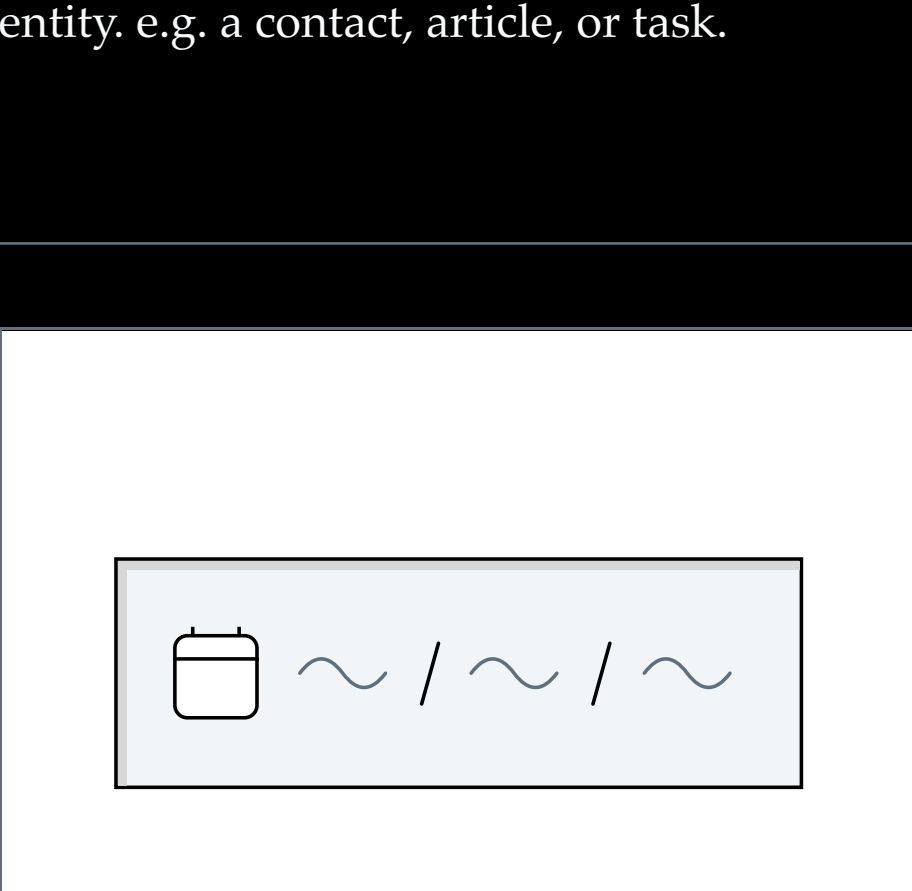

Card 85 examples


A container for content representing a single entity, e.g. a contact, article, or task.

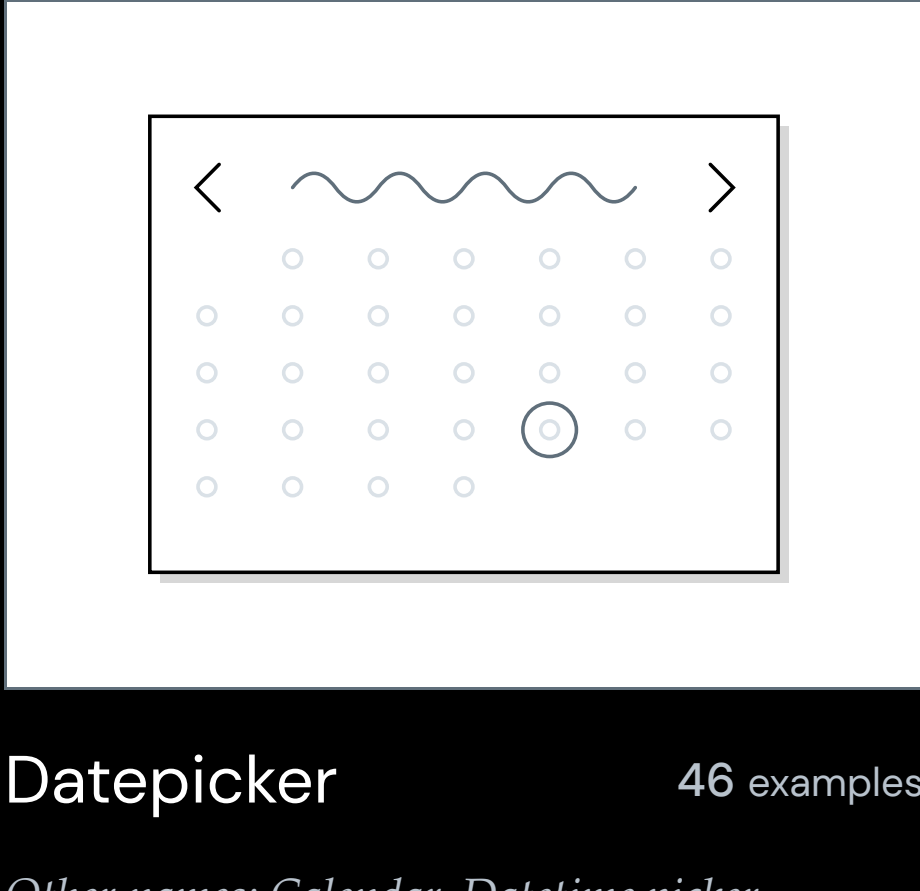

Checkbox 88 examples


An input for choosing from predefined options.

- when used alone, it gives a binary choice (checked / unchecked);
- in a group it allows the user to select multiple values from a list of options.

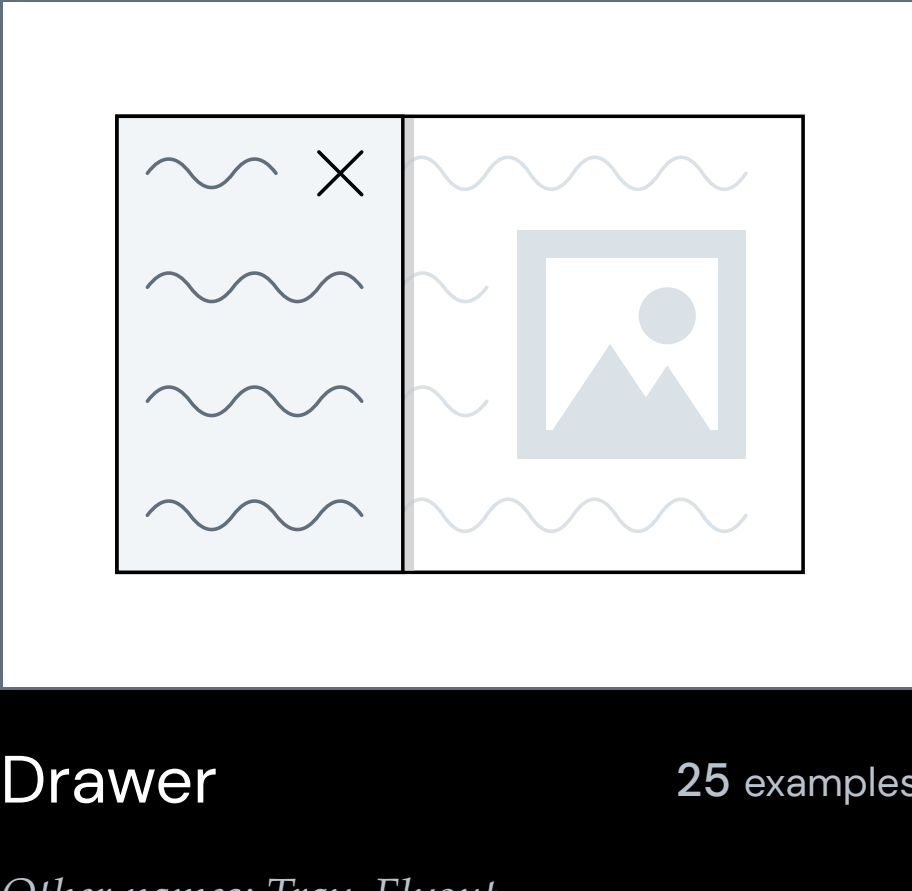

Color picker 11 examples


An input for choosing a color.

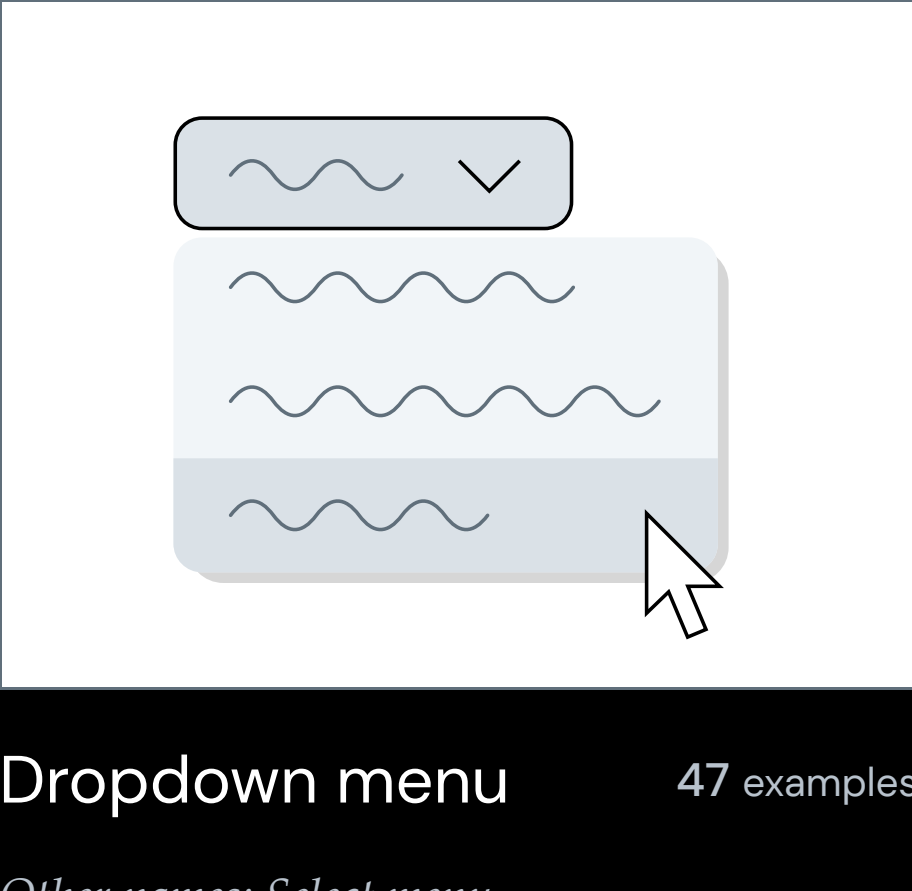

Combobox 33 examples


Other names: Autocomplete, Autosuggest

An input that behaves similarly to a select, with the addition of a free text input to filter options.

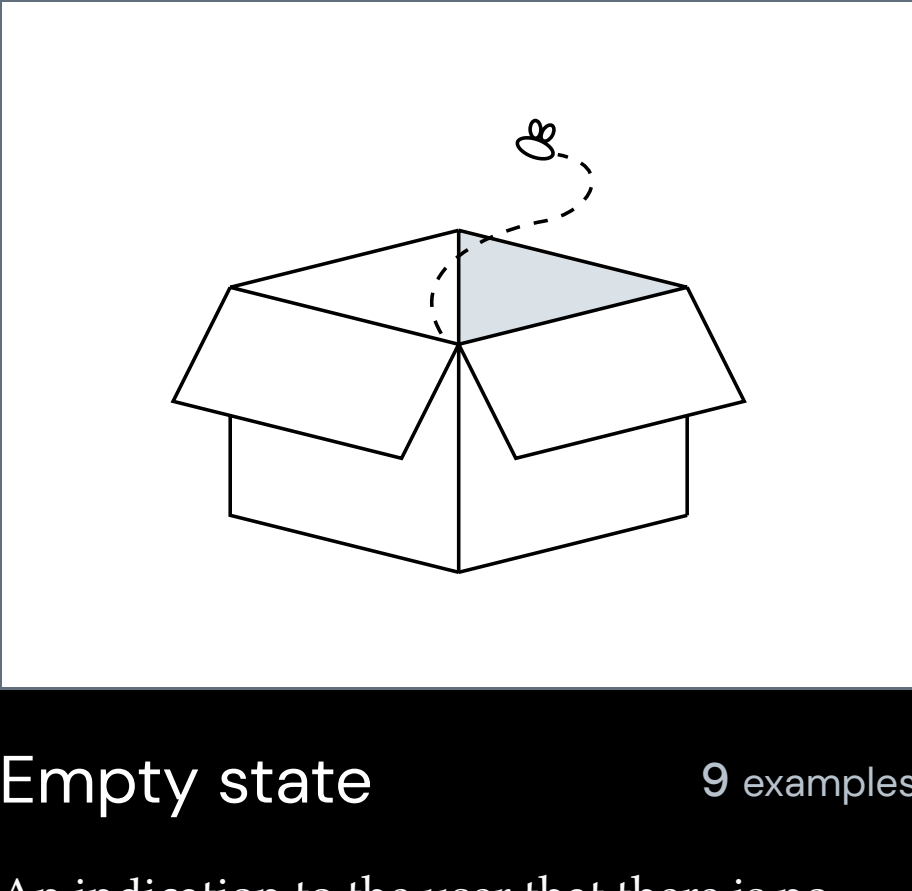

Date input 19 examples


A means of inputting a date – often separated into multiple individual fields for day/month/year.

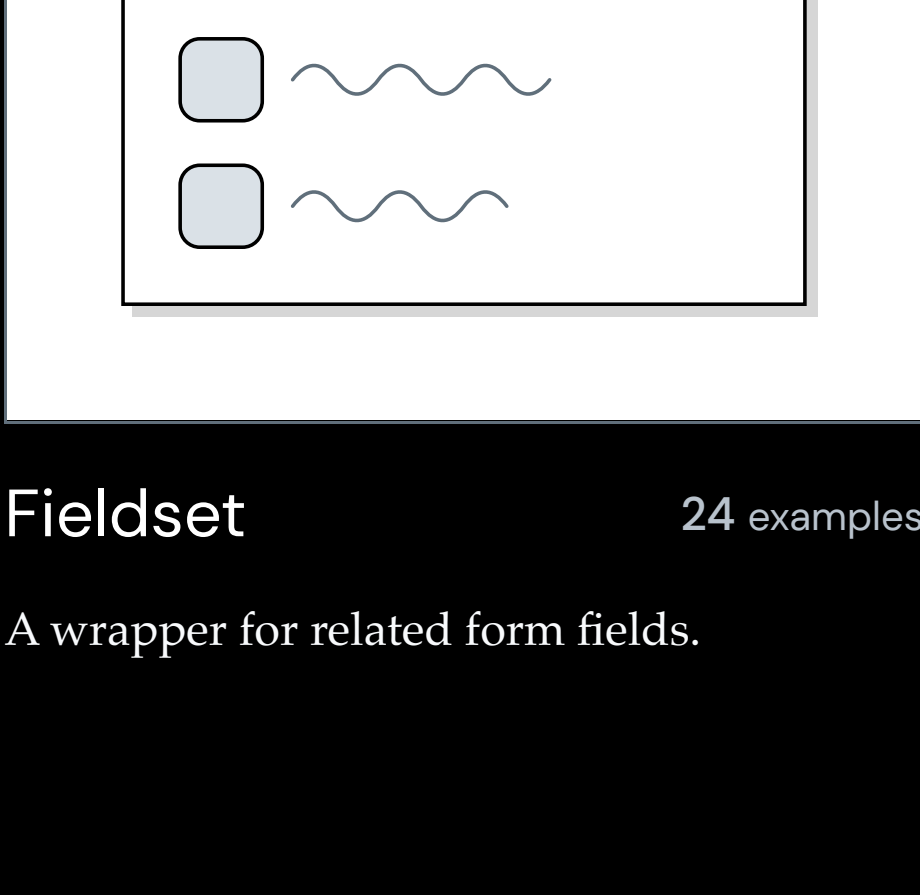

Datepicker 46 examples

Other names: Calendar, Datetime picker


A visual way to choose a date using a calendar view.

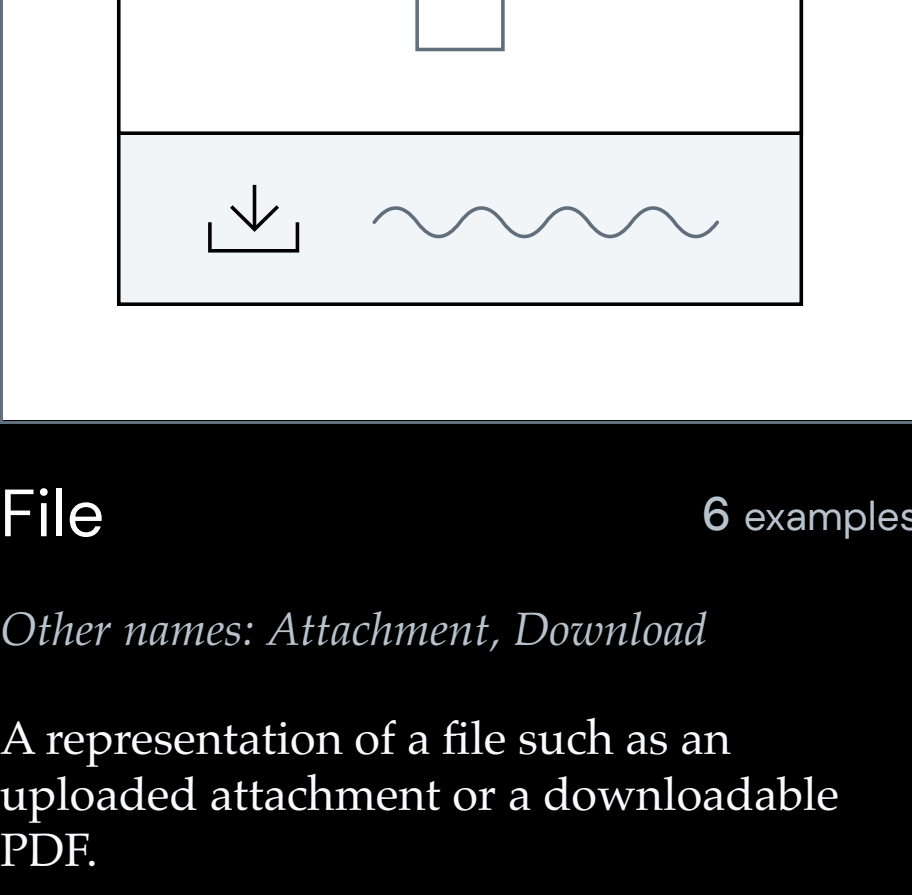

Drawer 25 examples

Other names: Tray, Flyout


A panel which slides out from the edge of the screen.

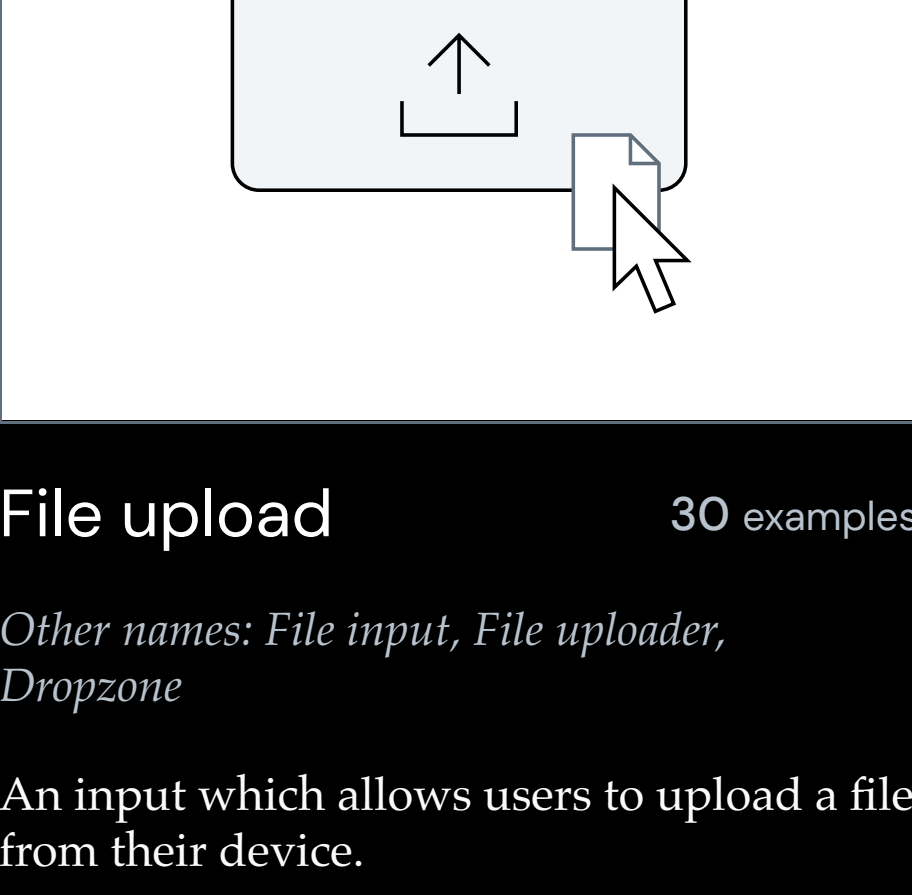

Dropdown menu 47 examples


Other names: Select menu

A menu in which options are hidden by default but can be shown by interacting with a button; it differs from a select in that it shows actions or navigation options and is not a form input.

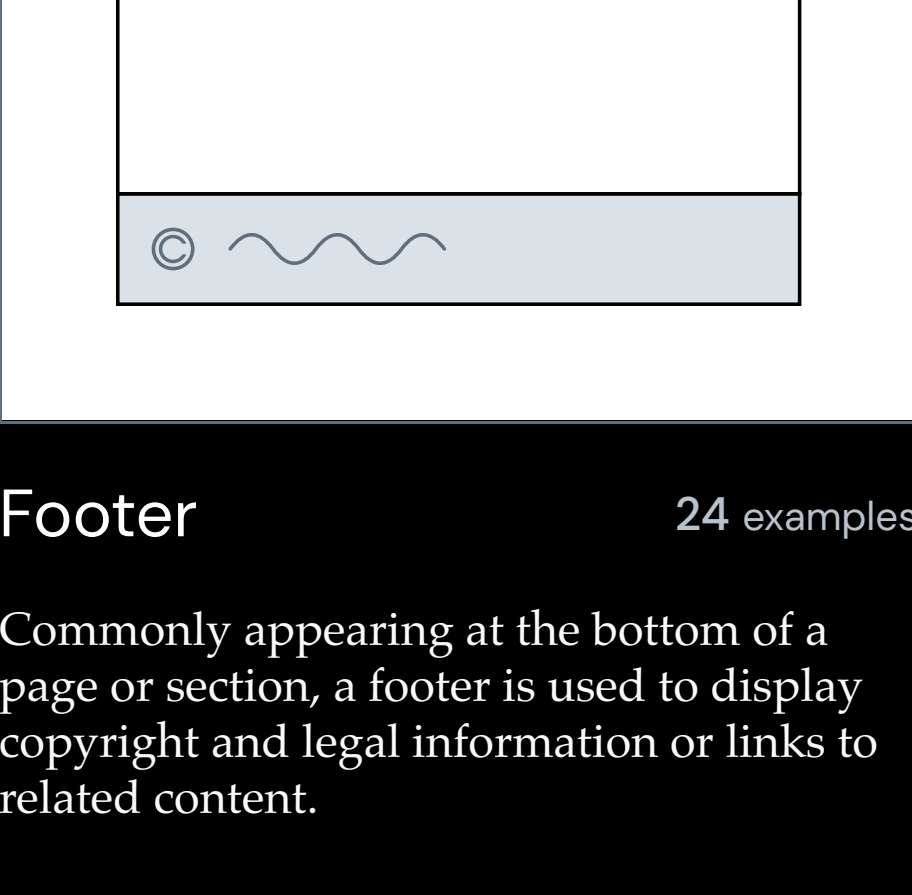


Empty state 9 examples

An indication to the user that there is no data to display in the current view; it often includes an alternative action (e.g. try a different search term).

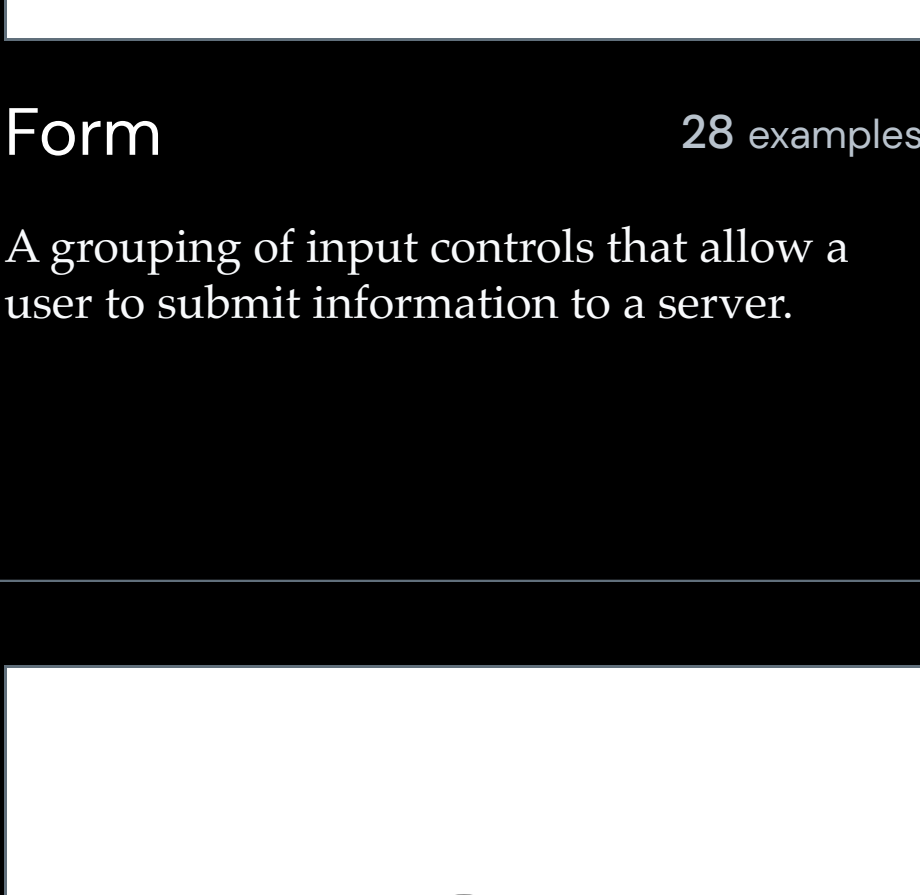

Fieldset 24 examples


A wrapper for related form fields.

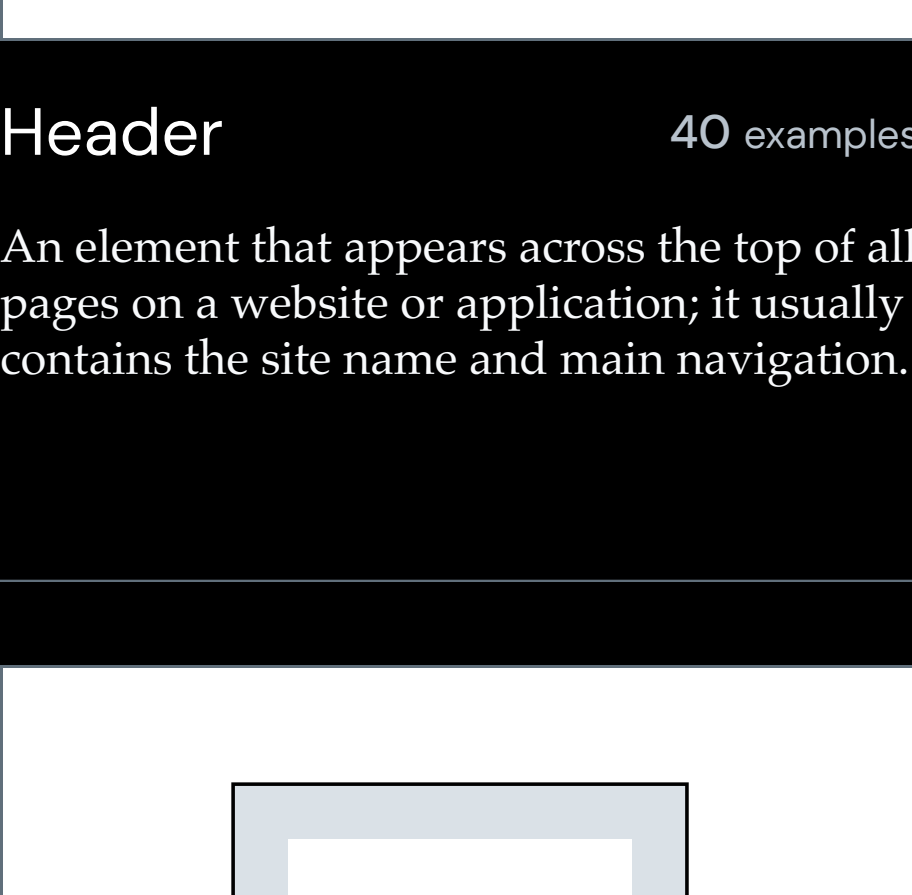

File 6 examples

Other names: Attachment, Download


A representation of a file such as an uploaded attachment or a downloadable PDF.

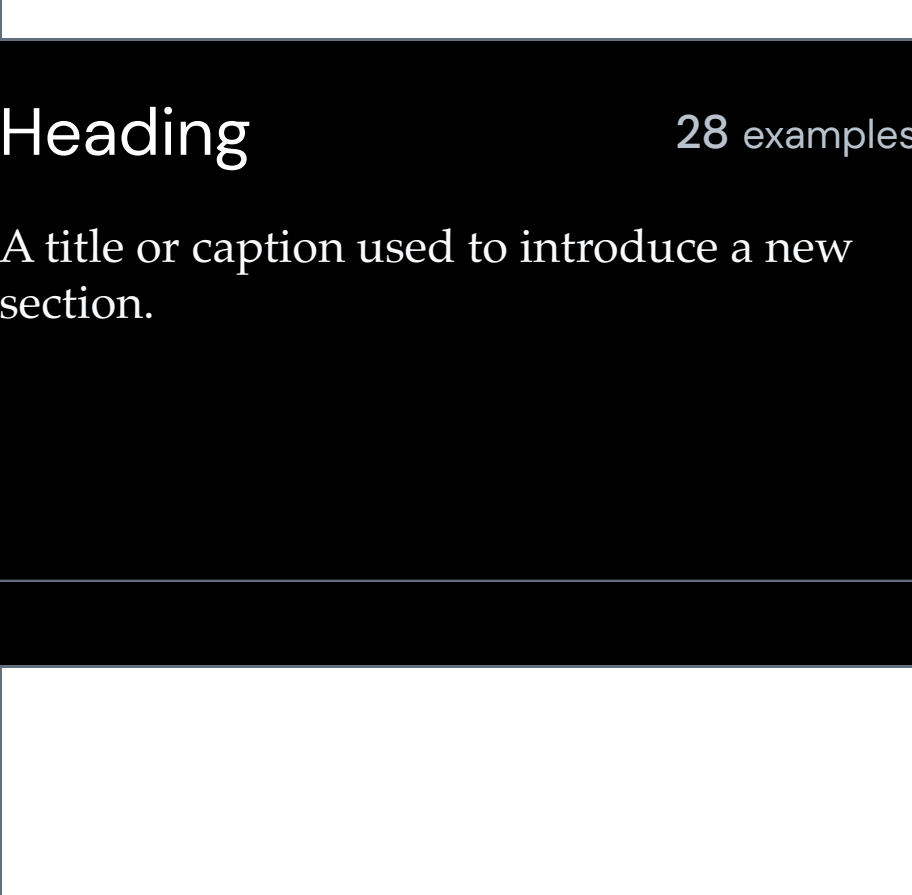

File upload 30 examples


Other names: File input, File uploader, Dropzone

An input which allows users to upload a file from their device.

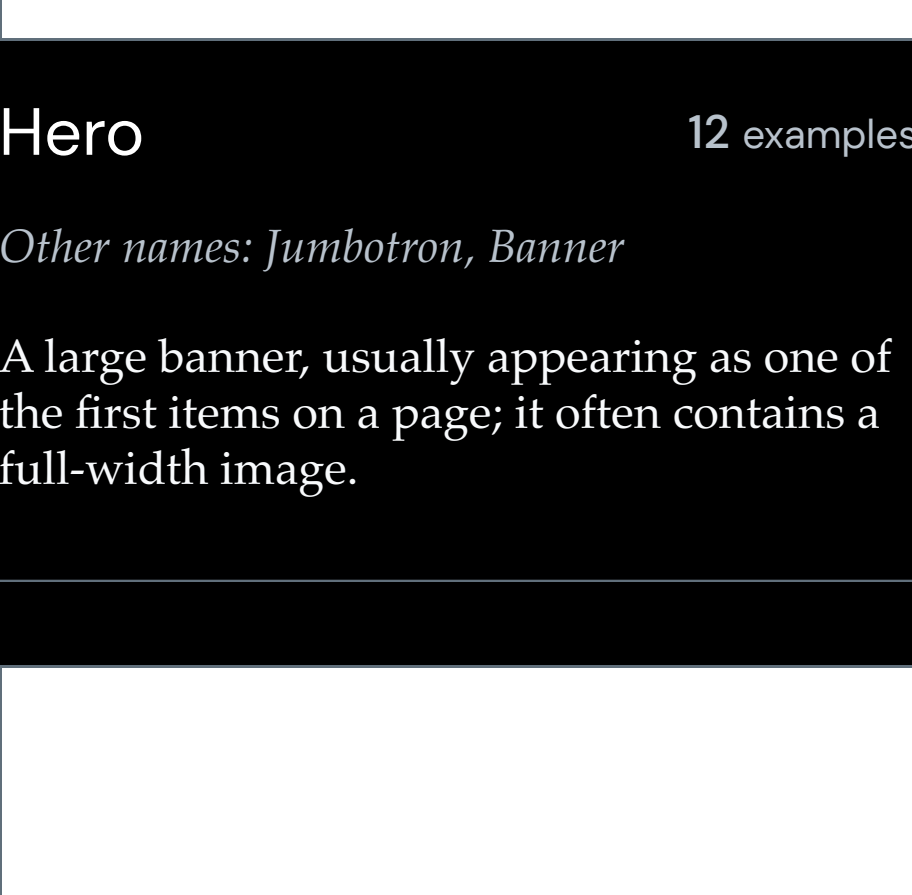


Footer 24 examples

Commonly appearing at the bottom of a page or section, a footer is used to display copyright and legal information or links to related content.

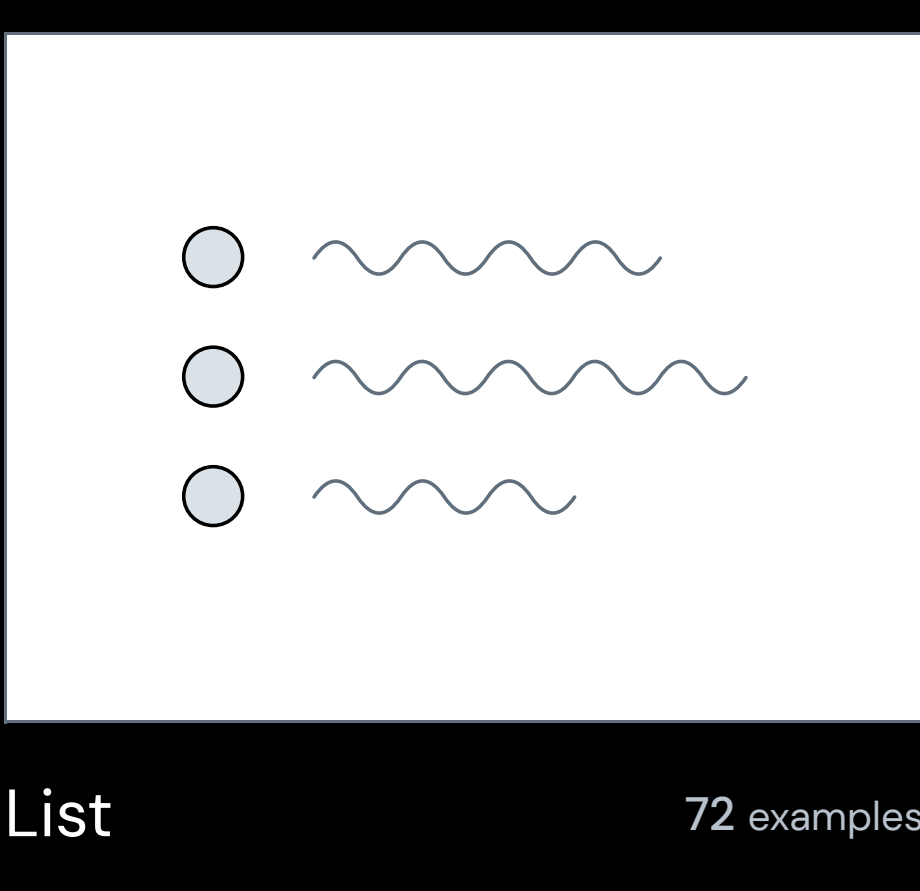


Form 28 examples

A grouping of input controls that allow a user to submit information to a server.

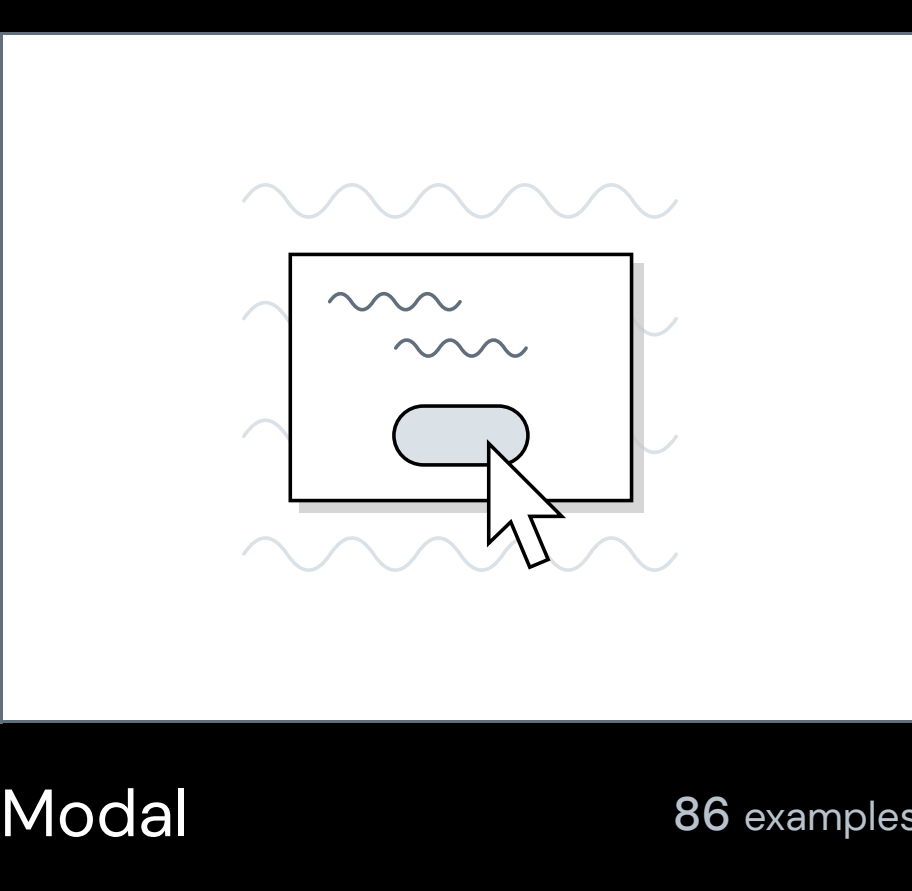


Header 40 examples

An element that appears across the top of all pages on a website or application; it usually contains the site name and main navigation.

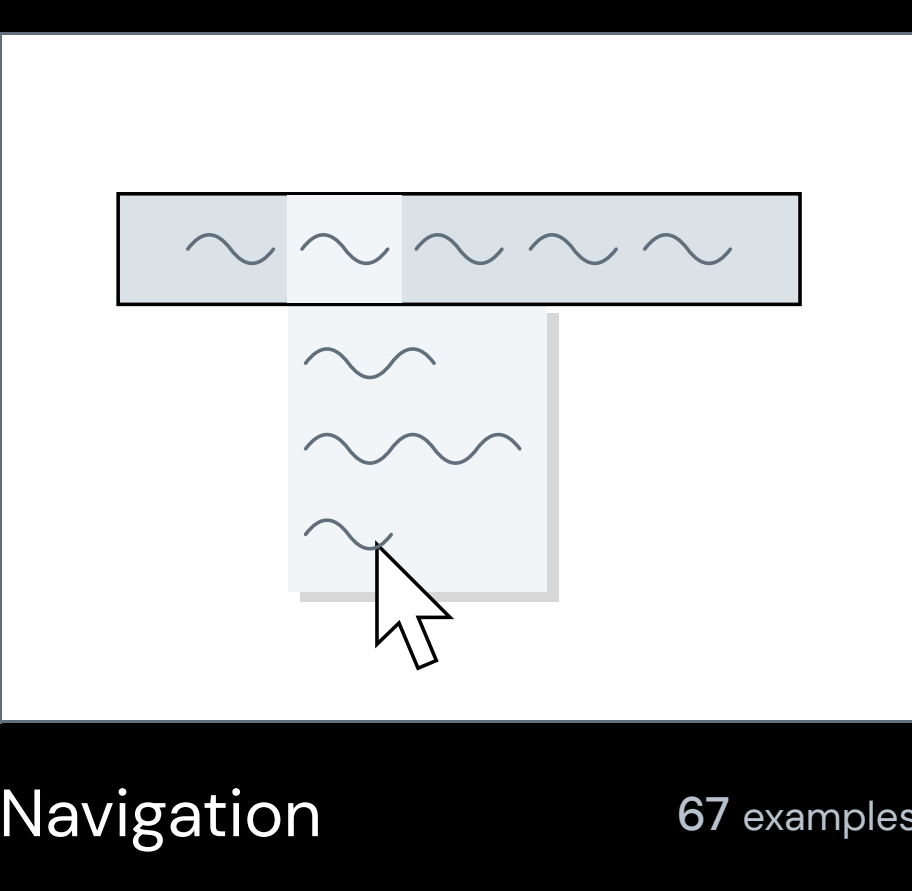

Heading 28 examples


A title or caption used to introduce a new section.

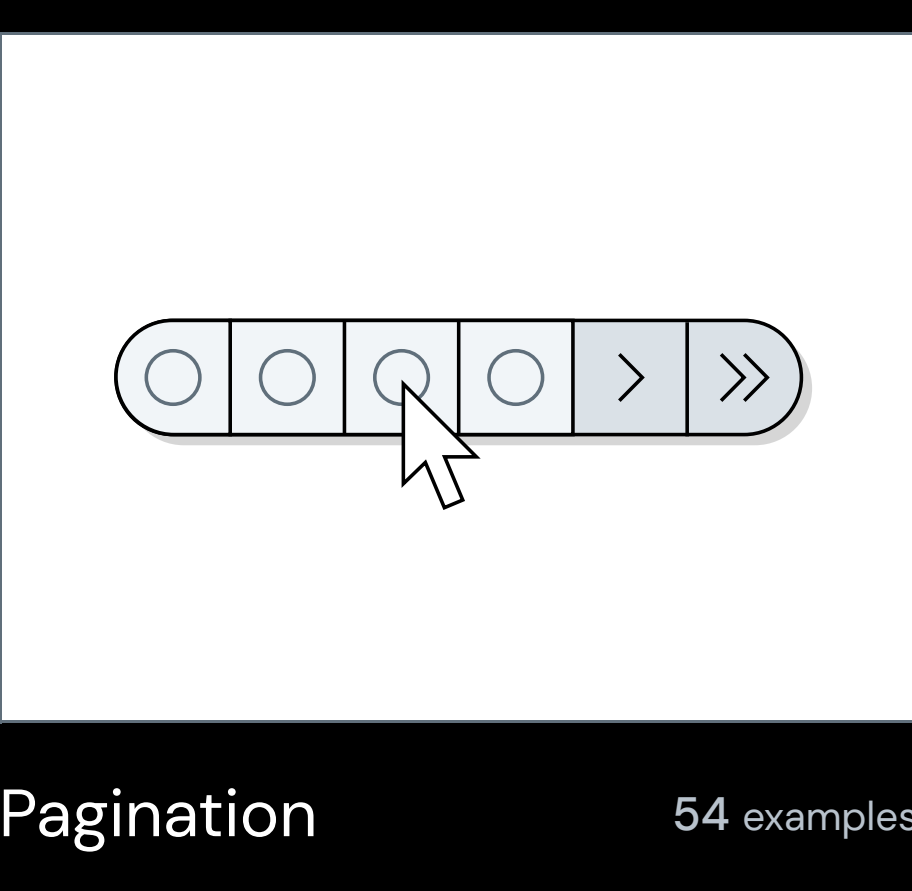

Hero 12 examples

Other names: Jumbotron, Banner

A large banner, usually appearing as one of the first items on a page; it often contains a full-width image.

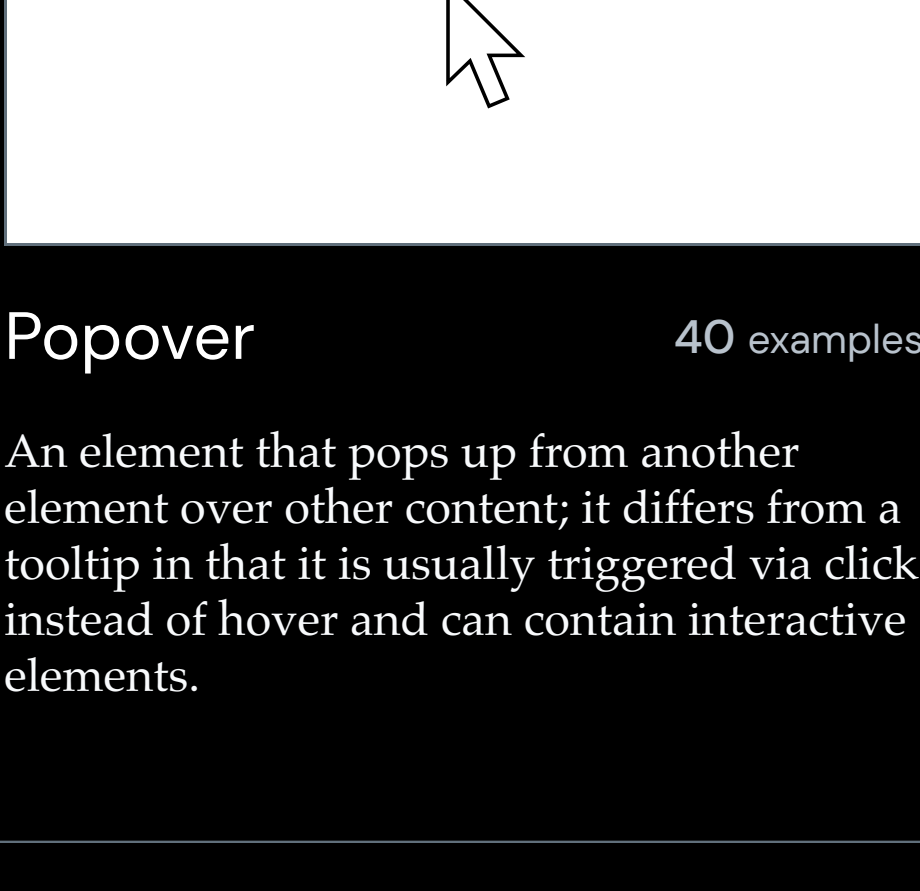

Icon 50 examples

An icon is a graphic symbol designed to visually indicate the purpose of an interface element.

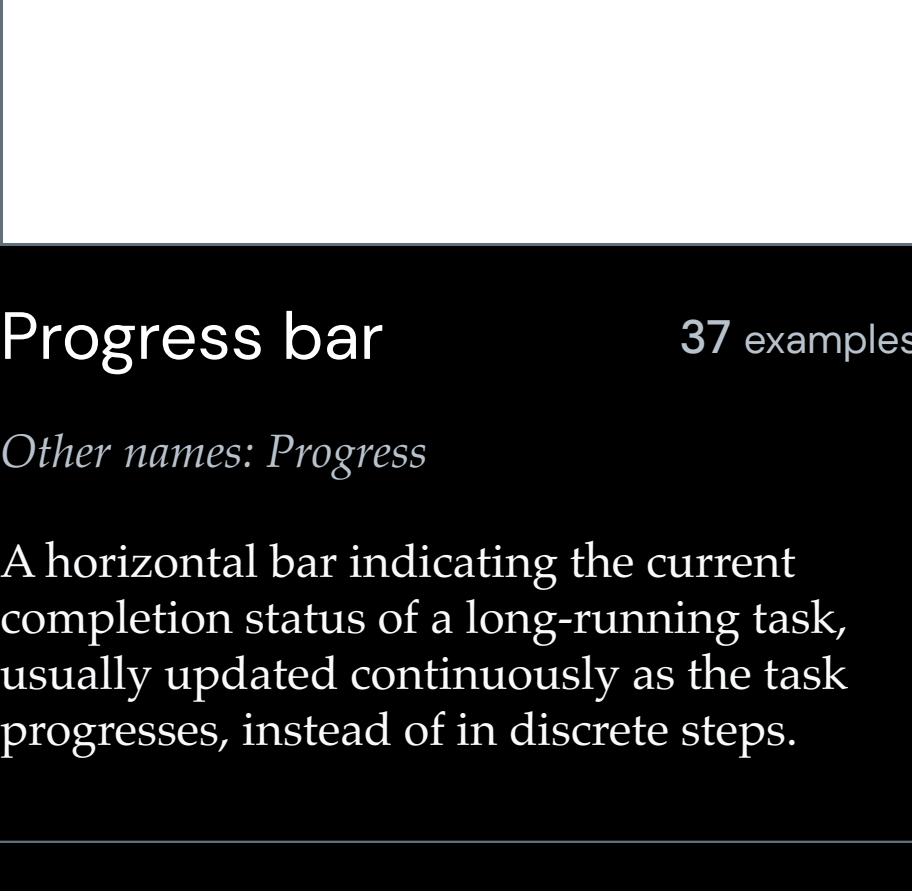


Image 28 examples

Other names: Picture


An element for embedding images.



Label 16 examples

Other names: Form label


A text label for form inputs.

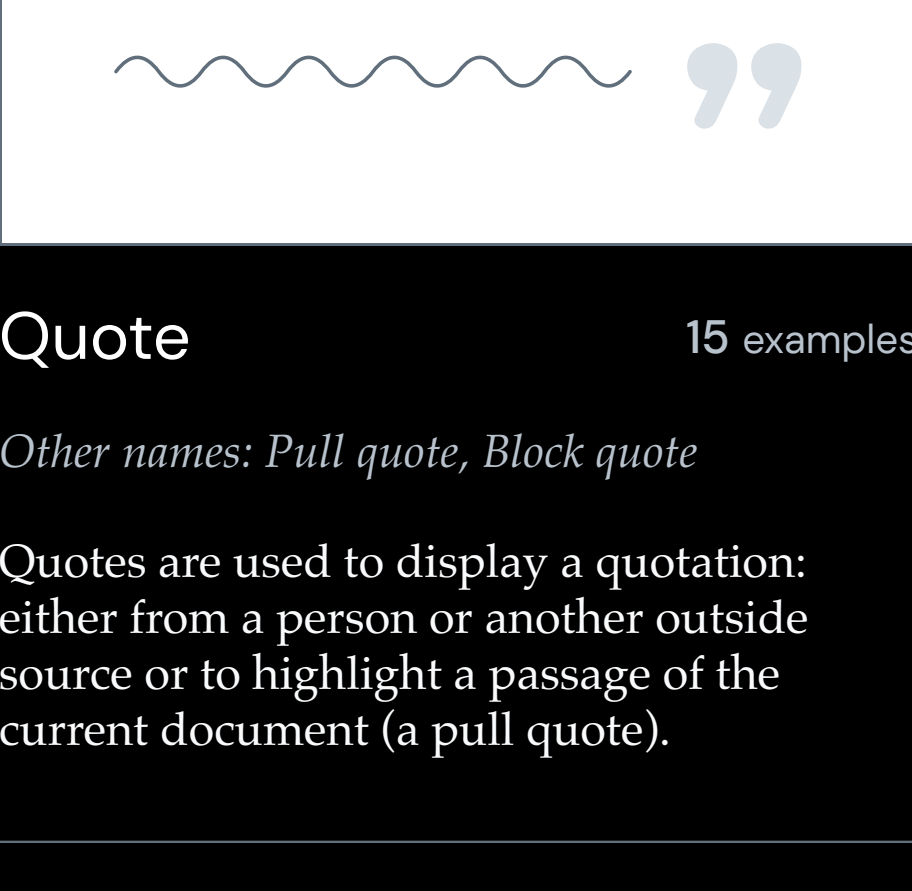

Link 71 examples

Other names: Anchor, Hyperlink


A link is a reference to a resource. This can be external (e.g. a different web page) or internal (e.g. a specific element in the current document).

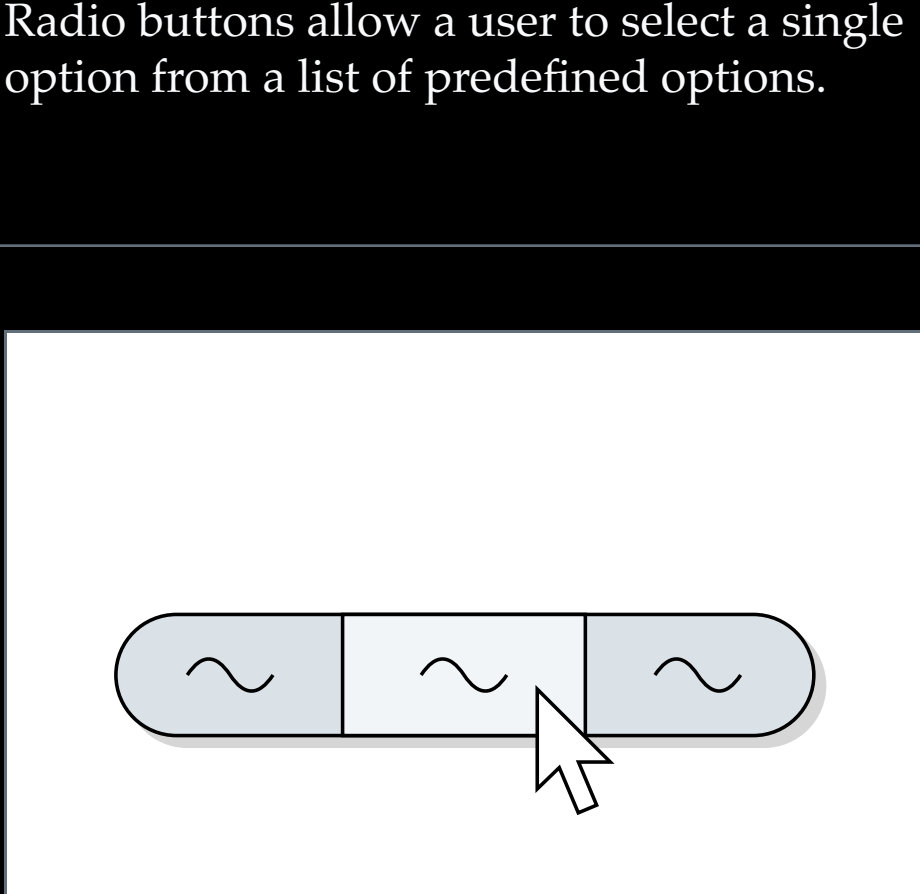

List 72 examples

Lists are used for grouping a collection of related items. In HTML there are three types:


- unordered list — for items in no particular order.
- ordered list — for items in a specific order.
- description list — for key-value pairs.

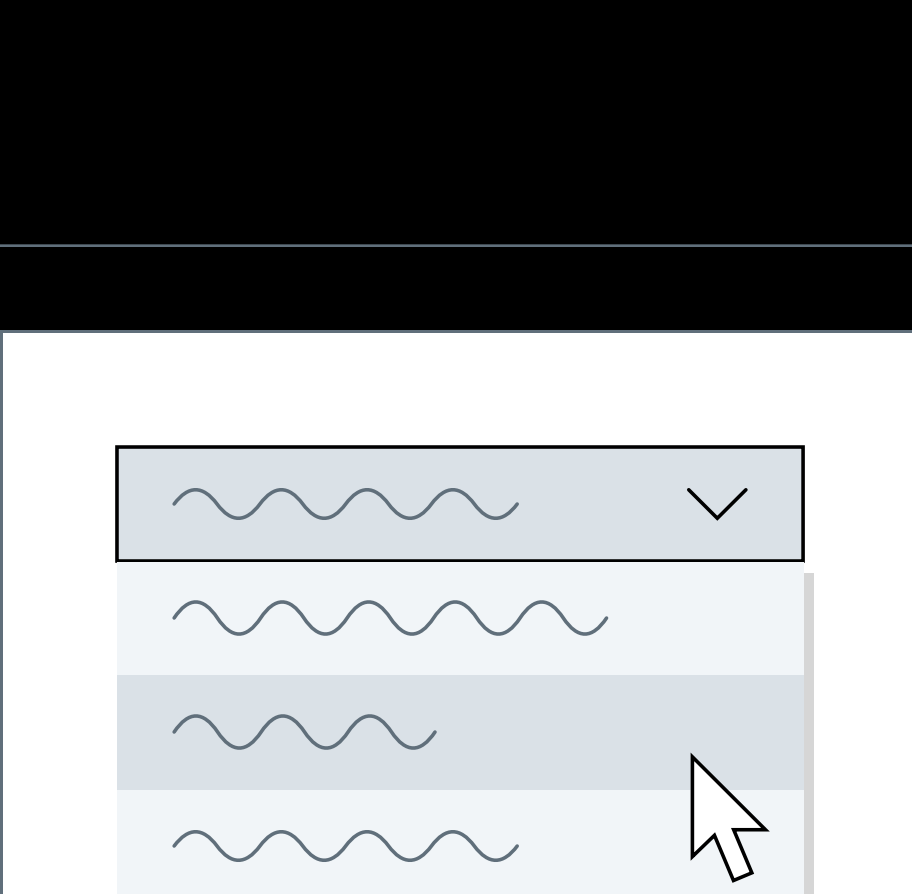

Modal 86 examples

Other names: Dialog, Popup, Modal window


A modal is an interface element that appears over other content. It requires an interaction from the user before they can return to whatever is underneath.

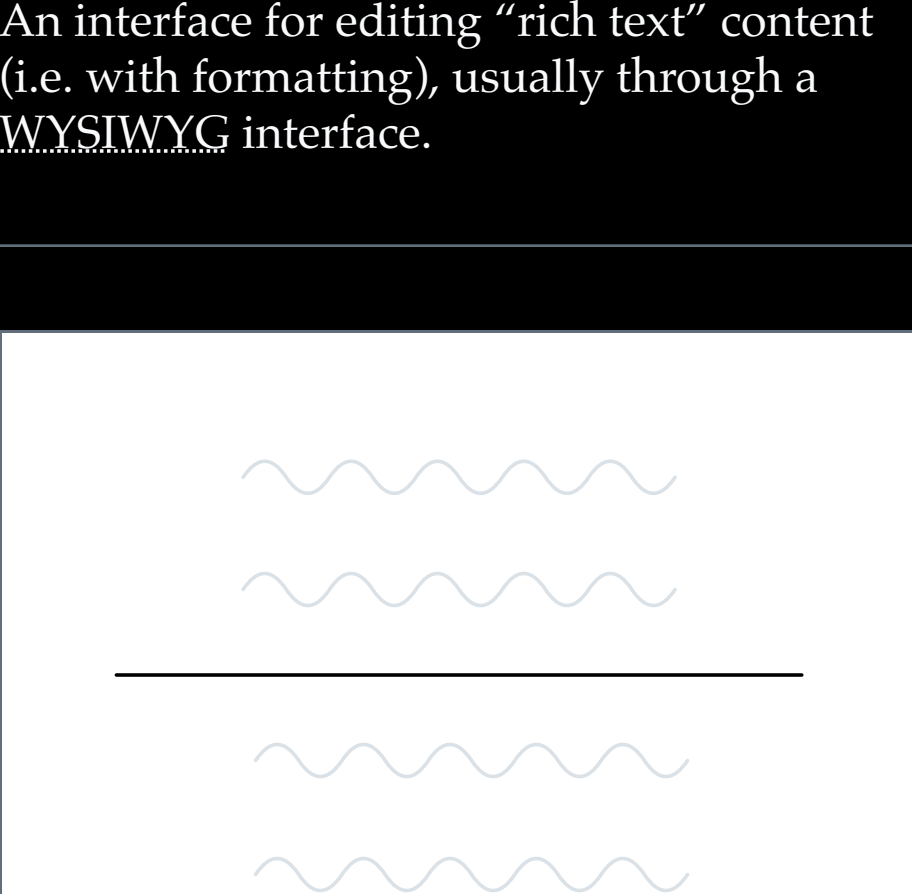

Navigation 67 examples


Other names: Nav, Menu

A container for navigation links; these can be to other pages (e.g. main site navigation) or to elements within the current page (e.g. a table of contents).

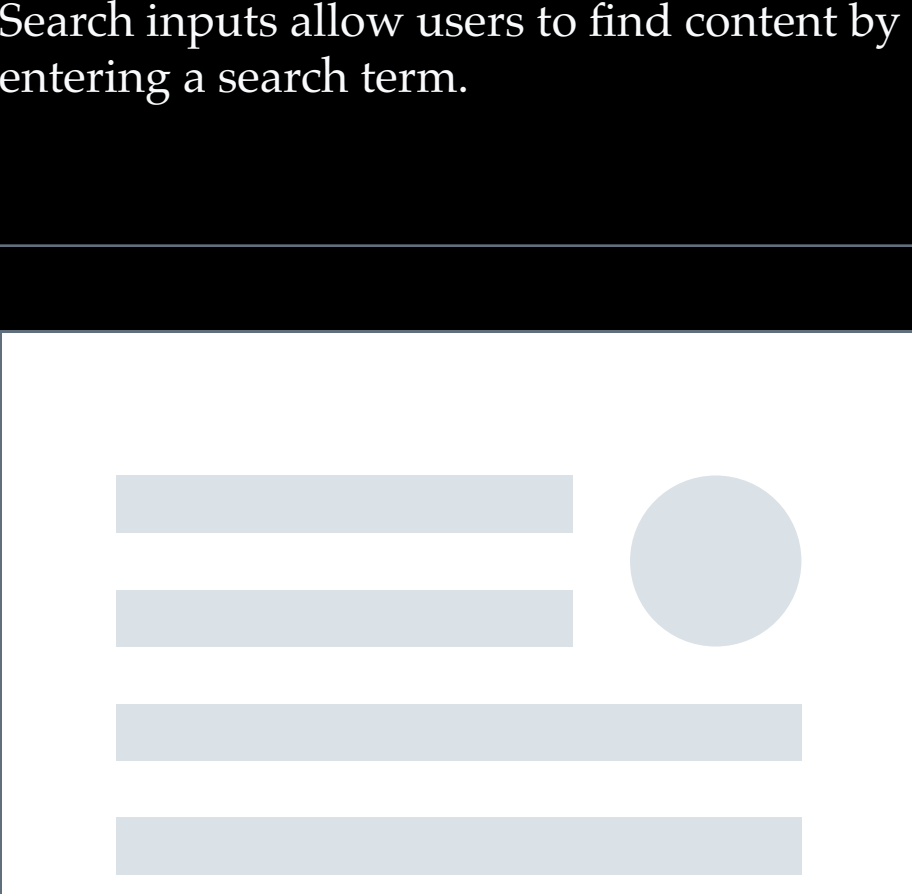


Pagination 54 examples

Pagination is the process of splitting information over multiple pages instead of showing it all on a single page; also the name for the interface component used for navigating between these pages.

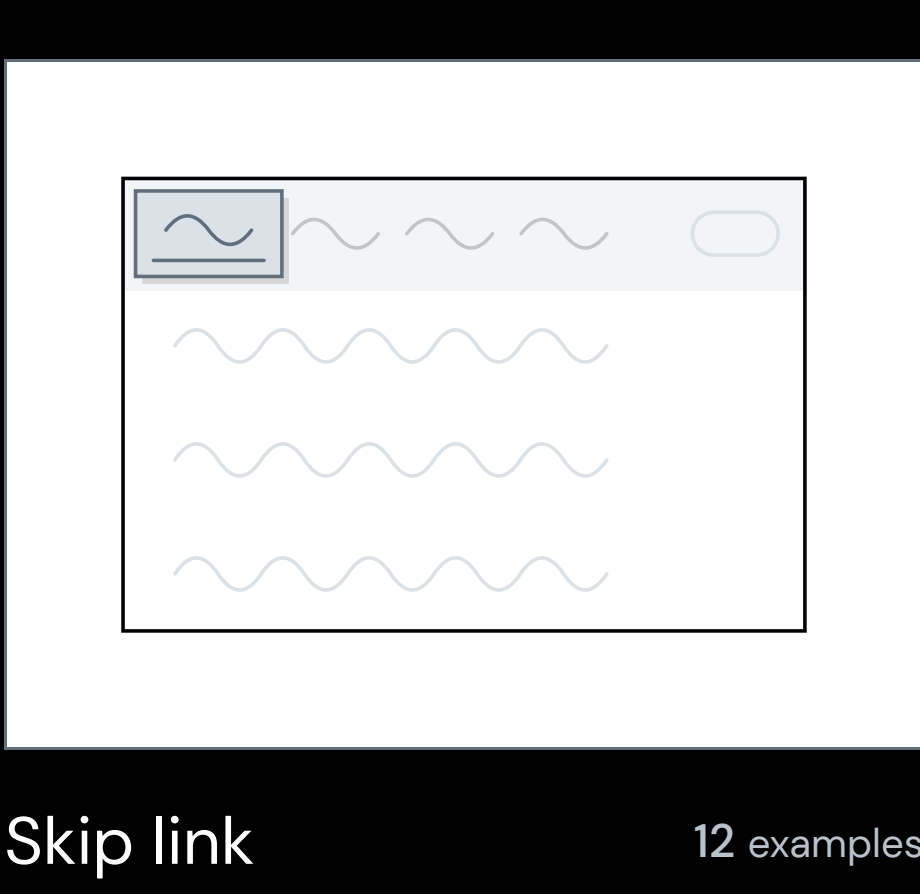

Popover 40 examples


An element that pops up from another element over other content; it differs from a tooltip in that it is usually triggered via click instead of hover and can contain interactive elements.

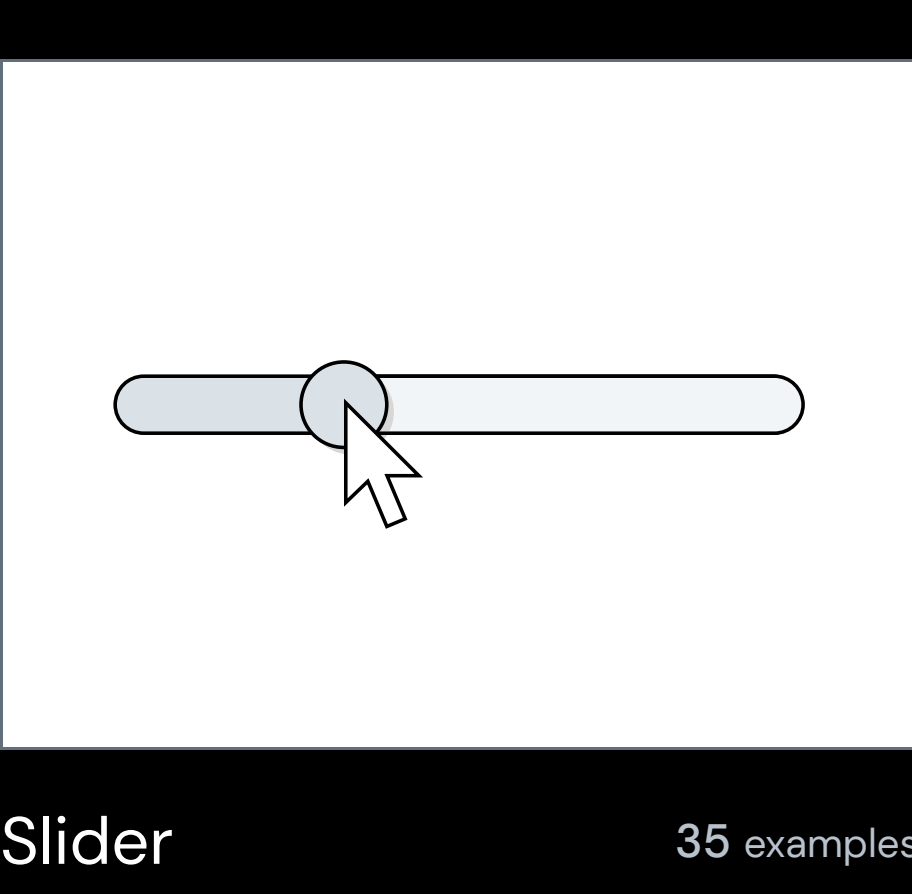

Progress bar 37 examples

Other names: Progress


A horizontal bar indicating the current completion status of a long-running task, usually updated continuously as the task progresses, instead of in discrete steps.

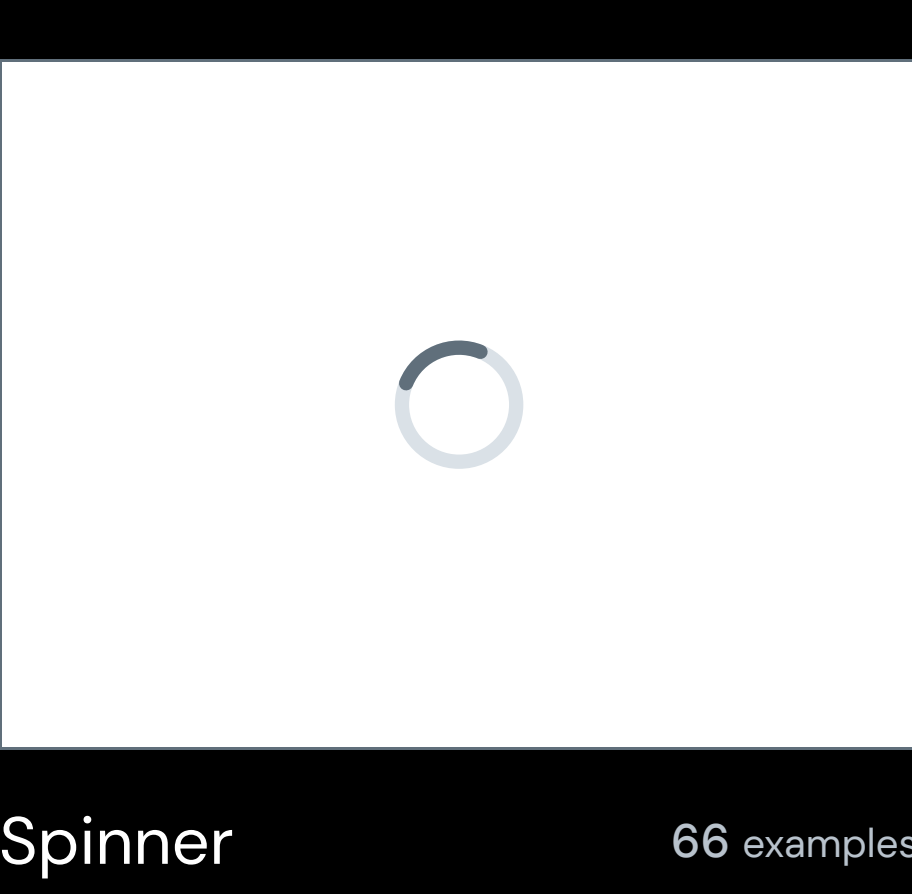

Progress indicator 40 examples

Other names: Progress tracker, Stepper, Steps, Meter


A representation of a user's progress through a series of discrete steps.

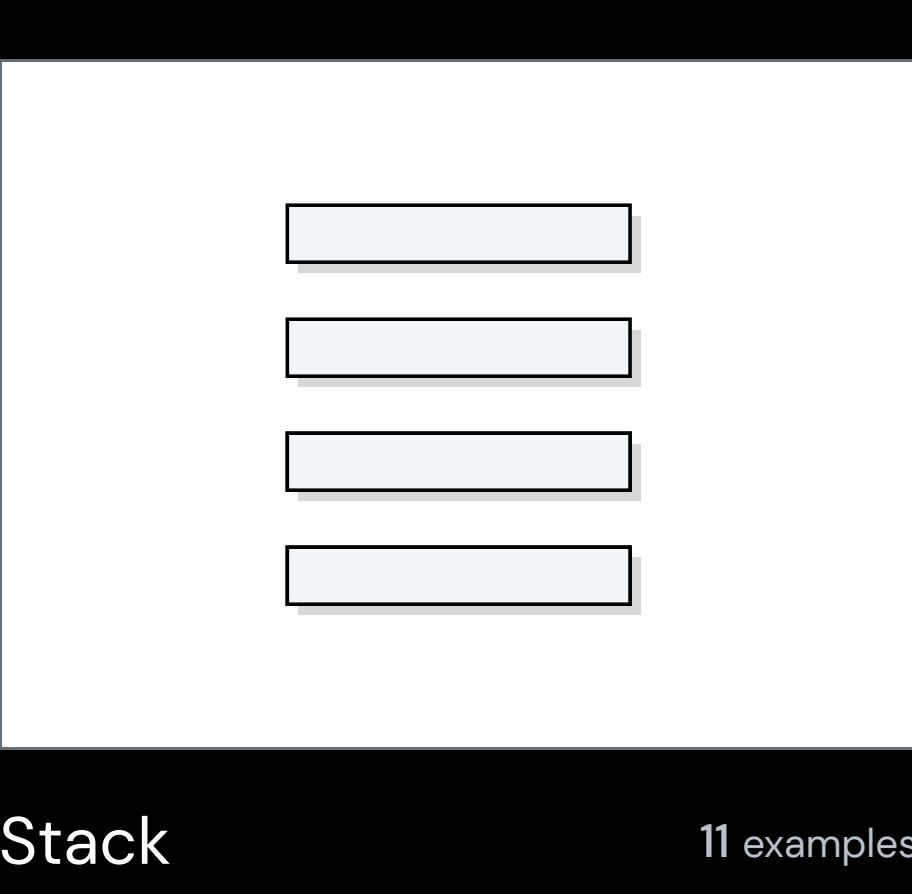

Quote 15 examples

Other names: Pull quote, Block quote


Quotes are used to display a quotation: either from a person or another outside source or to highlight a passage of the current document (a pull quote).

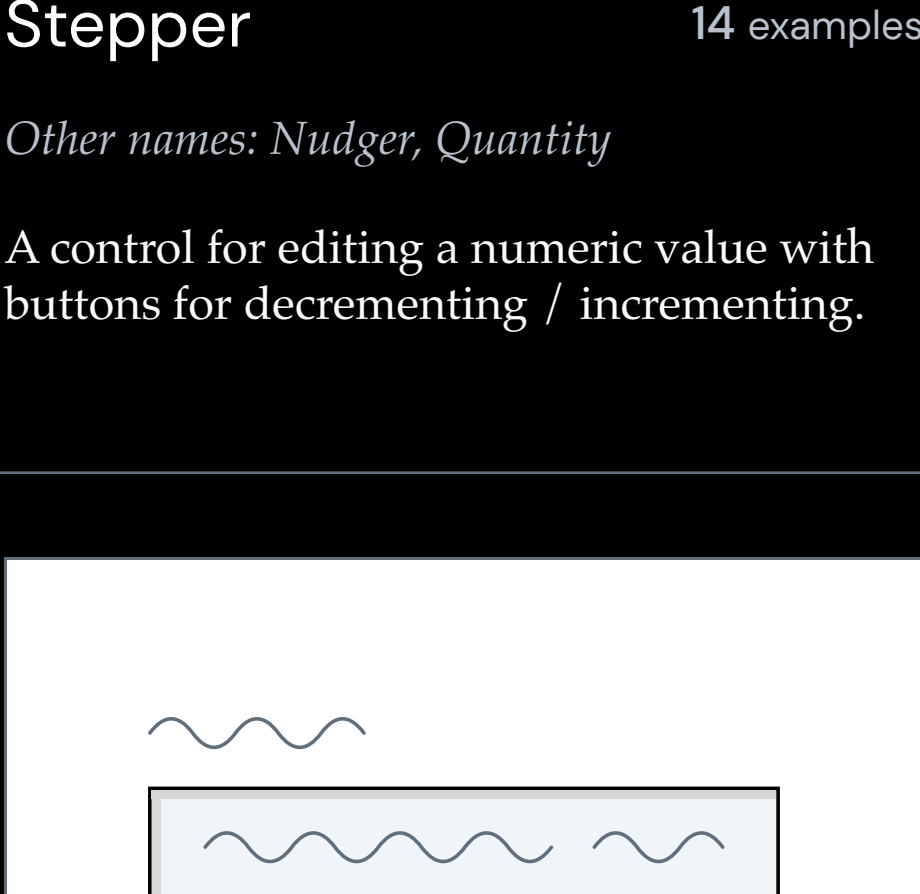

Radio button 90 examples


Other names: Radio, Radio group

Radio buttons allow a user to select a single option from a list of predefined options.

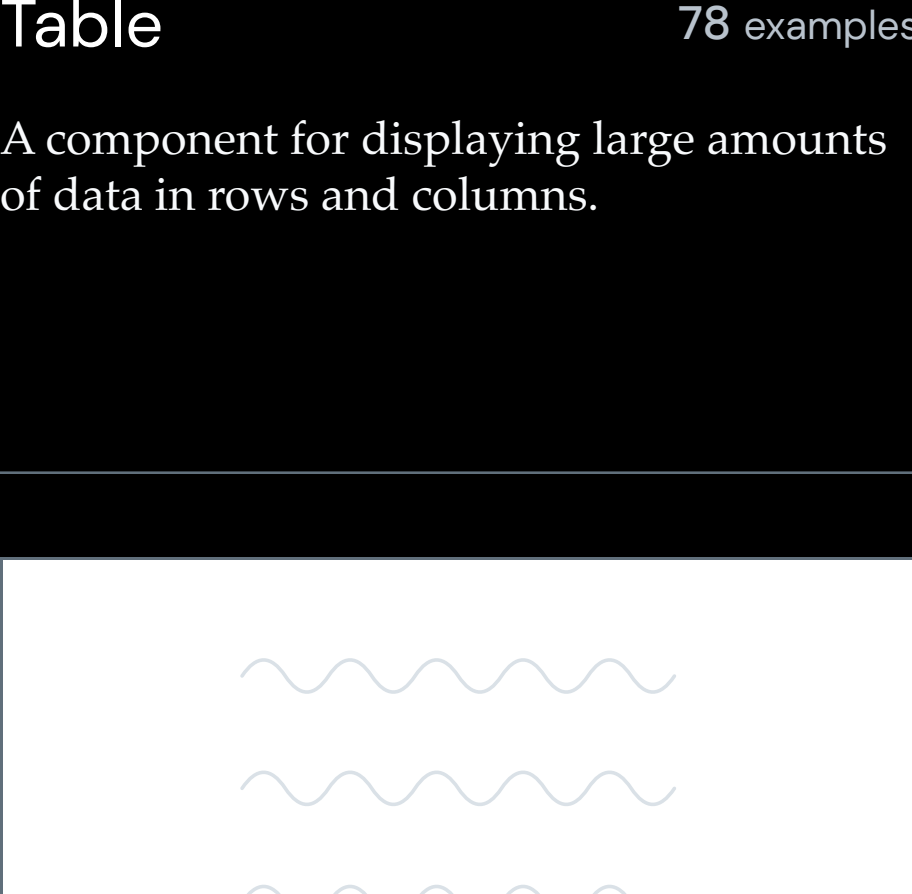

Rating 14 examples


Ratings let users see and /or set a star rating for a product or other item.

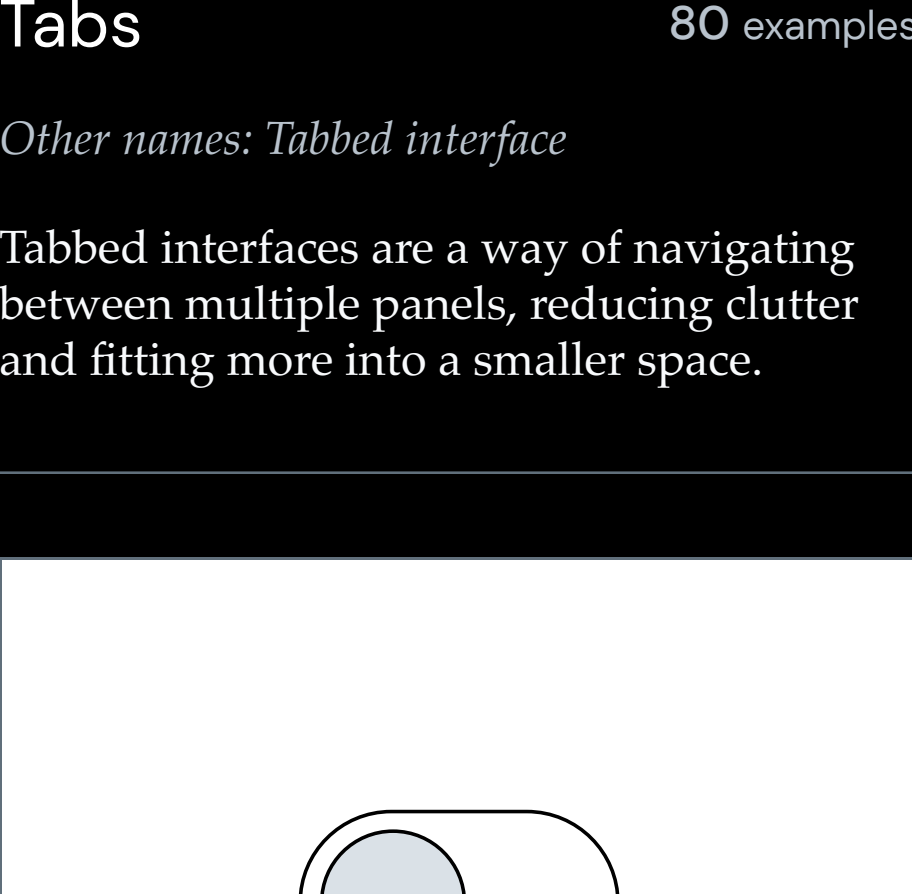

Rich text editor 3 examples

Other names: RTE, wysiwyg editor


An interface for editing "rich text" content (i.e. with formatting), usually through a WYSIWYG interface.

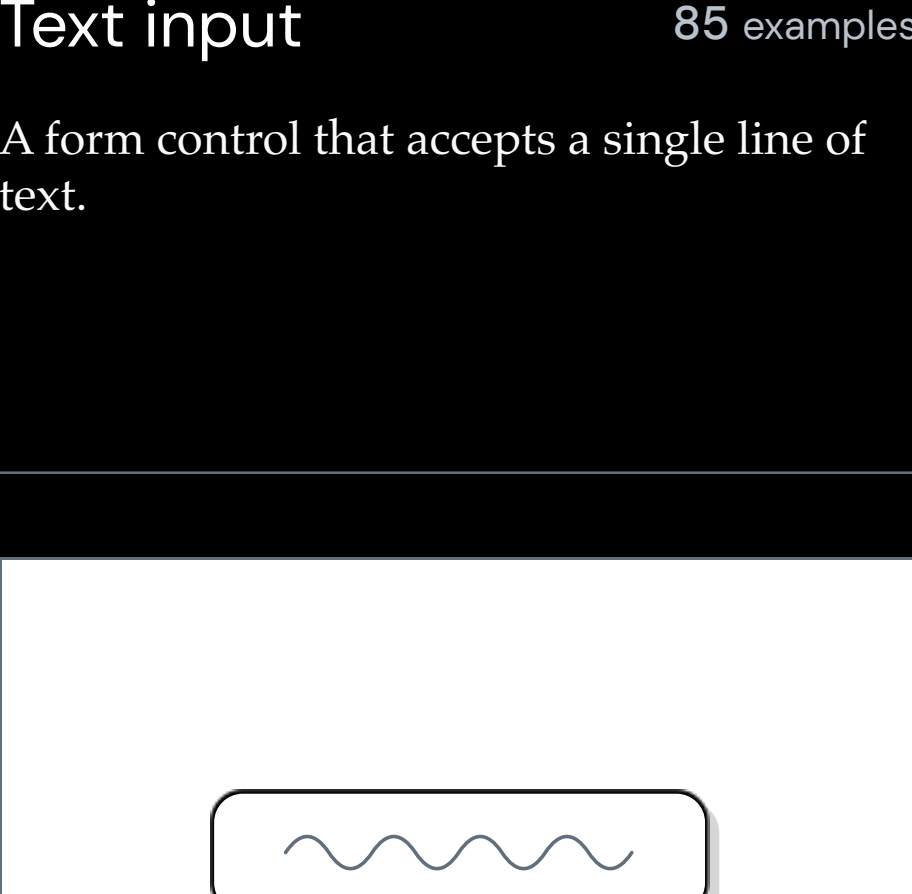

Search input 33 examples

Other names: Search

Search inputs allow users to find content by entering a search term.

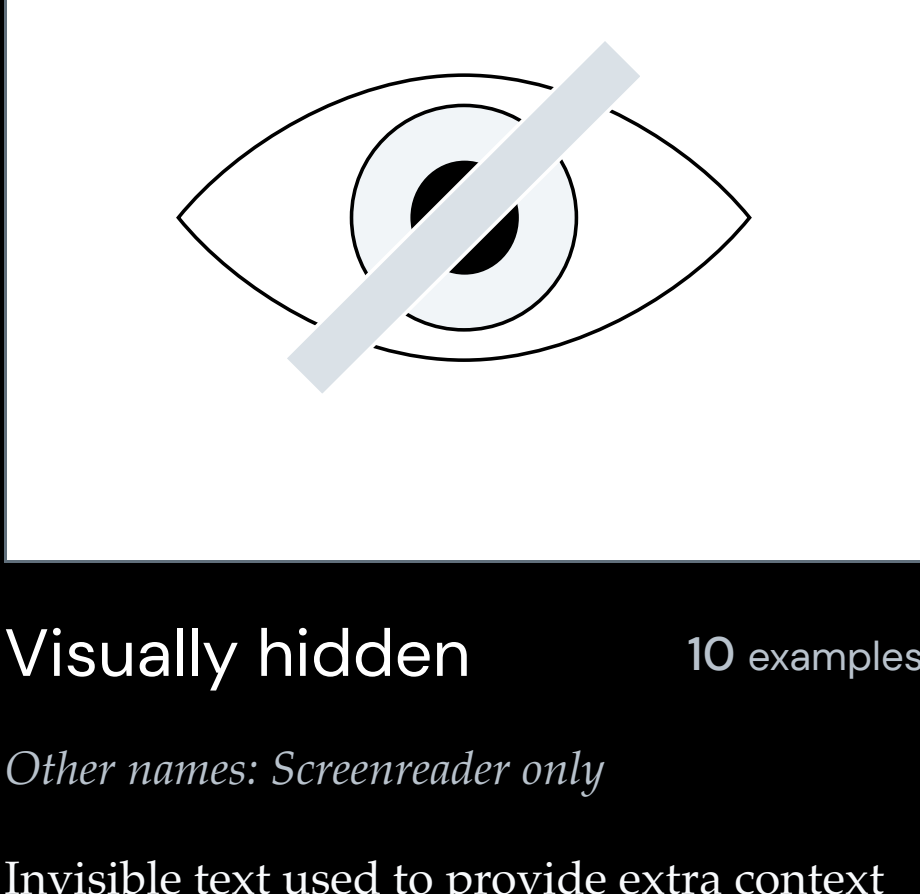

Segmented control 20 examples

Other names: Toggle button group


A hybrid somewhere between a button group, radio buttons, and tabs; segmented controls are used to switch between different options or views.



Select 82 examples

Other names: Dropdown, Select input


A form input used for selecting a value: when collapsed it shows the currently selected option and when expanded, it shows a scrollable list of predefined options for the user to choose from.



Separator 24 examples

Other names: Divider, Horizontal rule, Vertical rule

A separator between two elements, usually consisting of a horizontal line.



Skeleton 23 examples

Other names: Skeleton loader

A placeholder layout for content which hasn't yet loaded, usually built up of grey boxes.

Skip link 12 examples

Links within a page for skipping to another section, primarily for users who navigate using a keyboard.

Slider 35 examples

Other names: Range input

A form control for choosing a value within a preset range of values.

Spinner 66 examples

Other names: Loading

A visual indicator that a process is happening in the background but the interface is not yet ready for interaction.

Stack 11 examples

A wrapper component for adding a consistent margin between components.

Stepper 14 examples

Other names: Nudger, Quantity

A control for editing a numeric value with buttons for decrementing / incrementing.

Table 78 examples

A component for displaying large amounts of data in rows and columns.

Tabs 80 examples

Other names: Tabbed interface

Tabbed interfaces are a way of navigating between multiple panels, reducing clutter and fitting more into a smaller space.

Text input 85 examples

A form control that accepts a single line of text.

Textarea 57 examples

Other names: Textbox, Text box

A form control for editing multi-line text.

Toast 33 examples

Other names: Snackbar

A type of alert which appears in a layer above other content, visually similar to a mobile or desktop push notification.

Toggle 51 examples

Other names: Switch, Lightswitch, Toggle button

A control used to switch between two states: often on or off.

Tooltip 68 examples

Other names: Toggletip

A means of displaying a description or extra information about an element, usually on hover, but can also be on click or tap.

Visually hidden 10 examples

Other names: Screenreader only

Invisible text used to provide extra context for users of assistive technology.

Is there a component missing?

Let me know >>>