

# Identification and Classification in Food Images

Tom Barrett

January 25, 2018

## **Abstract**

Final Year Project focused on identification and classification of food images. A background of previous work done on the subject is outlined, followed by experiments in creating neural networks to perform classifications and segmentations. These experiments will be applied to food images and evaluated.

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Overview . . . . .	3
1.2	Objectives . . . . .	5
1.3	Methodology . . . . .	6
1.4	Overview of Report . . . . .	8
1.5	Motivation . . . . .	8
<b>2</b>	<b>Background</b>	<b>10</b>
2.1	Introduction to Machine Learning . . . . .	10
2.2	Neural Computing . . . . .	11
2.3	Perceptron Learning - Artificial Neuron . . . . .	12
2.4	Multi Layered Perceptron . . . . .	13
2.5	Support Vector Machine . . . . .	16
2.6	Convolutional Neural Networks Overview . . . . .	16
2.7	Convolutional Neural Networks for use in Classification . . . . .	19
2.8	Convolutional Neural Networks - Extensions . . . . .	21
2.9	Image Segmentation . . . . .	24
2.10	Technologies . . . . .	26
2.11	Evaluating the Output . . . . .	27

<b>3</b>	<b>Experiments</b>	<b>31</b>
3.1	Experiment 1 . . . . .	31
3.2	Experiment 2 . . . . .	35
3.3	Experiment 3 . . . . .	45
3.4	Experiment 4 . . . . .	56
3.5	Experiment 5 - Retrain ImageNet Inception V3 Model . . . .	63
3.6	Experiment 6 - Retrain with Extended Dataset . . . . .	67
3.7	Experiment 7 - Retrain with Parameter Tuning . . . . .	69
3.8	Experiment 8 - Segment Image . . . . .	71
3.9	Experiment 9 - MobileNet . . . . .	72
3.10	Experiment 10 - Scale? . . . . .	72
<b>4</b>	<b>Empirical Studies with Food Images</b>	<b>73</b>
<b>5</b>	<b>Discussion and Conclusion</b>	<b>74</b>
<b>A</b>	<b>Appendix</b>	<b>78</b>

# Chapter 1

## Introduction

### 1.1 Overview

This project explores the use of identification and classification of food images for use in a calorie measurement android application. Food calorie consumption is a huge problem in the modern world. Over 25% of the population in Ireland is obese and this figure is likely to rise over the coming years. A mobile application that could help keep track of a user's calorie intake by taking pictures of their meals would be a great help. The area of Machine Vision is a very difficult topic to address as it is a very hard task for computers to undertake. We, as humans, take vision for granted as we can soon see, from the study of Machine Vision, that there are many difficult steps that have to be made for full identification and classification of an image.

When looking into calorie measurement using an image, there are three questions that have to be answered:

- Where are the Regions of Interest (ROI) in this food image?
- What food types are in these ROI's?
- What is the portion size of each food type?



Figure 1.1: Segmented Image

In this project, my main focus will be on the first question, 'Where are the Regions of Interest (ROI) in this food image?'. This is normally achieved through image segmentation. Image segmentation is the process in which you divide an image into multiple segments as per Figure 1.1.

Many researchers in various machine vision labs have attempted to solve this problem using different methodologies. There has been promising results from some papers but these are mostly under highly constrained circumstances. When mixed foods are introduced to the problem, many of the methods fail. Convolutional Neural Networks (CNN) have had very promising results in the field of image classification in the recent years but to get to the classification step, image segmentation is first needed, otherwise known as image identification. Where CNN's have been shown to work best is in the area of face detection.

I have researched many different methods of image segmentation but it seems that CNN's have had the best results for multiple objects in one image and I

hope to apply these results for many foods in an image. This is because we will rarely want to classify an image that only has one food item in it. Therefore, the one shot approach won't work by which we build a classifier that takes in an image and gives back the most likely food in that image.

The system that I am proposing to solve the problem statement would be able to integrate with an Android mobile phone application. The idea is, that when a user is about to eat their meal, they can simply take a picture of their meal for computation. From here, the application would take the image, find the objects (ROI) in the image and take note of them. Concurrently, the application would attempt to classify each object detected. Once this is done, the size of each food type would be measured and through this an overall calorie count would be displayed for the user. This could be logged for user metrics. I will focus on finding the objects for this application as I will not be able to implement the full system due to time constraints.

## 1.2 Objectives

### Primary Objectives

#### **Replicate results of previous work and possibly improve the result**

There are many different approaches to food identification and classification, many of which we will see in Chapter 2. I hope to select an approach that has shown promising results in the past and replicate them. As a stretch goal, I may be able to improve the results that were originally found.

#### **Develop an application**

Another objective for this project is to develop an application that can be used for dietary assessment. This application would be able to take an image and then identify and classify the foods within the image. I will not focus on size estimation of the food type in this project.

## **Secondary Objectives**

### **Understanding of Convolutional Neural Networks**

In the project, I will be using Convolutional Neural Networks (CNN's) for object identification in Food Images. I will be using an API for this due to time constraints but it is a key objective for me to develop a deep understanding of CNN's as they are quite pivotal in the current Machine Vision Industry and I find bio-inspired systems very interesting.

### **Learn about different image identification and classification techniques**

Although, I will be using CNN's for my implementation, I will not be turning a blind eye to other methods of identification and classification. I have done extensive research on many different methods prior to my decision to use CNN's. I think it is very important to learn about other methods as different methods are better suited for some situations and it would be best to know about these methods due to the inevitability of their use.

## **1.3 Methodology**

The following methodology were adapter for this project:

### **Define the research question**

The first step to this project was to define the research question. I knew that I wanted to look into the general area of 'Food Identification and Classification' but the scope of this is too broad for an FYP. Therefore I decided that the research question would be to look at the food identification aspect ie. region of interest detection.



## **Literature Review**

Once I had defined the question, finding related work was the next milestone. There are many attempts at Food Image Classification and these were not difficult to find, using Google Scholar, but many of these papers glossed over the segmentation aspect and relied on third parties for this step. Because of this, I had to follow quite a few references to different papers that focused solely on image segmentation.

## **Explore different image identification methods**

I had collected various image identification methods from the literature review that I carried out, so there were many options to evaluate. I wanted to try something with Convolutional Neural Networks so more traditional methods of identification using colour and texture was not so strenuously explored.

## **Select an image identification method**

## **Research technologies and develop skills in these technologies**

As I used a Convolutional Neural Network (CNN) in this project, I leveraged many resources to enrich my understanding of the process. I decide to use Tensorflow as my main resource in creating a CNN so I followed online tutorials for this technology. I also enrolled in a Deep Learning Course on Udacity to enhance my understanding and skills.

**Build a prototype of the application**

**Compare and analyse results to other implementations**

## **1.4 Overview of Report**

This report is broken down into various main headings:

### **Introduction**

This section is to give an overview of what this project is about, how I will approach this project and why I am doing it.

### **Background**

I will be giving some information on the background of the subject that I am focusing on.

### **Experiments**

In this part of the report I will carry out various experiments using tensorflow.

### **Empirical Studies with Food Images**

This section will analyse the results I have obtained and compare them against various metrics and other implementations.

### **Discussion and Conclusion**

In this section, I will discuss my results from the empirical studies and conclude my findings.

## **1.5 Motivation**

I find the topic of Computer Vision a very interesting one. It excites me, to be able to 'teach' a machine how to see as we do. For this reason, I really wanted to learn about Neural Networks and this was a large motivator for this project.

Once I had a topic that I wanted to research, I needed a focus or problem statement for this research. I find that it is much more rewarding to work on something that positively impacts both myself and other people so I decided that I wanted to research something that fit this requirement.

Food calorie consumption is a very big problem in the modern world. Over 25 percent of the population in Ireland are obese. A mobile application that could help keep track of a user's calorie intake by taking a picture of their meals would be a big help to combat this problem. This problem statement works very well for me because of its application use and because of its complexity. Identifying and recognising food is much more difficult than say recognising faces as it has no uniform shape. Therefore, this problem would also be very beneficial to developing skills in the computer vision area.

I would like to develop these real world skills so that I can partake in Computer Vision projects in industry or to do further research in academia. This is because machine learning has really taken off in the last few years and is used by many in industry. While machine learning as a whole has become very popular, computer vision is probably the most prominent that has come out of it. Face detection, for one, is being researched extensively for use in personalised advertising and also secure access to devices and systems.

# Chapter 2

## Background

### 2.1 Introduction to Machine Learning

In Mitchell [14], Machine Learning is defined as "the question of how to construct computer programs that automatically improve with experience". Machine Learning has blossomed in recent years with applications across multiple domains using vastly different paradigms and technologies.

There are many ways in which Machine Learning can be used in the modern world, many of which are being utilised to great affect. Some of these applications, are image recognition, natural language processing, medical diagnosis and many more. There may be fear that Machine Learning will start to take away many jobs from humans but this may not be the case. Imagine a doctor, having to diagnose a patient, a machine can offer suggestions based on very large datasets of what the diagnosis is. This is not to say that a Machine would be perscribing patients, but merely act as an assistant to the doctor.

Machine Ethics is a large problem that comes hand in hand with Machine Learning. There is a very important question of who takes the blame when things go wrong, that is why I think it is important that we only use Machine Learning to advise and not to determine but this can be very difficult in a world where, for example, an autonomous car has to decide between crashing into a vehicle beside them with an unknown number of people inside or the

two children playing in the street.

One of the most exciting avenues in Machine Learning, in my opinion, is Computer Vision. Computer Vision can be used in many areas to improve our lives. As mentioned earlier, autonomous cars are only possible when a machine can determine what objects are around it. Computer Vision can allow a machine to recognise skin diseases in an image. The applications are nearly limitless and that is without taking into account other uses.

## 2.2 Neural Computing

The main area of my focus for this project is in Artificial Neural Networks (ANN). This is because I have researched extensively into Convolutional Neural Networks which are based on ANN's.

### Artificial Neural Networks

An Artificial Neural Network is a bio-inspired system that is used to model the human brain in how it learns from experience. The ANN uses this model to build a very complex web of connected units called artificial neurons. These neurons are connected by certain weights which determines the processing capacity of the network and these weights are created by learning a dataset. (Malachy)

An ANN has a set of inputs that take in a value, sometimes from network outputs and produce a single result or classification. While an ANN is bio-inspired from the human brain, there are many elements of the brain that are not present in ANN and many new elements in ANN that are not modelled from the human brain.

Before I can talk about Convolution Neural Networks which are vital the image processing, I will have to talk about the perceptron learning algorithm, the multi layer perceptron, and backpropagation.



Figure 2.1: Perceptron

## 2.3 Perceptron Learning - Artificial Neuron

In our Artificial Neural Network a Perceptron is an Artificial Neuron. It is called an Artificial Neuron because it is a bio-inspired neuron which models a neuron in the human brain in terms of inputs and output.

In Perceptron learning, we can take two inputs which are put towards an activation function with a bias attached as seen in 2.1. These inputs are multiplied by the weights that connect the input to the activation function and depending on the result, the activation function may fire an output. These inputs are either 1 or -1.

This Perceptron Learning Rule assumes that there are two sets of instances, a positive and negative set, and that they are linearly separable.

A perceptron is trained using supervised learning. When the perceptron classifies a results, it is told if it is correct or not. If the result is incorrect, weights are changed in value so that this error can be reduced Luger [12].

The one major problem with perceptron learning and that is that it can't solve the problem if there is not a clear linear separation between the classes. There is a way in which we can attempt to solve this, through the delta rule. The delta rule utilizes gradient descent to find the best weight for the training samples Mitchell [14]. We will discuss gradient descent in the next section.

## 2.4 Multi Layered Perceptron

Multi Layer Perceptrons (MLP) are made up of multiple layers of perceptrons connected together. Firstly, we have an input layer, followed by one or more hidden layers and then finally an output layer. Any Neural Network with more than three hidden layers is categorised as a deep layer.

The input layer of your network consists of the data you feed into the network in order to classify it. The input layer passes this data to a hidden layer whose purpose is to transform this data into something that the output layer can understand. The output layer normally consists of a class prediction.

Multi Layer Perceptrons are a class of feed forward Artificial Neural Networks. This means that the output of each perceptron feeds into an input in the next layer of the network.

There is one large problem with MLP's and this is why Convolutional Neural Networks (CNN) were created. If you attempt to classify images with an MLP then each pixel in that image would have to be a separate input. This created a massive amount of neurons through all the layers and this isn't feasible. CNN's solve this problem which we will discuss later.

### Gradient Descent

Gradient Descent is an algorithm used to find the optimal weights to produce the smallest prediction error. It is used to overcome problems of non linearly separable classes. Gradient descent search selects a random weight value and then modifies it gradually to minimize the error. "At each step, the weight vector is altered in the direction that produces the steepest descent along the surface" Mitchell [14]. This step is iterated until the lowest value is met.

One problem with Gradient Descent is that if we look at 2.3, we may never get to the optimal point, point B. This is because we will find point A without too many problems but when the weights change we will get too high a slope of error and therefore will never reach point B.

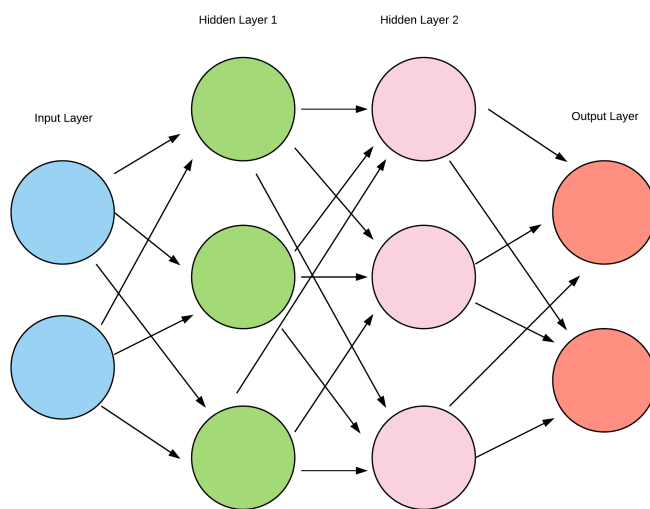


Figure 2.2: Multi Layer Perceptron



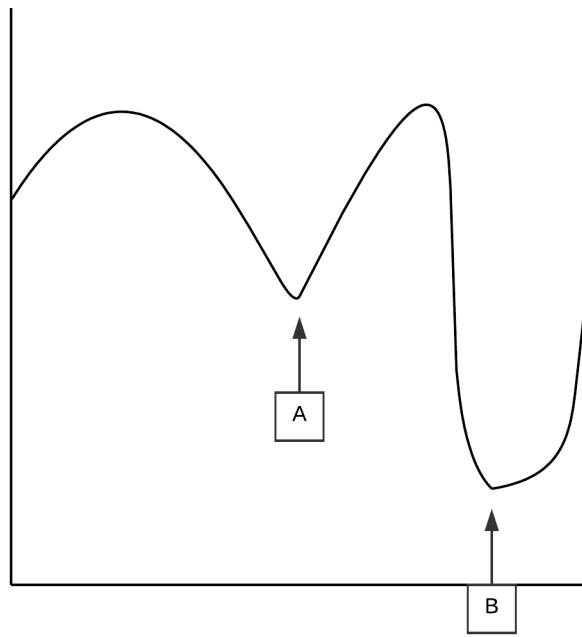


Figure 2.3: Gradient Descent

Another variation of Gradient Descent is Stochastic Gradient Descent (SGD). SGD is different because it updates "weights incrementally, following the calculation of the error of each individual example" Mitchell [14].

### **Backpropagation**

"The Backpropagation algorithm learns the weights of a multilayer network, given a network with a fixed set of units and interconnections" Mitchell [14]. Backpropagation attempts to minimise the mean squared error between the target output and the output of a network.

Backpropagation works by starting at the output layer of the network and going back through previous hidden layers, updating weights as it goes.

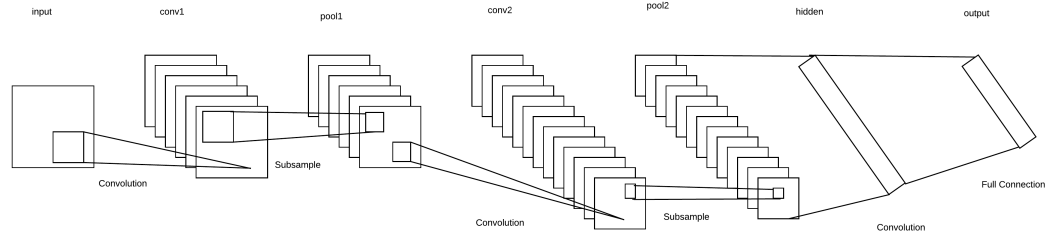


Figure 2.4: CNN Architecture

## 2.5 Support Vector Machine

A Support Vector Machine (SVM) is a machine learning algorithm that has been very popular before the power of a CNN was realised.

A SVM works by creating an  $n$ -dimensional space, with  $n$  as the number of inputs you have *Support Vector Machines for Machine Learning* [18]. The SVM algorithm finds the hyperplane that splits this space. This hyperplane can then be used for classification.


## 2.6 Convolutional Neural Networks Overview

Convolutional Neural Networks (CNN's) are essentially a Multi Layered Percetron with a special structure. CNN's have one major difference from a MLP, they have extra layer of convolution and pooling. The architecture of a convolution network can be seen in Figure 2.4.

Figure 2.5a show an image that we want to compare against Figure 2.5b. For humans, it is quite easy to determine that these images are very similar but for a computer this task is surprisingly difficult.

So what a CNN does, to combat this problem, is to take a small feature from Figure 2.5a and compare it to a subsection of Figure 2.5b. The CNN multiplies the feature and a section of Figure 2.5b, adds up the results and divides by 9. This then gives a decimal value of how likely it is that the feature is in the part of the image, as seen in Figure 2.6b. This is called filtering. The

Figure 2.5: Image filtering

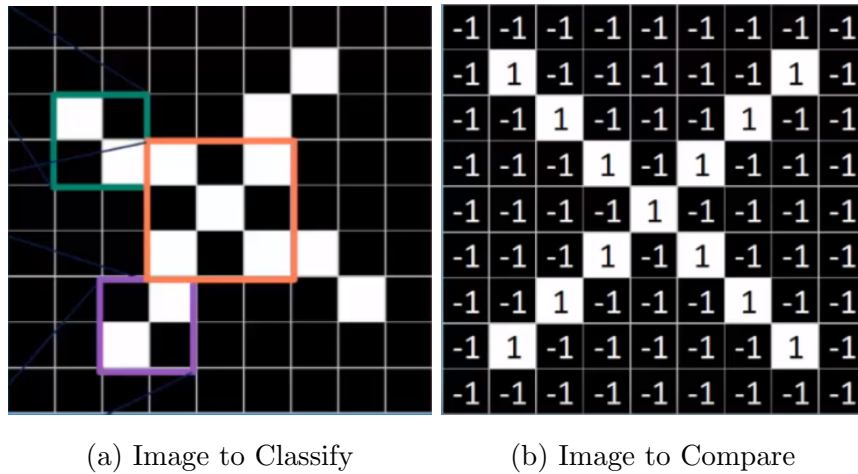

Convolutional layer is composed of carrying out this filtering for every single possible location in Figure 2.5b.

Next is the Pooling Layer, what this layer does, is it takes the convoluted layer output, you can use Figure 2.6b as reference, and from a user defined size ie. 2x2, gets either the highest decimal value (Max pooling) or the average value (Mean pooling) and records that as the new value for the section. This is then applied to the entire image. As we can see in Figure 2.7 we know have a much smaller image stack in which to classify, thus making the computation easier.

In between the Convolution and Pooling layer, there is sometimes a Normalization layer. This Normalization layer creates Rectified Linear Units (RLU's). In other words, if we take Figure 2.6b, it changes all minus values to zero.

There are some problems with CNN's however. One of the main problems is that you need a very large dataset in order to produce an accurate model and the training can be very time consuming without a GPU.

## Fully Convolutional Networks

A Fully Convolutional Network is one that does not have a fully connected layer and in a fully connected layers place is another convolution layer.

Figure 2.6: Image Convolution

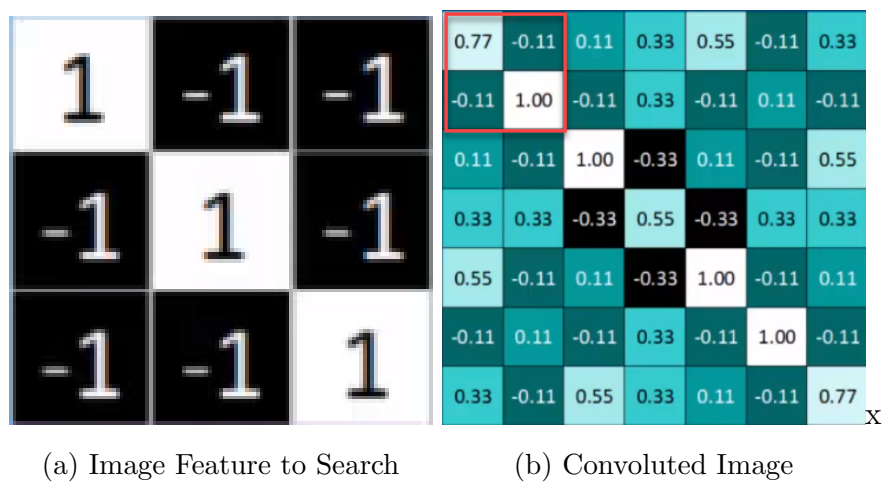


Figure 2.7: Pooled Image

## 2.7 Convolutional Neural Networks for use in Classification

Many reserachers have used convolutional neural networks for image classification with various network architectures and many have used a food image dataset. I will be looking at some of these papers below.

### Deep Learning Based Food Recognition

One paper focused on a deep learning approach to food image recognition based their neural network architecture on Inception-ResNet and Inception V3. They also used the Food-101 dataset Mao, Yu, and Wang [13]. For this system, Googles Tensorflow was used for image preprocessing. Preprocessing was needed as the environmental background is different in many food images. Because of these "Grey World method and Histogram equalization" Mao, Yu, and Wang [13] were used.

AWS GPU instances were used for training and the results on completion were quite impressive with a Top-1 Accuracy of 72.55% and a Top-5 Accuracy of 91.31% Mao, Yu, and Wang [13]

### Food Image Recognition Using Deep Convolutional Neural Network With Pre-Training and Fine-Tuning

Another research team in Japan researched this topic. They were aware of how difficult the problem was and therefore employed many techniques to solve the problem such as "pre-training with the large-scale ImageNet data, fine-tuning and activateion features extracted from the pre-trained DCNN" Yanai and Kawano [19].

In conclusion, they found that the "fine-tuned DCNN which was pre-trained with 2000 categories" Yanai and Kawano [19] from ImageNet was the best method. A DCNN is a Deep Convolution Neural Network. The achieved results of 78.77% for Top-1 Accuracy in the UECFOOD100 dataset.

## **Food Detection and Recognition Using Convolutional Neural Network**

Kagaya, Aizawa, and Ogawa [10] also employed the use of convolutional neural networks for image detection. They used a CNN for the "tasks of food detection and recognition through parameter optimization" Kagaya, Aizawa, and Ogawa [10].

They found that a CNN is much better suited to the task than a Support Vector Machine (SVM). They achieved an overall classification accuracy of 93.8% against their baseline accuracy of 89.7% Kagaya, Aizawa, and Ogawa [10]. This accuracy was calculated using a dataset that they created specifically for this task. When they had completed the task they analysed the trained convolutional kernels and came to an interesting conclusion. They found that "color features are essential to food image recognition" Kagaya, Aizawa, and Ogawa [10].

## **DeepFood: Deep Learning-based Food Image Recognition for Computer-aided Dietary Assessment**

The last paper that I will look at, oriented around using a convolutional neural network for food image recognition, focused on developing a dietary assessment application for use on a smartphone. They used the UEC-256 and Food-101 dataset for their experiments and achieved impressive results.

They used a convolutional neural network but "with a few major optimizations, such as optimized model and an optimized convolution technique" Liu et al. [11]. They used the Inception module for their CNN. After the inception module was complete, they made the GoogleNet by combining modules. In total, the network had 22 layers.

They achieved the results shown in 2.1.

Table 2.1: DeepFood Results

	Top-1	Top-5
UEC-256	54.7%	81.5%
UEC-100	76.3%	94.6%
Food-101	77.4%	93.7%
UEC-256 With Bounding Box	63.8%	87.2%
UEC-100 With Bounding Box	77.2%	94.8%

## 2.8 Convolutional Neural Networks - Extensions

### Region Based Convolutional Neural Networks

Ross Girshik and other contributors had some very positive results in the area of object detection using region based convolutional neural networks. There were four iterations of papers based on this work by Ross and groups in UC Berkley, Microsoft and Facebook. A PHD student at the time of Ross's first paper also completed his dissertation on the subject. I will analyse this papers, their results (2.2) and the changes made through each iteration.

#### RCNN

In the first paper written by Ross Girshik, while researching at UC Berkeley, focused on two main insights. These were that "one can apply high-capacity convolutional neural networks (CNNs) to bottom-up region proposals in order to localize and segment objects" and that "when training data is scarce, supervised pre-training for an auxiliary task, followed by domain-specific fine-tuning, yields a significant performance boost" Girshick et al. [5].

The system that they developed followed these steps:

- Take image as input
- Extract approximately 2000 region proposals from the image

- Compute fixed length vectors of features for the regions using a convolutional neural network
- Use a Support Vector Machine (SVM) to classify these regions
- Bounding box regression for final region proposals

This system utilised selective search to gather these region proposals but they mention that a sliding-window detector is also an option. Ross Girshik and his team used the open source Caffe CNN library for this system. The system is quite efficient and scalable. It is scalable because of the fixed length vector of features which will remain constant regardless of inputs and additional outputs.

The team evaluated their results on a few metrics and test sets as seen in 2.2.

## **Fast RCNN**

Ross Girshik's next iteration of work on region based convolution neural networks took place in Microsoft Research. This paper was titled "Fast R-CNN" as it's aim was to decrease training and testing time "while also increasing detection accuracy" Girshick [4].

This paper analyses why RCNN Girshick et al. [5] was slow and therefore how it could be improved. RCNN was classified to be slow because of three main factors:

- There are multiple stages to training as both a CNN and a SVM need to be trained.
- In training of the SVM, each region proposal must be written to disk and is therefore expensive.
- Object detection takes 47s per image Girshick [4].

Due to these problems with RCNN, a new algorithm, titled Fast RCNN was proposed. The architecture is as follows. An image is taken as input along



with a proposals for regions. The image is pushed through convolutional and pooling layers (using max pooling). A fixed-length vector of features is then extracted from each region proposal. These vectors are inputted to fully connected layers for bounding box location prediction Girshick [4].

At detection time, a pass through of the net is all that is needed so this runtime is significantly less than RCNN.

## **Faster RCNN**

Due to the success of RCNN and Fast RCNN, Faster RCNN was introduced to combat the problem of region proposal computation Ren et al. [16].

The architecture for this system comprises of two modules. These consist of a convolutional neural network for region proposals (RPN) which the feeds into a Fast RCNN detector. These combine to produce a single neural network for object detection.

Instead of training these networks seperately, the team had to look at how to share layers between the two networks. There were three option available:

- Alternating training whereby RPN is trained, and then used to train Fast RCNN. The Fast RCNN network is then used to initialise RPN and the process is iterated Ren et al. [16]. This paper follows this approach.
- Approximate joint training.
- Non- approximate joint training.

## **Mask RCNN**

The most recent paper on this topic was also written by Ross Girshik while working with Facebook AI Research He et al. [6]. Mask RCNN ”extends Faster RCNN by adding a branch for predicting an object mask in parallel with the existing branch for bounding box regression” He et al. [6].

Table 2.2: Results from Region Based CNN Research

	VOC07	VOC10	VOC11	VOC12	COCO15	COCO16
RCNN	58.5%	53.7%	47.9%	N/A	N/A	N/A
Fast RCNN	70.0%	68.8%	N/A	68.4%	N/A	N/A
Faster RCNN	78.8%	N/A	N/A	75.9%	42.7%	N/A
Mask RCNN	N/A	N/A	N/A	N/A	N/A	63.1%

Mask RCNN has two modules, similar to Faster RCNN, where the first module is the Region Proposal Network. In the second module, in parallel to classification, a binary mask is outputted for each region. Bounding box regression and classification are done in parallel.

## 2.9 Image Segmentation

### Fully Convolutional Neural Networks for Semantic Segmentation

There has been a very interesting paper from UC Berkeley focused on using Full Convolutional Networks for semantic segmentation Shelhamer, Long, and Darrell [17]. Fully Convolutional Networks (FCN) do not have any fully connected layers. They are replaced with more filtering layers. Nvidia Digits have a semantic segmentation implementation based off the work of this paper.

They took this approach because "feedforward computation and backpropagation are much more efficient when computer layer-by-layer over an entire image instead of independently patch-by-patch" Shelhamer, Long, and Darrell [17]. This was also because they were focused on object detection. Normal classifiers do not work very well when they are to classify more than one subject in an image and image segmentation was a way to solve this.

There are a set of steps you can follow to turn a CNN into a FCN for semantic segmentation as follows ie. change to a convolutional layer from a fully connected one:

Table 2.3: FCN Results Shelhamer, Long, and Darrell [17]

	FCN
VOC11 mean IU	62.7
VOC12 mean IU	62.2
PASCAL VOC10 pixel acc.	67.0
PASCAL VOC10 mean acc.	50.7
PASCAL VOC10 mean IU	37.8
PASCAL VOC10 f.w. IU	52.5

- The size of the filters must be set to the size of the input layers.
- For every neuron in the fully connected layer, have a filter.

## Segmentation

### Graph Based Segmentation

Graph cut segmentation has been used extensively in image segmentation. OpenCV has an implementation of a graph cut algorithm called grabcut which has been used to segment food on occasion Pouladzadeh, Shirmohammadi, and Yassine [15].

According to Pouladzadeh, Shirmohammadi, and Yassine [15], "Graph cut based method is well-known to be efficient, robust, and capable of finding the best contour of objects in an image, suggesting it to be a good method for separating food portions in a food image for calorie measurement". Along with the graph cut segmentation algorithm, this research team also used color and texture segmentation. Gabor filters were used to measure texture features Pouladzadeh, Shirmohammadi, and Yassine [15]. When color and texture segmentation was applied, the method came into difficulty with mixed foods but by applying graph cut segmentation, clearer object boundaries were shown.

In conclusion, the accuracy of the classification increased when using graph based segmentation rather than color and texture as seen in 2.4.

Table 2.4: Results

	Single Food Portion	Non-mixed Food	Mixed Food
Color and Texture	92.21	N/A	N/A
Graph Based	95 (3% increase)	5% increase	15% increase

### Local Variation Framework

Another paper was published in which the research team attempted to create a food calorie estimation system He et al. [7]. This system would comprise of three steps, image segmentation, image classification and weight estimation. For the segmentation module, a local variation approach to segmentation was performed. Local variation is by which intensity differences between neighbouring pixels is measured. This is a type of graph based segmentation.

The team also carried out some segmentation refinement when the segmentation algorithm had been performed. This consisted of removed small segments (defined as less than 50 pixels) and trying to prevent over and under segmentation. After classification was performed on each segment, segments with low confidence values were removed He et al. [7].

### Conclusion

Both of the above papers of Pouladzadeh, Shirmohammadi, and Yassine [15] and He et al. [7] used a graph based segmentation. The first paper used a more generic implementation while the second used a local variation framework. Both methods provided successful results in the image segmentation process.

## 2.10 Technologies

### Tensorflow

Tensorflow is a deep learning software library for various machine learning paradigms. I will be using tensorflow to create neural networks. Tensorflow has

two utilisations, through a Graphics Processing Unit (GPU) and also through a Central Processing Unit (CPU). GPU computation is recommended for CNN training.

### **Central Processing Unit Computation**

It is quite easy to get tensorflow up and running if you are only using a CPU to train. I have successfully installed tensorflow cpu on both Windows and Ubuntu. For Windows you can download and install using the tensorflow website and on ubuntu you can use apt-get. Once installed, tensorflow can be imported into any python shell or script for use. Tensorflow can also be used in C. There will be various python implementations of neural networks in Chapter 3.

### **Graphics Processing Unit Computation**

For use with a GPU, the set up for tensorflow is a bit more complicated. Firstly you use check that the GPU in your machine is compatible for CUDA 8.0 using the NVIDIA website. If your GPU is compatible, you must install CUDA after signing up as an NVIDIA developer. CUDA 8.0 is compatible with tensorflow. You also need to install cudnn6. The NVIDIA website contains tutorials to install these. Once these are installed, download and install tensorflow-gpu. This can be imported into python similar to CPU computation.

## **2.11 Evaluating the Output**

There are various different metrics that can be used for evaluating the output of a classifier or segmentation algorithm, many of which we have seen in previous sections. I will analyse a few of these evaluations of results so that I can use them as a reference to apply to my own experiments. I will also look into some problems associated with evaluating models.

## Research into Diagnosing Errors in Object Detectors

There has been some research into the question of how to evaluate object detectors, one of which I will discuss in detail Hoiem, Chodpathumwan, and Dai [8]. This paper in question ”analyzes the influences of object characteristics on detection performance and the frequency and impact of different types of false positives” Hoiem, Chodpathumwan, and Dai [8]. They found that there were many effects that had influence on detectors as follows:

- occlusion
- size
- aspect ratio
- visibility of parts
- viewpoint
- localization error
- confusion with semantically similar objects
- confusion with other labeled objects
- confusion with background

The research team goes on to analyse false positives in object detectors. Localization errors were a large factor. This is where bounding boxes overlap to other objects in the image. Confusion with similar objects had a large influence on false positives also by which, for example, a dog detector had a high score for a cat Hoiem, Chodpathumwan, and Dai [8]. Confusion with dissimilar objects and confusion with background are the categories of the rest of the false positives they measured.

In conclusion the team would that ”Most false positives are due to misaligned detection windows or confusion with similar objects” Hoiem, Chodpathumwan, and Dai [8]. They had some recommendations towards improves detectors as follows:

- Smaller objects are less likely to be detected
- Localization could be improved
- Reduce confusion with similar categories
- Robustness to object variation
- More detailed analysis

## **Detection Average Precision**

The average detection accuracy of a system. See A.1.

## **Mean Average Precision**

The mean accuracy of a system across all results. See A.2.

## **Distribution of top-ranked false positives**

This metric is used to tell where most errors occur when false positives are evident. These errors are broken down into four categories of localization, similar objects, background confusion and others. See A.3.

## **Segmentation Mean Accuracy**

This is the mean accuracy of segmentation. See A.4.

## **Per-category segmentation accuracy**

This metric measures the accuracy of segmentation at a category level. See A.5.

## **Per-class segmentation accuracy**

The accuracy of segmentation at a class level is analysed. See A.6.

## **Top-1 and Top-5 Accuracy**

When a classifier is given an image it normally responds with a list of predictions along with a decimal representation of the likelihood that it is of that class. The Top-1 accuracy is the top valued prediction and Top-5 accuracy is the top 5 predictions.



# Chapter 3

## Experiments

### 3.1 Experiment 1

Overview

Network Architecture

Dataset

API's

Script

```
In [1]: import tensorflow as tf
import input_data
```

```
In [2]: mnist = input_data.read_data_sets("MNIST_data/", one_hot=True)
```

```
Extracting MNIST_data/train-images-idx3-ubyte.gz
Extracting MNIST_data/train-labels-idx1-ubyte.gz
Extracting MNIST_data/t10k-images-idx3-ubyte.gz
Extracting MNIST_data/t10k-labels-idx1-ubyte.gz
```

## Helper Functions

```
In [3]: #INIT WEIGHTS
def init_weights(shape):
    init_random_dist = tf.truncated_normal(shape, stddev = 0.1)
    return tf.Variable(init_random_dist)
```

```
In [4]: #INIT BIAS
def init_bias(shape):
    init_bias_vals = tf.constant(0.1, shape = shape)
    return tf.Variable(init_bias_vals)
```

```
In [5]: #CONV2D
def conv2d(x, W):
    #x -> [batch, H, W, Channels]
    #W -> [filterH, filterW, ChannelsIn, ChannelsOut]
    return tf.nn.conv2d(x, W, strides = [1,1,1,1], padding = 'SAME')
```

```
In [6]: #POOLING
def max_pool_2by2(x):
    #x -> [batch, H, W, Channels]
    return tf.nn.max_pool(x, ksize = [1,2,2,1], strides = [1,2,2,1], padding = 'SAME')
```

```
In [7]: #CONVOLUTIONAL LAYER
def convolutional_layer(input_x, shape):
    W = init_weights(shape)
    b = init_bias([shape[3]])
    return tf.nn.relu(conv2d(input_x, W) + b)
```

```
In [8]: #NORMAL (FULLY CONNECTED)
def normal_full_layer(input_layer, size):
    input_size = int(input_layer.get_shape()[1])
    W = init_weights([input_size, size])
    b = init_bias([size])
    return tf.matmul(input_layer, W) + b
```

## Placeholders

```
In [9]: x = tf.placeholder(tf.float32, shape = [None, 784])
```

```
In [10]: y_true = tf.placeholder(tf.float32, shape = [None, 10])
```

### Create Layers

```
In [11]: x_image = tf.reshape(x, [-1,28,28,1])
```

```
In [12]: #32 features for every 5 x 5 patch with 1(gray scale)  
        convo_1 = convolutional_layer(x_image, shape = [5,5,1,32])  
        convo_1_pooling = max_pool_2by2(convo_1)
```

```
In [13]: convo_2 = convolutional_layer(convo_1_pooling, shape = [5,5,32,64])  
        convo_2_pooling = max_pool_2by2(convo_2)
```

```
In [14]: convo_2_flat = tf.reshape(convo_2_pooling, [-1,7*7*64])  
        full_layer_one = tf.nn.relu(normal_full_layer(convo_2_flat, 1024))
```

```
In [15]: #DROPOUT  
        hold_prob = tf.placeholder(tf.float32)  
        full_one_dropout = tf.nn.dropout(full_layer_one, keep_prob= hold_prob)
```

```
In [16]: y_pred = normal_full_layer(full_one_dropout, 10)
```

```
In [17]: #LOSS FUNCTION  
        cross_entropy = tf.reduce_mean(tf.nn.softmax_cross_entropy_with_logits(labels = y_true,
```

```
In [18]: #OPTIMIZER  
        optimizer = tf.train.AdamOptimizer(learning_rate = 0.001)  
        train = optimizer.minimize(cross_entropy)
```

```
In [19]: init = tf.global_variables_initializer()
```

```
In [20]: steps = 1000
```

```
with tf.Session() as sess:  
    sess.run(init)  
  
    for i in range(steps):  
        batch_x, batch_y = mnist.train.next_batch(50)  
        sess.run(train, feed_dict = {x:batch_x, y_true:batch_y, hold_prob:0.5})  
        if i%100 == 0:  
            print("ON STEP: {}".format(i))  
            print("ACCURACY: ")  
            match = tf.equal(tf.argmax(y_pred, 1), tf.argmax(y_true, 1))  
            acc = tf.reduce_mean(tf.cast(match, tf.float32))  
            print(sess.run(acc, feed_dict = {x:mnist.test.images, y_true:mnist.test.labels}))  
            print('\n')
```

```
ON STEP: 0  
ACCURACY:  
0.101
```

ON STEP: 100  
ACCURACY:  
0.94

ON STEP: 200  
ACCURACY:  
0.9603

ON STEP: 300  
ACCURACY:  
0.971

ON STEP: 400  
ACCURACY:  
0.9717

ON STEP: 500  
ACCURACY:  
0.9759

ON STEP: 600  
ACCURACY:  
0.9772

ON STEP: 700  
ACCURACY:  
0.9811

ON STEP: 800  
ACCURACY:  
0.9793

ON STEP: 900  
ACCURACY:  
0.973

Results

Analysis

## 3.2 Experiment 2

Overview

Network Architecture

Dataset

API's

Script

```
In [1]: from __future__ import division, print_function, absolute_import
```

```
# Import MNIST data
from tensorflow.examples.tutorials.mnist import input_data
mnist = input_data.read_data_sets("/tmp/data/", one_hot=False)

import tensorflow as tf
import matplotlib.pyplot as plt
import matplotlib.image as mpimg
import numpy as np
import PIL
```

```
Extracting /tmp/data/train-images-idx3-ubyte.gz
Extracting /tmp/data/train-labels-idx1-ubyte.gz
Extracting /tmp/data/t10k-images-idx3-ubyte.gz
Extracting /tmp/data/t10k-labels-idx1-ubyte.gz
```

```
In [2]: # Training Parameters
learning_rate = 0.001
num_steps = 5000
batch_size = 128
```

```
# Network Parameters
num_input = 784 # MNIST data input (img shape: 28*28)
num_classes = 10 # MNIST total classes (0-9 digits)
dropout = 0.25 # Dropout, probability to drop a unit
```

```
In [3]: # Create the neural network
```

```
def conv_net(x_dict, n_classes, dropout, reuse, is_training):

    # Define a scope for reusing the variables
    with tf.variable_scope('ConvNet', reuse=reuse):
        # TF Estimator input is a dict, in case of multiple inputs
        x = x_dict['images']

        # MNIST data input is a 1-D vector of 784 features (28*28 pixels)
        # Reshape to match picture format [Height x Width x Channel]
        # Tensor input become 4-D: [Batch Size, Height, Width, Channel]
        x = tf.reshape(x, shape=[-1, 28, 28, 1])

        # Convolution Layer with 32 filters and a kernel size of 5
```

```

conv1 = tf.layers.conv2d(x, 32, 5, activation=tf.nn.relu)
# Max Pooling (down-sampling) with strides of 2 and kernel size of 2
conv1 = tf.layers.max_pooling2d(conv1, 2, 2)

# Convolution Layer with 64 filters and a kernel size of 3
conv2 = tf.layers.conv2d(conv1, 64, 3, activation=tf.nn.relu)
# Max Pooling (down-sampling) with strides of 2 and kernel size of 2
conv2 = tf.layers.max_pooling2d(conv2, 2, 2)

# Flatten the data to a 1-D vector for the fully connected layer
fc1 = tf.contrib.layers.flatten(conv2)

# Fully connected layer (in tf contrib folder for now)
fc1 = tf.layers.dense(fc1, 1024)
# Apply Dropout (if is_training is False, dropout is not applied)
fc1 = tf.layers.dropout(fc1, rate=dropout, training=is_training)

# Output layer, class prediction
out = tf.layers.dense(fc1, n_classes)

return out

```

In [4]: # Define the model function (following TF Estimator Template)

```

def model_fn(features, labels, mode):

    # Build the neural network
    # Because Dropout have different behavior at training and prediction time, we
    # need to create 2 distinct computation graphs that still share the same weights.
    logits_train = conv_net(features, num_classes, dropout, reuse=False, is_training=True)
    logits_test = conv_net(features, num_classes, dropout, reuse=True, is_training=False)

    # Predictions
    pred_classes = tf.argmax(logits_test, axis=1)
    pred_probab = tf.nn.softmax(logits_test)

    # If prediction mode, early return
    if mode == tf.estimator.ModeKeys.PREDICT:
        return tf.estimator.EstimatorSpec(mode, predictions=pred_classes)

    # Define loss and optimizer
    loss_op = tf.reduce_mean(tf.nn.sparse_softmax_cross_entropy_with_logits(
        logits=logits_train, labels=tf.cast(labels, dtype=tf.int32)))
    optimizer = tf.train.AdamOptimizer(learning_rate=learning_rate)
    train_op = optimizer.minimize(loss_op, global_step=tf.train.get_global_step())

    # Evaluate the accuracy of the model
    acc_op = tf.metrics.accuracy(labels=labels, predictions=pred_classes)

```

```

# TF Estimators requires to return a EstimatorSpec, that specify
# the different ops for training, evaluating, ...
estim_specs = tf.estimator.EstimatorSpec(
    mode=mode,
    predictions=pred_classes,
    loss=loss_op,
    train_op=train_op,
    eval_metric_ops={'accuracy': acc_op})

return estim_specs

```

In [5]: # Build the Estimator

```
model = tf.estimator.Estimator(model_fn)
```

INFO:tensorflow:Using default config.

WARNING:tensorflow:Using temporary folder as model directory: C:\Users\tom13\AppData\Local\Temp\

INFO:tensorflow:Using config: {'\_keep\_checkpoint\_every\_n\_hours': 10000, '\_task\_type': 'worker',

In [6]: # Define the input function for training

```

input_fn = tf.estimator.inputs.numpy_input_fn(
    x={'images': mnist.train.images}, y=mnist.train.labels,
    batch_size=batch_size, num_epochs=None, shuffle=True)

```

# Train the Model

```
model.train(input_fn, steps=num_steps)
```

INFO:tensorflow:Create CheckpointSaverHook.

INFO:tensorflow:Saving checkpoints for 1 into C:\Users\tom13\AppData\Local\Temp\tmp97az0nju\mode

INFO:tensorflow:step = 1, loss = 2.31252

INFO:tensorflow:global\_step/sec: 62.4813

INFO:tensorflow:step = 101, loss = 0.165548 (1.602 sec)

INFO:tensorflow:global\_step/sec: 67.4517

INFO:tensorflow:step = 201, loss = 0.149662 (1.485 sec)

INFO:tensorflow:global\_step/sec: 67.1394

INFO:tensorflow:step = 301, loss = 0.208731 (1.487 sec)

INFO:tensorflow:global\_step/sec: 67.1479

INFO:tensorflow:step = 401, loss = 0.0409326 (1.490 sec)

INFO:tensorflow:global\_step/sec: 68.0719

INFO:tensorflow:step = 501, loss = 0.0213496 (1.470 sec)

INFO:tensorflow:global\_step/sec: 68.771

INFO:tensorflow:step = 601, loss = 0.037192 (1.452 sec)

INFO:tensorflow:global\_step/sec: 67.3723

INFO:tensorflow:step = 701, loss = 0.0822325 (1.485 sec)

INFO:tensorflow:global\_step/sec: 68.6787

INFO:tensorflow:step = 801, loss = 0.0128403 (1.455 sec)

INFO:tensorflow:global\_step/sec: 68.8452

INFO:tensorflow:step = 901, loss = 0.0358137 (1.455 sec)

INFO:tensorflow:global\_step/sec: 68.75

INFO:tensorflow:step = 1001, loss = 0.0192664 (1.453 sec)



INFO:tensorflow:global\_step/sec: 68.5087  
INFO:tensorflow:step = 1101, loss = 0.00774879 (1.459 sec)  
INFO:tensorflow:global\_step/sec: 67.7028  
INFO:tensorflow:step = 1201, loss = 0.0851327 (1.477 sec)  
INFO:tensorflow:global\_step/sec: 67.7039  
INFO:tensorflow:step = 1301, loss = 0.0553374 (1.479 sec)  
INFO:tensorflow:global\_step/sec: 64.6995  
INFO:tensorflow:step = 1401, loss = 0.0355084 (1.547 sec)  
INFO:tensorflow:global\_step/sec: 67.4277  
INFO:tensorflow:step = 1501, loss = 0.0163228 (1.481 sec)  
INFO:tensorflow:global\_step/sec: 65.4895  
INFO:tensorflow:step = 1601, loss = 0.00959715 (1.528 sec)  
INFO:tensorflow:global\_step/sec: 67.7365  
INFO:tensorflow:step = 1701, loss = 0.00657101 (1.477 sec)  
INFO:tensorflow:global\_step/sec: 68.2635  
INFO:tensorflow:step = 1801, loss = 0.00808421 (1.464 sec)  
INFO:tensorflow:global\_step/sec: 68.3004  
INFO:tensorflow:step = 1901, loss = 0.00447089 (1.465 sec)  
INFO:tensorflow:global\_step/sec: 66.2228  
INFO:tensorflow:step = 2001, loss = 0.00395705 (1.510 sec)  
INFO:tensorflow:global\_step/sec: 67.0613  
INFO:tensorflow:step = 2101, loss = 0.0143454 (1.492 sec)  
INFO:tensorflow:global\_step/sec: 66.8144  
INFO:tensorflow:step = 2201, loss = 0.00251255 (1.496 sec)  
INFO:tensorflow:global\_step/sec: 67.2051  
INFO:tensorflow:step = 2301, loss = 0.00249033 (1.487 sec)  
INFO:tensorflow:global\_step/sec: 67.9835  
INFO:tensorflow:step = 2401, loss = 0.0498065 (1.470 sec)  
INFO:tensorflow:global\_step/sec: 68.2512  
INFO:tensorflow:step = 2501, loss = 0.00226328 (1.467 sec)  
INFO:tensorflow:global\_step/sec: 67.8173  
INFO:tensorflow:step = 2601, loss = 0.000694454 (1.473 sec)  
INFO:tensorflow:global\_step/sec: 67.6461  
INFO:tensorflow:step = 2701, loss = 0.0344697 (1.480 sec)  
INFO:tensorflow:global\_step/sec: 67.8946  
INFO:tensorflow:step = 2801, loss = 0.00430426 (1.472 sec)  
INFO:tensorflow:global\_step/sec: 69.0382  
INFO:tensorflow:step = 2901, loss = 0.033511 (1.447 sec)  
INFO:tensorflow:global\_step/sec: 67.9999  
INFO:tensorflow:step = 3001, loss = 0.00375906 (1.470 sec)  
INFO:tensorflow:global\_step/sec: 68.4807  
INFO:tensorflow:step = 3101, loss = 0.00979484 (1.462 sec)  
INFO:tensorflow:global\_step/sec: 67.3055  
INFO:tensorflow:step = 3201, loss = 0.0192151 (1.488 sec)  
INFO:tensorflow:global\_step/sec: 68.755  
INFO:tensorflow:step = 3301, loss = 0.00091159 (1.452 sec)  
INFO:tensorflow:global\_step/sec: 68.2027  
INFO:tensorflow:step = 3401, loss = 0.00265687 (1.466 sec)

```

INFO:tensorflow:global_step/sec: 66.981
INFO:tensorflow:step = 3501, loss = 0.00322506 (1.493 sec)
INFO:tensorflow:global_step/sec: 67.9271
INFO:tensorflow:step = 3601, loss = 0.00257395 (1.475 sec)
INFO:tensorflow:global_step/sec: 68.4105
INFO:tensorflow:step = 3701, loss = 0.0113146 (1.459 sec)
INFO:tensorflow:global_step/sec: 68.9221
INFO:tensorflow:step = 3801, loss = 0.0119776 (1.453 sec)
INFO:tensorflow:global_step/sec: 68.3297
INFO:tensorflow:step = 3901, loss = 0.000739706 (1.464 sec)
INFO:tensorflow:global_step/sec: 67.7096
INFO:tensorflow:step = 4001, loss = 0.00202849 (1.474 sec)
INFO:tensorflow:global_step/sec: 68.4309
INFO:tensorflow:step = 4101, loss = 0.00123262 (1.462 sec)
INFO:tensorflow:global_step/sec: 68.589
INFO:tensorflow:step = 4201, loss = 0.0213804 (1.460 sec)
INFO:tensorflow:global_step/sec: 68.3938
INFO:tensorflow:step = 4301, loss = 0.00818979 (1.463 sec)
INFO:tensorflow:global_step/sec: 68.1871
INFO:tensorflow:step = 4401, loss = 0.0192472 (1.465 sec)
INFO:tensorflow:global_step/sec: 67.4095
INFO:tensorflow:step = 4501, loss = 0.009068 (1.483 sec)
INFO:tensorflow:global_step/sec: 68.0209
INFO:tensorflow:step = 4601, loss = 0.00785339 (1.470 sec)
INFO:tensorflow:global_step/sec: 68.466
INFO:tensorflow:step = 4701, loss = 0.00145256 (1.461 sec)
INFO:tensorflow:global_step/sec: 68.8636
INFO:tensorflow:step = 4801, loss = 0.0157578 (1.452 sec)
INFO:tensorflow:global_step/sec: 68.8196
INFO:tensorflow:step = 4901, loss = 0.0353847 (1.454 sec)
INFO:tensorflow:Saving checkpoints for 5000 into C:\Users\tom13\AppData\Local\Temp\tmp97az0nju\m
INFO:tensorflow:Loss for final step: 0.024679.

```

```

Out[6]: <tensorflow.python.estimator.estimator.Estimator at 0x226833dcd30>

```

```

In [7]: # Evaluate the Model
        # Define the input function for evaluating
        input_fn = tf.estimator.inputs.numpy_input_fn(
            x={'images': mnist.test.images}, y=mnist.test.labels,
            batch_size=batch_size, shuffle=False)
        # Use the Estimator 'evaluate' method
        model.evaluate(input_fn)

```

```

INFO:tensorflow:Starting evaluation at 2018-01-21-16:56:42
INFO:tensorflow:Restoring parameters from C:\Users\tom13\AppData\Local\Temp\tmp97az0nju\model.ck
INFO:tensorflow:Finished evaluation at 2018-01-21-16:56:43
INFO:tensorflow:Saving dict for global step 5000: accuracy = 0.989, global_step = 5000, loss = 0


```

```
Out[7]: {'accuracy': 0.98900002, 'global_step': 5000, 'loss': 0.052190915}
```


```
In [8]: # Predict single images
n_images = 5
# Get images from test set
test_images = mnist.test.images[:n_images]
# Prepare the input data
input_fn = tf.estimator.inputs.numpy_input_fn(
    x={'images': test_images}, shuffle=False)
# Use the model to predict the images class
preds = list(model.predict(input_fn))

# Display
for i in range(n_images):
    plt.imshow(np.reshape(test_images[i], [28, 28]), cmap='gray')
    plt.show()
    print("Model prediction:", preds[i])
```


```
INFO:tensorflow:Restoring parameters from C:\Users\tom13\AppData\Local\Temp\tmp97az0nju\model.ck
```

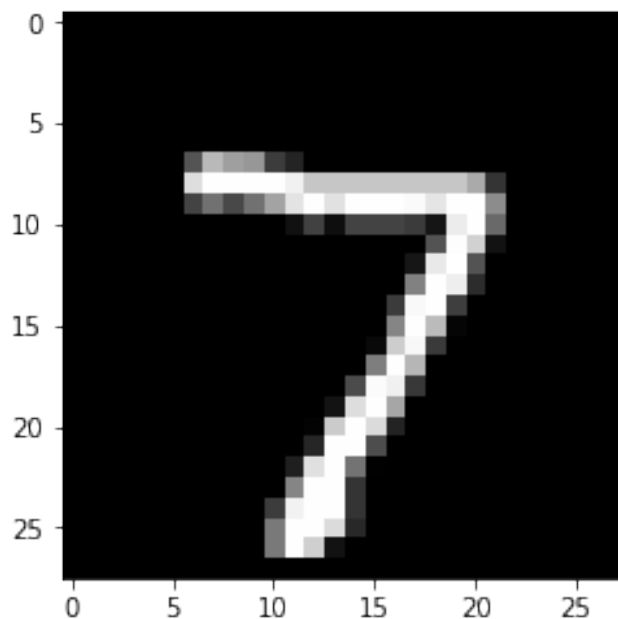


```
Model prediction: 7
```

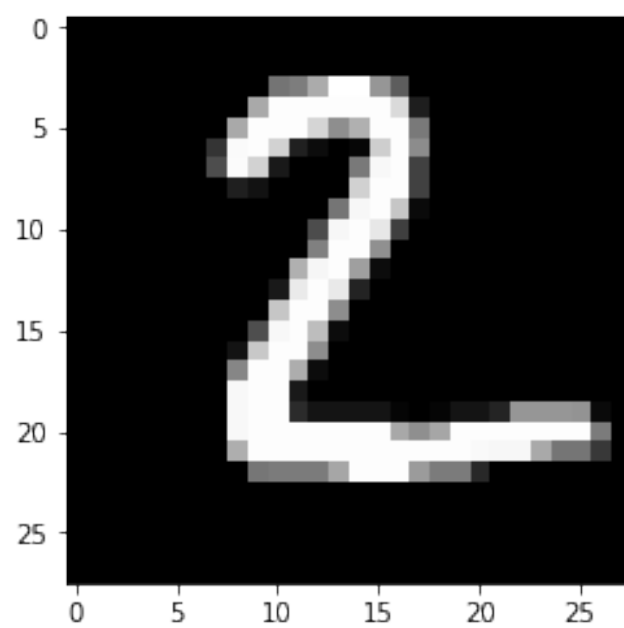


Model prediction: 2

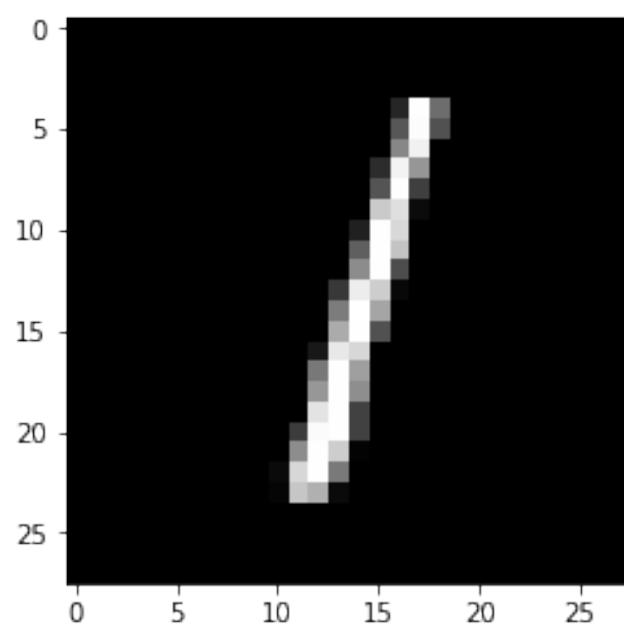

Model prediction: 1

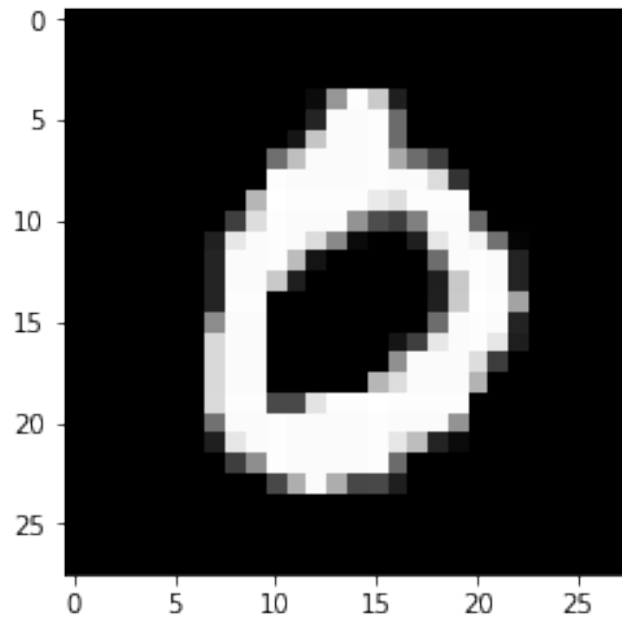

Model prediction: 0

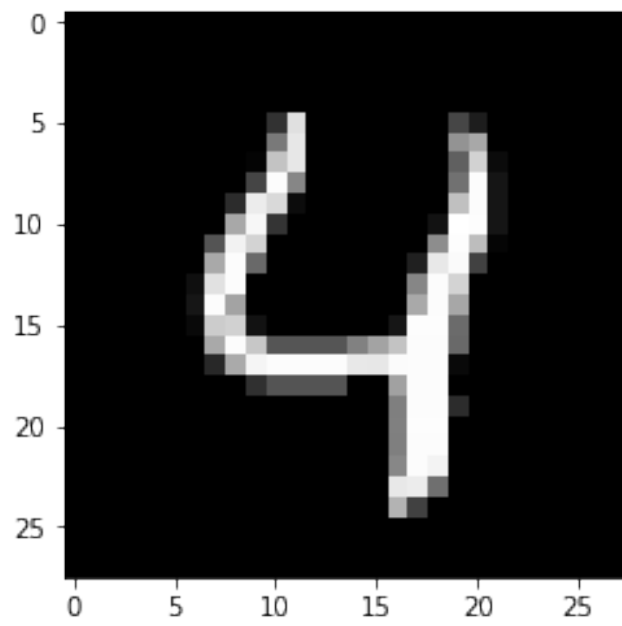

Model prediction: 4

Results

Analysis

### 3.3 Experiment 3

Overview

Network Architecture

Dataset

API's

Script

## 0.1 CNN-Project-Exercise

We'll be using the CIFAR-10 dataset, which is very famous dataset for image recognition!

The CIFAR-10 dataset consists of 60000 32x32 colour images in 10 classes, with 6000 images per class. There are 50000 training images and 10000 test images.

The dataset is divided into five training batches and one test batch, each with 10000 images. The test batch contains exactly 1000 randomly-selected images from each class. The training batches contain the remaining images in random order, but some training batches may contain more images from one class than another. Between them, the training batches contain exactly 5000 images from each class.

**0.1.1 Follow the Instructions in Bold, if you get stuck somewhere, view the solutions video!**  
**Most of the challenge with this project is actually dealing with the data and its dimensions, not from setting up the CNN itself!**

## 0.2 Step 0: Get the Data

*\*\* Note: If you have trouble with this just watch the solutions video. This doesn't really have anything to do with the exercise, its more about setting up your data. Please make sure to watch the solutions video before posting any QA questions. \*\**

**\*\* Download the data for CIFAR from here: <https://www.cs.toronto.edu/~kriz/cifar.html> \*\***

**Specifically the CIFAR-10 python version link: <https://www.cs.toronto.edu/~kriz/cifar-10-python.tar.gz>**

**\*\* Remember the directory you save the file in! \*\***

```
In [1]: # Put file path as a string here
        CIFAR_DIR = 'C:/Users/tom13/jupyter/FYP/CIFAR-10/'
```

The archive contains the files data\_batch\_1, data\_batch\_2, ..., data\_batch\_5, as well as test\_batch. Each of these files is a Python "pickled" object produced with cPickle.

**\*\* Load the Data. Use the Code Below to load the data: \*\***

```
In [2]: def unpickle(file):
        import pickle
        with open(file, 'rb') as fo:
            cifar_dict = pickle.load(fo, encoding='bytes')
        return cifar_dict
```

```
In [3]: dirs = ['batches.meta', 'data_batch_1', 'data_batch_2', 'data_batch_3', 'data_batch_4', 'data_batch_5', 'test_batch']
```

```
In [4]: all_data = [0,1,2,3,4,5,6]
```

```
In [5]: for i,direc in zip(all_data,dirs):
        all_data[i] = unpickle(CIFAR_DIR+direc)
```



```
In [6]: batch_meta = all_data[0]
        data_batch1 = all_data[1]
        data_batch2 = all_data[2]
        data_batch3 = all_data[3]
        data_batch4 = all_data[4]
        data_batch5 = all_data[5]
        test_batch = all_data[6]
```

```
In [7]: batch_meta
```

```
Out[7]: {b'label_names': [b'airplane',
                          b'automobile',
                          b'bird',
                          b'cat',
                          b'deer',
                          b'dog',
                          b'frog',
                          b'horse',
                          b'ship',
                          b'truck'],
         b'num_cases_per_batch': 10000,
         b'num_vis': 3072}
```

**\*\* Why the 'b's in front of the string? \*\*** Bytes literals are always prefixed with 'b' or 'B'; they produce an instance of the bytes type instead of the str type. They may only contain ASCII characters; bytes with a numeric value of 128 or greater must be expressed with escapes.

<https://stackoverflow.com/questions/6269765/what-does-the-b-character-do-in-front-of-a-string-literal>

```
In [8]: data_batch1.keys()
```

```
Out[8]: dict_keys([b'data', b'batch_label', b'labels', b'filenames'])
```

Loaded in this way, each of the batch files contains a dictionary with the following elements:

- \* data -- a 10000x3072 numpy array of uint8s. Each row of the array stores a 32x32 colour image. The first 1024 entries contain the red channel values, the next 1024 the green, and the final 1024 the blue. The image is stored in row-major order, so that the first 32 entries of the array are the red channel values of the first row of the image.
- \* labels -- a list of 10000 numbers in the range 0-9. The number at index *i* indicates the label of the *i*th image in the array data.

The dataset contains another file, called batches.meta. It too contains a Python dictionary object. It has the following entries:

- label\_names -- a 10-element list which gives meaningful names to the numeric labels in the labels array described above. For example, label\_names[0] == "airplane", label\_names[1] == "automobile", etc.

### 0.2.1 Display a single image using matplotlib.

**\*\* Grab a single image from data\_batch1 and display it with plt.imshow(). You'll need to reshape and transpose the numpy array inside the X = data\_batch[b'data'] dictionary entry.\*\***

**\*\* It should end up looking like this: \*\***

```
# Array of all images reshaped and formatted for viewing
X = X.reshape(10000, 3, 32, 32).transpose(0,2,3,1).astype("uint8")
```

```
In [9]: import matplotlib.pyplot as plt
        %matplotlib inline
        import numpy as np
```

```
In [10]: X = data_batch1[b"data"]
```


```
In [11]: X.shape
```

```
Out[11]: (10000, 3072)
```

```
In [12]: X = X.reshape(10000, 3, 32, 32).transpose(0,2,3,1).astype("uint8")
```


```
In [13]: plt.imshow(X[12])
```

```
Out[13]: <matplotlib.image.AxesImage at 0x287f0aa3780>
```

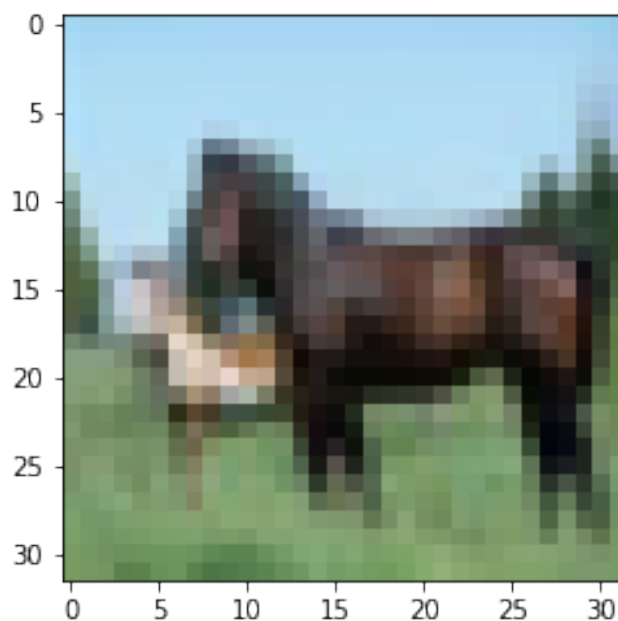


```
In [14]: plt.imshow(X[1])
```

```
Out[14]: <matplotlib.image.AxesImage at 0x287f0b0e390>
```

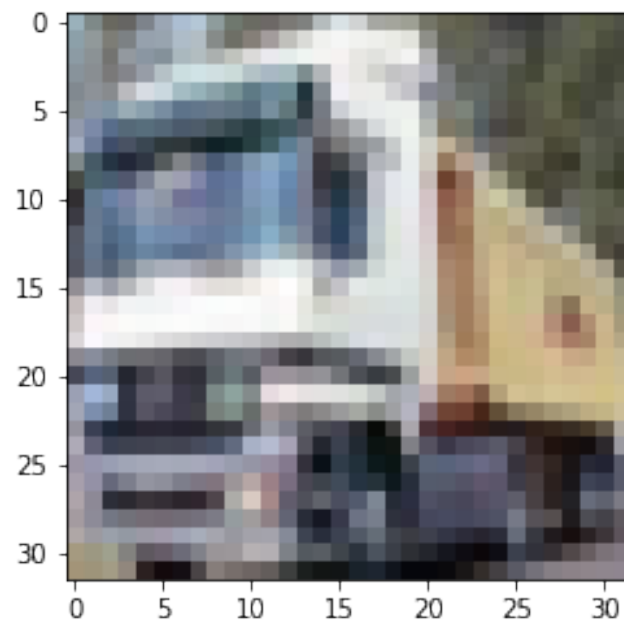

```
In [15]: plt.imshow(X[4])
```

```
Out[15]: <matplotlib.image.AxesImage at 0x287f0b53390>
```

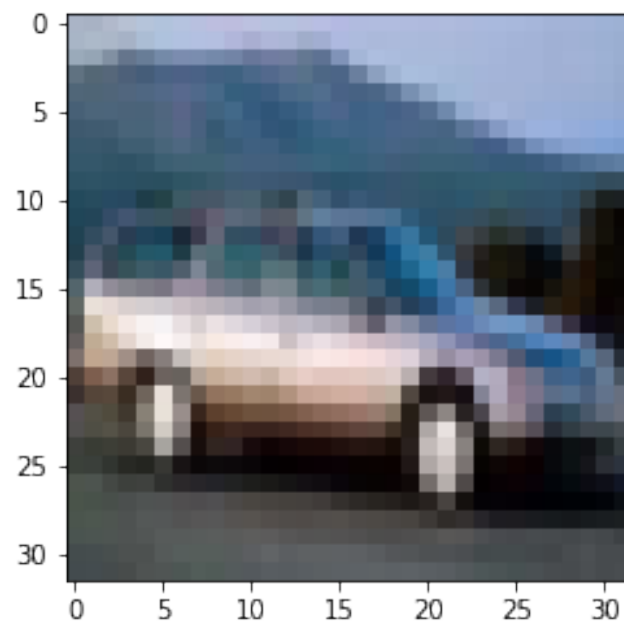

## 1 Helper Functions for Dealing With Data.

**\*\* Use the provided code below to help with dealing with grabbing the next batch once you've gotten ready to create the Graph Session. Can you break down how it works? \*\***

```
In [55]: def one_hot_encode(vec, vals=10):
        '''
        For use to one-hot encode the 10- possible labels
        '''
        n = len(vec)
        out = np.zeros((n, vals))
        out[range(n), vec] = 1
        return out

In [56]: class CifarHelper():

        def __init__(self):
            self.i = 0

            # Grabs a list of all the data batches for training
            self.all_train_batches = [data_batch1,data_batch2,data_batch3,data_batch4,data_
            # Grabs a list of all the test batches (really just one batch)
            self.test_batch = [test_batch]

            # Intialize some empty variables for later on
            self.training_images = None
            self.training_labels = None

            self.test_images = None
            self.test_labels = None

        def set_up_images(self):

            print("Setting Up Training Images and Labels")

            # Vertically stacks the training images
            self.training_images = np.vstack([d[b"data"] for d in self.all_train_batches])
            train_len = len(self.training_images)

            # Reshapes and normalizes training images
            self.training_images = self.training_images.reshape(train_len,3,32,32).transpose(1,2,3,0)
            # One hot Encodes the training labels (e.g. [0,0,0,1,0,0,0,0,0,0])
            self.training_labels = one_hot_encode(np.hstack([d[b"labels"] for d in self.all

            print("Setting Up Test Images and Labels")

            # Vertically stacks the test images
            self.test_images = np.vstack([d[b"data"] for d in self.test_batch])
```

```

test_len = len(self.test_images)

# Reshapes and normalizes test images
self.test_images = self.test_images.reshape(test_len,3,32,32).transpose(0,2,3,1)
# One hot Encodes the test labels (e.g. [0,0,0,1,0,0,0,0,0,0])
self.test_labels = one_hot_encode(np.hstack([d[b"labels"] for d in self.test_images]))

def next_batch(self, batch_size):
    # Note that the 100 dimension in the reshape call is set by an assumed batch size
    x = self.training_images[self.i:self.i+batch_size].reshape(100,32,32,3)
    y = self.training_labels[self.i:self.i+batch_size]
    self.i = (self.i + batch_size) % len(self.training_images)
    return x, y

def next_test_batch(self, batch_size):
    # Note that the 100 dimension in the reshape call is set by an assumed batch size
    x = self.test_images[self.i:self.i+batch_size].reshape(100,32,32,3)
    y = self.test_labels[self.i:self.i+batch_size]
    self.i = (self.i + batch_size) % len(self.test_images)
    return x, y

```

**\*\* How to use the above code: \*\***

```

In [57]: # Before Your tf.Session run these two lines
         ch = CifarHelper()
         ch.set_up_images()

         # During your session to grab the next batch use this line
         #batch = ch.next_batch(100)

```

Setting Up Training Images and Labels  
Setting Up Test Images and Labels

## 1.1 Creating the Model

**\*\* Import tensorflow \*\***

```

In [58]: import tensorflow as tf

In [59]: x = tf.placeholder(tf.float32, shape = [None, 32, 32, 3])
         y_true = tf.placeholder(tf.float32, shape = [None, 10])
         hold_prob = tf.placeholder(tf.float32)

```

### 1.1.1 Helper Functions

**\*\* Grab the helper functions from MNIST with CNN (or recreate them here yourself for a hard challenge!). You'll need: \*\***

- init\_weights
- init\_bias
- conv2d
- max\_pool\_2by2
- convolutional\_layer
- normal\_full\_layer

```
In [60]: def init_weights(shape):
          init_random_dist = tf.truncated_normal(shape, stddev=0.1)
          return tf.Variable(init_random_dist)

          def init_bias(shape):
              init_bias_vals = tf.constant(0.1, shape=shape)
              return tf.Variable(init_bias_vals)

          def conv2d(x, W):
              return tf.nn.conv2d(x, W, strides=[1, 1, 1, 1], padding='SAME')

          def max_pool_2by2(x):
              return tf.nn.max_pool(x, ksize=[1, 2, 2, 1],
                                     strides=[1, 2, 2, 1], padding='SAME')

          def convolutional_layer(input_x, shape):
              W = init_weights(shape)
              b = init_bias([shape[3]])
              return tf.nn.relu(conv2d(input_x, W) + b)

          def normal_full_layer(input_layer, size):
              input_size = int(input_layer.get_shape()[1])
              W = init_weights([input_size, size])
              b = init_bias([size])
              return tf.matmul(input_layer, W) + b
```

### 1.1.2 Create the Layers

**\*\* Create a convolutional layer and a pooling layer as we did for MNIST. Its up to you what the 2d size of the convolution should be, but the last two digits need to be 3 and 32 because of the 3 color channels and 32 pixels. So for example you could use:\*\***

```
convo_1 = convolutional_layer(x, shape=[4,4,3,32])
```

```
In [61]: convo_1 = convolutional_layer(x, shape = [4, 4, 3, 32])
          convo_1_pooling = max_pool_2by2(convo_1)
```

**\*\* Create the next convolutional and pooling layers. The last two dimensions of the convo\_2 layer should be 32,64 \*\***

```
In [62]: convo_2 = convolutional_layer(convo_1_pooling, shape = [4, 4, 32, 64])
          convo_2_pooling = max_pool_2by2(convo_2)
```

**\*\* Now create a flattened layer by reshaping the pooling layer into [-1,8 \* 8 \* 64] or [-1,4096] \*\***

```
In [63]: convo_2_flat = tf.reshape(convo_2_pooling, [-1, 4096])
```

**\*\* Create a new full layer using the normal\_full\_layer function and passing in your flattened convolutional 2 layer with size=1024. (You could also choose to reduce this to something like 512)\*\***

```
In [64]: full_layer_one = tf.nn.relu(normal_full_layer(convo_2_flat, 1024))
```

**\*\* Now create the dropout layer with tf.nn.dropout, remember to pass in your hold\_prob placeholder. \*\***

```
In [65]: full_one_dropout = tf.nn.dropout(full_layer_one, keep_prob = hold_prob)
```

**\*\* Finally set the output to y\_pred by passing in the dropout layer into the normal\_full\_layer function. The size should be 10 because of the 10 possible labels\*\***

```
In [66]: y_pred = normal_full_layer(full_one_dropout, 10)
```

### 1.1.3 Loss Function

**\*\* Create a cross\_entropy loss function \*\***

```
In [67]: cross_entropy = tf.reduce_mean(tf.nn.softmax_cross_entropy_with_logits(labels = y_true,
```

### 1.1.4 Optimizer

**\*\* Create the optimizer using an Adam Optimizer. \*\***

```
In [68]: optimizer = tf.train.AdamOptimizer(learning_rate = 0.001)
         train = optimizer.minimize(cross_entropy)
```

**\*\* Create a variable to initialize all the global tf variables. \*\***

```
In [69]: init = tf.global_variables_initializer()
```

## 1.2 Graph Session

**\*\* Perform the training and test print outs in a Tf session and run your model! \*\***

```
In [73]: with tf.Session() as sess:
         sess.run(tf.global_variables_initializer())

         for i in range(10000):
             batch = ch.next_batch(100)
             sess.run(train, feed_dict={x: batch[0], y_true: batch[1], hold_prob: 0.5})

         # PRINT OUT A MESSAGE EVERY 100 STEPS
         if i%1000 == 0:
```

```

# Test the Train Model
matches = tf.equal(tf.argmax(y_pred,1),tf.argmax(y_true,1))

acc = tf.reduce_mean(tf.cast(matches,tf.float32))
testSet = ch.next_test_batch(100)
print('Accuracy: ')
print(sess.run(acc,feed_dict={x:testSet[0] ,y_true:testSet[1],hold_prob:1.0}
print('\n')

```

Accuracy:  
0.08

Accuracy:  
0.58

Accuracy:  
0.66

Accuracy:  
0.65

Accuracy:  
0.69

Accuracy:  
0.7

Accuracy:  
0.7

Accuracy:  
0.63

Accuracy:  
0.67

Accuracy:  
0.71





**Results**

**Analysis**

## **3.4 Experiment 4**

**Overview**

**Network Architecture**

**Dataset**

**API's**

**Script**

```

In [1]: from __future__ import print_function

import tensorflow as tf
import os

In [2]: # Dataset Parameters - CHANGE HERE
MODE = 'folder' # or 'file', if you choose a plain text file (see above).
DATASET_PATH = 'C:/Users/tom13/jupyter/FYP/food-101/train' # the dataset file or root folder

# Image Parameters
N_CLASSES = 101 # CHANGE HERE, total number of classes
IMG_HEIGHT = 128 # CHANGE HERE, the image height to be resized to
IMG_WIDTH = 128 # CHANGE HERE, the image width to be resized to
CHANNELS = 3 # The 3 color channels, change to 1 if grayscale

In [3]: # Reading the dataset
# 2 modes: 'file' or 'folder'
def read_images(dataset_path, mode, batch_size):
    imagepaths, labels = list(), list()
    if mode == 'file':
        # Read dataset file
        data = open(dataset_path, 'r').read().splitlines()
        for d in data:
            imagepaths.append(d.split(' ')[0])
            labels.append(int(d.split(' ')[1]))
    elif mode == 'folder':
        # An ID will be affected to each sub-folders by alphabetical order
        label = 0
        # List the directory
        try: # Python 2
            classes = sorted(os.walk(dataset_path).next()[1])
        except Exception: # Python 3
            classes = sorted(os.walk(dataset_path).__next__()[1])
        # List each sub-directory (the classes)
        for c in classes:
            c_dir = os.path.join(dataset_path, c)
            try: # Python 2
                walk = os.walk(c_dir).next()
            except Exception: # Python 3
                walk = os.walk(c_dir).__next__()
            # Add each image to the training set

```

```

        for sample in walk[2]:
            # Only keeps jpeg images
            if sample.endswith('.jpg') or sample.endswith('.jpeg'):
                imagepaths.append(os.path.join(c_dir, sample))
                labels.append(label)
            label += 1
    else:
        raise Exception("Unknown mode.")

    # Convert to Tensor
    imagepaths = tf.convert_to_tensor(imagepaths, dtype=tf.string)
    labels = tf.convert_to_tensor(labels, dtype=tf.int32)
    # Build a TF Queue, shuffle data
    image, label = tf.train.slice_input_producer([imagepaths, labels],
                                                shuffle=True)

    # Read images from disk
    image = tf.read_file(image)
    image = tf.image.decode_jpeg(image, channels=CHANNELS)

    # Resize images to a common size
    image = tf.image.resize_images(image, [IMG_HEIGHT, IMG_WIDTH])

    # Normalize
    image = image * 1.0/127.5 - 1.0

    # Create batches
    X, Y = tf.train.batch([image, label], batch_size=batch_size,
                          capacity=batch_size * 8,
                          num_threads=4)

    return X, Y

```

```

In [4]: # Parameters
learning_rate = 0.001
num_steps = 5000
batch_size = 32
display_step = 500

# Network Parameters
dropout = 0.75 # Dropout, probability to keep units

# Build the data input
X, Y = read_images(DATASET_PATH, MODE, batch_size)

```

```

In [5]: # Create model
def conv_net(x, n_classes, dropout, reuse, is_training):
    # Define a scope for reusing the variables

```

```

with tf.variable_scope('ConvNet', reuse=reuse):

    # Convolution Layer with 32 filters and a kernel size of 5
    conv1 = tf.layers.conv2d(x, 32, 5, activation=tf.nn.relu)
    # Max Pooling (down-sampling) with strides of 2 and kernel size of 2
    conv1 = tf.layers.max_pooling2d(conv1, 2, 2)

    # Convolution Layer with 32 filters and a kernel size of 5
    conv2 = tf.layers.conv2d(conv1, 64, 3, activation=tf.nn.relu)
    # Max Pooling (down-sampling) with strides of 2 and kernel size of 2
    conv2 = tf.layers.max_pooling2d(conv2, 2, 2)

    # Convolution Layer with 32 filters and a kernel size of 5
    conv3 = tf.layers.conv2d(conv2, 64, 3, activation=tf.nn.relu)
    # Max Pooling (down-sampling) with strides of 2 and kernel size of 2
    conv3 = tf.layers.max_pooling2d(conv3, 2, 2)

    # Flatten the data to a 1-D vector for the fully connected layer
    fc1 = tf.contrib.layers.flatten(conv3)

    # Fully connected layer (in contrib folder for now)
    fc1 = tf.layers.dense(fc1, 1024)
    # Apply Dropout (if is_training is False, dropout is not applied)
    fc1 = tf.layers.dropout(fc1, rate=dropout, training=is_training)

    # Output layer, class prediction
    out = tf.layers.dense(fc1, n_classes)
    # Because 'softmax_cross_entropy_with_logits' already apply softmax,
    # we only apply softmax to testing network
    out = tf.nn.softmax(out) if not is_training else out

    return out

```

```

In [6]: # Create a graph for training
        logits_train = conv_net(X, N_CLASSES, dropout, reuse=False, is_training=True)
        # Create another graph for testing that reuse the same weights
        logits_test = conv_net(X, N_CLASSES, dropout, reuse=True, is_training=False)

In [7]: # Define loss and optimizer (with train logits, for dropout to take effect)
        loss_op = tf.reduce_mean(tf.nn.sparse_softmax_cross_entropy_with_logits(
            logits=logits_train, labels=Y))
        optimizer = tf.train.AdamOptimizer(learning_rate=learning_rate)
        train_op = optimizer.minimize(loss_op)

In [8]: # Evaluate model (with test logits, for dropout to be disabled)
        correct_pred = tf.equal(tf.argmax(logits_test, 1), tf.cast(Y, tf.int64))
        accuracy = tf.reduce_mean(tf.cast(correct_pred, tf.float32))

In [9]: # Initialize the variables (i.e. assign their default value)
        init = tf.global_variables_initializer()

```

```

In [10]: # Saver object
saver = tf.train.Saver()

In [11]: # Start training
with tf.Session() as sess:

    # Run the initializer
    sess.run(init)

    # Start the data queue
    tf.train.start_queue_runners()

    # Training cycle
    for step in range(1, num_steps+1):

        if step % display_step == 0:
            # Run optimization and calculate batch loss and accuracy
            _, loss, acc = sess.run([train_op, loss_op, accuracy])
            print('Step')
            print("Step " + str(step) + ", Minibatch Loss= " + \
                  "{:.4f}".format(loss) + ", Training Accuracy= " + \
                  "{:.3f}".format(acc))
        else:
            # Only run the optimization op (backprop)
            sess.run(train_op)

    print("Optimization Finished!")

    # Save your model
    #saver.save(sess, 'my_tf_model')

```

```

Step
Step 500, Minibatch Loss= 4.6192, Training Accuracy= 0.031
Step
Step 1000, Minibatch Loss= 4.6240, Training Accuracy= 0.031
Step
Step 1500, Minibatch Loss= 4.5927, Training Accuracy= 0.031
Step
Step 2000, Minibatch Loss= 4.5935, Training Accuracy= 0.000
Step
Step 2500, Minibatch Loss= 4.6218, Training Accuracy= 0.000
Step
Step 3000, Minibatch Loss= 4.6296, Training Accuracy= 0.000
Step
Step 3500, Minibatch Loss= 4.4787, Training Accuracy= 0.031
Step
Step 4000, Minibatch Loss= 4.3978, Training Accuracy= 0.000
Step

```

Step 4500, Minibatch Loss= 4.3245, Training Accuracy= 0.062

Step

Step 5000, Minibatch Loss= 3.8302, Training Accuracy= 0.188

Optimization Finished!

ERROR:tensorflow:Exception in QueueRunner: Run call was cancelled

ERROR:tensorflow:Exception in QueueRunner: Enqueue operation was cancelled

[[Node: batch/fifo\_queue\_enqueue = QueueEnqueueV2[Tcomponents=[DT\_FLOAT, DT\_INT32], tim

ERROR:tensorflow:Exception in QueueRunner: Enqueue operation was cancelled

[[Node: batch/fifo\_queue\_enqueue = QueueEnqueueV2[Tcomponents=[DT\_FLOAT, DT\_INT32], tim

ERROR:tensorflow:Exception in QueueRunner: Enqueue operation was cancelled

[[Node: input\_producer/input\_producer/input\_producer\_EnqueueMany = QueueEnqueueManyV2[T

ERROR:tensorflow:Exception in QueueRunner: Enqueue operation was cancelled

[[Node: batch/fifo\_queue\_enqueue = QueueEnqueueV2[Tcomponents=[DT\_FLOAT, DT\_INT32], tim

Exception in thread QueueRunnerThread-batch/fifo\_queue-batch/fifo\_queue\_enqueue:

Traceback (most recent call last):

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 914

self.run()

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 862

self.\_target(\*self.\_args, \*\*self.\_kwargs)

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo

enqueue\_callable()

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo

target\_list\_as\_strings, status, None)

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo

c\_api.TF\_GetCode(self.status.status))

tensorflow.python.framework.errors\_impl.CancelledError: Enqueue operation was cancelled

[[Node: batch/fifo\_queue\_enqueue = QueueEnqueueV2[Tcomponents=[DT\_FLOAT, DT\_INT32], tim

Exception in thread QueueRunnerThread-batch/fifo\_queue-batch/fifo\_queue\_enqueue:

Traceback (most recent call last):

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 914

self.run()

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 862

self.\_target(\*self.\_args, \*\*self.\_kwargs)

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo

enqueue\_callable()

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo

target\_list\_as\_strings, status, None)

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo

c\_api.TF\_GetCode(self.status.status))

tensorflow.python.framework.errors\_impl.CancelledError: Enqueue operation was cancelled

[[Node: batch/fifo\_queue\_enqueue = QueueEnqueueV2[Tcomponents=[DT\_FLOAT, DT\_INT32], tim

Exception in thread QueueRunnerThread-batch/fifo\_queue-batch/fifo\_queue\_enqueue:

Traceback (most recent call last):

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 914

```

    self.run()
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 862
    self._target(*self._args, **self._kwargs)
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    enqueue_callable()
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    target_list_as_strings, status, None)
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    c_api.TF_GetCode(self.status.status))
tensorflow.python.framework.errors_impl.CancelledError: Run call was cancelled

```

Exception in thread QueueRunnerThread-input\_producer/input\_producer-input\_producer/input\_producer:

Traceback (most recent call last):

```

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 914
    self.run()
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 862
    self._target(*self._args, **self._kwargs)
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    enqueue_callable()
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    target_list_as_strings, status, None)
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    c_api.TF_GetCode(self.status.status))
tensorflow.python.framework.errors_impl.CancelledError: Enqueue operation was cancelled
    [[Node: input_producer/input_producer/input_producer_EnqueueMany = QueueEnqueueManyV2[T

```

Exception in thread QueueRunnerThread-batch/fifo\_queue-batch/fifo\_queue\_enqueue:

Traceback (most recent call last):

```

File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 914
    self.run()
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\threading.py", line 862
    self._target(*self._args, **self._kwargs)
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    enqueue_callable()
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    target_list_as_strings, status, None)
File "c:\users\tom13\appdata\local\conda\conda\envs\tensorflow-gpu\lib\site-packages\tensorflo
    c_api.TF_GetCode(self.status.status))
tensorflow.python.framework.errors_impl.CancelledError: Enqueue operation was cancelled
    [[Node: batch/fifo_queue_enqueue = QueueEnqueueV2[Tcomponents=[DT_FLOAT, DT_INT32], tim

```



## Results

## Analysis

### 3.5 Experiment 5 - Retrain ImageNet Inception V3 Model

#### Overview

For my fifth experiment, I decided to take inspiration from Yanai and Kawano [19], where pre-training was used training a model for food classification. In order to achieve this, I retrained the final layer of the Inception V3 model which was trained on the ImageNet dataset. This is called Transfer Learning. I followed the tutorial by Google on the tensorflow website for direction on this process *Howto Retrain Inception's Final Layer for New Categories* [9].

Firstly, in order to retrain the final layer of a model, a dataset must be prepared in the correct way. I used the Food-101 dataset Bossard, Guillaumin, and Van Gool [1] which I will analyse in a later section. The dataset must be structured so that there is a separated directory for each class with the directory name as the class name. These directories should contain all the images for this class.

Once this dataset has been set up correctly, a directory can be found on github which contains the necessary files for this tutorial. When the directory has been downloaded, the following command can be ran:

---

```
python tensorflow/examples/image_retraining/retrain.py \ --image_dir  
~/dataset_directory
```

---

The first thing that the script will do is create bottleneck files for the images. A bottleneck is a term used to define the final layer before the output layer. This is so that for each image, we do not have to push it through the entire network during training *Howto Retrain Inception's Final Layer for New Categories* [9].

After, the bottlenecks are created, the training can be completed. The images

are split into three sub directories of training, testing and validation. By default, these images are split into percentages of 80%, 10% and 10% respectively. The model is trained at a default of 4000 steps.

The command used for using this model once it is trained is:

---

```
python tensorflow/examples/label_image.py
    --graph=/tmp/output_graph.pb
--labels=/tmp/output_labels.txt --input_layer=Mul
    --output_layer=final_result
--input_mean=128 --input_std=128 --image=~ /image_directory
```

---

## Network Architecture

The Inception V3 model network architecture was used which consists of 22 layers.

## Dataset

The dataset used for this experiment is the Food-101 dataset **Food 101**. This dataset has 101 classes with 1000 images for each class.

## Libraries

Tensorflow and Numpy were used to run this script.

## Script

The following snippets of code are from the retrain.py script.

---

```
# Add the new layer that we'll be training.
(train_step, cross_entropy, bottleneck_input, ground_truth_input,
final_tensor) = add_final_training_ops(
    len(image_lists.keys()), FLAGS.final_tensor_name,
```

```

        bottleneck_tensor,
        model_info['bottleneck_tensor_size'],
        model_info['quantize_layer'])

# Create the operations we need to evaluate the accuracy of our new
    layer.
evaluation_step, prediction = add_evaluation_step(
    final_tensor, ground_truth_input)

# Merge all the summaries and write them out to the summaries_dir
merged = tf.summary.merge_all()
train_writer = tf.summary.FileWriter(FLAGS.summaries_dir + '/train',
                                     sess.graph)

validation_writer = tf.summary.FileWriter(
    FLAGS.summaries_dir + '/validation')

# Set up all our weights to their initial default values.
init = tf.global_variables_initializer()
sess.run(init)

```

---

```

# We've completed all our training, so run a final test evaluation on
# some new images we haven't used before.
test_bottlenecks, test_ground_truth, test_filenames = (
    get_random_cached_bottlenecks(
        sess, image_lists, FLAGS.test_batch_size, 'testing',
        FLAGS.bottleneck_dir, FLAGS.image_dir, jpeg_data_tensor,
        decoded_image_tensor, resized_image_tensor,
        bottleneck_tensor,
        FLAGS.architecture))
test_accuracy, predictions = sess.run(
    [evaluation_step, prediction],
    feed_dict={bottleneck_input: test_bottlenecks,
               ground_truth_input: test_ground_truth})

```



Figure 3.1: Pizza

```
tf.logging.info('Final test accuracy = %.1f%% (N=%d)' %  
                (test_accuracy * 100, len(test_bottlenecks)))
```

---

## Results

The final test accuracy for this retrained model was 54.8%.

For example, an image of pizza, see 3.1 was fed into the model with the following results:

- pizza 0.925
- pancakes 0.008
- nachos 0.007
- beef carpaccio 0.006
- tiramisu 0.004

## Analysis

### 3.6 Experiment 6 - Retrain with Extended Dataset

#### Overview

As the Food-101 dataset mostly consisted of meals Bossard, Guillaumin, and Van Gool [1], I decided to extend the dataset slightly by including some single foods such as:

- cheese
- grapes
- banana
- apple
- orange
- spaghetti
- roll

In order to collect these images, I used the ImageNet repository to search for these foods individually and then downloaded the subset of images to be included with Food 101 Deng et al. [2]. I ran the retrain.py script on the extended dataset as in Experiment 5.

#### Network Architecture

The Inception V3 Model was used for this experiment.

#### Dataset

In this experiment I extended the Food-101 dataset.

## Libraries

Tensorflow and numpy are used in the retrain.py script.

## Script

As seen in Experiment 5.

## Results

For this model, I achieved an accuracy of 55.3%.

For example, an image of a banana, see 3.2 was fed into the model with the following results:

- banana 0.9962
- orange 0.0009
- cheese 0.0003
- frozen yoghurt carpaccio 0.0002
- churros 0.0001

## Analysis

The slight increase in accuracy in Experiment 5, from 54.8% to 55.3%, makes sense. Since the model was pre-trained using the ImageNet dataset and all the new images I used were from ImageNet, we would expect a higher classification accuracy on the new additions to the dataset. This would overall increase the average classification accuracy.



Figure 3.2: Banana

## 3.7 Experiment 7 - Retrain with Parameter Tuning

### Overview

Within the `retrain.py` script *Howto Retrain Inception's Final Layer for New Categories* [9], as mentioned in previous experiments, there are various parameters that can be set and changed. I tested out a few combinations of the parameters to see if I could increase the test accuracy of the model.

### Network Architecture

The Inception V3 architecture was used for this model.

### Dataset

The Food-101 dataset Bossard, Guillaumin, and Van Gool [1] with additional classes, as per experiment 6, was used for this model.

Table 3.1: My caption

Parameter Tuning	Steps	Learning Rate	Test %	Validation %	Results
Configuration 1	8000	default	default	default	59.1%
Configuration 2	8000	0.1	default	default	65.8%
Configuration 3	10000	0.1	default	default	66.3%
Configuration 4	12000	0.1	default	default	66.6%
Configuration 5	10000	0.2	default	default	66.0%
Configuration 6	10000	0.1	15	15	66.3%

## Libraries

The libraries in use for this experiment are tensorflow and numpy.

## Script

Script as seen in experiment 5 but with some additions to the command as seen below:

---

```
python tensorflow/examples/image_retraining/retrain.py \ --image_dir
~/dataset_directory \ --how_many_training_steps 4000 \
    --learning_rate 0.01 \
--testing_percentage 10 \ --validation_percentage 10
```

---

Some further parameters could be set such as:

- `-flip_left_right`
- `-random_crop`
- `-random_scale`
- `-random_brightness`



## Results

### Analysis

There were two separate factors that each increased classification accuracy of about 5% each. These were training steps and learning rate.

Training steps are related to the number of images so before, when the training steps were at 4000, not all of our training images were being used. As the steps were increased twofold we saw a 3.8% increase in accuracy.

Another parameter that increased accuracy significantly was learning rate. The default learning rate is 0.01 which I increased to 0.1. This resulted in an increase of 6.7%. This is most likely due to the fact that since we are only looking at the last layer, we can afford to change the weights more significantly.

## 3.8 Experiment 8 - Segment Image

### Overview

In the previous experiments, I have looked at the one-shot approach to food image classification. That is, the model will give a prediction of the most likely food item in that image. This is a problem when there are multiple food in an image. There are a few options to combat this problem. Firstly, I could detect objects in the image, segment the image according to these objects and then run each segment through the model. A simple approach to this would be to segment the image into a number of sections and then run each section through the model.

## Network Architecture

## Dataset

## API's

## Script

## Results

## Analysis

### 3.9 Experiment 9 - MobileNet

#### Overview

Due to the fact that the end goal for this project is to have a smartphone application that a user can use to keep track of their calorie measurement, there are a couple of options in how to achieve this. Firstly, an image can be taken on the phone and sent to a server to run a classification algorithm. Secondly, a model can be stored on the phone for computation. I decided to train the model, using transfer learning as before, but on a different architecture, MobileNet.

#### Network Architecture

The network architecture used for this experiment is MobileNet *Howto Retrain Inception's Final Layer for New Categories* [9]. This architecture is designed to be smaller so that it can be used on smartphones which have less powerful resources available.

## Dataset

The Food 101 dataset Bossard, Guillaumin, and Van Gool [1] with added classes was used for this experiment.

## Libraries

Tensorflow and numpy.

## Script

The retrain.py script *Howto Retrain Inception's Final Layer for New Categories* [9] was used, with a different command paramater.

---

```
python tensorflow/examples/image_retraining/retrain.py \ --image_dir  
~/dataset_directory \ --architecture mobilenet_1.0_224 \  
--how_many_training_steps 10000 \ --learning_rate 0.1
```

---

## Results

The final test accuracy of this model came to 50.2%.

## Analysis

There was a decrease of 16.1% in this model to the highest accuracy from experiment 7. This is due to the smaller architecture which is aimed to be faster and smaller with the expected decrease in accuracy.

## 3.10 Experiment 10 - Scale?

Overview

Network Architecture

Dataset

API's

Script

Results

Analysis

## Chapter 4

# Empirical Studies with Food Images

## Chapter 5

## Discussion and Conclusion

# Bibliography

- [1] Lukas Bossard, Matthieu Guillaumin, and Luc Van Gool. “Food-101 – Mining Discriminative Components with Random Forests”. In: *European Conference on Computer Vision*. 2014.
- [2] J. Deng et al. “ImageNet: A Large-Scale Hierarchical Image Database”. In: *CVPR09*. 2009.
- [3] Jeffrey Donahue. “Transferrable Representations for Visual Recognition”. PhD thesis. EECS Department, University of California, Berkeley, May 2017.
- [4] Ross Girshick. “Fast R-CNN”. In: *Proceedings of the International Conference on Computer Vision (ICCV)*. 2015.
- [5] Ross Girshick et al. “Rich feature hierarchies for accurate object detection and semantic segmentation”. In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. 2014.
- [6] Kaiming He et al. “Mask R-CNN”. In: *arXiv preprint arXiv:1703.06870* (2017).
- [7] Ye He et al. “Food image analysis: Segmentation, identification and weight estimation”. In: *Multimedia and Expo (ICME), 2013 IEEE International Conference on*. IEEE. 2013, pp. 1–6.
- [8] Derek Hoiem, Yodsawalai Chodpathumwan, and Qieyun Dai. “Diagnosing Error in Object Detectors”. In: *Computer Vision – ECCV 2012: 12th European Conference on Computer Vision, Florence, Italy, October 7–13, 2012, Proceedings, Part III*. Ed. by Andrew Fitzgibbon et al. Berlin, Heidelberg: Springer Berlin Heidelberg, 2012, pp. 340–353.

- [9] *Howto Retrain Inception's Final Layer for New Categories*. [https://www.tensorflow.org/tutorials/image\\_retraining](https://www.tensorflow.org/tutorials/image_retraining). Accessed: 2018-01-24.
- [10] Hokuto Kagaya, Kiyoharu Aizawa, and Makoto Ogawa. "Food detection and recognition using convolutional neural network". In: *Proceedings of the 22nd ACM international conference on Multimedia*. ACM. 2014, pp. 1085–1088.
- [11] Chang Liu et al. "Deepfood: Deep learning-based food image recognition for computer-aided dietary assessment". In: *International Conference on Smart Homes and Health Telematics*. Springer. 2016, pp. 37–48.
- [12] George F. Luger. *Artificial Intelligence. Structures and Strategies for Complex Problem Solving/Luger GF*. Pearson Education Limited, 2005.
- [13] Dongyuan Mao, Qian Yu, and Jingfan Wang. "Deep Learning Based Food Recognition". In: ().
- [14] Tom M. Mitchell. *Machine Learning*. International Edition 1997. New York: The McGraw-Hill Companies, Inc., 1997, pp. 81–126.
- [15] Parisa Pouladzadeh, Shervin Shirmohammadi, and Abdulsalam Yassine. "Using graph cut segmentation for food calorie measurement". In: *Medical Measurements and Applications (MeMeA), 2014 IEEE International Symposium on*. IEEE. 2014, pp. 1–6.
- [16] Shaoqing Ren et al. "Faster R-CNN: Towards Real-Time Object Detection with Region Proposal Networks". In: *Neural Information Processing Systems (NIPS)*. 2015.
- [17] Evan Shelhamer, Jonathan Long, and Trevor Darrell. "Fully Convolutional Networks for Semantic Segmentation". In: *IEEE Trans. Pattern Anal. Mach. Intell.* 39.4 (Apr. 2017), pp. 640–651.
- [18] *Support Vector Machines for Machine Learning*. <https://machinelearningmastery.com/support-vector-machines-for-machine-learning/>. Accessed: 2017-12-20.



- [19] Keiji Yanai and Yoshiyuki Kawano. “Food image recognition using deep convolutional network with pre-training and fine-tuning”. In: *Multimedia & Expo Workshops (ICMEW), 2015 IEEE International Conference on*. IEEE. 2015, pp. 1–6.

# Appendix A

## Appendix

VOC 2010 test	aero	bike	bird	boat	bottle	bus	car	cat	chair	cow	table	dog	horse	mbike	person	plant	sheep	sofa	train	tv	mAP
DPM v5 (Girshick et al. [2013])	49.2	53.8	13.1	15.3	35.5	53.4	49.7	27.0	17.2	28.8	14.7	17.8	46.4	51.2	47.7	10.8	34.2	20.7	43.8	38.3	33.4
UVA (Uijlings et al. [2013])	56.2	42.4	15.3	12.6	21.8	49.3	36.8	46.1	12.9	32.1	30.0	36.5	43.5	52.9	32.9	15.3	41.1	31.8	47.0	44.8	35.1
Regionlets (Wang et al. [2013a])	65.0	48.9	25.9	24.6	24.5	56.1	54.5	51.2	17.0	28.9	30.2	35.8	40.2	55.7	43.5	14.3	43.9	32.6	54.0	45.9	39.7
SegDPM (Folber et al. [2013])	61.4	53.4	25.6	25.2	35.5	51.7	50.6	50.8	19.3	33.8	26.8	40.4	48.3	54.4	47.1	14.8	38.7	35.0	52.8	43.1	40.4
R-CNN	67.1	64.1	46.7	32.0	30.5	56.4	57.2	65.9	27.0	47.3	40.9	66.6	57.8	65.9	53.6	26.7	56.5	38.1	52.8	50.2	50.2
R-CNN BB	71.8	65.8	53.0	36.8	35.9	59.7	60.0	69.9	27.9	50.6	41.4	70.0	62.0	69.0	58.1	29.5	59.4	39.3	61.2	52.4	53.7

Figure A.1: Detection Average Precision Donahue [3]

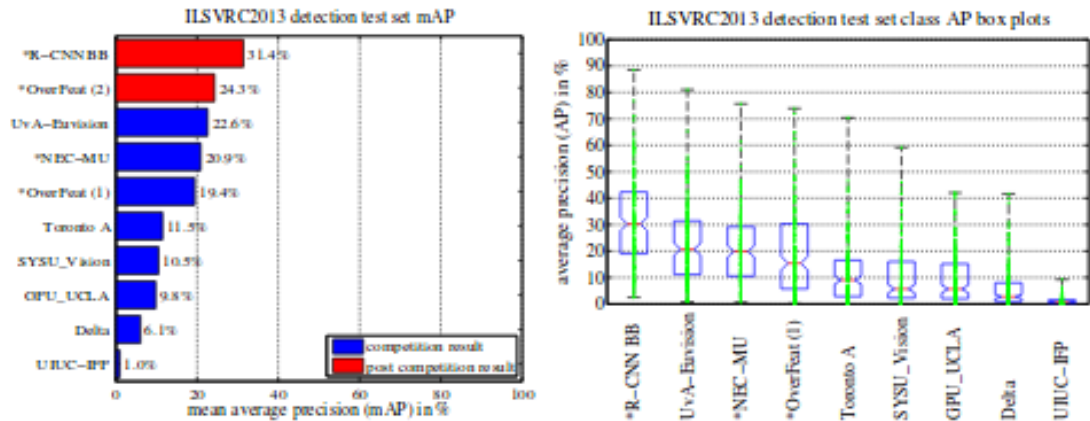


Figure A.2: Mean Average Precision Donahue [3]

Table A.1: Project Plan

Task/Deliverable	Deadline
Interim Report	21/12/17
Select method and paper to replicate	10/01/18
Iteration 1	???
Iteration 2	???
Iteration 3	???
Draft Final Report	08/03/18
FYP Product	10/04/18
FYP Report	17/04/18

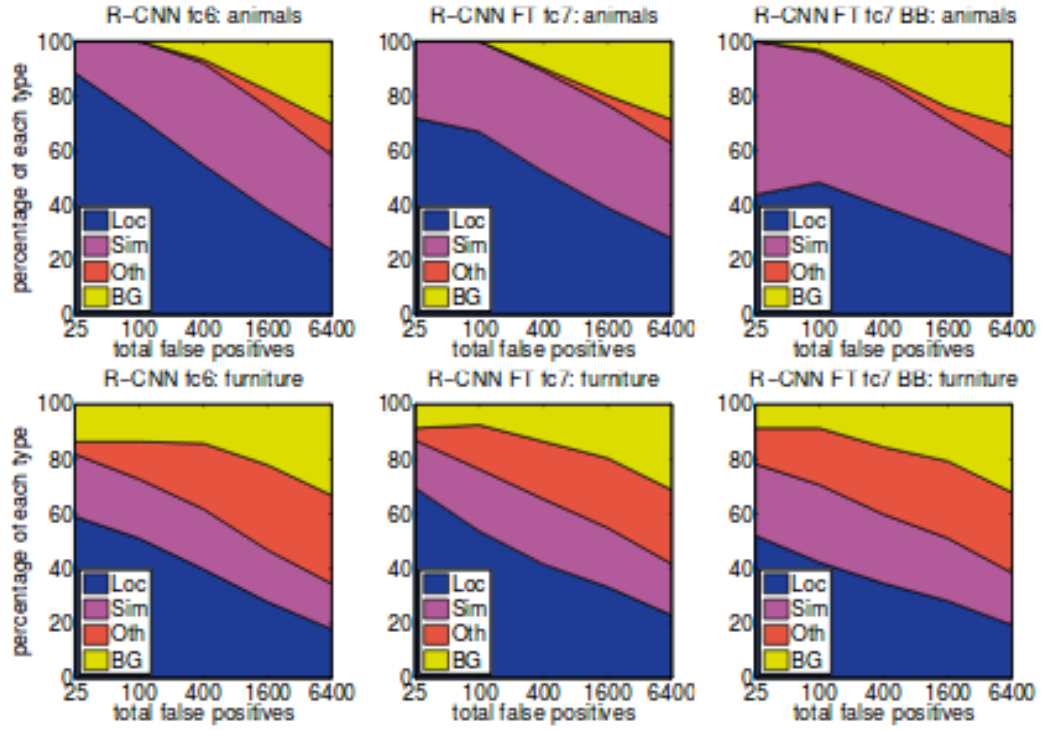


Figure A.3: Distribution of top-ranked false positives Donahue [3]

	<i>full</i> R-CNN		<i>fg</i> R-CNN		<i>full+fg</i> R-CNN	
	<i>fc<sub>6</sub></i>	<i>fc<sub>7</sub></i>	<i>fc<sub>6</sub></i>	<i>fc<sub>7</sub></i>	<i>fc<sub>6</sub></i>	<i>fc<sub>7</sub></i>
$O_2P$ (Carreira et al., 2012)	46.4	43.0	42.5	43.7	42.1	47.9
						45.8

Figure A.4: Segmentation Mean Accuracy Donahue [3]

VOC 2011 val	bg	arm	bike	bird	boat	bottle	bus	car	cat	chair	cow	table	dog	horse	mbike	person	plant	sheep	sofa	train	tv	mean
$O_2P$ (Carreira et al., 2012)	84.0	69.0	21.7	47.7	42.2	42.4	64.7	65.8	57.4	12.9	37.4	20.5	43.7	35.7	52.7	51.0	35.8	51.0	28.4	59.8	49.7	46.4
<i>full</i> R-CNN <i>fc<sub>6</sub></i>	81.3	56.2	23.9	42.9	40.7	38.8	59.2	56.5	53.2	11.4	34.6	19.7	48.1	37.0	51.4	46.0	31.5	44.0	24.3	53.7	51.1	43.0
<i>full</i> R-CNN <i>fc<sub>7</sub></i>	81.0	52.8	25.1	43.8	40.5	42.7	55.4	57.7	51.3	8.7	32.5	11.5	48.1	37.0	50.5	46.4	30.2	42.1	21.2	57.7	56.0	42.5
<i>fg</i> R-CNN <i>fc<sub>6</sub></i>	81.4	54.1	21.1	40.6	38.7	53.6	59.9	57.2	52.5	9.1	36.5	23.6	46.4	38.1	53.2	51.3	32.2	38.7	29.0	53.0	47.5	43.7
<i>fg</i> R-CNN <i>fc<sub>7</sub></i>	80.9	50.1	20.0	40.2	34.1	40.9	59.7	59.8	52.7	7.3	32.1	14.3	48.8	42.9	54.0	48.6	28.9	42.6	24.9	52.2	48.8	42.1
<i>full+fg</i> R-CNN <i>fc<sub>6</sub></i>	83.1	60.4	23.2	48.4	47.3	52.6	61.6	60.6	59.1	10.8	45.8	20.9	57.7	43.3	57.4	52.9	34.7	48.7	28.1	60.0	48.6	47.9
<i>full+fg</i> R-CNN <i>fc<sub>7</sub></i>	82.3	56.7	20.6	40.9	44.2	43.6	59.3	61.3	57.8	7.7	38.4	15.1	53.4	43.7	50.8	52.0	34.1	47.8	24.7	60.1	55.2	45.7

Figure A.5: Per-category segmentation accuracy Donahue [3]

class	AP	class	AP	class	AP	class	AP	class	AP
accordion	50.8	centipede	30.4	hair spray	13.8	pencil box	11.4	snowplow	69.2
airplane	50.0	chain saw	14.1	hamburger	34.2	pencil sharpener	9.0	soap dispenser	16.8
ant	31.8	chair	19.5	hammer	9.9	perfume	32.8	soccer ball	43.7
antelope	53.8	chime	24.6	hamster	46.0	person	41.7	sofa	16.3
apple	30.9	cocktail shaker	46.2	harmonica	12.6	piano	20.5	spatula	6.8
armadillo	54.0	coffee maker	21.5	harp	50.4	pineapple	22.6	squirrel	31.3
artichoke	45.0	computer keyboard	39.6	hat with a wide brim	40.5	ping-pong ball	21.0	starfish	45.1
axe	11.8	computer mouse	21.2	head cabbage	17.4	pitcher	19.2	stethoscope	18.3
baby bed	42.0	corkscrew	24.2	helmet	33.4	pizza	43.7	stove	8.1
backpack	2.8	cream	29.9	hippopotamus	38.0	plastic bag	6.4	strainer	9.9
bagel	37.5	croquet ball	30.0	horizontal bar	7.0	plate rack	15.2	strawberry	26.8
balance beam	32.6	crutch	23.7	horse	41.7	pomegranate	32.0	stretcher	13.2
banana	21.9	cucumber	22.8	hotdog	28.7	popicle	21.2	sunglasses	18.8

Figure A.6: Per-class segmentation accuracy Donahue [3]