

Stage 3

To start this Stage you do not need to have done the previous 2, in this Stage you will perform the password decryption of a compressed file locally.

The dynamics of this Stage consists of calling a participant from the audience, if it is in a secondary entity, the president of a room can be called, this to ensure their participation and the good rhythm of the demonstration.

To make it more enjoyable, it is recommended to use a photograph taken at that moment of the quorum of the presentation with the speaker at the head, then the photo must be sent to the Promedeux device, to do so it is recommended to use WhatsApp web which is easy and fast.

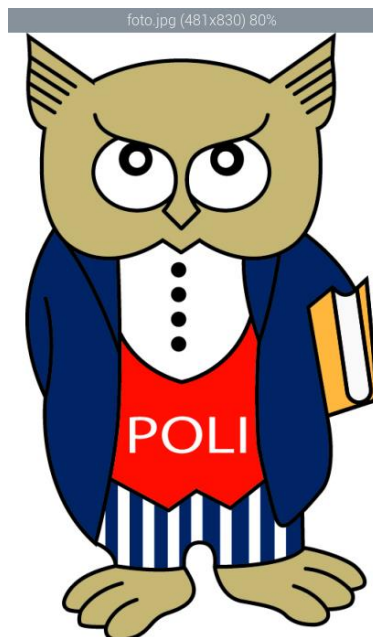


Image 1. Photography.

Once the photograph is hosted at the root, the photo must be named and it must be made sure that it is in .JPG format, this is because the automation is configured for this type of format and with this specific name.

```
epn@raspberrypi:~ $ zp
Enter password:
Verify password:
  adding: foto.jpg (deflated 23%)
epn@raspberrypi:~ $
```

Image 2. Compression.

Once you have the photo with the aforementioned characteristics, you must use the reserved `zp` or `ZP` command that will initiate the compression of the image, as can be seen in Image 2. No other parameters are needed other than those mentioned above, at this point the speaker must ask the participant to enter a password for the document, for this he should previously have an amphora of names or numbers that match those saved in the dictionary to guarantee the success of the attack.

```
autcom.sh Documents foto.jpg Music run.sh Videos
Desktop Downloads hot.sh Pictures Templates
diccionario.txt fotocompress.zip mcap.pcap Public tmshrck.sh
```

Image 3. Compressed file.

The creation of the compressed file can be verified, it will always be saved with the name `fotocompress.zip`

Once the compressed file is available, the speaker must explain to the audience that the attackers have several ways to discover the password, they will proceed first with brute force.

```
epn@raspberrypi:~ $ dzp
```

```
possible pw found: aac7o* ()
possible pw found: aac7pz ()
possible pw found: aac7q2 ()
possible pw found: aac7r() ()
possible pw found: aac7ug ()
possible pw found: aac7uW ()
possible pw found: aac7vL ()
possible pw found: aac7xr ()
possible pw found: aac7xX ()
possible pw found: aac7x9 ()
possible pw found: aac7AJ ()
possible pw found: aac7BL ()
possible pw found: aac7CG ()
possible pw found: aac7Th ()
possible pw found: aac7Tm ()
possible pw found: aac7UH ()
possible pw found: aac7We ()
possible pw found: aac7YN ()
possible pw found: aac72~ ()
possible pw found: aac78d ()
possible pw found: aac7:A ()
possible pw found: aac7/L ()
possible pw found: aac7(w ()
possible pw found: aac7[L ()
possible pw found: aac7}i ()
possible pw found: aac7-( ()
possible pw found: aac8cC ()
possible pw found: aac8kH ()
possible pw found: aac8k~ ()
possible pw found: aac8lo ()
possible pw found: aac8ou ()
possible pw found: aac8q} ()
possible pw found: aac8so ()
possible pw found: aac8ux ()
possible pw found: aac8wW ()
possible pw found: aac8yp ()
possible pw found: aac8HT ()
possible pw found: aac8Lt ()
possible pw found: aac8LD ()
possible pw found: aac8M] ()
possible pw found: aac8W2 ()
```

Image 4. Brute force.

To initiate the brute force attack, you must make use of the reserved command `dzp` or `DZP` that will initiate the attack, in which the system will try to discover all the variations of passwords until it finds the correct one, as this action is too extensive you have to take advantage of the execution of the command to explain

what is happening to the participants, emphasize that the attackers can leave the machine running for several hours to fulfill their objective, to continue with the demonstration you must get out of the loop with CTRL+C.

```
epn@raspberrypi:~ $ dzp1
possible pw found: yazhounbabocaiwangzhan ()
possible pw found: yermas ()
possible pw found: yesal ()
possible pw found: yingfengguojizuixinwangzhan ()
possible pw found: yinghuangguojiyuleyinghuangguoji ()
possible pw found: yolas ()
possible pw found: yongligaozhenrenbocai ()
possible pw found: youbodiyipingtai ()
possible pw found: yucas ()
possible pw found: yulechengjiangxinyong ()
possible pw found: yulechengligonghaoma ()
possible pw found: zaixianzhajinhuaawangyeban ()
possible pw found: zaixianzuqiumbtouzhu ()
possible pw found: zambulli ()
possible pw found: zarapo ()
possible pw found: zarce ()
possible pw found: zarparas ()
possible pw found: zenobiusz ()
possible pw found: zhaf-akumenulis ()
possible pw found: zhajinhua58wdatingxiazai ()
possible pw found: zhengzhounalikeyiwanbaijiale ()
possible pw found: zhenren3dlunpankaihu ()
possible pw found: zhongqingshishicaidaxiaojiqiao ()
possible pw found: zhongyuanyulechang ()
possible pw found: z-log ()
possible pw found: zolocha ()
possible pw found: zoyanailpolish ()
possible pw found: zozobrosas ()
possible pw found: zu ()
possible pw found: zuanshibocaixianjinkaihu ()
possible pw found: zuianquandelunpanshinage ()
possible pw found: zuihaodeqipaiyouxidating ()
possible pw found: zuixinyudezhenqianqipaiyouxi ()
possible pw found: zuizo ()
possible pw found: zunlongyulechengdubo ()
possible pw found: zuqiubocaikaipan ()
possible pw found: zuqiulanqiubifenzhibo ()
possible pw found: zuqiushipinzhibo ()
possible pw found: zuquiwaiweiwangzhan ()
possible pw found: zurriara ()
possible pw found: catoute ()
```

Image 5. Coincidences.

For the second part, the reserved command `dzp1` or `DZP1` must be executed that will allow finding all the matches of the password used through the use of a dictionary, the speaker must explain to the participants that another method of discovering passwords is a dictionary, a document where the most used passwords around the world are recorded. In addition to those that are leaked on the Internet when there are hacks to the companies that are responsible for storing this type of information, the command will automatically execute the password search and will show the possibilities on the screen.

```
epn@raspberrypi:~ $ dzp2
found file 'foto.jpg', (size cp/uc 695469/898798, flags 9, chk 9036)

PASSWORD FOUND!!!!: pw == 12345
epn@raspberrypi:~ $ █
```

Image 6. Decryption.

For the third and last part of you must execute the reserved command `dzp2` or `DZP2` that allows you to run the dictionary search and find exactly the password entered in verbose mode, this allows information such as the content of the file and its size to be displayed, this will help the exhibitor to explain the final process that an attacker will use to discover passwords.

To conclude, the speaker should emphasize the importance of having a strong and extensive password, and emphasize the irrefutable fact that you are never fully protected, unfortunately new ways of violating security are created daily, and because this is the last Stage scheduled for the exhibition, the university and the Information Technology career should be promoted in a way that if you are more curious, or if they want to become the biggest nightmare of hackers this is the career they should follow after finishing high school, it is important to use these epithets to make a greater impression and interest of the participants.

Prepared by JS.