DESIGN & SUPPLY
DOOR SPECIALISTS

COMPANY BROCHURE
2026

CERTIFIED STEEL DOORSETS. MADE IN WALES.



SECURITY / FIRE / THERMAL / FLOOD-LINE
ACOUSTIC / STOCK / SLIMLINE GLAZING

Since 1986
MERTHYR TYDFIL · SOUTH WALES

ABOUT DESIGN & SUPPLY

THE DOOR SPECIALISTS. SINCE 1986.

We design, manufacture, finish and install certified steel doorsets and slimline glazing — all from our own factory in Merthyr Tydfil.

Design & Supply was founded in 1986 by Terry Stares, in leased premises with rented equipment. We moved to Merthyr Tydfil in 1990 and to Pant Industrial Estate in 1997, where our steel door business began.

Today we manufacture LPCB-certified LPS 1175 security doorsets from SR1 to SR4, CE-marked fire doorsets tested to EN 1634-1 with certification up to 4 hours, and thermal, flood and acoustic doorsets. Our Slimline division, launched in 2017, fabricates Schüco, Jansen and Forster glazed doors, screens and façades.

Survey, CAD design, fabrication and powder coating all happen in-house, and our accredited fitters install nationwide. In 2026 a management buy-out put the business in the hands of Tom Grother, Damian Regis and Scott Davies.



Members of our management team outside the factory at Pant Industrial Estate, Merthyr Tydfil.

> We're proud to continue the legacy built over nearly four decades and remain committed to investing in the future of the business here in Wales.

Tom Grother · Director

MILESTONES

1986
Founded by Terry Stares

1997
Steel door business begins at Pant Industrial Estate

2003
Fire certification obtained

2004
Security certification earned

2017
Slimline division launched

2026
Management buy-out

WHY DESIGN & SUPPLY

ONE MANUFACTURER. START TO FINISH.

01 MADE IN MERTHYR TYDFIL

Every made-to-order doorset is designed, fabricated and powder coated in-house at our own factory, so quality is controlled at every stage of manufacture.

02 INDEPENDENTLY CERTIFIED

LPCB-certified to LPS 1175 SR1–SR4. CE-marked fire doorsets tested to EN 1634-1, certified up to 4 hours. The first steel door manufacturer to join UKTC Ensure.

03 IN-HOUSE POWDER COATING

Our own powder-coating plant finishes our made-to-order doorsets in hundreds of RAL and BS colours. Stock doors come etch primed, with powder coating available.

04 ONE ACCOUNTABLE PARTNER

Survey, CAD design, fabrication, finishing, installation and aftercare — one manufacturer responsible from first measurement onwards.

05 PRICE MATCH. TRADE & PUBLIC.

Every quotation is free and without obligation, and we price match any genuine like-for-like quote from a UK manufacturer.

06 FAST WHEN YOU NEED IT

Stock doors are typically delivered in 3–5 working days, subject to availability. Streamline doorsets are prioritised through manufacture.

1986
Established

SR1–SR4
LPCB-certified LPS 1175 security ratings

4 hrs
Fire certification, tested to EN 1634-1

350+
RAL & BS powder-coat colours

HOW WE WORK

FROM SURVEY TO AFTERCARE.

Every stage is handled by our own team — so there's one point of contact and one company accountable for the result.

01

FREE QUOTE & SITE SURVEY

A free, no-obligation quotation, with site surveys available — we measure each opening and confirm the specification before anything is made.

02

CAD DESIGN

Our in-house design team details every doorset and issues drawings for your approval before fabrication begins.

03

FABRICATION

Every doorset is made in Merthyr Tydfil — programmed, punched, bent and welded by our own team.

04

POWDER COATING

Made-to-order doorsets are finished in our own powder-coating plant, in your choice of RAL or BS colour.

05

NATIONWIDE INSTALLATION

Accredited fitters install across the UK — standard sizes in as little as 10 days.

06

HANDOVER & AFTERCARE

O&M documentation at handover, with maintenance and repair services to keep doorsets performing.

INSTALLED TO DHF TS 005

Where we install, our work follows DHF TS 005, the Door & Hardware Federation's standard for the installation of doors and shutters — including installation records and completion certificates. We are a DHF member.

THE RANGE

DOORSETS FOR EVERY OPENING AND THREAT.



SECURITY STEEL DOORS

LPCB-certified security, from SR1 to SR4.

P. 06-07



FIRE RATED STEEL DOORSETS

Certified up to 4 hours. Tested as complete doorsets.

P. 08



THERMA-LINE THERMAL DOORS

U-values as low as 1.3 W/m²K, without giving up strength.

P. 09



FLOOD-LINE FLOOD DOORS

Up to 900mm of water protection in a steel doorset.

P. 10



ACOUSTIC STEEL DOORS

Engineered around your target sound reduction.

P. 11



STOCK & STREAMLINE DOORS

General purpose doors for programmes that can't wait.

P. 12



SLIMLINE GLAZING

Schüco, Jansen and Forster systems — security, fire and non-rated.

P. 13-14

NEED MORE THAN ONE RATING?

SR2 security doorsets are available with an optional EN 1634 fire rating.

Janisol C4 slimline combines security features with EI60–EI90 fire protection.

Louvre and vision panel options on selected doorsets — options may affect ratings.

01



SECURITY RATED

01 · SECURITY RATED

SECURITY STEEL DOORS

LPCB-certified security, from SR1 to SR4.

Steel hinged security doorsets, independently tested and certified by the Loss Prevention Certification Board to LPS 1175 Security Ratings 1, 2, 3 and 4. Single and double leaf, outward opening, for internal or external openings — each rating matched to a threat level, from opportunist attack with basic tools (SR1) to sustained, experienced attack (SR4).

KEY FEATURES

LPCB CERTIFIED
LPS 1175 SR1–SR3 (certificate 694b) and SR4 / D10 (certificate 694d)

ATTACK RESISTANCE
Tool category A (SR1) through to category D (SR4)

CONFIGURATION
Single or double leaf, outward opening, internal or external

LOCKING
Manual and electronic options, with access control at SR2 and SR4

PANELS
Louvres SR2–SR4 · vision panels SR2 · overpanels SR1–SR3

FIRE + SECURITY
SR2 available with an optional EN 1634 fire rating

FINISH
Pre-treated, primed and powder coated in-house

DATA SHEETS ↗ SR1 · SR2 · SR3 · SR4 data sheets

01 · SECURITY RATED

SR1 TO SR4 AT A GLANCE.

RATING	TESTED RESISTANCE	TYPICAL USE	OPTIONS
SR1	Opportunist attack using basic tools (LPS 1175 tool category A).	Certified entry-level protection — the entry point to the range.	Overpanels
SR2	Determined attack with a wider tool set, including levers and cutting tools (category B).	Our most specified rating — most commercial, education, healthcare and residential-communal projects.	Louvres, vision panels, overpanels, access control, optional EN 1634 fire rating
SR3	Deliberate forced entry with heavier tools — crowbars, short axes and cordless drills (category C).	Vaults, critical infrastructure and high-value stores.	Louvres, overpanels
SR4	Sustained, experienced attack with serious cutting and levering tools (category D).	Data centres, utility substations and high-security facilities.	Louvres, access control

CHOOSING A RATING


Choose SR2 where a risk assessment anticipates determined attack with a wider tool set, or where an insurer, police adviser or specification calls for certified security beyond entry level. Step up to SR3 for a prepared intruder with serious tools, and to SR4 for sustained, experienced attack. Our team will help you match the rating to the risk.

CHECK OUR CERTIFICATION

Our security doorsets are listed in the LPCB Red Book — certificates 694b (LPS 1175 Issue 7: SR1, SR2 and SR3) and 694d (LPS 1175 Issue 8: D10 / SR4). Specifiers can check any listing on the Red Book.

02

UKTC ENSURE CERTIFIED

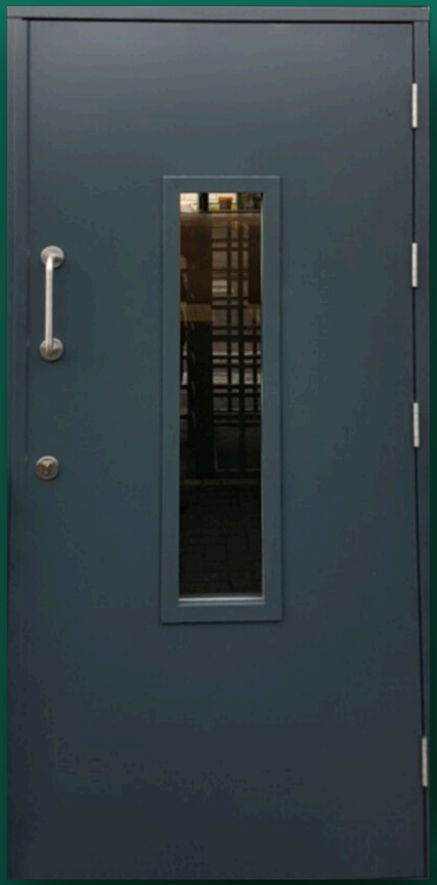

FIRE RATED

02 · FIRE RATED

FIRE RATED STEEL DOORSETS

Certified up to 4 hours. Tested as complete doorsets.

Our fire rated steel doorsets are tested as complete assemblies to EN 1634-1, with certification up to 4 hours. They are CE marked and third-party certified under the UKTC Ensure scheme. Built around a dense mineral core, they protect escape routes in warehouses, flat entrances, server rooms, schools, data centres, retail, public buildings and offices.

KEY FEATURES

FIRE RATING
Certification up to 4 hours

TESTED
EN 1634-1, as complete doorset assemblies

CERTIFIED
CE marked; third-party certified under UKTC Ensure

CONSTRUCTION
1.5mm galvanised steel, double-skinned, dense mineral core

STANDARD SIZES
Single up to 1250 × 2650mm · double up to 2800 × 2650mm; larger subject to limits

OPTIONS
Vision panels, louvres and access control on selected doorsets; louvres rule out a smoke rating

FIRE + SECURITY
Optional EN 1634 fire rating on LPS 1175 SR2 doorsets

DATA SHEET ↗ Fire rated doors data sheet

03



THERMAL RATED

03 · THERMAL RATED

THERMA-LINE THERMAL DOORS

U-values as low as 1.3 W/m²K, without giving up strength.

Therma-Line is our range of thermally efficient steel doorsets. A double-skinned galvanised steel leaf and frame surrounds a bonded mineral wool core, so thermal performance comes without compromising strength, durability or security. Designed for Part L, Therma-Line suits new-build and refurbishment projects across commercial, industrial and public-sector buildings.

KEY FEATURES

U-VALUE
As low as 1.3 W/m²K at tested sizes (±25%); otherwise estimated

PART L
Designed for Part L of the Building Regulations

INSULATED CORE
Double-skinned leaf, interlocking edges, bonded mineral wool core

STEEL
1.5mm galvanised steel leaf and frame · 54mm leaf

CONFIGURATION
Single and double doorsets, inward or outward opening

SIZE RANGE
Single up to 1410 × 2950mm · double up to 2820 × 2950mm

FINISH
Powder coated in-house, including coastal grades

DATA SHEET ↗ Thermal rated doors data sheet

04



FLOOD DEFENCE

FLOOD-LINE FLOOD DOORS

Up to 900mm of water protection in a steel doorset.

Our Flood-Line flood doors keep rising water out with steel-lined, high-grade seals, giving up to 900mm of water protection. A 45mm galvanised steel leaf, a minimum of five reinforced fixing points per side and Grade 13 stainless steel hinges provide the strength. Single and double doorsets are manufactured in Merthyr Tydfil and installed UK-wide.

KEY FEATURES

FLOOD HEIGHT
Up to 900mm water protection

SEALS
Steel-lined, high-grade seals to prevent water ingress

CONSTRUCTION
45mm leaf, 1.5mm galvanised steel, mineral core

STRENGTH
Min. 5 reinforced fixing points per side · Grade 13 hinges

MAXIMUM SIZES
Single 1408 × 3000mm · double 2800 × 3000mm

SITE TESTING
Flood tested on installation; annual retest visits available

FINISH
Powder coated in-house

Flood-Line doors are not LPS 1175 rated. Where a certified security rating is needed, specify an LPS 1175 security doorset.

DATA SHEET ↗ Flood-Line data sheet

05



ACOUSTIC RATED

05 · ACOUSTIC RATED

ACOUSTIC STEEL DOORS

Engineered around your target sound reduction.

Our acoustic steel doorsets give an estimated 38–51 dB of sound reduction, adapted to door size and application, with acoustic seals customised to your target rating. A double-skinned galvanised steel leaf is built around a dense mineral core. They suit recording and broadcast studios, police interview rooms, medical centres, offices and residential entrances.

KEY FEATURES

SOUND REDUCTION
38–51 dB (estimated), adapted to size and application

ACOUSTIC SEALS
Customised to your target dB rating

DOOR LEAF
Double-skinned 1.5mm galvanised steel, 48–55mm thick

CORE
Dense mineral core; plasterboard or e-coustiquilt options

FRAME
1.5mm galvanised Zintec steel, single or double rebate

FIXINGS
Minimum 5 per side, plus 2 on the head for doubles

FINISH
Powder coated in-house

ENQUIRE ↗ Specification on request

06



GENERAL PURPOSE

STOCK & STREAMLINE DOORS

General purpose doors for programmes that can't wait.

Stock Doors come in two standard structural opening sizes and are typically delivered within 3–5 working days, subject to availability. Streamline doorsets are precision-engineered in galvanised steel for commercial and industrial applications, and prioritised through manufacture to a rapid lead time. Both suit offices, retail, education, healthcare and hospitality.

KEY FEATURES

STOCK DELIVERY
Typically 3–5 working days, subject to availability

STOCK SIZES
900 × 2100mm and 1000 × 2100mm structural openings

READY TO FIT
Hinges, fixings, threshold, jacking screws and brick fixings included

STREAMLINE
Prioritised through manufacture to a rapid lead time

STREAMLINE SIZES
Up to 1440 × 3050mm single · 2900 × 3050mm double

STREAMLINE OPTIONS
Side, over, louvred and vision panels; open in or out

FINISH
Stock: etch primed, powder coat optional · Streamline: galvanised steel

DATA SHEET ↗ Streamline data sheet



07 · SLIMLINE

SCHÜCO JANSEN FORSTER

SLIMLINE ARCHITECTURAL GLAZING.

Narrow steel profiles. Maximum daylight. Certified performance.

Slimline brings narrow steel sightlines to doors, screens, windows and façades. We fabricate Schüco, Jansen and Forster systems at our factory in Merthyr Tydfil, with in-house CAD support, fabrication and powder coating.

Janisol glazed doorsets are certified to LPS 1175 and LPS 2081. Four fire-rated systems run from E30 to EI90, with Jansen Economy to E120, and five non-rated systems cover everything from internal partitions to full façades.

DATA SHEET ↗ Slimline data sheet

KEY FEATURES

SYSTEMS
Schüco, Jansen and Forster, fabricated in Merthyr Tydfil

SECURITY
Janisol doorsets certified to LPS 1175 (B3 / SR2) and LPS 2081

FIRE RATED
E30 to EI90 across four systems; Jansen Economy to E120


THERMAL
Thermally broken Janisol and Arte 2.0; thermally improved VISS

APPLICATIONS
Internal doors and partitions to external doors, windows and façades

IN-HOUSE SERVICE
CAD, fabrication and powder coating in-house; installation by accredited fitters nationwide

FROM PARTITIONS TO FULL FAÇADES.


Jansen VISS

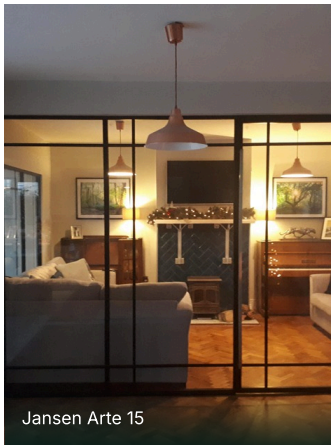
Jansen Arte 15


Janisol C4


Janisol VISS Fire

SECURITY

Janisol – LPS 1175
B3 (SR2) · LPCB certificate 694e

Janisol – LPS 2081
Rating B · LPCB certificate 694c

Janisol C4
Security features with EI60–EI90 fire protection

FIRE RATED

Janisol 2
EI30 · doors and fixed glazing

Janisol C4
EI60–EI90 · doors and fixed glazing

Jansen Economy
E30–E120 · internal doors and glazing

Janisol VISS Fire
E30–EI90 · façade system

NON-RATED

Janisol
Thermally broken doors and glazing

Jansen Arte 15
Internal partitions and doors

Jansen Arte 2.0
Thermally broken windows

Jansen Economy
Internal doors and glazing

Jansen VISS
Thermally improved façades

SECTORS

TRUSTED WHERE PERFORMANCE MATTERS.

Trade customers, main contractors, architects and specifiers rely on our doorsets across commercial, public-sector, infrastructure and residential projects.

UTILITIES & SUBSTATIONS	SCHOOLS & UNIVERSITIES	HEALTHCARE	RESIDENTIAL & HOUSING
CAR PARKS	DATA CENTRES & SERVER ROOMS	RETAIL	INDUSTRIAL & WAREHOUSING
OFFICES & PUBLIC BUILDINGS	STUDIOS & BROADCAST	SPORT & LEISURE	CASH ROOMS & FINANCE

SELECTED PROJECTS

- Silverstone Race Circuit
- University of Bristol — TQEC Research Hub
- Fish Island Village, London
- Watling Gardens, London
- Mermaid Quay car park, Cardiff Bay
- Celtic Manor Hotel

ACCREDITATIONS

INDEPENDENTLY TESTED. INDEPENDENTLY CERTIFIED.

LPCB · LPS 1175
Security doorsets certified by the Loss Prevention Certification Board from SR1 to SR4 and listed in the LPCB Red Book. Janisol slimline doorsets are also certified to LPS 2081.

CE MARKED · EN 1634-1
Fire doorsets tested as complete assemblies to EN 1634-1, with certification up to 4 hours, and CE marked.

UKTC ENSURE
UKAS-accredited third-party fire door certification. We were the first steel door manufacturer to join the scheme.

SECURED BY DESIGN
Police Preferred Specification options available

UKTC ENSURE
Certified fire doorsets carry QR-coded labels

DHF MEMBER
Installations follow DHF TS 005

CONSTRUCTIONLINE GOLD
Pre-qualified supplier

CHAS
Health & safety accredited

SSIP
Safety Schemes in Procurement

ACHILLES NETWORK
Supply-chain member

SYSTEMS PARTNER
Jansen and Forster slimline systems

PROJECTS WE'RE PROUD OF.

SLIMLINE GLAZING


HIGHER EDUCATION · BRISTOL


TQEC RESEARCH HUB ↗

The first phase of the University of Bristol's Temple Quarter Enterprise Campus. We delivered the bespoke glazing package for two 19th-century industrial buildings in a conservation area — the Retort House (1821) and the Coal Shed (1885).

- Arched Janisol screens matched to the original stonework
- Jansen Economy 60 and Janisol 2 partitions and fire-rated doors
- VISS curtain walling, curved louvres and spandrel panels
- A single 3m × 2m pane weighing over 500 kg

SHORTLISTED · SCHÜCO EXCELLENCE AWARDS 2025

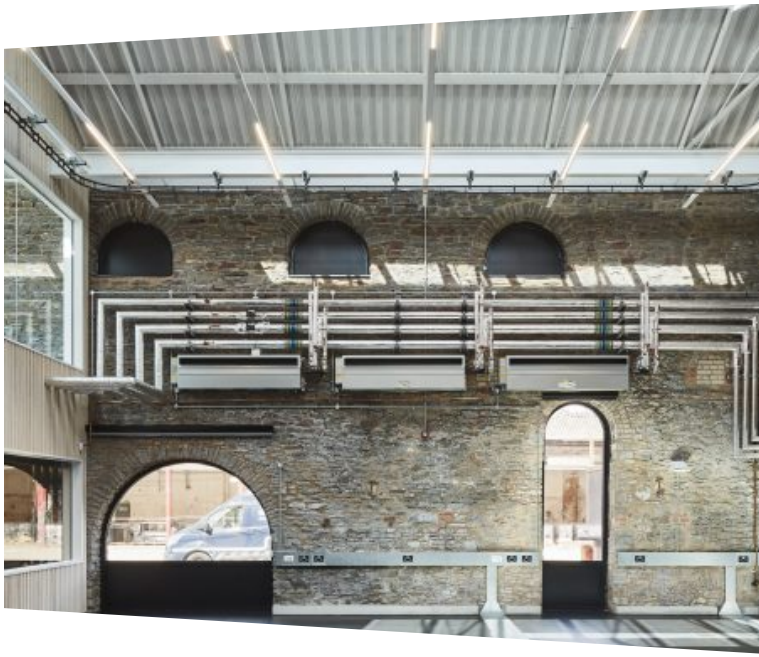



RESIDENTIAL · LONDON

FISH ISLAND VILLAGE ↗

We supplied and installed all the external doors, screens and curtain walling. Entrance doors used our LPS 2081 product, certified within Secured by Design, and louvres in selected screens solved ventilation without altering the architect's design.

£545k	1.0	2022
doors, screens & curtain walling	W/m²K — U-values from 1.0 across the package	completed August

Photo © Fred Howarth

CASE STUDIES

SECURITY & FIRE IN THE REAL WORLD.

STEEL DOORSETS



RESIDENTIAL · CRICKLEWOOD, LONDON

WATLING GARDENS ↗

125 affordable homes across three new blocks designed by Pollard Thomas Edwards Architects, including 45 independent-living homes for Brent Council. We manufactured 21 bespoke LPS 1175 SR2 doorsets with louvre panels and a precision-engineered perforated design, plus 3 SR2 glazed doorsets in Jansen Janisol. Completed 2025.

21	3	125
SR2 steel doorsets	SR2 glazed doorsets	new homes

CAR PARK · CARDIFF BAY

MERMAID QUAY ↗

Over 40 FD60 steel doorsets manufactured, supplied and installed for the new 679-space multi-storey car park. Tested and certified to EN 1634-1 for 60 minutes' fire resistance, and built for heavy daily use in semi-exposed locations. Completed 2026.

40+	60	679
FD60 doorsets	minutes' fire resistance	parking spaces



PUBLIC SECTOR · EBBW VALE

EBBW VALE CAR PARK ↗

Working with Blaenau Gwent County Borough Council, we delivered and installed enhanced anti-vandal steel doors and heavy-duty security grilles for a high-traffic, open-access site — with minimal disruption to car park operations. Completed November 2024.

CUSTOMER PORTAL

TRACK EVERY DOOR THROUGH THE FACTORY.

Our Customer Portal lets you follow each door on your order through every stage of manufacture — so you always know where your job is.

1. PROGRAMMING
2. PUNCHING
3. BENDING
4. WELDING
5. PAINTING
6. PACKING

TECHNICAL SUPPORT

EVERYTHING YOU NEED TO SPECIFY.

Free to download — no forms, no sign-up.

DATA SHEETS ↗
Security SR1–SR4, fire, thermal, flood, car park, Streamline and Slimline.

O&M MANUAL ↗
Installation, operation and maintenance — site safety, checks, handover, inspection schedules and troubleshooting.

CILL TYPES ↗
Every cill profile, A to J, with section dimensions.

DOOR HANDING DIAGRAMS ↗
Single doorsets, standard astragal doubles and lipped flush doors.

COLOUR CHART ↗
Our standard powder-coat colours.

SCAN OR CLICK FOR DOWNLOADS
designandsupply.co.uk/downloads

DESIGN & SUPPLY
DOOR SPECIALISTS

GET IN TOUCH

FREE QUOTATION. NO OBLIGATION.

Tell us about your project — from a single stock door to a full security, fire or glazing package. Open to trade and public, and we price match any genuine like-for-like UK manufacturer quote.

01685 350 114
Talk to our sales team

sales@designandsupply.co.uk
Send drawings, schedules or photos

designandsupply.co.uk
Products, data sheets and case studies

13 Pant Industrial Estate
Merthyr Tydfil, Mid Glamorgan, CF48 2SR

REQUEST A QUOTE
designandsupply.co.uk/contact