Design Patterns - TP3

TP3 initial code

This is a template for the students' assignments.

Course material: http://bit.ly/jmb-cpoa

Assignment info

LAST NAME

BRUEL

First Name

Jean-Michel

Group #

- [x] Teachers
- [ ] 1
- [ ] 2
- [ ] 3
- [ ] 4
- [ ] Innopolis

Requirements

You'll need:

- [x] A GitHub account
- [ ] A Git Bash terminal (if you use Window$)

Try the following command in your terminal to check your `git` environment:

```
git config --global -l
```

Initial tasks

- [x] Click on the Github Classroom link provided by your teacher (in fact, this should be done if you read this).
- [ ] Clone on your machine the Github project generated by Github Classroom.

- [ ] Modify the README file to add your last name, first name and group number.
- [ ] Commit and push using the following message:

commit/push

```
fix #0 Initial task done
```

In the following, every time you'll see à `fix #⋯` text, make sure all your files are committed, and then push your modifications in the distant repo, making sure you used the corresponding message (`fix #⋯`) in one of the `commit` messages.

- If you want to check that you're really ready for `fix #0`, you can run the command in your shell: `make check`.
- If you want to list the ToDos of the day, run `make todos`.

This TD exercise is inspired from the excellent book: "Head First: Design Pattern. Bert Bates, Eric Freeman, Elisabeth Freeman, Kathy Sierra. Editions O'Reilly. 2005."

The *Factory* pattern

QUESTION

- Fully implement the Pizzeria application so that:
  - it implements the Abstract Factory
  - it implements the Singleton (for the factory)
  - the test program below will produce the result below

Start by writing this program and use *QuickFix* to "generate" the code as much as possible.

Rendus attendus

ToDo

- ☐ a `pom.xml` that runs the tests of your application
- ☐ a `build.gradle` that runs the tests of your application
- ☐ the class diagram of your application, in a file named `TP3.plantuml`, placed in a `docs` folder in your repo.

We will use the following pizzas model:

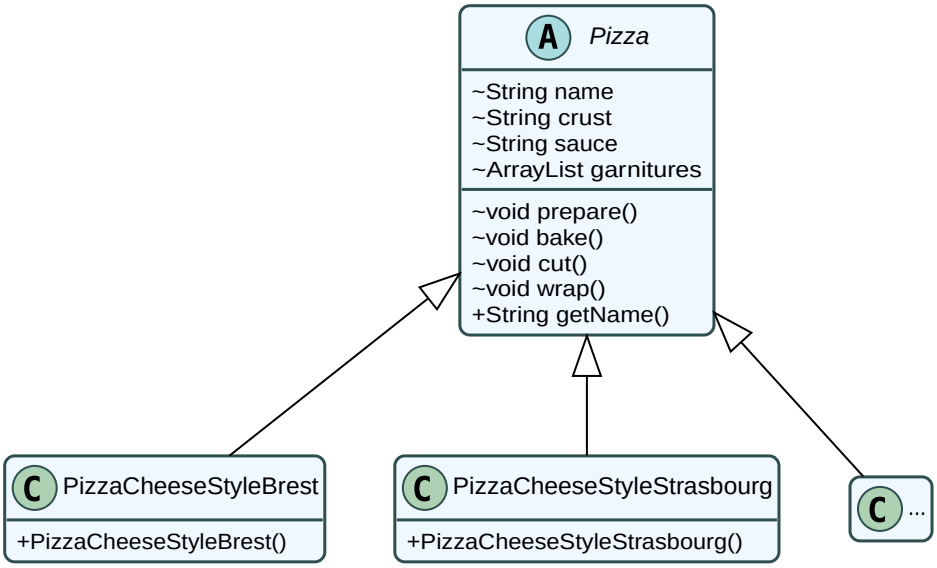

Figure 1. Class diagram of the Pizzas

Testing program

```
public class PizzaTestDrive {
    public static void main(String[] args) {
        Pizzeria shopFromBrest = PizzeriaFactory.getInstance().create("Brest");
        Pizzeria shopFromStrasbourg = PizzeriaFactory.getInstance().create
("Strasbourg");

        Pizza pizza = shopFromBrest.orderPizza("cheese");
        System.out.println("JMB has ordered a " + pizza.getName() + "\n");

        pizza = shopFromStrasbourg.orderPizza("cheese");
        System.out.println("JMI has ordered a " + pizza.getName() + "\n");
    }
}-------

.Résultat d'exécution
............
$ java -jar target/pizzeria-1.0.jar
Preparation of Pizza with Brest style sauce and cheese
Spread the pizza dough...
```

```
Add the sauce...
Add the garnitures:
 Parmigiano reggiano
Bake 25 minutes at 180°
Cut the pizza in triangles
Put the pizza in the official box
JMB has ordered a Pizza with Brest style sauce and cheese

Preparation of Pizza Strasbourg style with cheese
Spread the pizza dough...
Add the sauce...
Add the garnitures:
 Mozzarella
Bake 25 minutes at 180°
Cut in square portions
Put the pizza in the official box
JMI has ordered a Pizza Strasbourg style with cheese

.............


WARNING: This assessment is graded. The autograding will run the tests via `gradle
test` and `maven test`, as well as `test0` and the test of the model. This will
constitute  80%of your grade. The remaining 20% will be evaluated by your TA and will
focus on the tests (number and quality).

.icon:github[] commit/push
[source,shell]
....
fix #All: Completed all duties
....




//-------------------------------------
//-------------------------------------
//------------  Still Angry ----------
//-------------------------------------
//-------------------------------------

// :numbered!:
// [appendix]
// == {allerPlusLoin}

//---------------------------- Question -----------------
// .*QUESTION*
// [WARNING]
// ====
// . ...
// . Commit&Push when everything is ready
```

```
// +
// ifndef::backend-pdf[.pass:[<i class="fa fa-github"></i>] commit/push]
// ifdef::backend-pdf[.icon:github[] commit/push]
// [source,shell]
// ....
// fix #Bonus: Here is additional material...
// ....
// +
// ====

//-----------------------------------
== {contrib}
//-----------------------------------

- mailto:jbruel@gmail.com[Jean-Michel Bruel]

== {about}

*****************************************************************
Baked with {asciidoctorlink} (version `{asciidoctor-version}`) from 'Dan Allen', based
on {asciidoc}.
'Licence Creative Commons'.
image:88x31.png["Licence Creative
Commons",style="border-width:0",link="http://creativecommons.org/licenses/by-sa/3.0/"]
http://creativecommons.org/licenses/by-sa/3.0/[licence Creative Commons Paternité -
Partage à l&#39;Identique 3.0 non transposé].
*****************************************************************
```