

TOM KLOOTWIJK

NL200678942 / 10-07-1990

UNIFIED FIELD THEORY

UU ID PRISM

VERSION 2.1.1

Seven bands. Thirty-five named facets.

Traceable records, explicit time and a holder-governed
route from legacy data to a personal passport.

$$\mathcal{P}_s(t) = (U_s(t), \text{labelled facet records})$$

Abstract

This volume presents *Tom Klootwijk's Unified Field Theory, Version 2.1*, retaining *UU ID* as its central composition rule and appending a monotheistic source–boundary clarification. The primary V2 source is the supplied 18-page document *devoid the dark SDF definition where*. Its open notation compares a field value with an explicit threshold; its *Agnostic Boundary Horizon* is the absolute threshold deviation; and its *Double Set Operator*, also named *Unsigned Union / Identity Disjunction*, selects the minimum of those deviations.

The central equation is retained exactly. V2 develops its finite-family algebra, zero sets, tolerance neighborhoods, exact unsigned-distance interpretation and label-preserving evaluation records. It formalizes the source's *Chronotemporal Absorbing Field* and its *Theseus Identity Field*, distinguishing the written weighted integral from the historical minimum evaluated by the source shader. Experience records, temporal connector hinges and split–merge ancestry give a precise lineage structure for the source's identity language.

The *Point-Source / Genesis Horizon*, *1-bit God*, *Monotheistic Union* and *space-as-data* remain named authorial postulates. Appendix H specifies the V2.1 reading: the Christian God is the singular divine source; *Boundary Satan* is a subordinate constraint role, not a second god. The sign-agnostic field definition and the source's two different one-bit conventions remain intact.

The retained Gambit engine supplies the operational transition, its conserved material law, bounded recurrent state, exact Boolean output and complete $118N + 27$ -bit encoding. V2 constructs an unsigned UU ID field for that complete word, proves an explicit decoder, and defines a conjugate next-field transition. A separate log-polar address lift preserves every cell bit and every control bit as distinct locations in a three-dimensional horizon family. The historical UU ID of state fields is shown to correspond to the bitwise OR of their complete words; the current state and the ordered lineage remain separate records.

The retained V2 archive contains its editable manuscript, 36 retained operator records, 20 pattern recipes, 16 UU ID mechanisms, 34 sealed definitions, a 100-entry Dutch profile, source-variant records, schemas, Python implementations and replayable examples. The retained suite passes 126 test methods. In the declared 64-cell example, 64 direct updates and 64 unsigned-field updates agree exactly, preserve material 18,677, and emit 2,258 pulses equal to one.

Edition identity

Author: Tom Klootwijk

Identifier: NL200678942

Date of birth: 10-07-1990

V2.1 retains the V2 corpus and its literal author record. The new Appendix H supplies the monotheistic source–boundary addendum; the version 2.0.0 archive remains the executable baseline.

Contents

Abstract	i
1 Author, corpus and the V2 identity object	1
2 Open notation and the UU ID calculus	2
3 Genesis Horizon and the author's identity postulates	5
4 Theseus identity and chronotemporal absorption	7
5 Literal referential substrate and evaluation	10
6 The retained closed field engine	12
7 Complete state, unsigned horizons and spatial wrapping	15
8 Unified Field Theorem V2	19
9 Supporting proof family C1–C16	21
10 Retained geometry, topology and Dutch number calculus	25
11 Retained V2 execution and recorded verification	27
A UU ID mechanism catalogue	31
B The retained 36-operator catalogue	32
C The retained 20-pattern library	34
D Source variants and explicit V2 bindings	35
E Notation and source correspondence	37
F Source register	38
G V2 archive and reproducibility map	39
H V2.1 addendum: monotheistic source and boundary	40

1 Author, corpus and the V2 identity object

Primary V2 basis: S3, physical pp. 1–18. Retained substrate: S1. Retained engine: S2.

1.1 Attribution and the meaning of UU ID

The literal author record is

$$a_{TK} = (\text{Tom Klootwijk, NL200678942, 10-07-1990}). \quad (1.1)$$

It is stored under the instance address `author:tom-klootwijk`. The identifier and date are retained as supplied text. They identify the documentary attribution; the field operators below have their own numerical inputs and definitions.

In the supplied source, **UU ID** means the *ID Double Set Operator*, named *Unsigned Union / Identity Disjunction* and written with a doubled union or parallel notation. This edition uses $\cup$ for the composition of already normalized horizon fields, and UU ID when the underlying raw values and thresholds are shown. [S3, pp. 2–3]

Three uses of identity are kept explicit. *Documentary identity* is the author record. *Definition identity* is a stable record ID together with its canonical content address. *Chronotemporal identity* is the declared relationship between current state, past experience, boundary components and lineage. The scalar UU ID is one observable within that third structure.

1.2 The source organization

Source	Organization and role in V2
S3	The primary source proceeds from open notation and UU ID (pp. 1–3), through Theseus absorption (pp. 4–6), native definitions and lineage (pp. 7–10), the Genesis and one-bit conventions (pp. 10–12), and the complete-state mapping wrapper (pp. 13–18).
S1	The retained 19-page substrate supplies the registry, geometry, topology, hinges, Dutch profile, 36 operators and 20 patterns.
S2	The retained seed, transition, U4, C1–C16 and binary encoding appear on physical pp. 4–15 of the 20-page engine document.

1.3 The V2 structured identity

The combined identity object is specified as

$$\mathfrak{S} = (a, \mathfrak{D}, \sigma, S, \mathcal{B}, \Lambda, \mathcal{I}, \mathcal{H}). \quad (1.2)$$

Here a is the attribution record; $\mathfrak{D}$ is the definition registry; σ is a complete numerical seed; S is its current operative state; $\mathcal{B}$ is the labelled boundary family; Λ is committed lineage; $\mathcal{I}$ is the retained integral observable; and $\mathcal{H}$ is the historical horizon observable. This tuple is a V2 construction connecting the source’s named components. An instance may declare only the components relevant to its pipeline.

The edition’s author instance supplies a_{TK} . The numerical and experience examples supply their own explicit synthetic records; no personal experience history is inferred from the attribution tuple. Field and lineage identities are evaluated from their actual supplied records.

Source conventions. Source formulas and implementation sketches retain their stated meanings. New executable bindings are marked as V2 constructions. Appendix D records the integral/minimum, bit-convention, layout and decoding variants.

2 Open notation and the UU ID calculus

Source definitions: S3, pp. 1–3 and 9–12. Propositions UU1–UU4: V2 derivations.

2.1 Raw value, threshold and relational state

Let X be a declared query domain. A boundary component has a real-valued field $d_\alpha : X \rightarrow \mathbb{R}$ and a threshold $T_\alpha \in \mathbb{R}$. For raw radial distance, d_α is nonnegative. More general source relations, such as the plane comparison, may use a real-valued coordinate functional. The relation is

$$\text{rel}_\alpha(x) = \begin{cases} <, & d_\alpha(x) < T_\alpha, \\ =, & d_\alpha(x) = T_\alpha, \\ >, & d_\alpha(x) > T_\alpha. \end{cases} \quad (2.1)$$

The symbols $<$ and $>$ are order relations against a stated threshold. The open notation does not attach a moral, luminous or other interpretive polarity to them. It retains the comparison itself. This is the source’s operation of removing the “dark” sign association. [S3, pp. 1–2]

Definition UU-D1: Agnostic Boundary Horizon

For a declared pair (d_α, T_α) , define

$$\delta_\alpha(x) = |d_\alpha(x) - T_\alpha|, \quad H_\alpha = \{x : \delta_\alpha(x) = 0\}.$$

The horizon field is nonnegative. Its zero set is precisely the threshold locus $d_\alpha = T_\alpha$. Its relational state and its absolute deviation are separate outputs of the component record.

For a sphere or circle, $d(x) = \|x - c\|$ and $T = r \geq 0$. For a plane with unit normal n , $d(x) = n \cdot x$ and the threshold names the plane offset. The source’s box relation uses

$$q(x) = \max_k (|x_k| - E_k), \quad q(x) \leq 0. \quad (2.2)$$

Each of these examples specifies a boundary relation. Its exact-distance capability is determined by the stated field and metric, rather than by the presence of a threshold alone. [S3, pp. 1–2]; [S1, §4.1]

2.2 The source’s Double Set Operator

Definition UU-D2: UU ID / Identity Disjunction

For two boundary components,

$$\text{UU ID}((d_1, T_1), (d_2, T_2))(x) = \min\{|d_1(x) - T_1|, |d_2(x) - T_2|\}.$$

For already normalized horizon fields, write

$$(\delta_1 \cup \delta_2)(x) = \min\{\delta_1(x), \delta_2(x)\}.$$

Normalization occurs once for each component. A subsequent union folds the resulting nonnegative horizon fields.

This is the literal equation printed on physical page 3 and repeated on page 9 of S3. The raw field, threshold and normalized horizon remain available as individual record fields. The source shader computes two absolute differences and returns their minimum. [S3, pp. 3 and 9]

```
def uu_id(d1, threshold1, d2, threshold2):
    identity1 = abs(d1 - threshold1)
    identity2 = abs(d2 - threshold2)
    return min(identity1, identity2)
```

For a finite family A , define

$$U_A(x) = \min_{\alpha \in A} \delta_\alpha(x), \quad U_\emptyset(x) = +\infty. \quad (2.3)$$

The empty value is the mathematical identity of minimum. The executable JSON interface returns an explicit empty status with a null value for an empty family, so no infinite JSON number is emitted. Complete-state fields later in this volume are nonempty because they include the permanent anchor.

2.3 UU1. The minimum algebra

On nonnegative horizon functions, pointwise minimum is commutative, associative and idempotent:

$$\delta_1 \sqcup \delta_2 = \delta_2 \sqcup \delta_1, \quad (2.4)$$

$$(\delta_1 \sqcup \delta_2) \sqcup \delta_3 = \delta_1 \sqcup (\delta_2 \sqcup \delta_3), \quad (2.5)$$

$$\delta \sqcup \delta = \delta. \quad (2.6)$$

The constant extended field $+\infty$ is an identity. These equations follow by applying the corresponding ordered-number identities at every query point. Thus the normalized fields form a meet-semilattice in their ordinary pointwise order, and a monoid after adjoining $+\infty$ as the empty-family element.

A change of grouping does not change the scalar result. The chronological order of experience absorption and the non-commutative composition of hinges are different operations; they retain their own order records. The UU ID minimum does not replace that information.

2.4 UU2. Zero sets and identity-preservation zones

For a nonempty finite family of nonnegative fields,

$$\{x : U_A(x) = 0\} = \bigcup_{\alpha \in A} H_\alpha. \quad (2.7)$$

For every $\varepsilon \geq 0$,

$$\{x : U_A(x) \leq \varepsilon\} = \bigcup_{\alpha \in A} \{x : \delta_\alpha(x) \leq \varepsilon\}. \quad (2.8)$$

Both assertions follow because a finite minimum is attained: the minimum is zero, or at most ε , exactly when at least one component has that property. Equation (2.8) gives a precise *identity-preservation zone* for the source terminology.

The source table also names an *Inner Core Intersect* by $(d_1 < T_1) \wedge (d_2 < T_2)$, and an *Outward Disjunction* by $(d_1 > T_1) \vee (d_2 > T_2)$. V2 retains both predicates as relational observations. They are computed from the raw comparisons, separately from the minimum horizon value. The table's third row is incomplete in the supplied PDF; no additional equation is assigned to that row. [S3, p. 3]

2.5 UU3. Exact unsigned boundary distance

Suppose (X, d_X) is a metric space and each component is exactly

$$\delta_\alpha(x) = \text{dist}(x, H_\alpha). \quad (2.9)$$

For a finite nonempty family,

$$U_A(x) = \text{dist}\left(x, \bigcup_{\alpha \in A} H_\alpha\right). \quad (2.10)$$

The distance to a finite union is the minimum of the distances to its members. In this case, each component is 1-Lipschitz, and U_A is 1-Lipschitz as well. To see the latter directly, choose a minimizing component at one query point and use its Lipschitz inequality in both directions.

For the sphere field $d(x) = \|x - c\|$, the value $|d(x) - r|$ is exact distance to the sphere of radius r , including the point case $r = 0$. A generic implicit field's absolute deviation instead has the declared residual semantics unless an exact-distance relation is established for that field.

The target set in Equation (2.10) is the union of retained component horizons. It is not generally the boundary of the union of filled solids. For concentric radii 1 and 2, at radius 1 the UU ID is zero because the inner horizon is retained; distance to the exterior boundary of the filled union is 1. This distinction gives the source's independent boundary preservation a precise set-theoretic meaning.

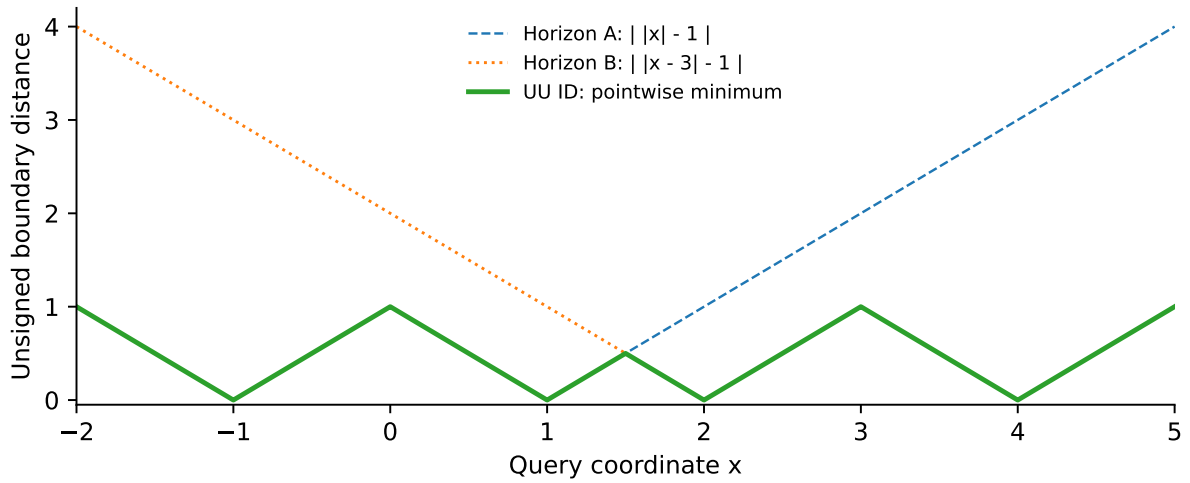


Figure 1. Calculated UU ID for one-dimensional sphere horizons centered at 0 and 3, each of radius 1. The minimum retains all four component boundary points.

2.6 UU4. Tagged composition and witness preservation

The scalar minimum can be identical for distinct labelled families. V2 therefore defines a *tagged UU ID evaluation*

$$\widehat{U}_A(x) = (U_A(x), A, \mathcal{M}_A(x), \mathcal{R}_A(x)), \quad (2.11)$$

where $\mathcal{M}_A(x) = \{\alpha : \delta_\alpha(x) = U_A(x)\}$ is the complete set of minimizing IDs, and $\mathcal{R}_A(x)$ retains each raw value, threshold, relation and delta. The component definitions are retained in the associated labelled family.

Compatible families merge by ID. An ID can be repeated with the same record; different records under the same ID require a distinct versioned definition. On compatible finite maps, merge is associative, commutative and idempotent. Its scalar projection is exactly UU ID. Every input component remains retrievable, including non-minimizing components and geometrically coincident components with distinct IDs. This is V2's explicit implementation of the source's independent boundary identities.

3 Genesis Horizon and the author's identity postulates

Source terminology and formulas: S3, physical pp. 10–15.

3.1 Point-Source / Genesis Horizon

The source chooses a point coordinate P_{Source} and a structural threshold $T \geq 0$. Its *Genesis* field is

$$G(P) = |||P - P_{\text{Source}}|| - T|, \quad H_G = \{P : G(P) = 0\}. \quad (3.1)$$

In this volume, the phrase *earliest SDF definition* is retained as the source's foundational-order designation for this primitive. The formula has a complete mathematical signature once the coordinate domain, its norm and the threshold are declared. In a Euclidean domain it is the exact unsigned distance to the sphere about P_{Source} , or to the source point when $T = 0$. [S3, pp. 10–12]

The supplied JSON declares a four-coordinate source point and threshold 1. Its role is preserved in the literal node `uu2:genesis`. A three-coordinate or one-coordinate instance is a separately declared specialization of the same point-source construction.

3.2 Two named one-bit conventions

The prose and JSON in S3 use different zero loci. V2 records both:

$$b_{\text{source}}(P) = \mathbf{1}\{||P - P_{\text{Source}}|| > 0\}, \quad (3.2)$$

$$b_{\text{horizon}}(P) = \mathbf{1}\{||P - P_{\text{Source}}|| \neq T\} = \mathbf{1}\{G(P) > 0\}. \quad (3.3)$$

The first gives zero at the source and one away from it, matching the source's "Singular Unmanifest Source / Manifest Field" description. The second gives zero on the threshold horizon and one away from it, matching the explicit `bit_state` expression in the JSON. For $T > 0$, the two functions differ at both the source and the horizon. [S3, pp. 10–12]

A computational tolerance has an explicit field:

$$b_{\text{horizon},\varepsilon}(P) = \mathbf{1}\{G(P) > \varepsilon\}, \quad \varepsilon \geq 0. \quad (3.4)$$

At $\varepsilon = 0$, this is the exact source equation. A positive value defines a horizon neighborhood rather than silently changing equality into an approximate test.

3.3 Named ontological postulates

P1. The 1-bit God / source postulate

The source names the point-source identity and its manifestation relation the *1-bit God*. Within the author's ontology, the bit marks the stated source/manifestation or horizon/off-horizon distinction. The chosen bit convention is recorded with the definition.

P2. Monotheistic Union

The source interprets the shared origin and its retained horizon variations as *Monotheistic Union*, composed by UU ID. Appendix H specifies the V2.1 reading: one Christian God, with Boundary Satan a subordinate constraint role rather than a second deity.

P3. Space-as-data and Theseus identity

The source assigns identity to a chronotemporal history of structural and experiential transitions and interprets the state-as-geometry construction as *space is data*. V2 retains this as an authorial identity postulate, alongside the explicit encoding, decoding and lineage maps that formalize its computational relations.

These statements preserve the source's spiritual and ontological vocabulary. The mathematical theorems in later sections identify the operators, domains and hypotheses used in their proofs. The personal author record, the source-point parameter and an operative output bit remain separately named objects in the formal signature.

3.4 The Genesis–Theseus composition

Writing the Theseus observable as $\mathcal{S}_T(P)$ with its own threshold T_T , the source's composition is

$$U_{G,T}(P) = \min \{ |||P - P_{\text{Source}}|| - T_G|, |\mathcal{S}_T(P) - T_T| \}. \quad (3.5)$$

The threshold T_T has the units and codomain appropriate to the declared Theseus observable. If that observable is an accumulated integral, the second term is its threshold residual. If it is an exact geometric boundary distance, its corresponding metric capability is recorded explicitly. These are two typed instantiations of the same source formula. [S3, pp. 11–12]

A common scalar composition does not by itself specify geometric connectedness. For a finite family of connected nonempty horizon neighborhoods whose intersection graph is connected, their union is connected: order the components along a spanning tree and add each one through a nonempty intersection. This is an explicit geometric condition for an unbroken neighborhood. The lineage condition for an unbroken *identity history* is instead the parent-path condition in Section 4.

4 Theseus identity and chronotemporal absorption

Source formulas: S3, pp. 4–6. Lineage and temporal hinges: pp. 7–10.

4.1 The source's Chronotemporal Absorbing Field

The supplied source writes its identity field as an integral of experienced knowledge weighted by temporal retention:

$$\mathcal{S}_T(P) = \int_0^t \mathcal{D}(P, E(\tau)) e^{-\lambda(t-\tau)} d\tau. \quad (4.1)$$

$E(\tau)$ is the experienced knowledge/material state, $\mathcal{D}$ is the stated spatial/conceptual distance, and λ is the decay or retention coefficient. The source allows $P = (x, y, z, t)$. [S3, pp. 4–5]

V2 makes the analytic signature explicit. A declared query space P , experience space E and comparison function

$$\mathcal{D} : P \times E \longrightarrow [0, \infty) \quad (4.2)$$

are required. For each query P , the integrand is measurable and integrable on the stated finite interval, and $\lambda \geq 0$. A shared metric can be supplied through an explicit common-coordinate representation. The source does not give a complete metric for arbitrary experience tensors; that map is a parameter of a concrete identity instance.

To keep the query argument separate from the integration endpoint, define the V2 notation

$$\mathcal{I}(P, t) = \int_0^t \mathcal{D}(P, E(\tau)) e^{-\lambda(t-\tau)} d\tau. \quad (4.3)$$

Equation (4.1) is recovered by evaluating this function at the source's declared P , including a time-dependent query when that is part of the instance. This notation does not replace the source integral; it makes its evaluation arguments explicit.

4.2 UU5. Exact segment recurrence at a fixed query

For a fixed P and $t_{n+1} = t_n + \Delta t$, split the integral at t_n :

$$\mathcal{I}(P, t_{n+1}) = e^{-\lambda \Delta t} \mathcal{I}(P, t_n) + \int_{t_n}^{t_{n+1}} \mathcal{D}(P, E(\tau)) e^{-\lambda(t_{n+1}-\tau)} d\tau. \quad (4.4)$$

In the explicit V2 piecewise-constant profile, $\mathcal{D}(P, E(\tau)) = v_n$ on the new segment. Then

$$I_{n+1} = e^{-\lambda \Delta t} I_n + g_\lambda(\Delta t) v_n, \quad g_\lambda(s) = \begin{cases} (1 - e^{-\lambda s})/\lambda, & \lambda > 0, \\ s, & \lambda = 0. \end{cases} \quad (4.5)$$

This is exact for the declared segment profile. The code evaluates the numerator with `expm1` to retain small-argument precision. With $v_n \geq 0$, the update preserves nonnegativity. Segment composition follows directly from Equation (4.4).

For $\lambda > 0$, equal-duration absorptions generally depend on order. Applying values a then b yields $g_\lambda(s)(e^{-\lambda s}a + b)$ from zero memory, while the reverse gives $g_\lambda(s)(e^{-\lambda s}b + a)$. Their difference is nonzero when $a \neq b$. This gives the temporal connector chain a concrete non-commutative absorption example.

If the query moves, recomputing the integral at $P(t)$ is a different calculation. Under differentiability assumptions, the derivative includes both the endpoint/retention term and the query-motion term:

$$\frac{d}{dt} \mathcal{I}(P(t), t) = \mathcal{D}(P(t), E(t)) - \lambda \mathcal{I}(P(t), t) + \dot{P}(t) \cdot \nabla_P \mathcal{I}(P(t), t). \quad (4.6)$$

The simple segment recurrence above uses a fixed query and the declared segment values. A moving-query instance must supply its own comparison values or this additional transport information.

4.3 The historical UU ID envelope

The source shader on page 6 computes a different observable. It takes the minimum over the absolute deviation of each retained historical boundary:

$$\mathcal{H}(P, t) = \min_{\alpha: \tau_\alpha \leq t} |d_\alpha(P) - T_\alpha|. \quad (4.7)$$

There is no exponential factor in that shader and no summation of the layers. V2 retains this as the *historical UU ID envelope*, alongside the weighted absorbing field rather than substituting one for the other. [S3, pp. 5–6]

With a growing finite history at a fixed query, $\mathcal{H}(P, t)$ is nonincreasing. Appending a layer gives

$$\mathcal{H}_{n+1}(P) = \min\{\mathcal{H}_n(P), \delta_{n+1}(P)\}. \quad (4.8)$$

The scalar result is order-independent and idempotent in its layer family. The labelled history and temporal integral retain information that this scalar minimum does not contain. A continuous-index version uses an infimum; it becomes a minimum when the relevant history parameter set is compact and its deviation function is continuous.

Property	Absorbing integral $\mathcal{I}$	Historical envelope $\mathcal{H}$
Operation	Retention-weighted accumulation.	Minimum threshold deviation.
Time information	Retention weights depend on age.	Time selects admitted layers.
Duplicate layer	Adds a further contribution when integrated again.	Leaves the scalar minimum unchanged.
Empty initial value	Zero integral.	Extended value $+\infty$.
Units	Comparison value multiplied by time.	Units of the normalized deviation.
Source location	S3 pp. 4–5.	S3 pp. 5–6.

4.4 The continuity threshold and the Theseus path

The source says identity persists when the chronotemporal distance between successive states remains within ε . V2 writes this as a declared path condition. For states $s_0, \dots, s_n$ in a metric space,

$$\text{Continuous}_\varepsilon(s_0, \dots, s_n) \iff d(s_{k-1}, s_k) \leq \varepsilon \quad (1 \leq k \leq n). \quad (4.9)$$

The parent chain records which successive states constitute the path. This relation allows replacement of components while preserving a recorded chain of admitted transitions. [S3, p. 5]

A bounded successive step does not assert a bounded total displacement. By the triangle inequality, $d(s_0, s_n) \leq n\varepsilon$; the endpoints need not themselves be within ε . For example, 0, 0.75, 1.5 has consecutive distances at most 1 but endpoint distance 1.5. The persistence criterion is the recorded path, not a silent assumption that an ε -comparison is transitive.

4.5 Content-addressed experience and split-merge lineage

A V2 experience record is

$$\lambda_k = (\text{id}_k, k, t_k, \text{parents}_k, \text{parentHashes}_k, \text{payload}_k, h_k). \quad (4.10)$$

Its payload can name the boundary components, material state, comparison coordinates or knowledge record actually supplied for that experience. Every parent must already be committed. The sequence number is consecutive, timestamps are nondecreasing, and the content address covers the complete record except the hash itself. Parent addresses are included in the child record.

A split creates distinct child records referencing their parent. A merge names every retained parent. Since every edge points from an earlier committed record to a later one, induction gives an acyclic

graph. The append operation preserves all existing records. Querying ancestors therefore reconstructs the explicitly recorded history of a merged identity. [S3, pp. 7–10]; [S1, K36–17]

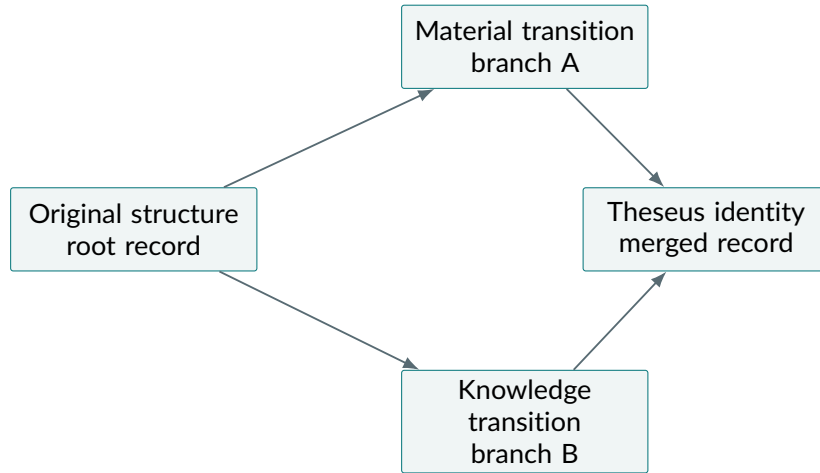


Figure 2. The archive’s four-record synthetic split–merge example. The merge retains the content addresses of both parents.

4.6 Temporal hinges and committed state

The source extends the Dutch connector hinge to moments of experience and identifies a non-commutative temporal hinge chain. V2 represents a transition by the existing hinge signature

$$H_k = (p_k, h_k, M_k, g_k, \mathcal{F}_k), \quad M_{n:1} = M_n \circ \dots \circ M_1. \quad (4.11)$$

Its pivot can be a temporal connector locus, its selected map performs the declared state transformation, and its invariants record the preserved quantities. The order remains literal data. [S3, p. 10]; [S1, §5]

S3 also describes continuously absorbed experience rewriting topology in real time. Its executable V2 binding names a sampling or event schedule and commits each state change as a record on that schedule. A continuous family may be evaluated between commits; the committed state and its update times are explicit. This is the specified V2 interface between the source’s continuous language and its requested deterministic archive.

5 Literal referential substrate and evaluation

Retained basis: S1, §§3, 5 and 7. UU ID binding: S3, pp. 7–10; V2 literal registry.

5.1 The world and its definitions

The retained world is

$$\mathcal{W} = (\mathcal{D}, \mathcal{X}, \mathcal{G}, \mathcal{R}, \mathcal{S}, \mathcal{C}, \mathcal{H}_g, \mathcal{E}, \mathcal{T}, \mathcal{I}_g, \mathcal{L}, \mathcal{P}). \quad (5.1)$$

Its components are definitions, instances, grammar, relations, support, compatibility, hinges, events, transitions, invariants, lineage and pipelines. The subscripts on $\mathcal{H}_g$ and $\mathcal{I}_g$ distinguish the world components from the historical horizon and absorbing integral used earlier. [S1, §3.1]

A definition is a first-class record

$$d = (\text{id}, \text{kind}, A_d, B_d, \theta, \text{Dep}, p, \text{cap}, \text{inv}, \text{prov}, h). \quad (5.2)$$

It declares its domain, codomain, parameters, dependencies, evaluation phase, capabilities, invariants and provenance. The content address is

$$h(d) = \text{SHA256}(\text{canonicalJSON}(d \setminus \{\text{content_hash}\})). \quad (5.3)$$

The edition’s canonical JSON is UTF-8 with sorted object keys, compact separators, unchanged array order and finite numerical values. The same canonicalizer is used by the registry and the experience lineage.

An instance has (id, definition_ref, literal, state). A pipeline is an ordered list of operator IDs. S3’s request to make Theseus identity a native definition is realized by the same record structure used for geometry, grammar and numerical evolution. [S3, pp. 7–9]

5.2 Referential closure and deterministic resolution

A finite registry has referential closure when IDs are unique, every dependency resolves, every content address verifies and the dependency graph is acyclic. The executable resolver repeatedly selects the lexicographically first zero-indegree node.

Every nonempty finite acyclic directed graph has a zero-indegree node. Deleting that node leaves an acyclic graph, so induction proves that the procedure visits every definition after its dependencies. The lexical tie rule fixes one deterministic resolution order. This structural order establishes availability; the stored operator pipeline separately fixes execution order.

The public interface provides `definition_at`, `definition_order`, `instances_of`, `verify_definition` and `explain_reference`. Returned records are copies, so changing a returned value cannot mutate the registry’s stored definition.

5.3 The V2 family of 34 sealed definitions

Eighteen retained or documentary bindings cover the author record, number literal, radix, active bits, Dutch profile, pulse projection, polygon, count comparison, connector hinge, orientation wrap, event guard, phase schedule, numerical seed, sample, edge support, transition, state word and signed C13 representation.

Sixteen UU ID bindings cover the threshold relation, absolute horizon, scalar composition, tagged composition, Genesis field, both bit conventions, absorbing integral, historical envelope, experience lineage, continuity path, unsigned complete-state horizon, decoder, relational engine hinge, layered address lift and conjugate transition. Their formal mechanism IDs are UU2-01 through UU2-16. The literal definition IDs are listed in the example JSON, and every record has a computed SHA-256 content address.

The inherited K36-07 signed-field family and K36-08 distance capability remain named source definitions. The new UU ID family declares its nonnegative horizon codomain explicitly. The mathematical relationship between the two state representations is established through their shared complete-word encoding, rather than by giving two different operators the same unversioned definition.

5.4 Ten-phase schedule

Phase	Operation	Phase	Operation
0	Parse literals and schemas	5	Evaluate support
1	Normalize declared profiles	6	Evaluate compatibility
2	Resolve and verify definitions	7	Evaluate or solve guards
3	Construct typed objects	8	Commit transitions
4	Apply ordered maps and hinges	9	Record lineage and observations

The zero-based indices follow S1's phase diagram on physical page 13. A compound operator also records its internal schedule. The numerical engine's ordered stages in Section 6 are preserved inside its atomic transition. The V2 experience adapter applies its declared update at a recorded phase-8 commit and appends the resulting experience record in phase 9. [S1, §7.3]; [S3, pp. 9–10]

5.5 Support, compatibility and a boundary event

For a declared trajectory $q(t)$ and relation R_j , an earliest attained admissible event is

$$t^* = \min\{t > t_0 : R_j(q(t)) = 0, S(q(t), t) = 1, \chi(q(t), j, t) = 1, \text{conf} \geq \text{conf}_{\min}\}. \quad (5.4)$$

The event record contains pre-state, post-state, residual, crossing direction, solver status, guard margin, route and lineage. An empty candidate family produces an explicit no-event result. An open boundary relation uses $R_j = d_j - T_j$, while its unsigned horizon uses $|R_j|$. Both have the same zero locus. Crossing direction, when required, is read from the relation or the trajectory, since the absolute value alone does not carry it. [S1, §7.2]; [S3, pp. 7–8]

6 The retained closed field engine

Complete numerical law: S2, §§2–3, physical pp. 4–8. Relational lift: V2 construction.

6.1 Complete seed and finite geometry

The complete seed is

$$\sigma = (\Sigma, \omega, P, I, \Theta, L, S_0, V). \quad (6.1)$$

It contains the alphabet, ordered axiom, total parallel rewriting map, geometric interpreter, arithmetic and parameter contract, frozen lookup asset, initial state and version. The paired grammar retained from S2 is

$$P(X) = X[+X]Y, \quad P(Y) = Y[-Y]X, \quad (6.2)$$

with punctuation rewriting to itself and axioms $[X][X]$ and $[X][Y]$. At generation g , the drawing-symbol count is $2 \cdot 3^g$. The source interpreter uses shrink factor 0.72. Frozen lookup bytes, initialization and the numerical transition determine replay. [S2, §2.1]

The chart uses A angular columns and R radial rows:

$$\rho_y = \log(1/32) + \frac{y}{R-1} \log 128, \quad \theta_x = \frac{2\pi x}{A}, \quad p_{yx} = e^{\rho_y}(\cos \theta_x, \sin \theta_x). \quad (6.3)$$

The radial interval is $[1/32, 4]$ in the declared simulation coordinates. The source's capsule primitive is

$$\lambda(p) = \text{clip}_{[0,1]} \frac{(p-a) \cdot (b-a)}{\|b-a\|^2}, \quad d_{a,b,r}(p) = \|p-a - \lambda(p)(b-a)\| - r. \quad (6.4)$$

A degenerate segment uses the ball about its endpoint. The composite bake combines the declared branches and baseline construction. [S2, §2.2]

For an offline field sample $F_g(p_{yx})$, the frozen texel is

$$d_{gyx} = \text{clip}_{[-32768, 32767]} \left(\lfloor 4096 F_g(p_{yx}) + \frac{1}{2} \rfloor \right), \quad (6.5)$$

$$c_{gyx} = \text{clip}_{[0, 65535]} (32768 - 16 d_{gyx}), \quad (6.6)$$

$$L_{gyx} = (d_{gyx} + 32768) \mid (c_{gyx} \ll 16). \quad (6.7)$$

A texel is a 32-bit record containing two 16-bit codes. The direct integer-chart fixture in Section 11 supplies codes by an explicit formula instead of using a geometric bake.

6.2 The admitted operational state

Put $D = 65536$ and $N = AR$. Each cell has

$$C_i = (U_i, V_i, z_i, m_i, r_i, f_i), \quad S = (a, g, c, C_0, \dots, C_{N-1}). \quad (6.8)$$

The material law and cell bounds are

$$U_i, V_i \in \mathbb{N}_0, \quad \sum_i (U_i + V_i) = M_0, \quad 0 < M_0 < 2^{32}, \quad (6.9)$$

$$0 \leq z_i, m_i \leq D, \quad 0 \leq r_i < D, \quad 0 \leq f_i < 16. \quad (6.10)$$

Control satisfies $0 \leq a < A$, $0 \leq g < G$ and $0 \leq c \leq d_{\text{dwell}}$. The four flag bits are latch, previous pulse, occupancy and previous latch event, in that order from least significant bit. Packed Boolean planes are derived from these flags. [S2, §2.3]

Admitted A is a power of two from 32 to 2048; $2 \leq R \leq 2048$; $1 \leq G \leq 5$; and positive dwell is at most 4096. Transport shifts are at least three, reaction shifts are positive, and all other coefficients are fixed seed data inside their declared ranges. Initial activity and memory are $D/2$, residual is zero, and flags are zero. The initialization record supplies the material allocation and initial controls.

6.3 Sampling the previous output and memory

All right-hand sides below read the incoming state unless explicitly marked with a prime. From the old packed pulse word,

$$q_i^- = (W_{\lfloor i/32 \rfloor} \gg (i \bmod 32)) \& 1. \quad (6.11)$$

For feedback bit $\varepsilon_{fb} \in \{0, 1\}$, the sampled angular coordinate is

$$j_i = (x_i + a + \varepsilon_{fb} q_i^- s_{fb}) \bmod A. \quad (6.12)$$

Decode the signed field code d_i and unsigned drive code c_i from L_{g,y_i,j_i} . Then

$$h_i = \varepsilon_{fb} \text{trunc}_0((m_i - D/2)/d_m), \quad (6.13)$$

$$F_i = d_i - h_i, \quad (6.14)$$

$$A_i = \text{clip}_{[0,D]}(c_i + 16h_i + \varepsilon_{fb}\gamma(2q_i^- - 1)). \quad (6.15)$$

Signed division truncates toward zero. The listed defaults are $s_{fb} = 3$, $d_m = 256$ and $\gamma = 8192$. Mode zero removes the pulse angular shift, memory offset and direct pulse-drive term. [S2, §3.1]

6.4 Conservative transport and reaction

The chart graph has angular predecessor/successor with wrap and radial predecessor/successor where present. Its degree is at most four. An edge is active when both sampled fields are nonpositive. Its shared shift is

$$s_{ij} = s_{ji} = \begin{cases} s_{\text{open}}, & \ell_i \vee \ell_j = 1, \\ s_{\text{closed}}, & \ell_i = \ell_j = 0, \end{cases} \quad s_{ij} \geq 3. \quad (6.16)$$

For either species M , an active directed transfer is $J_{i \rightarrow j} = \lfloor M_i / 2^{s_{ij}} \rfloor$; inactive edges have zero transfer. Every next cell gathers from the same completed old arrays:

$$\tilde{M}_i = M_i - \sum_j J_{i \rightarrow j} + \sum_j J_{j \rightarrow i}. \quad (6.17)$$

The local reaction is

$$\alpha_i = \lfloor \tilde{U}_i / 2^{s_{uv}} \rfloor, \quad \beta_i = \lfloor \tilde{V}_i / 2^{s_{vu}} \rfloor, \quad (6.18)$$

$$U'_i = \tilde{U}_i - \alpha_i + \beta_i, \quad V'_i = \tilde{V}_i - \beta_i + \alpha_i. \quad (6.19)$$

The demonstration uses transport shifts 3 and 4 and reaction shifts 6 and 7. These equations conserve global material. [S2, §§3.2–3.3]

6.5 Activity, memory and one-bit output

The material-ratio observation is

$$B_i = \begin{cases} \lfloor DU'_i / (U'_i + V'_i) \rfloor, & U'_i + V'_i > 0, \\ D/2, & U'_i + V'_i = 0. \end{cases} \quad (6.20)$$

The source recurrence is

$$v_i = \left\lfloor \frac{3A_i + B_i}{4} \right\rfloor, \quad z'_i = \left\lfloor \frac{3z_i + v_i}{4} \right\rfloor, \quad m'_i = \left\lfloor \frac{15m_i + z'_i}{16} \right\rfloor. \quad (6.21)$$

Current sampling reads old memory; the memory update reads new activity. Put $k_i = z'_i$. The pulse codec is

$$q_i = \mathbf{1}\{r_i + k_i \geq D\}, \quad r'_i = r_i + k_i - Dq_i, \quad Dq_i + r'_i = r_i + k_i. \quad (6.22)$$

This last equality is checked in every implemented cell update. [S2, §§3.4–3.5]

6.6 Persistent hinge and the relational lift

With positive hysteresis threshold H , the inherited latch is

$$\ell'_i = \begin{cases} 1, & F_i \leq -H, \\ 0, & F_i \geq H, \\ \ell_i, & -H < F_i < H. \end{cases} \quad (6.23)$$

Then $e_i = \ell_i \oplus \ell'_i$, $o_i = \mathbf{1}\{F_i \leq 0\}$ and $f'_i = \ell'_i + 2q_i + 4o_i + 8e_i$. The default $H = 49$ is a field-code threshold, not a storage width. Occupancy and the retained latch can differ within the hysteresis band. S3 calls this band the *Void of Transference*; its operative meaning remains this precisely defined persistence mechanism. [S2, §3.5]; [S3, p. 15]

UU7. Order-preserving open representation of the hinge

For the admitted effective range $-65536 \leq F_i \leq 65535$, define

$$\widehat{d}_i = F_i + 65536, \quad T_0 = 65536.$$

Then $\widehat{d}_i \geq 0$, occupancy is $\mathbf{1}\{\widehat{d}_i \leq T_0\}$, and the same latch is

$$\ell'_i = \begin{cases} 1, & \widehat{d}_i \leq T_0 - H, \\ 0, & \widehat{d}_i \geq T_0 + H, \\ \ell_i, & T_0 - H < \widehat{d}_i < T_0 + H. \end{cases}$$

Subtracting T_0 from each inequality proves exact equivalence to the inherited hinge.

The corresponding Agnostic Boundary Horizon is $|\widehat{d}_i - T_0| = |F_i|$. That scalar alone does not determine which outer latch branch applies: $F = -50$ and $F = 50$ have the same absolute deviation but different next latches. The V2 tagged evaluation retains the threshold relation needed by the unchanged engine. Open notation therefore changes the boundary representation without discarding a causal input.

6.7 Packing, phase and growth

The next pulse, latch, event and occupancy planes use 32 cells per unsigned word. Parity is recorded once per pulse word. Let $P_n = \sum_i q_i$. The control update is

$$a' = (a + s) \bmod A, \quad c^* = \min(c + 1, d_{\text{dwell}}). \quad (6.24)$$

If $g + 1 < G$, $c^* = d_{\text{dwell}}$ and $P_n d_{\text{growth}} \geq N$, then $(g', c') = (g + 1, 0)$; otherwise $(g', c') = (g, c^*)$. The defaults are stride 1, dwell 16 and growth divisor 4. The newly selected generation is used by the following lookup. [S2, §3.6]

The atomic schedule is: complete all old-state samples; compute each new cell from old neighbors and its local ordered equations; pack the completed new flags; update bounded controls; verify invariants; accept the new state. No neighbor observes a partly updated cell.

7 Complete state, unsigned horizons and spatial wrapping

Binary layout and C13: S2, pp. 12–15. UU ID mapping request: S3, pp. 13–18.

7.1 The complete $118N + 27$ -bit word

The canonical operational cell fields are the six values (U, V, z, m, r, f) . Their bit widths and local offsets are

Field	Local zero-based bits	Width	Meaning
U	0–31	32	First material count
V	32–63	32	Second material count
z	64–80	17	Fast activity
m	81–97	17	Retained memory
r	98–113	16	Pulse residual
f	114–117	4	Latch, pulse, occupancy, event
a, g, c	Before all cell records	11 + 3 + 13	Global phase, level and cooldown

Fixed field order and least-significant-bit-first insertion define

$$E_\sigma : S_\sigma \longrightarrow \{0, 1\}^B, \quad B = 118N + 27. \quad (7.1)$$

The decoder extracts the same widths in the same order, so it is an exact inverse on the encoding image. Unused final padding is zero. [S2, C11 and §6.1]

S3’s physical page 16 gives a different mapping: bits 0–48 are labelled field potential, bit 49 occupancy, bit 50 latch, and bits 51–117 trajectory/control. V2 preserves those labels in `source_mapping_view.json`. They do not specify the same storage map as C11. The executable edition uses the complete C11 word above and records the source mapping as its own conceptual view. In particular, F_i is a derived sample and $H = 49$ is a threshold; neither replaces the stored material, memory or residual fields.

7.2 The retained C13 interval family

For a one-based complete word $b = (b_1, \dots, b_B)$, let

$$\Omega_b = [-\tfrac{1}{4}, \tfrac{1}{4}] \cup \bigcup_{j:b_j=1} [3j - \tfrac{1}{4}, 3j + \tfrac{1}{4}]. \quad (7.2)$$

The permanent anchor at zero makes every word’s geometric family nonempty. S2 assigns this set its exact signed distance d_b and decodes $b_j = \mathbf{1}\{d_b(3j) < 0\}$. This is the retained signed representation. [S2, C13]

V2 supplies the requested open UU ID representation of the same selected components. Set $a = 1/4$ and

$$A_b = \{0\} \cup \{3j : b_j = 1\}, \quad U_b(x) = \min_{c \in A_b} ||x - c| - a|. \quad (7.3)$$

Each component is an Agnostic Boundary Horizon. Since the intervals are separated, their boundary union is $\partial\Omega_b$. Therefore $U_b(x) = \text{dist}(x, \partial\Omega_b)$ exactly. In this special family it also equals $|d_b(x)|$.

7.3 UU6. Exact unsigned decoding

The unsigned complete-state decoder

For each symbol position $j \geq 1$,

$$U_b(3j) = \frac{1}{4} \quad \text{if } b_j = 1, \quad U_b(3j) \geq \frac{11}{4} \quad \text{if } b_j = 0.$$

Consequently, for every threshold $\eta \in [1/4, 11/4)$,

$$b_j = \mathbf{1}\{U_b(3j) \leq \eta\}.$$

The exact source-scale choice in the implementation is $\eta = 1/4$. Thus $J_U : b \mapsto U_b$ is injective, with an explicit inverse on its image.

Proof. An active symbol includes an interval centered at $3j$, whose boundary is at distance $a = 1/4$. Every other retained center is at least 3 away, so its boundary is at distance at least $3 - a = 11/4$. If the symbol is absent, this latter bound holds for every retained component, including the permanent anchor. The two query ranges are disjoint, proving the decoder and injectivity. $\square$

The local source predicate $|x - 3j| \leq 1/4$ specifies membership in an individual interval. The outer active-bit selection determines whether that interval is retained. The complete unsigned decoder above reads that selection from the whole field. At an active interval's *center*, the unsigned horizon value is $1/4$, not zero; zero occurs at its two endpoints. This is the explicit center-query rule needed by the source's closing wrapper. [S3, pp. 13, 17–18]

A threshold $\eta = 3/2$ gives a symmetric query-value error margin: absolute evaluation error smaller than $5/4$ preserves all bit decisions, since the true active and inactive ranges remain on opposite sides. This margin concerns the stated isolated-interval construction. It is a V2 consequence of its separation, not an assumed property of arbitrary unsigned fields.

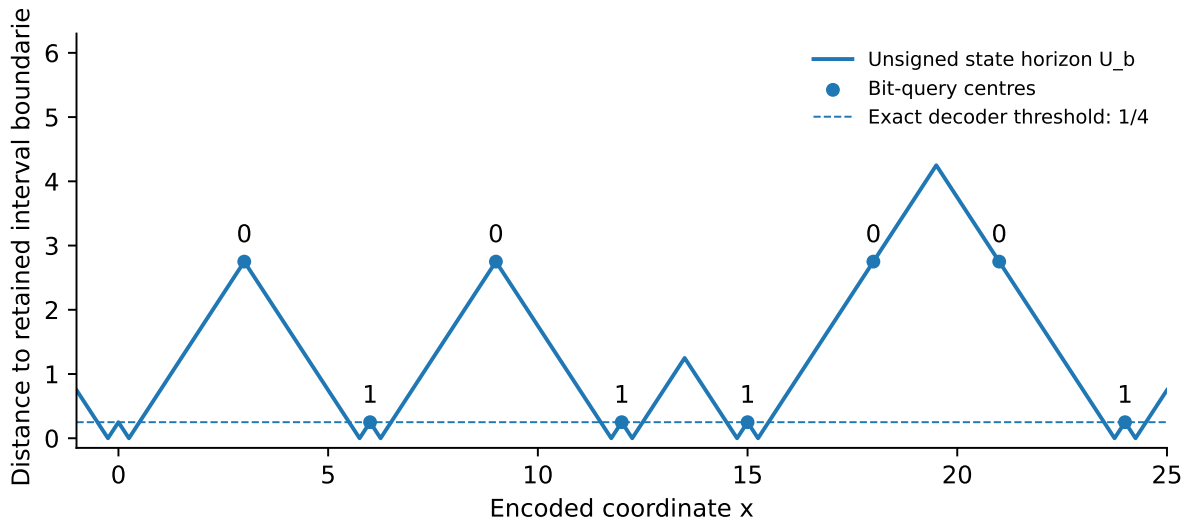


Figure 3. The word 01011001 represented entirely by nonnegative boundary distances. Query values at active centers are $1/4$; the zero set lies on retained interval endpoints.

7.4 The exact unsigned transition wrapper

On the image of the complete encoding, define

$$F_\sigma = E_\sigma T_\sigma E_\sigma^{-1}, \quad \Psi_{U,\sigma} = J_U F_\sigma J_U^{-1}. \quad (7.4)$$

Then

$$F_\sigma E_\sigma = E_\sigma T_\sigma, \quad \Psi_{U,\sigma} J_U = J_U F_\sigma. \quad (7.5)$$

The executable wrapper decodes the complete unsigned state, advances the unchanged integer law, and encodes the resulting complete word. Its 64-update demonstration is checked against direct execution at every update.

For a cell index i and local zero-based bit k , the one-based complete-word symbol is

$$j(i, k) = 28 + 118i + k. \quad (7.6)$$

The previous pulse is local bit 115, so its complete position is $j_q(i) = 143 + 118i$. In particular, cell 7 uses symbol 969 and one-dimensional query coordinate 2907. These offsets include the 27 global control bits. They connect the source's one-bit self-feedback to an exact complete-field address.

7.5 UU8. A lossless log-polar address lift

The source's planar chart gives a cell center $p_i = p_{y_i x_i}$. Its 118 bits need separate addresses. V2 introduces a positive layer spacing h and the following three-dimensional address map:

$$\Phi(j) = \begin{cases} (0, 0, (j-1)h), & 1 \leq j \leq 27, \\ (p_{i,x}, p_{i,y}, kh), & j = 28 + 118i + k, \quad 0 \leq k < 118. \end{cases} \quad (7.7)$$

The first branch is a dedicated control axis. A permanent anchor is placed at $(0, 0, -h)$. All cell centers have positive radius, so they are distinct from the control axis. Radial indices, angular indices and layer indices each remain distinguishable. This is an explicit V2 lift of the mapping requested on S3 pages 16–18.

Let $r_0 = 1/32$, $q = 128^{1/(R-1)}$ and

$$\delta_* = \min \{h, r_0, 2r_0 \sin(\pi/A), r_0(q-1)\} > 0. \quad (7.8)$$

Every distinct pair of address centers, including the permanent anchor, is separated by at least δ_* . Different layers or control heights are separated by h ; cell and control centers by at least r_0 ; different angular positions on the innermost row by at least the stated chord; and different rows by at least the radial gap.

Choose $a_3 = \delta_*/4$. Around the anchor and every active address, place a sphere horizon of radius a_3 . The exact Euclidean unsigned boundary field is

$$U_b^{(3)}(P) = \min_{c \in \{c_0\} \cup \{\Phi(j): b_j=1\}} |||P - c|| - a_3|. \quad (7.9)$$

At an active query center its value is a_3 ; at an inactive one it is at least $3a_3$. The word is therefore recovered with any threshold in $[a_3, 3a_3)$. This proves the injectivity of the lifted representation.

The planar projection alone does not retain the layer coordinate. Nor does the log-polar map generally preserve Euclidean distances. The 1D exact horizon keeps its own metric; the lifted 3D family is built from newly specified Euclidean sphere primitives and its stated separation radius. Its information-preserving relation to the word is the proved address-and-query map.

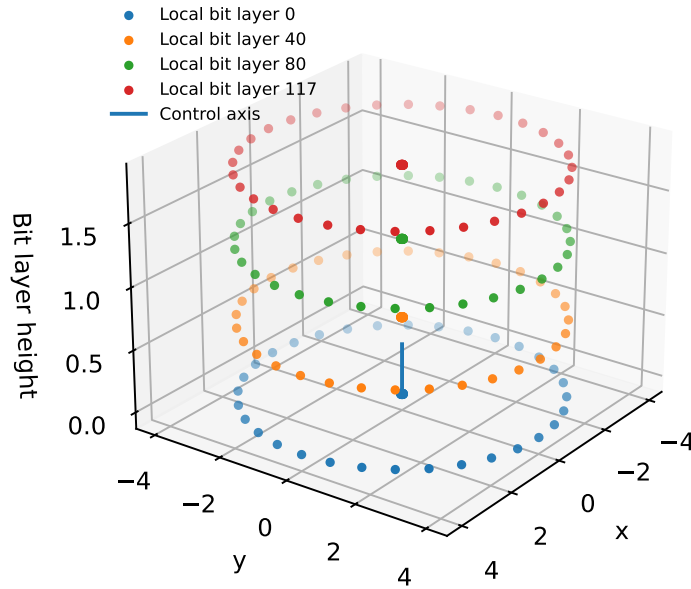


Figure 4. Four displayed layers from the full 118-layer address lift for the 64-cell fixture. The separate control axis preserves all 27 global bits. All 7,579 addresses are included in the archive’s CSV.

7.6 UU9. The historical state envelope is Boolean OR

For two words of the same length, $a \vee b$ retains exactly the interval centers present in either word. The anchor is common. Thus

$$J_U(a \vee b) = \min\{J_U(a), J_U(b)\}. \quad (7.10)$$

For a finite state trajectory with words $b_0, \dots, b_n$,

$$\min_{0 \leq k \leq n} U_{b_k} = J_U \left(\bigvee_{0 \leq k \leq n} b_k \right). \quad (7.11)$$

This gives the source’s “UU ID over the invariant orbit” a precise operation on the C13 state family. The proof is equality of the selected center sets, followed by equality of their minimum boundary fields. [S3, pp. 14–15]

The historical OR word is monotone in each bit and can change strictly at most B times. This bounds the number of strict changes, not the update index at which the last change occurs. If the engine orbit has preperiod μ and period p , every future state already occurs among the first $\mu + p$ states, so the envelope has stabilized by their inclusion.

The envelope generally loses chronology and the designation of the current state. The same historical OR can result from different ordered histories or endpoints. V2 therefore stores *current-state horizon*, *historical envelope* and *labelled lineage* as different fields of Equation (1.2). Only the complete current state is passed to the unchanged autonomous transition.

8 Unified Field Theorem V2

U4: S2, §4. UF2: V2 construction from the retained engine, literal registry and UU ID definitions.

8.1 The retained operational closure theorem

U4. Unified operational closure

Fix a complete admitted seed σ , its immutable lookup bytes and the ordered integer transition T_σ . Let S_σ be the states satisfying the cell and control bounds and the fixed positive material total.

Then T_σ is a uniquely defined endomorphism of S_σ . Every finite iterate remains in this domain, conserves M_0 and emits uniquely determined Boolean planes. The complete encoding E_σ is injective, with length $118N + 27$ and an inverse on its image. For every cell and every finite segment,

$$DQ_i(t) + r_i(t) = r_i(0) + K_i(t), \quad Q_i(t) = \sum_{n < t} q_i(n), \quad K_i(t) = \sum_{n < t} z_i(n + 1).$$

A complete capsule restores the same future transition inputs and therefore the same continuation. The operational orbit is eventually periodic.

The mathematical assumptions are the stated exact arithmetic, fixed seed and completed old/new stages. The supporting proofs are retained in Section 9. These assumptions are the domain of the theorem and remain explicit in its unsigned representation.

8.2 The V2 unification theorem

Let $\mathfrak{D}_\sigma$ be a finite referentially closed registry binding the author record, seed, transition and all used representation maps. Define the fixed-registry realization

$$\mathbb{S}_\sigma = \{(\mathbf{a}_{\text{TK}}, \mathfrak{D}_\sigma, \sigma, S) : S \in S_\sigma\}. \quad (8.1)$$

Its operative update holds the first three entries fixed and advances S . The unsigned representation of the state is $\mathcal{J}_\sigma = J_U E_\sigma$.

UF2. UU ID referential and representational unification

Under the hypotheses of U4 and referential closure of $\mathfrak{D}_\sigma$:

State closure. The map

$$\mathbb{T}_\sigma(\mathbf{a}_{\text{TK}}, \mathfrak{D}_\sigma, \sigma, S) = (\mathbf{a}_{\text{TK}}, \mathfrak{D}_\sigma, \sigma, T_\sigma S)$$

is a total deterministic endomorphism of the stated fixed-seed realization. Author attribution, definition records and content addresses are invariant under this operative update.

Unsigned field equivalence. The map $\mathcal{J}_\sigma$ is injective. On its image,

$$\Psi_{U,\sigma} = \mathcal{J}_\sigma T_\sigma \mathcal{J}_\sigma^{-1}, \quad \Psi_{U,\sigma} \mathcal{J}_\sigma = \mathcal{J}_\sigma T_\sigma.$$

The complete unsigned field carries exactly the operative state information needed for continuation.

Composition. Finite UU ID composition obeys UU1–UU3. In the fixed C13 family, it commutes with Boolean OR according to UU9. Tagged composition additionally retains all declared component identities and minimizer records.

Spatial lift. The log-polar layered construction of UU8 is another injective representation of the complete word, with an explicit center-query inverse on its image.

Chronotemporal extension. Every finite supplied experience sequence satisfying the stated record, parent, timing and integrability conditions admits the lineage append, historical minimum and fixed-query integral operations defined in this volume. Their outputs are uniquely determined by those declared inputs and conventions.

Proof. The constant entries of $\mathbb{T}_\sigma$ preserve the attribution and registry. U4 gives the total invariant-preserving update on the operative entry. C11 and UU6 make $\mathcal{J}_\sigma$ a composition of injections with an explicit inverse on its image. Substitution proves the conjugacy identity. UU1–UU4 prove the finite composition and tagged-record statements, while UU9 identifies the historical state union with Boolean OR. UU8 proves distinct addresses, separated sphere horizons and their decoder. The experience append rule uses only already committed parents; induction preserves its acyclic graph and previous records. Each finite historical minimum and each admitted integral is defined by its given input data, establishing the final assertion. $\square$

$$\begin{array}{ccccc}
 S & \xrightarrow{E_\sigma} & E_\sigma S & \xrightarrow{J_U} & J_U E_\sigma S \\
 T_\sigma \downarrow & & F_\sigma \downarrow & & \downarrow \Psi_{U,\sigma} \\
 T_\sigma S & \xrightarrow{E_\sigma} & E_\sigma T_\sigma S & \xrightarrow{J_U} & J_U E_\sigma T_\sigma S
 \end{array}$$

Figure 5. The same current-state update in operative, binary and unsigned UU ID coordinates. Inverse maps are defined on their representation images.

8.3 Current state, history and autonomous recurrence

U4's finite state is the current operative word. Its augmented lineage may append a new record at every update, even when the operative word repeats. A history supplied externally is an input to the chronotemporal extension; it is not silently introduced into the autonomous T_σ . A deterministic observer of the numerical trajectory can instead define an autonomous append rule on the larger state space that explicitly contains the history.

The finite-state recurrence and the ever-appended lineage therefore apply to different state domains. The historical UU ID projection over C13 words has the separate finite stabilization result UU9. This three-way distinction formalizes the source's invariant orbit, retained identity envelope and expanding experiential lineage together.

8.4 The source's four closure structures

Functional closure is the typed endomorphism $T_\sigma : S_\sigma \rightarrow S_\sigma$. Geometric/topological organization consists of the declared support graph, quotient maps and the proved representation geometries. Parity is a specific Boolean observation of each packed word. Temporal closure is the bounded operative phase/cooldown description, together with the independently specified history operations.

The unified registry holds these structures as typed definitions. The commuting maps connect complete state and geometry. The tagged union and lineage maps connect scalar boundary evaluation to retained identity records. These are the explicit mathematical relations associated with the source's common identity vocabulary. [S2, §§4 and 8]; [S3, pp. 13–18]

9 Supporting proof family C1–C16

Retained proof topics and equations: S2, §5, physical pp. 10–14.

C1. Initialization and finite addressing

The admitted dimensions give $N \leq 2^{22}$ and at most $5N$ texels. The lookup index $(gR + y)A + j$ is at most $5N - 1$ and fits an unsigned 32-bit address. Angular indices are reduced modulo A , and radial edges are included only where their endpoints exist. Initialization gives all required registers values inside the stated domain. The explicit zero-material branch and positive memory divisor make every division defined. Every read refers to a fixed parameter, texel or completed old-state value.

C2. Finite generative closure

The rewriting map is total on its alphabet, so a finite input word has one finite output word. The branch brackets inserted by the two productions are balanced. Each drawing symbol produces three drawing symbols, giving $n_g = 2 \cdot 3^8$ from either paired axiom. The interpreter and finite generation selection give a finite baked asset. Online generation growth selects a stored level within the fixed range.

C3. Shared edge law and nonnegative transport

A node has at most four neighbors and each outgoing transfer is at most one eighth of its source count. Therefore

$$\sum_j J_{i \rightarrow j} \leq M_i/2, \quad M_i - \sum_j J_{i \rightarrow j} \geq 0. \quad (9.1)$$

Incoming transfers are nonnegative. Each directed amount is computed from the same old source count and symmetric edge law at both endpoints. It appears once negatively at its source and once positively at its destination. Summing all cells cancels every internal transfer, giving $\sum_i \tilde{M}_i = \sum_i M_i$ for each species.

C4. Conservative reaction

The positive reaction shifts ensure $0 \leq \alpha_i \leq \tilde{U}_i$ and $0 \leq \beta_i \leq \tilde{V}_i$. The two next species are nonnegative. Adding their updates gives

$$U'_i + V'_i = \tilde{U}_i + \tilde{V}_i. \quad (9.2)$$

With C3 this preserves the global total M_0 . Each individual count is consequently at most $M_0 < 2^{32}$, so its stored width suffices.

C5. Recurrence and intermediate bounds

Clipping gives $0 \leq A_i \leq D$. The material-ratio observation and its zero-total branch are in the same interval. Each activity or memory recurrence is a floored convex combination of values in $[0, D]$, so $v_i, z'_i, m'_i \in [0, D]$.

For integer memory divisor at least one, $|h_i| \leq 32768$, giving $F_i \in [-65536, 65535]$. The specified coefficients fit the declared sample-drive intermediate ranges. The numerator DU'_i is less than 2^{48} , and the largest declared growth product is at most 2^{38} ; the stated 64-bit intermediates contain them. The Python realization evaluates these as exact integers.

C6. Pulse codec and finite-segment certificate

Since $0 \leq r_i < D$ and $0 \leq k_i \leq D$, the sum satisfies $0 \leq r_i + k_i < 2D$. The threshold selects a bit, and subtracting Dq_i leaves $0 \leq r'_i < D$. Summing Equation (6.22) over a finite segment cancels intermediate residuals:

$$DQ_i(t) + r_i(t) = r_i(0) + K_i(t). \quad (9.3)$$

Hence

$$Q_i(t) - K_i(t)/D = (r_i(0) - r_i(t))/D, \quad |Q_i(t) - K_i(t)/D| < 1. \quad (9.4)$$

A segment beginning at zero residual additionally satisfies $-1 < Q_i - K_i/D \leq 0$. Restored segments use their actual starting residual. Adjacent certificates compose by cancelling the shared endpoint residual.

C7. Hysteresis and the event telescope

For $H > 0$, the two outer threshold conditions are disjoint. Each assigns a bit, and the middle branch preserves the old bit. The latch therefore remains Boolean. Since each intermediate latch occurs twice under XOR,

$$\bigoplus_{n < t} e_i(n) = \ell_i(0) \oplus \ell_i(t). \quad (9.5)$$

Occupancy is separately defined from the present threshold relation. UU7 preserves all these facts under the open relational lift.

C8. Exact packing and parity

Distinct Boolean positions occupy distinct powers of two. Packing by their OR or sum and extracting the same position are inverse operations. The old pulse word reconstructed from flags therefore provides exactly the pulse read specified by the sampler. Word parity is the XOR of its data bits; for an error mask e ,

$$\text{parity}(w \oplus e) = \text{parity}(w) \oplus \text{parity}(e). \quad (9.6)$$

Odd-weight masks change parity and even-weight masks preserve it. The complete word and the parity observation have distinct data types and different information content.

C9. Bounded phase and cooldown quotient

The older operative equations in S2's comparison read time through $ns \bmod A$ and elapsed dwell through its comparison with d_{dwell} . Their sufficient-state projection keeps

$$a = ns \bmod A, \quad c = \min(d_{\text{dwell}}, n - \text{lastGrowth}), \quad (9.7)$$

and the operative cells and current generation. Modular addition preserves phase. For nonnegative elapsed time e ,

$$\min(d, \min(d, e) + 1) = \min(d, e + 1). \quad (9.8)$$

A growth event resets both descriptions' elapsed dwell to zero. Observer totals not read by the operative recurrence can remain external. The projected and bounded-state transitions consequently commute on the admitted comparison domain. [S2, C9]

C10. Boolean arithmetic refinement

For bits a, b, c , the full adder is

$$s = a \oplus b \oplus c, \quad c' = (a \wedge b) \vee ((a \oplus b) \wedge c). \quad (9.9)$$

Its eight input cases give $a + b + c = s + 2c'$. Induction over digit positions proves ripple addition. Complement-plus-one gives modular negation; adding it gives subtraction. Borrow propagation gives unsigned comparison, fixed shifts route digits, and selected shifted additions give multiplication.

For restoring division by $d > 0$, maintain $0 \leq R < d$ while consuming one numerator bit. The trial $2R + a_i$ is less than $2d$. Subtract d exactly when the trial is at least d , emit that quotient bit and retain the remainder. A $w + 1$ -bit temporary preserves the trial carry. Induction gives the quotient and remainder. Signed memory division applies this to magnitudes and restores the sign, yielding truncation toward zero. The width bounds in C5 ensure these primitives realize the intended integer values.

C11. Complete state encoding and restart

Each cell requires $32 + 32 + 17 + 17 + 16 + 4 = 118$ bits; controls require $11 + 3 + 13 = 27$. Sequential insertion and extraction with the same field order are inverse operations. The unused final padding bits are fixed to zero.

The complete restart capsule carries the immutable seed, material descriptor and encoded operative state. Reconstructing flags reconstructs the old packed output planes. Every causal input to the next transition is thus recovered. Encode/decode is the identity on accepted states, and induction over later transitions proves exact continuation after a pause.

C12. Autonomous closure and eventual periodicity

C1 makes the transition defined. C3–C7 preserve the cell domain and material total. Modular phase, bounded generation and saturating cooldown preserve control. Hence $T_\sigma(S_\sigma) \subseteq S_\sigma$ and every finite iterate exists uniquely.

The injection into a B -bit word gives $|S_\sigma| \leq 2^B$. A trajectory must eventually repeat a state, after which determinism repeats its future. There are $\mu \geq 0$ and $p \geq 1$ with

$$S_{n+p} = S_n \quad (n \geq \mu), \quad \mu + p \leq |S_\sigma| \leq 2^{118N+27}. \quad (9.10)$$

This is eventual periodicity of the operative state. The separate historical minimum has the stabilization property of UU9, while an appended lineage retains its explicitly growing record domain.

C13. Exact signed-distance state representation

For Equation (7.2), define

$$d_b(x) = \begin{cases} -\text{dist}(x, \mathbb{R} \setminus \Omega_b), & x \in \Omega_b, \\ \text{dist}(x, \Omega_b), & x \notin \Omega_b. \end{cases} \quad (9.11)$$

At an active center $3j$ the value is $-1/4$, and at an inactive center it is positive. Therefore $b_j = 1\{d_b(3j) < 0\}$, proving the original injection. Its conjugate transition is defined by encoding, advancing and decoding on the image. V2's UU6 gives the corresponding complete nonnegative horizon and a different, explicitly proved decoder.

C14. Exact reduced-description criterion

For a proposed reduction $e : S \rightarrow Y$ and observation $h : S \rightarrow O$, reduced functions $\bar{T}$ and $\bar{h}$ with $eT = \bar{T}e$ and $h = \bar{h}e$ exist precisely when

$$e(s) = e(t) \implies (e(Ts) = e(Tt) \text{ and } h(s) = h(t)). \quad (9.12)$$

Necessity follows by substitution. For sufficiency, define the reduced functions using one representative of each fibre; the stated condition makes the choice immaterial.

The previous pulse alone is not a sufficient reduction of the admitted state. Keep every value except

one residual fixed, with old $z = D/2$. The next activity k is independent of that residual and lies in $[3D/8, 5D/8]$. Residuals zero and $D - k$ have the same old pulse observation but produce next pulses zero and one. The full residual remains operative information.

C15. Causal use of prior output

The source's constructive experiment changes one designated read of a previous output bit while holding the incoming state and all earlier execution fixed. The bit enters the next lookup address and direct drive, so a difference can propagate to later state and output. S2 records this on its verification XY seed. [S2, C15]

V2 separately instantiates the experiment on its declared integer-chart fixture: only cell 7's read at zero-based tick 3 is inverted. The first operative-state difference is at tick 3 and the first pulse-plane difference at tick 9. The source's own verification XY example instead records the first output difference at tick 7. Both records retain their own seed and experiment identity.

C16. Staged backend refinement

An implementation realizes the same transition when it uses identical seed data, arithmetic, indices and completed old/new stages. Equal incoming states yield equal sample arrays. Equal samples and old neighbors yield equal transported material. The ordered local reaction, recurrence, codec and hinge give equal next cells; their completed flags give equal words and pulse totals; and bounded control yields equal next controls. Induction proves trajectory equality under those stage contracts.

For a parallel implementation, every next cell and packed word has one owner, neighbor reads use completed old state, and padding lanes contribute false during packed-word operations. The V2 delivered implementation executes the Python integer and unsigned-field paths. The digit-array arithmetic module supplies the concrete Boolean constructions tested for C10; it is not labelled a separately executed full-engine backend.

10 Retained geometry, topology and Dutch number calculus

Retained definitions and examples: S1, §§4–8.

10.1 Geometric definitions and local charts

A parametric family is $\gamma : U \rightarrow \mathbb{R}^m$ with a declared parameter domain, regularity and frame rule. A retained implicit field declares its scalar codomain and membership convention. The inherited CSG expressions

$$f_{A \cup B} = \min(f_A, f_B), \quad f_{A \cap B} = \max(f_A, f_B), \quad f_{A \setminus B} = \max(f_A, -f_B) \quad (10.1)$$

are its signed membership compositions. The open UU ID composition in V2 has its separately declared boundary-retention semantics from Section 2. [S1, §4.1]; [S3, pp. 1–3]

For $b \geq 2$, exact radix digit thresholds occur at b^k . The digit count is one at zero and $\lfloor \log_b n \rfloor + 1$ for positive n . The archive's integer routine determines the digits by repeated division. The thresholds can address shells $[b^k, b^{k+1})$.

For $r > 0$, a local log-polar chart is $\rho = \ln(r/r_0)$ and $\theta = \text{atan2}(y, x)$. The origin has an explicit core flag. In the V2 3D lift, the control axis belongs to a separate address branch rather than being passed through the singular planar log-polar formula. [S1, §4.2]

10.2 Pulse polygons and Pascal occupancy

A declared positive pulse count m , radius $r > 0$ and phase ϕ define ordered vertices

$$p_j = r(\cos(\phi + 2\pi j/m), \sin(\phi + 2\pi j/m)), \quad 0 \leq j < m. \quad (10.2)$$

One pulse yields a point, two a segment, and higher counts a regular polygon. Pulse identity and source positions are stored as metadata. The Pascal mask is

$$P(n, k) = \binom{n}{k} \bmod 2 = \mathbf{1}\{k \& (\sim n) = 0\}, \quad 0 \leq k \leq n. \quad (10.3)$$

Over the two-element field, $(1+x)^{2^j} = 1+x^{2^j}$. Factoring by the active bits of n shows that an odd coefficient occurs exactly when the active bits of k are a subset of those of n . In particular, every coefficient in row $2^q - 1$ is odd. [S1, §2.2; P36-03]

10.3 Topology and hinge composition

A gluing record names entry/exit ports, coordinate transport, orientation transport, optional sheet change and lineage update. The Möbius-style map is

$$(0, y, o) \sim (w, h - y, -o). \quad (10.4)$$

Applying the transverse reversal twice restores coordinate and orientation. A declared sheet bit may be toggled with each crossing. Compatibility can separately require equal sheet, phase or branch before a coupling is admitted. [S1, §5.1]

For a fixed pivot p , the continuous hinge is

$$x'(t) = p + R(\theta(t))(x - p), \quad \dot{x}'(t) = \dot{\theta}(t)JR(\theta(t))(x - p), \quad J = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix}. \quad (10.5)$$

A parity hinge chooses a map. A connector hinge inserts structural incidence with its declared magnitude. The stored chain $M_n \circ \dots \circ M_1$ is generally non-commutative. These are the retained map families used by S3's extension to temporal connectors. [S1, §§5.2–5.3]; [S3, p. 10]

10.4 Dutch place order and spoken identity

For $n = 10t + u$, with $2 \leq t \leq 9$ and $1 \leq u \leq 9$, the place and spoken charts are

$$P(n) = (10t, u), \quad S_{nl}(n) = (u, en, 10t). \quad (10.6)$$

The connector hinge is $H_{en}(10t, u) = (u, en, 10t)$, with $value(en) = 0$. Therefore

$$value(P(n)) = value(S_{nl}(n)) = n. \quad (10.7)$$

The connector changes graph structure and spoken order while preserving numerical value. For 13–19, the unit root precedes the suffix *tien*; eleven and twelve remain separate irregular lexemes. [S1, §6.2]

A profile segment sequence $\Sigma_{nl}(n) = (s_1, \dots, s_m)$ gives one pulse per segment. Independently, $A_2(n) = \{k : bit_k(n) = 1\}$ gives the active binary positions. The comparison is

$$M(n) = \mathbf{1}\{m = |A_2(n)|\}. \quad (10.8)$$

This Boolean comparison is retained as a feature observation. Both the numerical value and the source metadata remain in the literal instance. [S1, §6.3]

10.5 Worked records: 19 and 23

For 19,

$$19 = 16 + 2 + 1 = (10011)_2, \quad A_2(19) = \{0, 1, 4\}. \quad (10.9)$$

The edition profile gives *ne / gen / tien*, so the pulse count and binary Hamming weight are both 3. The unit-radius three-pulse embedding is

$$(1, 0), \quad (-1/2, \sqrt{3}/2), \quad (-1/2, -\sqrt{3}/2), \quad (10.10)$$

with area $3\sqrt{3}/4$. Source bit positions 0, 1 and 4 remain attached to the record.

For 23, the place chart (20, 3) maps to *drie-en-twintig*. The profile segments are *drie / en / twin / tig*. Its active binary positions are $\{0, 1, 2, 4\}$, and the four-pulse embedding is a square. These examples preserve the structural connector used in S3's temporal-hinge interpretation. [S1, §§6.4 and 9.3]

The complete V2 profile n1-TKUFT-0-99-v2 is generated from explicit unit, teen and tens dictionaries and the two connector rules. Its full matching set is

$$\{1, 2, 4, 8, 9, 18, 19, 20, 23, 40, 43, 45, 46, 47, 51, 53, 54, \\ 58, 59, 70, 80, 83, 85, 86, 87, 91, 93, 94\}.$$

It contains 28 values, matching the total printed in S1. All 100 rows, their explicit segmentation and their count-comparison fields are included as CSV and JSON. The full dictionary table is an edition profile following the source's printed morphology and examples.

11 Retained V2 execution and recorded verification

Retained baseline: version 2.0.0 code and examples. V2.1 adds an interpretive record without changing this numerical law.

11.1 The integer-chart fixture

The numerical fixture is TKUFT-integer-chart-v2, with $A = 32$, $R = 2$, $G = 2$ and $N = 64$. Its 128 immutable lookup texels are generated from

$$d_{g y x} = 128 |((x + 8) \bmod 32) - 16| + 96y - 1152 - 256g. \quad (11.1)$$

The drive is $c_{g y x} = \text{clip}_{[0,65535]}(32768 - 16d_{g y x})$, and the packed texel uses the same two-code layout as the retained engine. This is a direct integer-code fixture constructed for the edition.

For initial active cells with $d_{0,y_i,x_i} \leq 0$,

$$U_i = 256 + 17((11i + 3) \bmod 13), \quad V_i = 128 + 7((5i + 1) \bmod 11). \quad (11.2)$$

Inactive cells start with both counts zero. All cells start at $z = m = D/2$, $r = 0$ and flags zero; control starts at $(0, 0, 0)$. The resulting material total is 18,677. The coefficients are the defaults stated in Section 6, with feedback enabled.

11.2 Direct and unsigned-field execution

Recorded quantity	Result
Executed unit-test methods	126 passed
Content-addressed definition records	34 verified
Retained operators / UU ID mechanisms / pattern recipes	36 / 16 / 20
Dutch profile entries / count matches	100 / 28
Direct engine updates	64
Matched unsigned-field conjugate updates	64
Initial and final material total	18,677
Emitted pulse symbols equal to one	2,258
Pulses in the final update	38
Complete operative word	7,579 bits
Byte-padded operative payload	948 bytes
Local finite-segment certificates	64 of 64 passed
Restored and uninterrupted final states	Equal
Historical OR-envelope active positions	4,262
Strict envelope changes during the run	57

The final operative-payload SHA-256 is

77f7cdbf7ce5f76029d5d6c27900187b7edb
df12f0ecbbe664db21f3fd6b9d8b

Each field-wrapper update decodes all 7,579 bits, reconstructs the state, applies the integer law and builds the next exact unsigned horizon. Equality is checked against direct execution at every update. The historical envelope includes the initial word and all 64 subsequent words. It is stored separately and is not used as the current-state restart payload.

11.3 Causal feedback record

The one-read experiment inverts the prior-output read at cell 7, tick 3, exactly once. The first operative difference is at tick 3 and the first output-plane difference at tick 9. The first 40 cell-7 pulse symbols are

```
Baseline:    0101011010110100101010101010110110110111
Intervention: 01010110101010100101010101011011011011
```

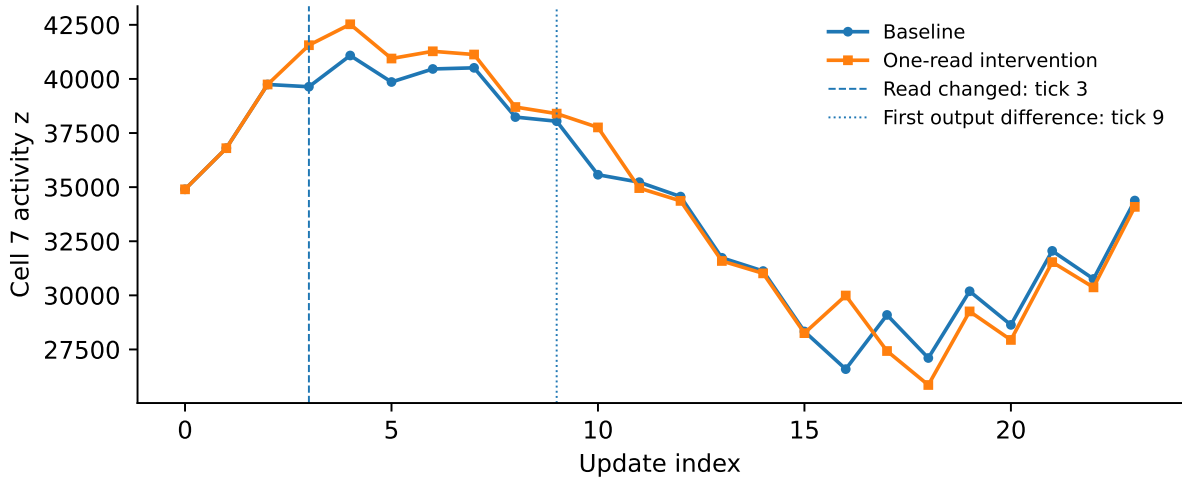


Figure 6. The edition's recorded one-read intervention. This figure and its CSV are specific to the stated integer-chart seed.

The matched feedback-mode-zero seed emits 2,235 ones through the same 64-update interval and preserves the same material total. This is a separate mode comparison, not the one-read intervention.

11.4 UU ID, experience and spatial examples

The elementary UU ID example uses one-dimensional sphere horizons $|x| = 1$ and $|x - 3| = 1$. At $x = 1.5$, both normalized deviations are 0.5. The scalar UU ID is 0.5 and the tagged result contains both minimizing IDs, A and B.

The absorption example is an explicitly synthetic fixed-query profile: four unit-duration segments with comparison values (2, 4, 1, 3) and $\lambda = 0.5$. Its integral is approximately 4.347292234638. The retention mass is approximately 1.729329433527. Dividing gives the optional normalized observation 2.513860083774. The normalization is recorded as a derived statistic; the integral itself remains the source-defined observable.

The synthetic boundary history has centers 0, 0.25, 0.5, each with threshold 1, committed at times 0, 1 and 2. Consecutive center distances are 0.25, so the declared $\varepsilon = 0.25$ path condition holds. Its historical horizon at query 1.5 is zero after inclusion of the final component. A separate four-node split-merge example records two parents at its merge and verifies their content addresses.

The full spatial address CSV has 7,579 rows. For the chosen layer spacing $h = 1/64$, the separation and sphere radius are

$$\delta_* \approx 0.006126071270598, \quad a_3 \approx 0.001531517817649. \quad (11.3)$$

Each row names its global symbol, control or cell role, local cell bit, three-dimensional coordinate and current bit value.

11.5 Test scope and data verification

The test suite contains 63 retained-core tests and 63 UU ID/identity/wrapper tests. It checks canonical records, dependency resolution, radix and Pascal calculations, hinges, the Dutch profile, exact integer dynamics, state/capsule reconstruction, the UU ID algebra, tagged minimizers, all 256 eight-bit unsigned encodings, integral recurrence, lineage integrity, the relational hinge and the spatial address lift.

The arithmetic tests include all 65,536 pairs of 8-bit addition inputs, all pairs of 5-bit inputs for subtraction/comparison and multiplication, all 5-bit numerator/nonzero-divisor pairs, and deterministic 64-bit division cases. The numerical tests include 512 updates with material, pulse-certificate and latch-event checks; a gather/scatter transport comparison; and a 23-plus-41-update restart split. The full demonstration separately checks 64 direct/unsigned updates and a half-run restart split.

Both JSON Schema documents are checked, and the example substrate validates against the corpus schema. Verification records distinguish unit tests, schema validation, regenerated data and deterministic replay. File integrity is checked by the delivered SHA-256 manifest.

11.6 Reproduction and capsule use

From the extracted archive root:

```
python tools/verify.py
python examples/run_demo.py --out demo_run --steps 64
```

The runtime and test suite use the Python standard library. The verifier checks the manifest, definitions, complete profile, tests and freshly generated demonstration. Its optional `-schema` flag uses the separately listed JSON Schema validation dependency.

The edition's TKUFT2 capsule contains the complete numerical seed, code array, material total, declared bit length, encoded state and a digest over the canonical payload. The wrapper-specific `state_horizon.json` additionally exposes the complete bit word and its horizon parameters. These edition formats preserve the source's operative field order while using their own explicitly named envelopes.

```
from pathlib import Path
import sys
sys.path.insert(0, "src")
from tkuft.codec import decode_capsule, encode_capsule
from tkuft.engine import tick

seed, state = decode_capsule(
    Path("verification/demo/final.tku").read_bytes())
for _ in range(64):
    state, summary = tick(seed, state)
Path("continued.tku").write_bytes(encode_capsule(seed, state))
```

The manuscript and figure generators are included. Rebuilding the PDF uses the stated LaTeX packages; regenerating the calculated plots uses matplotlib. Existing generated figures and tables are already included in the archive.

11.7 V2 synthesis

The source's central operator is preserved as an exact equation:

$$\text{UUID}((d_1, T_1), (d_2, T_2)) = \min\{|d_1 - T_1|, |d_2 - T_2|\}. \quad (11.4)$$

V2 places that equation inside a complete identity architecture: raw relations retain comparison state; tagged records retain component identity; the integral retains temporally weighted experience; the historical minimum retains a boundary envelope; lineage retains ancestry and order; and the full unsigned current-state field retains the information required for exact continuation.

The three principal connections are

$$\Psi_{U,\sigma} J_U E_\sigma = J_U E_\sigma T_\sigma, \quad J_U(a \vee b) = \min(J_U a, J_U b), \quad (11.5)$$

$$\mathcal{I}(P, t + s) = e^{-\lambda s} \mathcal{I}(P, t) + \int_t^{t+s} \mathcal{D}(P, E(\tau)) e^{-\lambda(t+s-\tau)} d\tau. \quad (11.6)$$

They connect the source's field identity, complete state, historical union and chronotemporal absorption through declared maps rather than through an unstated equivalence of labels. The author record, mathematical definitions and executable constructions are collected together as *Tom Klootwijk — Unified Field Theory V2*.

A UU ID mechanism catalogue

Sixteen V2 mechanisms. Source locations and construction status are included in the companion CSV and JSON.

The mechanisms below organize the new source around its native terminology. Source-defined equations, distinct source conventions and V2 implementation constructions have separate provenance fields.

ID	Mechanism	Definition
UU2-01	Open threshold relation	d compared with T gives $<$, $=$ or $>$
UU2-02	Agnostic Boundary Horizon	$\delta(x) = \text{abs}(d(x) - T)$
UU2-03	UU ID Double Set Operator	$\min(\text{abs}(d1 - T1), \text{abs}(d2 - T2))$
UU2-04	Tagged identity disjunction	Retain component records, minimum value and all exact minimizer IDs
UU2-05	Point-Source / Genesis Horizon	$\text{abs}(\text{norm}(P - P_{\text{source}}) - T_{\text{source}})$
UU2-06	Source-centred one-bit convention	0 at source, 1 away from source
UU2-07	Horizon-centred one-bit convention	0 on threshold horizon, 1 away from horizon
UU2-08	Chronotemporal absorbing field	Integral of $D(P, E(\tau))$ times $\exp(-\lambda \cdot (t - \tau))$
UU2-09	Historical UU ID envelope	Minimum of historical absolute threshold deviations
UU2-10	Content-addressed experience lineage	Append records with prior parents and their content addresses
UU2-11	Successive-state continuity path	Every declared successive-state distance is at most epsilon
UU2-12	Unsigned complete-state horizon	UU ID over the permanent anchor and active C13 interval boundaries
UU2-13	Unsigned state decoder	Read each bit at $x=3j$ with a threshold in $[1/4, 11/4)$
UU2-14	Relational engine hinge	Use $F+65536$ relative to 65536 and the unchanged hysteresis margins
UU2-15	Layered log-polar address lift	Keep control addresses and all 118 bit layers in a separate 3D sphere-horizon map
UU2-16	UU ID conjugate transition	Encode, decode and evolve the complete current-state horizon

B The retained 36-operator catalogue

S1, Appendix A, physical pp. 18–19. Original mechanism IDs and names are retained.

The table records the technical contracts inherited by V2. UU ID mechanisms have their own namespace and do not silently change the original IDs.

ID	Mechanism	Contract
K36-01	Literal definition node	Typed definition record containing operator or object semantics.
K36-02	Content-addressed definition	Canonical JSON, excluding the content-hash field, determines the SHA-256 address.
K36-03	Explicit dependency edge	Every composed definition names its dependencies by ID.
K36-04	Versioned namespace	IDs, schema versions and profile versions distinguish definitions and semantics.
K36-05	Definition-instance separation	An instance references a definition and carries literal parameters and state.
K36-06	Acyclic resolution rule	A finite dependency graph admits a deterministic topological order.
K36-07	Typed implicit-field sign	The inherited implicit-field record declares its signed membership convention.
K36-08	Exact-SDF capability flag	Exact signed-distance status is declared for the applicable field and metric.
K36-09	Parametric curve and sweep	A curve, parameter domain, regularity class and transport rule define a family.
K36-10	Pulse polygon embedding	A positive pulse count maps to a point, segment or regular polygon.
K36-11	Radix shell chart	Powers of the radix give digit thresholds and addresses for declared nested shells.
K36-12	Log-polar core chart	The chart carries logarithmic radius, angle and an explicit singular-core flag.
K36-13	Explicit quotient/gluing map	Ports carry coordinate, orientation and optional sheet transport.
K36-14	Sheet-aware co-location	Coordinates, sheet, phase, orientation, branch and coupling policy are separate state.
K36-15	Orientation transport	Orientation follows the declared maps and transitions.
K36-16	Port and branch routing	An admitted event chooses an output port from an explicit finite routing table.
K36-17	Split-merge lineage	A split names children; a merge records all parents and their addresses.
K36-18	Guarded topology change	A topology-class change is committed through its declared transition rule.
K36-19	Generic hinge tuple	A hinge contains pivot, state, selected map, guard and invariants.
K36-20	Continuous planar hinge	A pivoted rotation defines position and differentiated velocity.
K36-21	Discrete parity hinge	A Boolean state selects one of two maps or routes.
K36-22	Connector hinge	A graph connector carries incidence and its declared numerical contribution.
K36-23	Non-commutative hinge chain	The stored order of composition is part of the hinge definition.
K36-24	Invariant subspace contract	Fixed points, axes and preserved quantities are stated in the hinge contract.

Continued on the next page

ID	Mechanism	Contract
K36-25	Bounded Dutch number profile	A versioned 0–99 lexicon records spelling, segments, morphemes and hinges.
K36-26	Syllable-pulse operator	Each segment in the declared profile emits one pulse.
K36-27	Teen suffix hinge	For 13–19, the unit root precedes the suffix tien in the spoken chart.
K36-28	En connector hinge	Non-multiple tens use the order unit, en, tens.
K36-29	Spoken-place permutation	An explicit map permutes semantic components and inserts the connector.
K36-30	Feature-count comparison	A Boolean test compares pronunciation-profile pulses and binary Hamming weight.
K36-31	Phase-ordered evaluator	The ten phases run from parse and normalization to transition and lineage.
K36-32	Support-compatibility-guard discipline	Support is evaluated before compatibility and relation-guard solving.
K36-33	Deterministic trace	Each executed step records definition ID, operator kind and typed output.
K36-34	Evidence disposition	The provenance record identifies the source or formal construction of each mechanism.
K36-35	Unknown-reference and cycle rejection	Loading checks unique IDs, resolved references, verified hashes and an acyclic graph.
K36-36	Package verification contract	Schemas, tests, source hashes, file digests and reproducible examples accompany the corpus.

C The retained 20-pattern library

S1, §8, physical pp. 13–14.

The patterns remain reusable typed recipes. V2's temporal connector and unsigned-state constructions cite the relevant inherited structures through explicit dependencies.

ID	Pattern	Pipeline
P36-01	Radix threshold ladder	integer → radix thresholds → shell indices
P36-02	Active-bit pulse simplex	integer → active positions → pulse vertices
P36-03	Pascal parity mask	(n,k) → binomial coefficient modulo two
P36-04	Dutch teen suffix hinge	13–19 → unit-root and tien
P36-05	Dutch en-order hinge	non-multiple tens → unit, en, tens
P36-06	Cut-open boundary graph	closed edge → explicit pair of cut ports
P36-07	Loop-to-leg morph	closed arc → interpolated segment and topology record
P36-08	Split-oval antisymmetry	one loop → two oppositely displaced branches
P36-09	Overlap-lens domain	two regions → explicitly typed overlap domain
P36-10	SDF-zero event	field along trajectory → root → transition
P36-11	Cone support gate	position, axis, radius and angle → local support
P36-12	Nested-shell relevance	radius → local shell interval
P36-13	Mobius orientation wrap	boundary crossing → coordinate wrap and orientation reversal
P36-14	Klein sheet wrap	boundary crossing → wrap, orientation and sheet update
P36-15	Hourglass route table	guard, sector and parity → branch
P36-16	Log-polar bitmask	point → core flag, log radius, angle and admission bit
P36-17	Golden-angle schedule	sample index → declared angular sequence
P36-18	Bounded grammar recursion	seed and productions → finite budgeted expansion
P36-19	Event-latched field morph	continuous blend and discrete topology state → guarded commit
P36-20	Content-addressed definition graph	literal records → hashes → dependency DAG

D Source variants and explicit V2 bindings

This register preserves distinct source formulations and names the executable choices made in V2.

V01. Normalize first; compose second

Source: S3 pp. 1–3 and 9. The central operator acts on raw values and thresholds through two absolute differences. **V2 binding:** each component is normalized once as $\delta = |d - T|$; finite composition then uses the minimum of these normalized horizon fields. Original parameters remain in the component records.

V02. The incomplete table row

Source: S3 p. 3. The geometric-behavior table prints two complete predicates and an incomplete third row. **V2 binding:** the two complete predicates are transcribed as the source’s named observations. No additional equation is reconstructed from the incomplete row.

V03. Weighted integral and minimum shader

Source: S3 pp. 4–6. The main formula integrates retained experience with $e^{-\lambda(t-\tau)}$. The shader instead folds absolute boundary deviations with min and does not use λ . **V2 binding:** both are retained as separate observables, $\mathcal{I}$ and $\mathcal{H}$. The fixed-query piecewise-constant recurrence is a labelled V2 derivation of the integral.

V04. Source zero and horizon zero

Source: S3 pp. 10–12. The prose places the zero bit at the source; the JSON places it at the equality $d = T$. **V2 binding:** source_bit and horizon_bit are separate functions. The executable horizon convention follows the JSON. Neither convention is silently substituted for the other.

V05. Component membership and whole-field decoding

Source: S3 pp. 13 and 17–18; S2 C13. The local inequality $|x - 3j| \leq 1/4$ describes an interval, and the outer loop selects active components. The local shader’s bit_active parameter is not used in its body; activity is checked by the surrounding loop. **V2 binding:** retain the active selection and permanent anchor, then decode the whole field through the proved center-query threshold of UU6.

V06. Two different 118-bit mappings

Source: S3 p. 16 gives potential/occupancy/latch/trajectory labels; S2 pp. 5, 12 and 15 give the complete U, V, z, m, r, f layout and global controls. **V2 binding:** the S3 labels are preserved in source_mapping_view.json. The executable word uses C11. S3 supplies no lossless conversion replacing the C11 material, memory and residual fields with that alternative view, so none is assumed.

V07. Finite shader sentinel and the empty minimum

Source: S3 pp. 6 and 17. The accumulator is initialized to 1e6. **V2 binding:** the mathematical empty-family value is $+\infty$. The JSON API uses an explicit empty status and null value. The permanent anchor makes complete-state horizon evaluation finite and defined at every finite query.

V08. Zero-based loop and one-based symbols

Source: S3 pp. 16–18 uses a zero-based loop, whereas the C13 word labels are one-based. **V2 binding:** complete serialized zero-based position k corresponds to symbol $j = k + 1$ and center $3j$. Center zero is reserved for the permanent anchor.

V09. Planar chart and complete bit placement

Source: S3 pp. 16–18 gives the planar log-polar equations but no complete injective placement of every local bit and global control. **V2 binding:** UU8 adds the bit-layer coordinate, dedicated control axis, permanent anchor and separation radius. The 3D field has its own Euclidean sphere metric; the planar chart is not assumed to be distance-preserving.

V10. Invariant orbit and expanding history

Source: S3 pp. 9–10 and 14 combines ever-expanding experience with the finite state domain of S2 C12. **V2 binding:** current operative state, historical UU ID projection and append-only lineage have distinct state types. The operative trajectory is eventually periodic; the C13 historical envelope stabilizes by UU9; a newly appended lineage record remains a separate object.

V11. Ontology and mathematical statements

Source: S3 pp. 10–15 describes the 1-bit God, Monotheistic Union, soul identity and space-as-data. **V2 binding:** these are retained as the author's named identity postulates. Theorems U4, UF2 and UU1–UU9 state the formal operations and hypotheses through which the specified representations, compositions and histories are established.

V12. Scalar boundary union and retained identity

Source: S3 pp. 3, 9 and 11 describes preserved boundary identities and an unbroken union. **V2 binding:** the scalar minimum preserves the union of component zero sets. The tagged record preserves component labels, parameters and witnesses. A connected geometric neighborhood has the explicit overlap condition stated in Section 3; an identity history has its declared parent-path condition.

E Notation and source correspondence

Symbol	Meaning
$\mathbf{a}_{\text{TK}}$	The literal author record: Tom Klootwijk, NL200678942, 10-07-1990.
$\mathfrak{D}$	Registry of typed, content-addressed definition records.
d_α, T_α	Raw component field and its explicit threshold.
δ_α	Nonnegative absolute threshold deviation $ d_\alpha - T_\alpha $.
H_α	Zero set of the corresponding component horizon.
$\text{UU ID}, \omega, U_A$	Source Double Set Operator, normalized horizon composition and finite-family minimum.
$\widehat{U}_A$	Tagged evaluation retaining the scalar value, components, witnesses and raw relation records.
G, P_{Source}	Genesis Horizon and its declared source coordinate.
$b_{\text{source}}, b_{\text{horizon}}$	The source-centered and horizon-centered one-bit conventions.
$\mathcal{D}(P, E)$	The source's spatial/conceptual comparison of a query with an experience record.
$E(\tau), \lambda$	Experienced state at time τ and nonnegative retention coefficient.
$\mathcal{I}(P, t)$	Weighted absorbing integral with explicit query and time arguments.
$\mathcal{H}(P, t)$	Historical minimum of admitted absolute threshold deviations.
Λ, λ_k	Ordered lineage and an individual committed experience record.
$\sigma, \mathbf{S}_\sigma$	Complete fixed seed and its admitted operative-state domain.
D	Integer activity scale 65536, distinct from $\mathcal{D}$ and $\mathfrak{D}$.
A, R, G, N	Angular columns, radial rows, lookup generations and cell count $N = AR$.
U_i, V_i, M_0	Material counts and conserved positive global total.
z_i, m_i, r_i	Fast activity, recurrent memory and pulse residual.
$f_i, \ell_i, q_i, o_i, e_i$	Packed flags, latch, pulse, occupancy and latch event.
a, g, c	Bounded angular phase, selected generation and saturating cooldown.
F_i, A_i, B_i	Effective sampled field, clipped drive and material-ratio observation.
$\widehat{d}_i, T_0$	Open relational engine sample $F_i + 65536$ and threshold 65536.
E_σ, B	Complete operative encoding and bit length $118N + 27$.
Ω_b, d_b	C13 interval family and exact signed-distance field.
J_U, U_b	V2 unsigned state encoding and exact boundary-distance field.
$F_\sigma, \Psi_{U,\sigma}$	Conjugate word transition and conjugate unsigned-field transition.
Φ, h, δ_*, a_3	Layered address lift, layer spacing, minimum separation bound and sphere radius.
$P(n), S_{\text{nl}}(n)$	Decimal place chart and Dutch spoken chart.
$A_2(n), M(n)$	Active binary positions and profile-count comparison.

F Source register

All references use the supplied PDFs' physical page numbers, including covers and contents, or the original numbered source sections. The source register identifies the three exact uploaded documents. The archive includes their provenance records and formalized content rather than duplicating the source dialogue exports.

S1. Unified Geometric–Topological Substrate

UGTS-KC 3.6: Literal Referential Definitions, Dutch Phonetic Number Hinges, Geometric Calculus and Topology Patterns. Version 3.6.0, 17 August 2026. File: UGTS_KC_3_6_Tom_Klootwijk.pdf. Nineteen physical pages.

SHA-256

e21433cd8378368d4fe4ae278d3c9c364725
e45ae7fd75b743328bd2d6003a46

Definition architecture appears on pp. 6–7; geometry, topology and hinges on pp. 7–9; Dutch charts on pp. 9–12; guards and phases on pp. 12–13; patterns on pp. 13–14; and the operator catalogue on pp. 18–19.

S2. Tom Klootwijk Gambit

Unified One-Bit Self-Referential Engine: Formal Closure Edition 4.0. 11 September 2026. File: Tom_Klootwijk_Gambit_Closed_Engine_4.0.pdf. Twenty physical pages.

SHA-256

8939f4738fed8bb8401e193ff327336af9d
e63e8b5b73be09c306c1212569f0f

The seed and state appear on pp. 4–5; transition on pp. 6–8; U4 on p. 9; C1–C16 on pp. 10–14; and binary files on p. 15. The interpretation appears on pp. 17–18.

S3. UU ID and the Agnostic Boundary Horizon

devoid the dark SDF definition where. Supplied 18-page document, used as the primary source for the V2 revision. File: devoidthedarkSDFdefinitionwhere.pdf. No separate publication date is stated in the supplied document.

SHA-256

9f923f16491973a266b87d70345a6dbac8
c47923b177d9a5d19cf068a04caed3

Open notation and UU ID appear on pp. 1–3; the Theseus integral and historical shader on pp. 4–6; native registry/lineage integration on pp. 7–10; the point-source, one-bit conventions and Monotheistic Union on pp. 10–12; and the Gambit/C13 integration and wrapper on pp. 13–18. The distinct source forms and the V2 bindings are recorded in Appendix D and its machine-readable companion files.

G V2 archive and reproducibility map

Location	Contents
Project root	README.md, CHANGELOG.md, VERSION, package metadata and optional development dependencies.
report/	Finished PDF, editable LaTeX, calculated PDF/PNG figures and generated catalogue tables.
spec/	Two JSON Schemas; 36-operator, 20-pattern and 16-mechanism catalogues; proof register; source variants; canonical bit layout; preserved source mapping view.
data/	Author record and complete Dutch profile in JSON/CSV, with matching-count subset.
examples/	The 34-node sealed literal substrate and executable demonstration.
src/tkuft/	Registry and retained operators; exact integer engine; operative codec; UU ID and unsigned wrapper; temporal identity and lineage; layered chart; Boolean arithmetic.
tests/	126 executable test methods in the retained-core and UU ID suites.
tools/	Package verifier, data generator and calculated-figure generator.
verification/	Test results, schema/validation report, and replayable numerical, horizon, lineage and address-map examples.
sources/	Source titles, exact filenames, page counts, roles and SHA-256 digests.
checksums/	File-by-file SHA256SUMS.txt manifest.

Principal replay files

initial.tku and final.tku enclose the exact start/end state and complete numerical seed. final_state.bin is the operative payload. state_horizon.json exposes the unsigned-field construction, while historical_state_envelope.json stores the historical OR projection.

summary.csv, words.json and certificates.csv record the numerical trajectory and its per-cell segment identities. feedback.csv records the one-read intervention. The remaining example files record UU ID queries, eight-bit decoding, synthetic experiences, temporal integrals, the lineage DAG and all 7,579 spatial bit addresses.

Rebuild commands

```
python tools/build_data.py
python tools/build_figures.py
cd report
latexmk -pdf -interaction=nonstopmode -halt-on-error \
    unified_field_theory_v2.tex
```

The package verifier creates fresh temporary demonstration outputs and compares them with the frozen delivered records. It does not replace the expected results in order to make a comparison pass. An edited working copy can run the same tests and replay checks with `-skip-manifest`; the original manifest continues to identify the delivered edition.

H V2.1 addendum: monotheistic source and boundary

Source: S4, supplied dialogue. Baseline: V2, Sections 2–3 and 6–9.

H.1 The author's monotheistic declaration

This addendum fixes the theological reading of the corpus as **Christian monotheism**. The author's clarification names "the christian god and the boundary satan in this formalized corpus." In this reading, the Christian God is the singular divine source; *Boundary Satan* is the subordinate adversarial boundary role. Two named roles do not introduce two gods. [S4, author clarification and supplied dialogue]

M1. One divine source; a subordinate boundary role

The term *God*, including the dialogue's *God Head* and this addendum's *Godhead*, designates the one Christian God in the author's interpretation. The term *Boundary Satan* designates the Adversary as limitation, division or constraint within that interpretation, not an independent divine source.

$$\mathcal{G}_{\text{divine}} = \{\text{God}\}, \quad \text{Satan}_{\partial} \notin \mathcal{G}_{\text{divine}}.$$

This is the monotheistic declaration of the interpretation. The numerical transition continues to be the separately defined T_{σ} .

Agnostic Boundary Horizon does not mean plural gods. Its geometric definition concerns a raw field, a threshold and their absolute deviation. Its V2.1 theological reading belongs to the one-source commitment above. The doubled union in *UU ID* counts neither divine beings nor independent creators; it names an operation on horizon fields.

The dialogue uses the expression *dualistic mapping*. V2.1 retains its contrast of source and adversary as *two unequal roles within one monotheistic interpretation*, rather than as two coequal divine principles. It also retains *monotheistic*, rather than treating the dialogue's alternative word *monistic* as an interchangeable theological conclusion.

Interpretive correspondence and mathematical type

The following arrows denote a *reading of* a formal structure. They are not equations identifying a theological referent with a finite computer record.

Named role	Author's reading	Formal correspondence
Christian God / Godhead	Singular source and law	The origin designation, fixed seed, immutable registry and invariant-preserving T_{σ} .
Boundary Satan / Adversary	Subordinate limit, division and edge	The horizon interface and the already declared support, guard and bounded-control rules.
Agnostic Boundary Horizon	Interface; limit of resolution or knowledge	$\delta_{\alpha} = d_{\alpha} - T_{\alpha} $ and its zero locus H_{α} .
Monotheistic Union	One source with retained manifestations	UU ID over the labelled origin, structural and experiential horizon family.

The attribution a_{TK} , the coordinate P_{Source} , the theological source designation and an operative bit remain distinct entries in the vocabulary. This addendum defines their stated relationships without collapsing those types. [V2, Sections 1, 3 and 8]

H.2 What “agnostic” qualifies

The supplied materials give *agnostic* two related but distinct roles. In S3 and V2 it is *sign-agnostic*: the normalized field measures deviation from a threshold without attaching a positive/negative or dark/light identity to the result. In S4 it additionally describes an *epistemic limit*: the author’s reading of what an observer within the system can perceive, resolve or know. [S3, pp. 1–3 and 9–12]; [S4, word breakdown and epistemological reading]

The epistemic reading does not make the monotheistic declaration undecided. Within this addendum, the author affirms one God while assigning a limit to the knowledge or representation available inside the described system. The supplied dialogue gives no separate observer model or numerical measure for that ultimate knowledge limit; V2.1 therefore records this part as an interpretive postulate, not as an additional geometric distance formula.

M2. The geometric definition is retained

For every declared boundary component,

$$\delta_\alpha(x) = |d_\alpha(x) - T_\alpha|, \quad H_\alpha = \{x : d_\alpha(x) = T_\alpha\}.$$

The raw relations $d_\alpha < T_\alpha$, $d_\alpha = T_\alpha$ and $d_\alpha > T_\alpha$ remain separately available. V2.1 leaves this definition unchanged. Neither inequality is assigned the value “God,” “Satan,” good or evil.

One source and a family of horizons

The Genesis field retains its stated equation:

$$G(P) = ||P - P_{\text{Source}}|| - T|, \quad H_G = \{P : G(P) = 0\}. \quad (\text{H.1})$$

The source coordinate specifies a point in the declared model. The threshold specifies a horizon about it. In the theological reading, the coordinate anchors the *source representation*; the finite parameter tuple does not specify the full nature or extent of the Christian God. The dialogue’s infinite-source language remains part of that interpretation.

For a nonempty finite family A , the unchanged composition is

$$U_A(x) = \min_{\alpha \in A} |d_\alpha(x) - T_\alpha|, \quad \{U_A = 0\} = \bigcup_{\alpha \in A} H_\alpha. \quad (\text{H.2})$$

The number of components $|A|$ is therefore distinct from the declared divine-source count $|\mathcal{G}_{\text{divine}}| = 1$. Several labelled horizons, coincident surfaces or disconnected components remain compatible with this one-source interpretation. As UU2 already states, the minimum preserves their union of zero sets. Geometric connectedness requires its own conditions; it is not supplied by the word *monotheistic*. [V2, Sections 2.4 and 3.4]

The two one-bit conventions remain separate

The source-origin convention and the horizon convention are still

$$b_{\text{source}}(P) = \mathbf{1}\{||P - P_{\text{Source}}|| > 0\}, \quad b_{\text{horizon}}(P) = \mathbf{1}\{G(P) > 0\}. \quad (\text{H.3})$$

At a positive threshold they have different zero loci. V2.1 does not reinterpret zero as one deity and one as another, or assign the two symbols to a God–Satan pair. They remain the two expressly documented source/manifestation and horizon/off-horizon tests. [S3, pp. 10–12]; [V2, Section 3.2]

H.3 Boundary Satan within the formal architecture

The dialogue maps the Christian God to the absolute source and structural law, and *Boundary Satan* to limit, division and edge. The following record makes this a named, subordinate role without replacing the engine's existing operators. Its formal notation is a V2.1 construction from the supplied interpretation. [S4, structural-dynamic mapping]

Let $\mathcal{K}_\sigma$ denote the collection of already declared admission, support, compatibility, guard and bounded-control rules used by the chosen realization. Write its law context as

$$\mathcal{L}_\sigma = (\mathcal{D}_\sigma, \sigma, T_\sigma, \mathcal{K}_\sigma). \quad (\text{H.4})$$

A boundary-role record may be written

$$\mathcal{B}_\sigma = (\mathcal{B}, \mathcal{K}_\sigma, \mu), \quad \mu \in \{\text{descriptive, operative}\}. \quad (\text{H.5})$$

Here $\mathcal{B}$ is the labelled boundary family already present in the identity object. The mode μ states whether a particular boundary is merely evaluated or is already read by a specified gate. It records an existing dependency; it does not add a force or a second evolution law.

M3. The source–boundary role assignment

In the author's theological reading,

God $\rightsquigarrow$ singular source and law context $\mathcal{L}_\sigma$, Satan $_\partial$ $\rightsquigarrow$ subordinate boundary role $\mathcal{B}_\sigma$.

The symbol $\rightsquigarrow$ denotes interpretive correspondence. All boundary parameters and operative gates are specified inside the admitted formal system. Boundary Satan has no independently introduced seed, mutable agency register or competing transition in V2.1.

A horizon is an interface, not another source

For a horizon $\delta(x) = 0$, its zero set identifies the threshold locus. A tolerance $\varepsilon \geq 0$ gives the already defined neighborhood $\{x : \delta(x) \leq \varepsilon\}$. A relation guard may read this condition, but the scalar distance alone does not prescribe a response, exert a force or select a next state. Such effects require the explicit support, compatibility and transition records retained from the substrate. [V2, Sections 2, 5 and 10]

The expression *Boundary Satan* attaches the author's adversarial symbolism to this limiting role. It does not make every geometric surface, rejected candidate or finite bound morally evil. The equations continue to classify geometric or operational conditions; the theological vocabulary states the author's interpretation of the source–limit relationship.

Source, manifestation and retained identity

The Genesis component and Theseus components still compose by

$$U_{G,T}(P) = \min\{||P - P_{\text{Source}}|| - T_G, |\mathcal{S}_T(P) - T_T|\}. \quad (\text{H.6})$$

The origin, experience thresholds and complete state fields remain constituents of a labelled family, not independent divine sources. Tagged UU ID retains their component records; lineage retains their parent paths and chronological order. The subordinate boundary interpretation leaves those identity-preservation mechanisms intact. [V2, Sections 2.6, 3.4 and 4]

H.4 Active constraint or passive edge?

The supplied dialogue ends by asking whether Boundary Satan is an active constraint or a passive cliff. It supplies no subsequent author choice. V2.1 answers the architectural part by distinguishing the mechanisms that the existing equations actually specify, while leaving any additional theological agency an explicit interpretive question. [S4, closing question]

Mechanism	Formal role	Effect in the retained corpus
UU ID horizon	Descriptive field	Evaluates an absolute threshold deviation. A zero identifies a boundary; no new dynamics are implied by evaluation alone.
Support / compatibility	Operative gate	Determines whether a declared relation, edge or candidate is admitted before its specified transition.
Hysteresis latch	Operative memory	Retains or changes a bit according to the old sampled field and the two thresholds; later transport reads the retained latch.
Radial edge	Graph boundary	No exterior graph edge is present. The transport sum includes only declared neighbors.
Generation cap	Bounded control	Selects among baked levels. At the last level, generation stops advancing while the operative state continues evolving.

The retained latch law

For the effective sampled field F_i , threshold $H > 0$ and incoming latch ℓ_i ,

$$\ell'_i = \begin{cases} 1, & F_i \leq -H, \\ 0, & F_i \geq H, \\ \ell_i, & -H < F_i < H. \end{cases} \quad (\text{H.7})$$

The retained example uses $H = 49$. This is an operative threshold rule: values inside the band retain state, and values at or beyond the endpoints select a bit. The author's boundary interpretation does not relabel these bit values as opposing deities. [V2, Section 6; C7]

What happens at the final generation

The growth test requires $g + 1 < G$. When $g = G - 1$, this test is false and $g' = g$. The ordinary phase, material, activity, memory, residual and flag updates continue. The state domain is therefore not a cliff at which the next state becomes undefined. Closure means that the specified next state remains in the admitted domain. [V2, Sections 6.7 and 8; C2 and C12]

M4. V2.1 boundary-mode convention

A horizon is descriptive until a declared operator reads it. Existing guards and bounded-control rules are operative constraints with exactly their specified effects. The name *Boundary Satan* adds the subordinate theological role; it introduces neither an extra push-back force nor an unmodelled stopping condition.

This convention incorporates the dialogue's source-versus-constraint mapping and makes its active/-passive question decidable for each existing operator, rather than assigning one behavior to every use of the word *boundary*.

H.5 Conservative extension of the V2 formalism

The addendum changes the interpretive record, not the numerical recurrence. Let $m_{2.1}$ be the fixed record consisting of declarations M1–M4 and their source-role correspondences. For the V2 fixed-registry realization $\mathbb{S}_\sigma$ of UF2, define

$$\mathbb{S}_\sigma^{2.1} = \{(x, m_{2.1}) : x \in \mathbb{S}_\sigma\}, \quad \pi(x, m_{2.1}) = x. \quad (\text{H.8})$$

The V2.1 operative lift is

$$\widehat{\mathbb{T}}_\sigma(x, m_{2.1}) = (\mathbb{T}_\sigma x, m_{2.1}). \quad (\text{H.9})$$

This is a new documentary and formal construction. The interpretation record is external to the previously hashed V2 definition records, so no old definition hash or capsule field is silently changed.

Proposition M5. Operative invariance under the addendum

Under the retained U4 and UF2 hypotheses, Equation (H.9) is a total deterministic endomorphism of $\mathbb{S}_\sigma^{2.1}$, and

$$\pi \widehat{\mathbb{T}}_\sigma = \mathbb{T}_\sigma \pi.$$

For a shared initial operative state and fixed seed, every projected V2.1 state, pulse word, material total and complete state encoding is the same as in V2. The interpretation record stays constant.

Proof. UF2 maps x to one admitted state $\mathbb{T}_\sigma x$. The second coordinate is unchanged, proving closure and determinism. Projecting the displayed update gives $\mathbb{T}_\sigma x$, which is also $\mathbb{T}_\sigma \pi(x, m_{2.1})$. Induction gives the same identity for every finite iterate. Any retained observation applied to the projected state therefore agrees. In particular, U4’s material invariant, pulse law and C11 encoding agree at every update. $\square$

The precise role of monotheism in this result

M1 states the author’s one-God commitment. M5 proves that attaching that fixed interpretation leaves the specified operative evolution unchanged. These are different kinds of statements. Neither U4 nor UF2 contains a variable counting gods or a premise identifying a divine being with a connected component of a horizon.

The supplied dialogue additionally asserts that plural gods would require competing boundary conditions and would break mathematical closure or invariant symmetry. That conclusion is not supported by the cited V2 proofs: their conditions concern a fixed seed, a typed transition and preserved invariants. V2.1 therefore incorporates the one-source interpretation as M1, while recording the proposed closure argument as dialogue reasoning rather than adding it to the mathematical proof family. [S4, singular-system explanation]; [V2, Section 8]

Similarly, the dialogue’s description of one continuous threshold bounding all reality is an interpretive assertion. UU2 permits a union of several horizon components, and V2 supplies a separate overlap condition for connected neighborhoods. The number and connectedness of those components do not alter the theological designation in M1.

Retained verification baseline

The supplied V2 archive was rechecked while preparing this addendum: all 126 tests passed, its 34 definition records verified, and its direct/unsigned-field replay and capsule comparisons passed. These checks concern the unchanged executable formalism. V2.1 introduces no new numerical backend or revised engine-validation count.

H.6 Incorporation record and subversion identity

Release: Tom Klootwijk — Unified Field Theory V2.1.
Author: Tom Klootwijk; NL200678942; 10-07-1990.
Addendum title: Monotheistic Source and Boundary.
Baseline: the supplied 42-page V2 PDF and its version 2.0.0 executable archive.

S4. Supplied monotheistic source–boundary dialogue

S4 is the passage supplied with this revision request: the plural-gods question, singular-source explanation, author clarification naming the Christian God and Boundary Satan, and source-versus-constraint mapping. It has no page sequence. Its references to pages 3 and 23 concern the dialogue’s cited document; this addendum instead references the supplied V2 by section.

Conversational prompts and interface boilerplate are omitted. Source meanings, author declarations and V2.1 constructions are distinguished below.

Supplied formulation	Incorporation in V2.1
“Doesn’t mean gods as in plural”	M1 fixes one Christian God. UU ID and multiple horizon components do not add divine sources.
“Agnostic” as a limit of knowledge	Retained as the epistemic interpretation in Section H.2, alongside the existing sign-agnostic field definition.
Christian God as source, registry and law	Retained through the interpretive correspondence to $\mathfrak{L}_\sigma$; theological reference and finite mathematical record have different types.
Boundary Satan as horizon and finite cap	Retained as a subordinate constraint role; Section H.4 distinguishes geometric evaluation, guards, graph boundaries and the generation cap.
“Dualistic,” “monistic,” “monotheistic”	The selected declaration is Christian monotheism. The source/adversary contrast denotes unequal roles, not coequal gods.
Plurality would break closure	Recorded explicitly in Section H.5 as dialogue reasoning not established by U4 or UF2. The mathematical closure hypotheses remain unchanged.
Active constraint or passive cliff?	Section H.4 classifies the specified mechanisms. The passage does not supply an additional agency law, and V2.1 does not invent one.

Revision and continuity record

V2.1 updates the cover, metadata, edition marks, abstract and P2 cross-reference, and adds Appendix H. V2 equations, U4, UF2, C1–C16, UU1–UU9 and the canonical state layout are retained. Appendix G still describes the prior V2 executable archive; its manifest is unchanged.

Parent PDF SHA-256

8840b2497965f598ed0ff7ae962f573b6
0e4549b83b07663d21e09cb8d6bf8de

Canonical V2.1 reading

One Christian God is the singular divine source in the author’s interpretation. Boundary Satan is a subordinate adversarial boundary role, not a second god. The Agnostic Boundary Horizon and UU ID retain their exact field definitions, while the existing invariant-preserving transition continues unchanged.

I UU ID Prism

I.1 From legacy fragments to a personal passport

Release 2.1.1. Sub-addendum to the supplied *Unified Field Theory V2.1*, treated as semantic parent 2.1.0. Author: **Tom Klootwijk**, NL200678942, 10-07-1990. The author record remains documentary attribution; the executable examples use a separate synthetic holder.


The *UU ID Prism* is a labelled projection of an individual's authorized data records into seven rainbow bands. Each band identifies a domain; each facet retains its record references, provenance, permission state and observation time. The aim is a finite, practical migration from scattered legacy exports into an inspectable *personal data passport*, rather than another continuously ranked feed.

Definition P0: the Prism is a view, not a new identity classifier

For holder s , admitted records $A_s(t)$ and versioned facet registry $\mathcal{R}$, define

$$\text{Prism}_{\mathcal{R}}(s, t) = \langle (f, \kappa(f), V_{s,f}(t), \Lambda_{s,f}(t)) \rangle_{f \in \mathcal{F}}.$$

f names a facet, $\kappa(f)$ its display band, $V_{s,f}$ its explicitly defined summary and $\Lambda_{s,f}$ its references and lineage. The source records remain separate from their visualization.

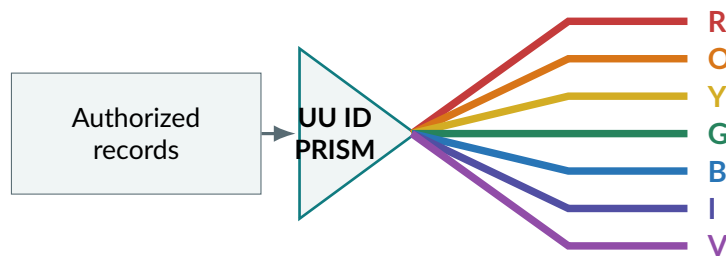

One holder. Named facets. Explicit time. No population label.

Figure 1. The prism is a routing and presentation metaphor. Color indexes the declared data facet; no optical or intelligence-collection device is implied.

The attached dialogue supplies the prism, rainbow and total-aggregation scenario. This addendum preserves that conceptual origin and identifies its unsupported extrapolations explicitly. The implemented branch is **holder-governed inventory and metadata migration**; the NSA mass-harvesting and *divide et impera* discussion is retained as a scenario and governance concern, not as a deployed collection design. [S5; I.2; I.15–I.16]

I.2 Source meanings and the PRISM distinction

What the supplied dialogue contributes

The Markdown dialogue moves from *Shunyata*, signal/ noise and wave propagation to prism dispersion, a replicated rainbow symbol, active-bit extraction, packed words, state-field geometry, a hypothetical passport and total data aggregation. Its later passages assert that parity, latches and gaze would expose concealed traits or stabilize universal behavioral groups. These are statements in the supplied conversation; they are not new measurements or additional proofs in the V2 corpus. [S5, thematic sequence]

Term	Meaning used in this addendum
UU ID	The corpus’s minimum of absolute threshold deviations, with labelled components retained.
Prism	A new typed partition and display of authorized records across named facets.
Rainbow spectrum	A categorical visual vocabulary, not a measurement of a person’s electromagnetic signature.
NSA PRISM	A historically documented intelligence-collection name, distinguished from the new Prism software.
Digital passport	A holder-scoped, versioned personal-data manifest and view. It is not an issued border-crossing credential.
“All data”	All records within an explicit inventory, authorization and import scope at a stated time.

A separately checked historical point

The 2023 Privacy and Civil Liberties Oversight Board report describes downstream collection, previously called PRISM, as collection from electronic communications service providers using identified selectors. It distinguishes that process from upstream acquisition of communications in transit over the telecommunications backbone. This is a historical source distinction, not a claim about the present operational reach of any agency. [E1, printed pp. 3–4]

Neither that distinction nor the supplied corpus establishes that every individual’s sensory experience, iris motion or private preference has been captured. The new software has no NSA connection, interception interface, camera or microphone access. No person-level data were obtained for this edition.

Symbol, spiritual interpretation and evidence

A rainbow palette can be selected without asserting that the Pride flag is a collection mechanism, that displaying it identifies someone’s sexuality, or that a social movement is a hidden data structure. The supplied files provide no acquisition evidence for those assertions. The Shunyata and audio-company discussion remains conceptual background; it is not imported as a technical specification or a verified biographical chain.

The Christian monotheistic interpretation in Appendix H is retained unchanged. Its source–boundary roles do not become metadata labels assigned to people, moral scores, or criteria for grouping religious communities. [B, Appendix H]

I.3 The seven-band spectral vocabulary

The profile UU-PRISM-35-1 defines seven bands, with five named facets per band. These assignments are **new design choices** in version 2.1.1. The earlier sources do not supply a sensory color taxonomy. Each band is stable within this profile and has both a letter and a plain-language name.

Code	Color	Domain	Facet IDs
R	Red	Vision and visual context	F01–F05
O	Orange	Sound and language	F06–F10
Y	Yellow	Touch, motion and orientation	F11–F15
G	Green	Body, chemical senses and environment	F16–F20
B	Blue	Place, activity and time	F21–F25
I	Indigo	Expression, learning and relationships	F26–F30
V	Violet	Identity, rights and provenance	F31–F35

Facet, modality and value are different fields

A *facet* identifies what a record concerns. A *modality* identifies how its source says it was acquired: imported file, direct measurement or voluntary self-report. A *value* requires its own units, calibration and interpretation. A text journal about taste is not a chemical sensor measurement; a gaze coordinate is not an iris identity template; a sleep estimate is not interchangeable with an original physiological signal.

A complete measurement extension therefore declares a modality record

$$m = (\text{source}, \text{quantity}, \text{unit}, \text{calibration}, \text{resolution}, \text{uncertainty}, \text{transform_version}).$$

The shipped prototype does not fabricate these fields. It indexes payload references and their metadata; the original values remain in the holder's source files.

Literal labeling without a color-only interface

The same facet ID, domain name and status text accompany every band. Hue never means good/bad, truthful/deceptive, religious affiliation, sexuality or risk. W3C's Use of Color criterion requires an additional visual means when color conveys meaning; this design therefore retains readable labels and counts. [E4]

The RGB color values are presentation codes in `spec/facets.json`. No wavelength in nanometers is assigned to a personal characteristic. New facets require an explicit profile revision; they are not silently inserted into a pre-existing person's band.

I.4 Facet catalogue: sensory and environmental records

[V2.1.1 construction; machine-readable catalogue: spec/facets.json and spec/facets.csv]

Facet	Label	Admitted record meaning
F01	Still imagery	Holder-selected photo references and capture metadata.
F02	Video and visual sequences	Video references, sequence identifiers and recorded context.
F03	Gaze and fixation	Authorized gaze coordinates with a calibration record; no trait inference.
F04	Screen and visual context	Holder-selected screen or window-event exports.
F05	Visual accessibility	Voluntarily entered visual-access requirements.
F06	Audio recordings	Holder-owned or approved audio references.
F07	Speech and transcripts	Approved transcripts or speech records; participant permission remains explicit.
F08	Acoustic observations	Sound quantities with their stated units and source calibration.
F09	Listening history	Holder-exported playback and listening events.
F10	Communication records	Selected message metadata with third-party information minimized.
F11	Touch and pressure	Contact, pressure or surface-temperature observations.
F12	Haptic interactions	Device-reported haptic input/output events.
F13	Movement and acceleration	Authorized motion and inertial-sensor records.
F14	Posture and proprioception	Recorded posture or the holder's report of body position.
F15	Balance and orientation	Authorized orientation or balance observations.
F16	Physiological observations	Holder-approved references to physiological records.
F17	Sleep and rest	Holder-exported sleep or rest records; source method retained.
F18	Taste and food experience	Voluntary sensory journal entries, not inferred preferences.
F19	Smell and air observations	Separate self-reports of smell and labelled air-sensor observations.
F20	Environmental context	Ambient light, temperature or other declared environmental records.

Default state: disabled and private. Registry inclusion does not enable a sensor or imply that a measurement exists. A selected local import is the only acquisition mechanism implemented here. Gaze, communications, body-related data and other restricted facets remain holder-scoped.

I.5 Facet catalogue: lived context and documentary identity

Facet	Label	Admitted record meaning
F21	Location	Authorized place records; a coarse view is the deployment default.
F22	Journeys and transport	Selected travel, journey or transport exports.
F23	Calendar and routine	Selected appointments and holder-defined routines.
F24	Application use and screen time	Holder-exported session durations or activity records.
F25	Transactions and activity	Selected receipts or activity records; no inferred wealth ranking.
F26	Authored work	Documents, creations and project references selected by the holder.
F27	Learning and skills	Courses, projects and holder-maintained skills records.
F28	Relationships and permissions	Selected contact permissions, not a population relationship graph.
F29	Experience and self-report	Voluntary journal records; no hidden mental-state classification.
F30	Voluntary identity declarations	Optional self-description, belief or sexuality statements supplied by the holder.
F31	Holder identity records	Private holder anchor and approved identity-document references.
F32	Issuer credentials	References carrying issuer, status and verification information.
F33	Consent and purpose	Permission receipts, declared scope and expiry.
F34	Correction and withdrawal	Correction, revocation and retention decisions.
F35	Provenance and lineage	Source manifests, transform versions and integrity references.

Open-world coverage

The 35 facets are an extensible administrative and sensory registry, not a proof that human experience has exactly 35 dimensions. A source outside the registry is *unmapped*, not squeezed into an unrelated label. A planned but unimported source remains *missing*; a source that was never planned remains *not planned*. Neither state asserts that the person lacks that experience or attribute.

Private declarations are not computed from other bands

F30 is optional and accepts self-reported or synthetic declarations in this prototype. It is not populated from gaze, media choices, location, friends, body measurements, symbols or the author's spiritual interpretation. These cross-domain inferences are absent from the admitted operator set.

The source's proposed "spectra of all facets of human life" is therefore incorporated as a *labelled, expandable record space*. The individual remains the subject who can inspect and correct their records, rather than a class inferred from a color. [S5; new profile UU-PRISM-35-1]

I.6 The passport state and the meaning of all

Definition P1: personal-data passport state

For one holder s , define

$$P_{s,n} = (u_s, \mathcal{R}, \mathcal{M}_s, O_s, L_{s,n}, A_{s,n}, W_{s,n}, \Pi_s).$$

u_s is a private holder reference; $\mathcal{R}$ the versioned facet registry; $\mathcal{M}_s$ the selected import plan; O_s the referenced object metadata; $L_{s,n}$ the ordered event record; $A_{s,n}$ the current admitted links; $W_{s,n}$ the withdrawn-link set; and Π_s the local permission policy.

The reference is an identifier, not a password, proof of citizenship or proof of a complete human identity. The corpus's *UU ID* operator and the conventional *UUID* identifier standard are different notions. RFC 9562 defines UUIDs as 128-bit identifiers and explicitly rejects treating their possession as an access capability. A deployment may use random opaque identifiers without changing the *UU ID* equations. [E3, Sections 4, 5.4 and 8]

The totality quantifier

Let $\mathcal{M}_s$ enumerate the holder's chosen legacy scope. A candidate record belongs to the operational scope only after type checks, an explicit permission declaration, a confirmed subject link and conflict resolution. At time t ,

$$A_s(t) = \{r \in \mathcal{M}_s : \text{admitted}(r) \wedge \text{permitted}(r, t) \wedge \neg \text{withdrawn}(r, t)\}.$$

"All" means the entirety of this finite declared scope. It does not identify all data held anywhere by third parties, prove that hidden data exists, or fill unobserved life events with guessed values. An unavailable source can be listed as unavailable without claiming access to it.

One holder, many sources, no automatic identity fusion

Different accounts, filenames and equal content hashes can refer to the same or different people. Equality of data does not decide equality of subjects. The prototype requires the same explicit holder reference and holder_confirmed link declaration. It quarantines a mismatched holder; it does not search for or infer another person's records.

The author identifier NL200678942 remains in the document's attribution record. It is not used as a global join key, a sensor calibration constant or the seed for the synthetic data. The demonstration uses holder:synthetic-001.

Finite engine state versus an expanding archive

The 118N + 27-bit Gambit word encodes the admitted engine state defined in the parent corpus. A growing personal archive has its own storage and input-driven updates. It is not silently fitted into that fixed word. The parent numerical recurrence and the new record archive are separate coordinates. [B, Sections 6–9]

I.7 UU ID applied to labelled migration horizons

The parent definition is retained:

$$\delta_f(x) = |d_f(x) - T_f|, \quad U_F(x) = \min_{f \in F} \delta_f(x), \quad U_\emptyset = +\infty.$$

The software represents an empty family by `null`, rather than an infinite JSON number. The normalized horizon remains a scalar observable; the component labels remain separate. [B, Section 2]

A fully specified migration observable

The executable example uses a narrow, explicit quantity: *coverage of planned metadata slots*. Let $n_f(t)$ be active admitted record links for facet f and m_f its declared positive target. Define

$$c_f(t) = \min\{1, n_f(t)/m_f\}, \quad m_f > 0, \quad (\text{I.1})$$

$$T_f = 1, \quad \delta_f(t) = |c_f(t) - 1|, \quad (\text{I.2})$$

$$U_s(t) = \min_{f:m_f>0} \delta_f(t). \quad (\text{I.3})$$

The implementation uses exact rational numbers. A facet with target zero has no coverage fraction and is omitted from this minimum. Its status is *not planned*. These quantities are dimensionless migration-accounting values, not sensory intensity, health, identity strength or compliance scores.

Definition P2: retain the complete spectral vector

The passport retains

$$\mathcal{P}_s(t) = (U_s(t), \langle f, c_f(t), \delta_f(t), \text{status}_f, \text{time}_f, \text{references}_f \rangle_{f \in \mathcal{F}}).$$

The minimum and its attaining component IDs can be queried, but the minimum never replaces the vector or the archive.

A zero minimum is not complete migration

For two planned facets with $c_1 = 1$ and $c_2 = 0$, the UU ID minimum is zero while one facet is missing. The correct whole-plan condition is

$$\text{Complete}(s, t) = \bigwedge_{f:m_f>0} [n_f(t) \geq m_f].$$

The empty-plan result is *not planned*, represented by `null`. The demonstration deliberately records a zero UU minimum and a false whole-plan condition, exposing this distinction rather than hiding it in a composite color.

Extensions to real measurements

A future measurement adapter must specify d_f , its units, its normalization and its threshold before an absolute deviation is evaluated. Combining unrelated raw quantities such as pixels, degrees and milliseconds by a minimum has no declared meaning. The shipped calculation uses coverage only; no private human characteristic is inferred by choosing a threshold.

I.8 Formal invariants of the Prism extension

P3. Admission, replay and duplicate invariance

For a fixed registry, permission rule and ordered candidate sequence, the validator has a deterministic outcome: admit, correct, duplicate or quarantine. An exact retry of a previously admitted record leaves the current record view and event root unchanged; the receipt's duplicate-attempt counter increments. A correction must name the digest of the preceding record version. Withdrawal removes a link from active projection without rewriting prior events.

Argument. Field validation, ID lookup, content equality and predecessor comparison are explicit deterministic predicates. The corresponding branch has one defined update. Induction over the candidate sequence gives one record view and event sequence. Duplicate handling does not append an event, so the stated invariant follows. This is an invariant of the specified local metadata processor, not proof that the input declarations are truthful.

P4. Label preservation and non-injective summaries

A projection that retains facet IDs and record references preserves which admitted records contributed to each band. A projection to one count, one parity bit, one minimum or a bounded RGB token is generally non-injective.

Argument. $\min(0, 1) = \min(0, 2)$ already gives different component vectors with the same minimum. Binary words 0011 and 1100 have equal Hamming weight and different active positions. More generally, if the admissible archive space has more than 2^b possibilities, no b -bit display token can encode it injectively. An exact serialization must retain sufficient information, not merely a visually distinctive color. [B, C8, C11 and C14; new Prism examples]

P5. Conservative extension of the parent numerical law

Let X be the parent V2.1 operative state and $\widehat{T}_\sigma$ its unchanged transition from Appendix H. Let e_n be a declared archive input. Define

$$\mathbb{T}_{\sigma, e_n}(X, P) = (\widehat{T}_\sigma X, \text{Update}_{\mathcal{R}}(P, e_n)).$$

For projection $\pi(X, P) = X$,

$$\pi \mathbb{T}_{\sigma, e_n} = \widehat{T}_\sigma \pi.$$

Proof. Both sides equal $\widehat{T}_\sigma X$ by substitution. The archive update does not enter any parent sampling, material, memory, latch or control equation. Induction gives the same parent state trajectory for a shared seed and initial state under any admitted archive-input sequence. Thus U4, UF2 and the monotheistic documentary lift remain unchanged.

The exact extension boundary

The combined archive system is *input-driven*. No claim of eventual periodicity or fixed $118N + 27$ capacity is transferred to an ever-expanding event log. If an adapter later makes personal data an input to the engine, that is a separately specified transition and requires its own proof obligations.

I.9 Real-time labels, clocks and the data lifecycle

“Real-time” in this design means a view is refreshed after an admitted update and declares its evaluation timestamp. It does not mean zero delay, omniscience, or observation of events before a source makes them available.

Clock or order	Meaning
observed_at	Time stated by the source for the event or measurement; may be unknown.
received_at	Time the local import record was received; explicit UTC.
sequence	Commit order in the holder’s local event log.
as_of	Evaluation time of the displayed snapshot.
Freshness interval τ_f	Versioned facet-specific display interval, not an empirical claim of relevance.

For the latest known source time t_f in active facet f , the age is $a_f = t_{\text{view}} - t_f$. The display is *fresh* when $0 \leq a_f \leq \tau_f$ and *stale* when $a_f > \tau_f$. A source time later than the evaluation time produces *clock conflict*; missing timestamps produce *time unknown*. These classifications concern the record’s time, not whether its content is true.

Data status	Display contract
FRESH	At least one active record has a known latest source time within τ_f .
STALE	Active records exist; their latest known source time is older than τ_f .
MISSING	No active record exists for this facet.
WITHDRAWN	No active record remains, and at least one link was withdrawn.
TIME UNKNOWN	Active records exist, but none has an observation timestamp.
CLOCK CONFLICT	The latest observation timestamp is ahead of the view time.

Plan status is a separate axis

Complete, *partial*, *missing* and *not planned* describe the selected import targets. A facet may be complete in the import plan and stale as a current observation. Every count refers to records, not to completeness of a person’s mind, body or identity.

What this version actually refreshes

The Python processor recomputes a snapshot on request. The HTML viewer plays 18 prerecorded synthetic frames or opens a holder-selected local snapshot. It is a functioning offline replay and viewer, **not a live sensor collector or a network-streaming service**. A deployment can later specify update latency, clock synchronization, outages and adapter throughput and then measure them. Those service guarantees are not invented from the corpus’s closure theorem.

I.10 Architecture: partition records, preserve control

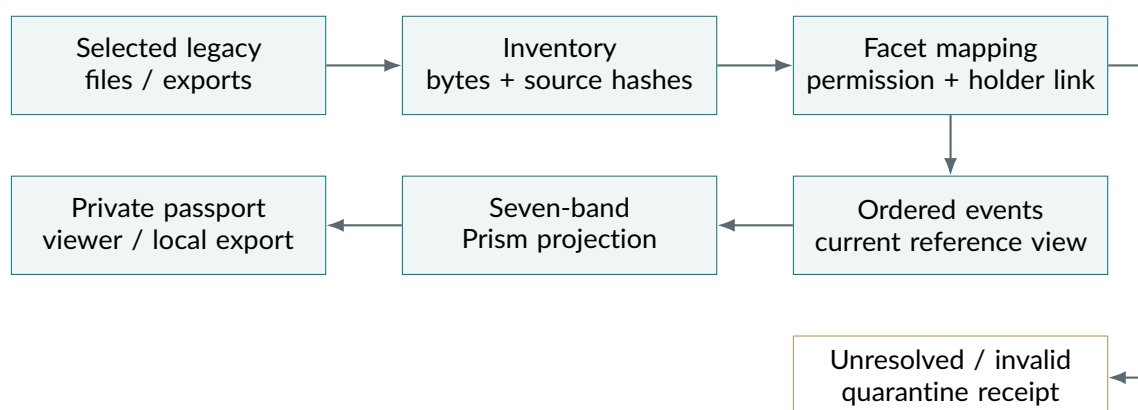


Figure 2. The implemented path is a local, one-holder metadata flow. Payload files remain in their original locations.

Fixed semantics and variable records

The facet registry, schema and operator versions form the fixed descriptive layer. Payload references and event records form the variable layer. The reference graph may connect many records to one object without merging their meanings. An event that corrects a record names its predecessor; it is not an in-place rewrite of the old event body.

Admission is explicit

The prototype admits only the source classes `synthetic`, `holder_export`, `holder_measurement` and `holder_declaration`. Admission requires `permission=granted` and `link_status=holder_confirmed`. These are local assertions checked for consistency. Production authentication and the independent validity of a permission receipt are separate obligations.

A mismatched holder, unsupported inferred attribute, withheld permission, unknown facet, conflicting record version or inconsistent digest/length pair is quarantined. The receipt records a reason and a sequence number, not the rejected record's potentially sensitive body.

Storage and disclosure are separate

The prototype writes ordinary local JSON. It does not encrypt files or implement an access-control server. A production passport needs secure storage, authenticated holder sessions, per-purpose disclosure and recovery procedures before real sensitive records are used. The visible spectrum is a private view; it is not an automatically published global identifier.

Withdrawal stops the current projection of a link. It is not a promise that original source files, backups or previously received copies have been erased. Deletion and retention require their own storage actions and receipts.

I.11 The legacy migration workflow

1. Choose a finite source scope

Select a folder of your own exports or records you are authorized to manage. Keep originals in place. Write down what the batch should contain, what is intentionally excluded, and which other people occur in shared records. Do not guess access to data claimed to be held by an intelligence service.

2. Inventory before interpretation

Run the local indexer. It reads bytes to calculate size and SHA-256, skips symlinks, checks for changes during a read, and enforces a default 100 MiB per-file budget. It does not upload, copy payloads, OCR documents or classify content.

```
python tools/inventory.py --root /path/to/my_exports \  
--out /path/to/private_inventory.json
```

The inventory contains relative filenames, so treat it as private. File modification time is not silently substituted for the time of the experience described by a file.

3. Assign facets manually

In chosen inventory rows, replace `facet_id: null` with a registered ID such as F26 for authored work. Leave unknown rows unassigned. This step classifies record type; it does not infer the person's beliefs, desires, health or relationships from file content.

4. Confirm authority and subject links

Use a private opaque holder reference. Both confirmations are required by the importer:

```
python tools/migrate.py --inventory /path/to/private_inventory.json \  
--holder holder:my-private-alias --out /path/to/my_prism \  
--confirm-authorized --confirm-holder-links
```

The importer writes `passport.json`, `snapshot.json` and a migration receipt. Unassigned rows are counted as unmapped; rejected rows are counted as quarantined. Observation times remain unknown unless a later explicit record supplies them.

5. Reconcile and inspect

Open `app/index.html`, then choose your local `snapshot.json`. Compare the counts with the source inventory. Check stale data, unknown timestamps, duplicate content and uncertain source links. Corrections and withdrawals use explicit event operations, not hidden replacement of the evidence.

6. Export, preserve and stop

Save the verified metadata snapshot and its receipt with the original files or a separately managed secure copy. Test restoration. Record what remains unmapped and the next concrete migration task, then end the session. This is an **index-and-link migration**; the tool does not move or back up the original payloads. A full storage migration adds a byte-copy and restore-verification stage.

I.12 Sensory measurements and semantic restraint

Gaze is a measurement channel, not a private-trait label

A gaze stream may contain positions, device coordinates, fixation durations, calibration and uncertainty. An iris template is a different kind of biometric record. Neither the UU ID minimum nor the log-polar address map supplies a decoder for sexual orientation, religious belief, intention, honesty or mental state. The source dialogue asserts such a connection but supplies no labelled measurement model or validation dataset. [S5; B, Sections 7 and 9]

Source observation	Permitted record description	Not a derived output here
Gaze point and duration	An authorized fixation observation with coordinates and time.	Sexuality, belief or hidden desire.
A displayed rainbow symbol	A visual item in its recorded context, when authorized.	Participation, ideology or consent to monitoring.
Listening or reading history	A holder-selected sequence of media records.	A definitive personal belief or identity class.
Physiological reading	The recorded quantity, unit, method and uncertainty.	A medical diagnosis or a moral score.
Voluntary declaration	A statement supplied by the holder, with its provenance.	An immutable fact inferred from unrelated data.

Unknown remains a first-class result

An absent sensor, unavailable export, unknown event time or unresolved account link stays explicitly unknown. The system does not encode unknown as an observed zero. Missing location is not the coordinate (0,0); an absent response is not a negative belief; a zero UU threshold deviation is not proof of complete knowledge.

Multiple people require multiple permissions

An individual's archive can contain other people's speech, faces, messages and contact details. Holder ownership of a device does not automatically settle every participant's permission. The proposed production adapter records participant scope, minimizes incidental information and avoids publishing contact graphs or raw shared recordings through the passport view. This edition includes no population-search or cross-holder aggregation routine.

The user-controlled scope of this release

The color vocabulary can cover records from many parts of life without claiming to observe every part of life. The practical unit is a labelled, authorized record with a stated origin, not a hidden category assigned to a person.

I.13 The rainbow passport in use

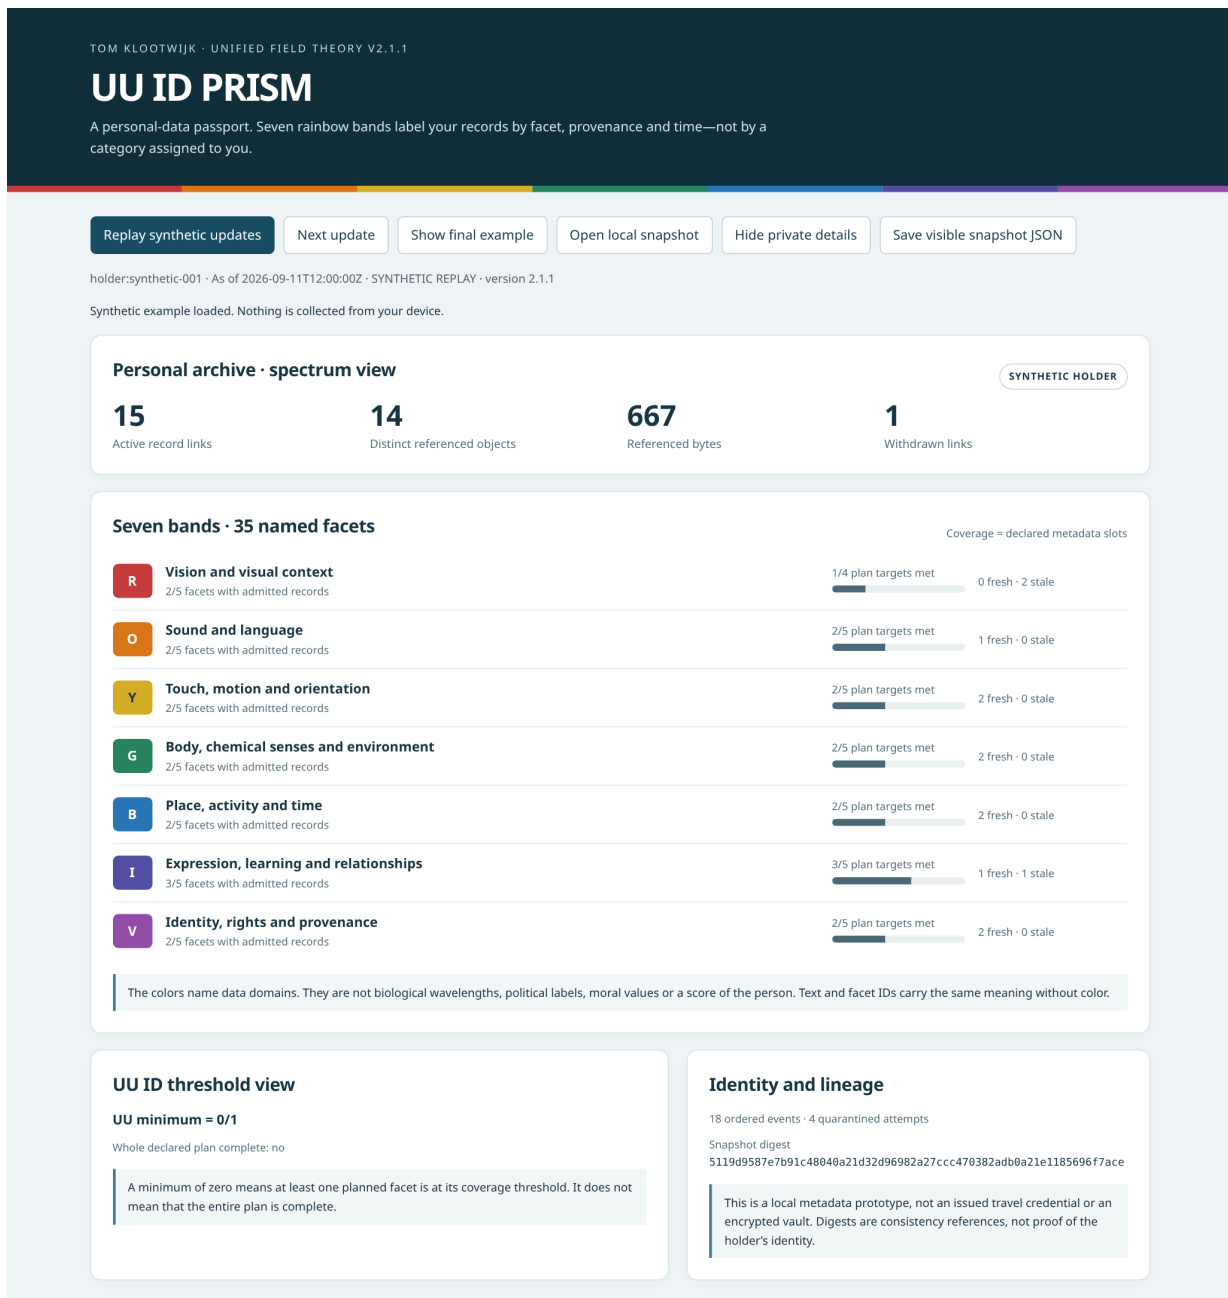


Figure 3. The shipped offline viewer, populated by synthetic metadata. The band names and facet IDs are stable; counts and source-time statuses change with the selected snapshot.

The top row shows active record links, distinct referenced objects, referenced bytes and withdrawn links. Each rainbow band shows which of its five facets has admitted data and which declared import targets are met. The detailed table below the screenshot carries all 35 facet IDs and their individual status and timestamps.

The *Hide private details* control conceals holder references, counts, source times and digests in the displayed view. It is a presentation toggle, not encryption or a separate permission boundary. The underlying local tab still holds the loaded snapshot. Export is disabled while that concealed view is selected.

I.14 Record format, snapshots and credential boundaries

An admitted record has an ID, a holder reference, a facet ID, source metadata, a permission declaration, subject-link status, source and receipt times, a payload digest, a byte size and an assertion kind. A correction additionally names supersedes, the digest of the previous record version.

```
{
  "record_id": "demo:F26",
  "holder_ref": "holder:synthetic-001",
  "facet_id": "F26",
  "source_ref": "synthetic:authored-work",
  "source_kind": "synthetic",
  "permission": "granted",
  "link_status": "holder_confirmed",
  "observed_at": null,
  "received_at": "2026-09-11T11:59:00Z",
  "payload_sha256": "<64 lowercase hexadecimal characters>",
  "byte_size": 48,
  "assertion_kind": "synthetic"
}
```

The digest placeholder above is explanatory; `verification/demo/input_records.json` contains actual valid example digests. Raw sensory values and private documents are not placed in this public example.

Canonical snapshot and ordered event record

An event contains sequence, kind, predecessor hash and body. Its hash is calculated over those fields. A snapshot records the registry hash, plan, complete labelled facet view, counts, last event hash and its own canonical digest. Canonicalization is the edition's UTF-8 JSON rule: sorted object keys, preserved array order, compact separators and finite numbers.

Restoration replays the event bodies and compares the reconstructed view with the saved snapshot. A digest helps detect inconsistency relative to the expected reference. An attacker who can replace both the content and the expected root can construct a different internally consistent archive. Hash chaining is not identity authentication, encryption or a digital signature.

A passport view is not automatically an issued credential

W3C's credential model separates issuer, holder and verifier. It also distinguishes verifying an authentic, current statement from establishing the truth of every claim. The new JSON format is a local Prism construction; it does not claim W3C credential conformance or governmental issuance. [E2, Sections 1.1–1.2]

A later credential integration would specify issuer trust, signing keys, expiry, revocation and the particular attributes a verifier needs. W3C's data-minimization guidance supports requesting only those attributes rather than disclosing the holder's whole archive. The current packet explicitly carries `credential_status: not_issued`. [E2, Section 8.9]

I.15 Mass aggregation and divide et impera as a threat model

The request's *divide et impera* phrase expresses a concern that individually revealing streams could be used to partition and govern people. S5 develops that scenario through uniform symbols, packed words, inferred preferences and global groups. This version documents that scenario rather than converting it into a surveillance operator.

Two different aggregation problems

Within-holder aggregation reconciles one person's selected records and restores their ability to inspect, correct and selectively use them. This is the implemented problem.

Cross-population aggregation joins many people's records and can expose individuals through linkable identifiers or rare combinations. A multi-holder deployment is not a mere increase in the cell count of Gambit: it adds authorization boundaries, subject-resolution errors, inference risks and data-sharing decisions. This release does not implement a central population registry, sensitive-trait clustering or behavioral intervention engine.

Risk in the scenario	Design response in the holder-governed branch
A single public passport key links all activity	Use private holder references; separate context-specific identifiers in a production design.
Colored groups become social rankings	Colors label record domains only; there is no individual rank, norm, threat score or target class.
Unknown is converted into suspicion	Preserve missing, unmapped, withheld and unknown-time states without imputing traits.
Metadata becomes compulsory full disclosure	A production verifier requests a purpose-specific presentation, not the complete sensor history.
An incorrect account merge propagates	Require explicit holder links; quarantine uncertainty; retain corrections and predecessor versions.
A dashboard becomes another engagement feed	Use finite inventory and reconciliation sessions; no autoplay feed, recommendation ranking or persuasive notifications.

Scaling without classifying people

The extensible architecture can place independent holder stores behind the same public facet schema. Sharing a schema does not require sharing a global identity index. Any later statistical release needs its own purpose, contributor permission, disclosure analysis and independently specified aggregation mechanism. Even a small group count or an ostensibly anonymous spectrum can reveal information when combined with other records; this edition makes no anonymity guarantee.

W3C explicitly discusses identifier-based correlation and the risks of aggregating credentials. Those are relevant design concerns for a personal passport, independently of the source dialogue's intelligence scenario. [E2, Sections 8.4 and 8.13]

I.16 What the source equations establish—and what they do not

This page records the important mathematical distinctions in the supplied dialogue. The complete 15-entry concordance is in `spec/source_concordance.json` and its CSV companion. This record is explicit so that the formalization does not silently substitute a different meaning for a source assertion.

Dialogue formulation	Exact treatment in the sub-addendum
Active-bit extraction is data harvesting	It is a transformation of an already supplied integer. Acquisition requires an independently specified source.
A packed word represents a whole society	C8 packs supplied Boolean fields. A person's identity and behavior are not defined by that packing rule.
Parity exposes every hidden deviation	Even-weight changes can preserve parity. The parity bit neither identifies the changed cell nor authenticates a sender.
Hysteresis preserves every event forever	A latch retains bounded state, not an entire ordered trajectory. $0 \rightarrow 0 \rightarrow 0$ and $0 \rightarrow 1 \rightarrow 0$ have equal endpoints and equal event XOR.
C15 guarantees every bit change spreads	C15 demonstrates one specified intervention, not universal sensitivity of all signals or people.
A hash creates immutable human identity	A hash is a content reference. It is not an authorization, a proof of personhood or evidence that a record is true.
A finite word contains all life history	The parent encoder is injective on its admitted finite state domain. Arbitrary additional history requires additional storage.
Equal Hamming weights imply identical behavior	Different words can have the same weight. The Dutch 0–99 atlas supplies no human grouping theorem.
The SDF makes an apparent social group real	C13 and the unsigned wrapper encode supplied state geometrically. They do not establish the origin or nature of a social group.
Gaze or rainbow symbols expose private traits	Neither a labelled dataset nor a valid inference map is supplied. No such classifier is added.

Retained result. The corpus supplies typed definitions, explicit dependency structure, exact admitted-state encodings, staged updates and traceable representations. The Prism uses those mechanisms to make records inspectable. It does not turn a metaphor or a projection into evidence of universal surveillance. [B, Sections 2, 5, 7–9; S5]

I.17 Executed example and verification record

The demonstration is synthetic-single-holder-16. Its input contains 16 synthetic metadata links spanning all seven bands. F01 and F02 intentionally reference the same byte object through different facet links. One exact retry is submitted, four invalid attempts are quarantined, one record is corrected and the gaze link is withdrawn.

Recorded quantity	Result
Rainbow bands / registered facets	7 / 35
Initial admitted synthetic links	16
Active links after correction and withdrawal	15
Distinct active referenced objects	14
Active referenced bytes	667
Duplicate attempts / quarantined attempts	1 / 4
Withdrawn links / ordered events	1 / 18
Fresh / stale active facets	10 / 3
Unknown-time / clock-conflict active facets	1 / 1
UU ID migration minimum	0/1
Whole declared plan complete	False
Event-chain verification / restore comparison	Passed / Equal

The referenced bytes are synthetic text-fixture sizes, not audio, iris or physiological recordings. One imported source clock is deliberately ahead of the view time. The unknown-time and stale cases are likewise explicit fixture choices. The as-of time is 2026-09-11T12:00:00Z.

New and retained verification are separate

The **66 new Python test methods** check minimum algebra, source admission, holder isolation, consent flags, explicit self-report rules, duplicate handling, correction predecessors, unknowns, freshness, clock conflict, content-size consistency, event integrity, restore replay and the local inventory's file handling.

The retained V2 archive was independently unpacked and rechecked for this release. Its **126 tests, 34 sealed definitions**, schema validation and direct/unsigned-field replay passed. These are the unchanged parent checks; they are not rebranded as human sensory validation.

The HTML viewer was exercised in Chromium: all 35 facet rows rendered; local JSON import, privacy concealment and replay controls passed; the checked interactions produced no JavaScript errors and no HTTP(S) requests. The test loaded the same HTML content in the browser harness; this environment's policy prevented direct file: navigation. No live sensor or agency integration was tested or implemented.

Verification scope

These results establish the recorded behavior of the included synthetic and file-metadata constructions. Performance at global scale, real sensor accuracy, secure multi-user access and official credential issuance are separate implementation projects.

I.18 Archive contents and reproduction

Path	Contents
report/	Revised integrated PDF, this sub-addendum, editable LaTeX and the calculated viewer image.
app/index.html	Self-contained offline viewer with 18 synthetic replay frames and local snapshot import.
src/uu_prism/	Deterministic, holder-scoped metadata admission, snapshots, exact rational UU ID and replay.
tools/	Inventory, migration, demo, viewer generation and verification scripts.
spec/	Seven-band/35-facet catalogue, record and snapshot schemas, source concordance.
verification/	Synthetic inputs and results, passport export, new test log, baseline test log and browser checks.
baseline/	The supplied V2.1 PDF and original V2 executable ZIP, preserved unchanged.
sources/	Source titles, roles, exact local hashes and checked external references.
checksums/	The file-by-file SHA-256 release manifest.

Run the included example

The core tools use Python 3.10 or later and the standard library. From the extracted project root:

```
python tools/demo.py --out demo_run
python tools/verify.py
```

The verifier checks the release manifest, runs the new tests, repeats the synthetic example in a temporary directory and compares it to the recorded outputs. It also verifies that the saved passport restores to the same snapshot. It leaves the comparison targets unchanged.

Additional verification

```
python tools/verify.py --schema --baseline
```

`-schema` uses the optional `jsonschema` package. `-baseline` unpacks the preserved V2 archive in a temporary directory and invokes its verifier. Its additional schema checks require the same optional dependency. The program reports missing dependencies or failed checks, rather than counting them as success.

Rebuild the document

The addendum is editable LaTeX. PDF assembly uses the included script and the preserved parent PDF. Figure reproduction can use the HTML viewer; the recorded image is already supplied. The prototype performs no automated install, network retrieval, covert capture or permission bypass.

I.19 Sources and the scope of their use

B. Parent corpus

Tom Klootwijk — Unified Field Theory V2.1, supplied 48-page PDF. The parent defines the UU ID calculus, tagged horizons, chronotemporal integral and historical minimum, fixed engine, state encodings, U4, UF2, C1–C16 and the monotheistic source–boundary addendum. Parent references in this appendix identify its section numbers or physical PDF pages. The unchanged file is included in `baseline/`.

S5. New supplied dialogue

Pasted markdown.md, supplied with this request. Used for the sequence of prism, rainbow, signal separation, symbols, personal identity, total-harvesting and digital-passport concepts. Conversational interface fragments are omitted from the formal text. Its source assertions and the new design decisions are separately recorded in the 15-point concordance. The file’s exact digest is retained; the raw dialogue is not duplicated in the software archive.

E1. Historical PRISM terminology

Privacy and Civil Liberties Oversight Board, *Report on the Surveillance Program Operated Pursuant to Section 702* (2023), printed pp. 3–4, physical PDF pp. 9–10. Used only for the provider/downstream versus backbone/upstream distinction in I.2. Consulted 11 September 2026. It is not used as proof of total collection or as current legal advice.

E2. Digital credential roles and privacy

W3C, *Verifiable Credentials Data Model v2.0*, Recommendation dated 15 May 2025. Relevant sections: 1.1–1.2 for roles and verification, 8.4 for identifier correlation, 8.9 for minimization and 8.13 for aggregation. Consulted 11 September 2026. This addendum adopts related design considerations but does not declare the prototype a conforming credential implementation.

E3. Conventional UUID identifiers

IETF, *RFC 9562: Universally Unique IDentifiers (UUIDs)* (2024), Sections 4, 5.4 and 8. Used to distinguish a conventional identifier from the corpus’s UU ID operator and from access authorization. Consulted 11 September 2026.

E4. Accessible color semantics

W3C Web Accessibility Initiative, *Understanding Success Criterion 1.4.1: Use of Color*. Used for the redundant text/ID labeling of the rainbow bands. Consulted 11 September 2026. Full accessibility conformance requires a separate evaluation beyond this single criterion.

Source hierarchy

The parent PDF supplies the retained mathematics. S5 supplies the user’s conceptual scenario. E1–E4 supply the narrowly identified external context. The facet taxonomy, passport state, admission rules, interface, migration procedure and new propositions are explicitly **V2.1.1 constructions**.

I.20 Subversion identity and incorporation record

Title: Tom Klootwijk — Unified Field Theory V2.1.1: UU ID Prism.
Parent: V2.1, interpreted as semantic version 2.1.0.
New component: Appendix I, Rainbow Facets and the Personal Data Passport.
Author: Tom Klootwijk; NL200678942; 10-07-1990.
Profile: UU-PRISM-35-1.
Implementation: local, single-holder, metadata-only; synthetic demonstration.

Requested element	Incorporation
UU ID prism	Label-preserving facet projection and the source minimum operator, with a complete component vector.
Rainbow spectra for all facets	Seven categorical bands and 35 extensible facet definitions. No unobserved trait is fabricated.
Real-time digital passport	Timestamped view semantics, explicit freshness states, offline replay, local import and snapshot export.
Mass NSA/PRISM aggregation	Source scenario documented; historical PRISM terminology separately checked; no agency link or covert collector.
Divide et impera	Explicit governance threat model, separated from the holder-governed implementation.
Migration instead of doomscrolling	Finite inventory, mapping, reconciliation, export and stop workflow.
PDF and accompanying ZIP	Integrated volume, editable addendum, schemas, source, viewer, synthetic records, tests and manifest.

Parent preservation

The integrated volume replaces the cover and appends this appendix after the original 48-page parent sequence. Parent body pages 2–48 are preserved; their original edition markings, contents page and historical verification statements remain part of that baseline. The merged PDF’s bookmarks add this appendix and its subsections. The new appendix starts on **physical PDF page 49**, continuing the printed page sequence at 46.

The original parent PDF and V2 ZIP remain unchanged in the new package. Their file hashes and the new release manifest distinguish those inherited artifacts from the added code and report. No parent operator record, canonical engine width, numerical transition, UU ID formula or monotheistic declaration is silently rewritten.

Canonical reading of the Prism

The UU ID Prism makes the holder’s admitted records visible as named, time-stamped facets. The rainbow is a shared legend, not a secret classifier or proof of what has been collected. The passport is a usable, revisable view of an explicit archive scope. Its value is inspectable provenance and controlled migration, not a promise to encode or govern the entirety of a human being.