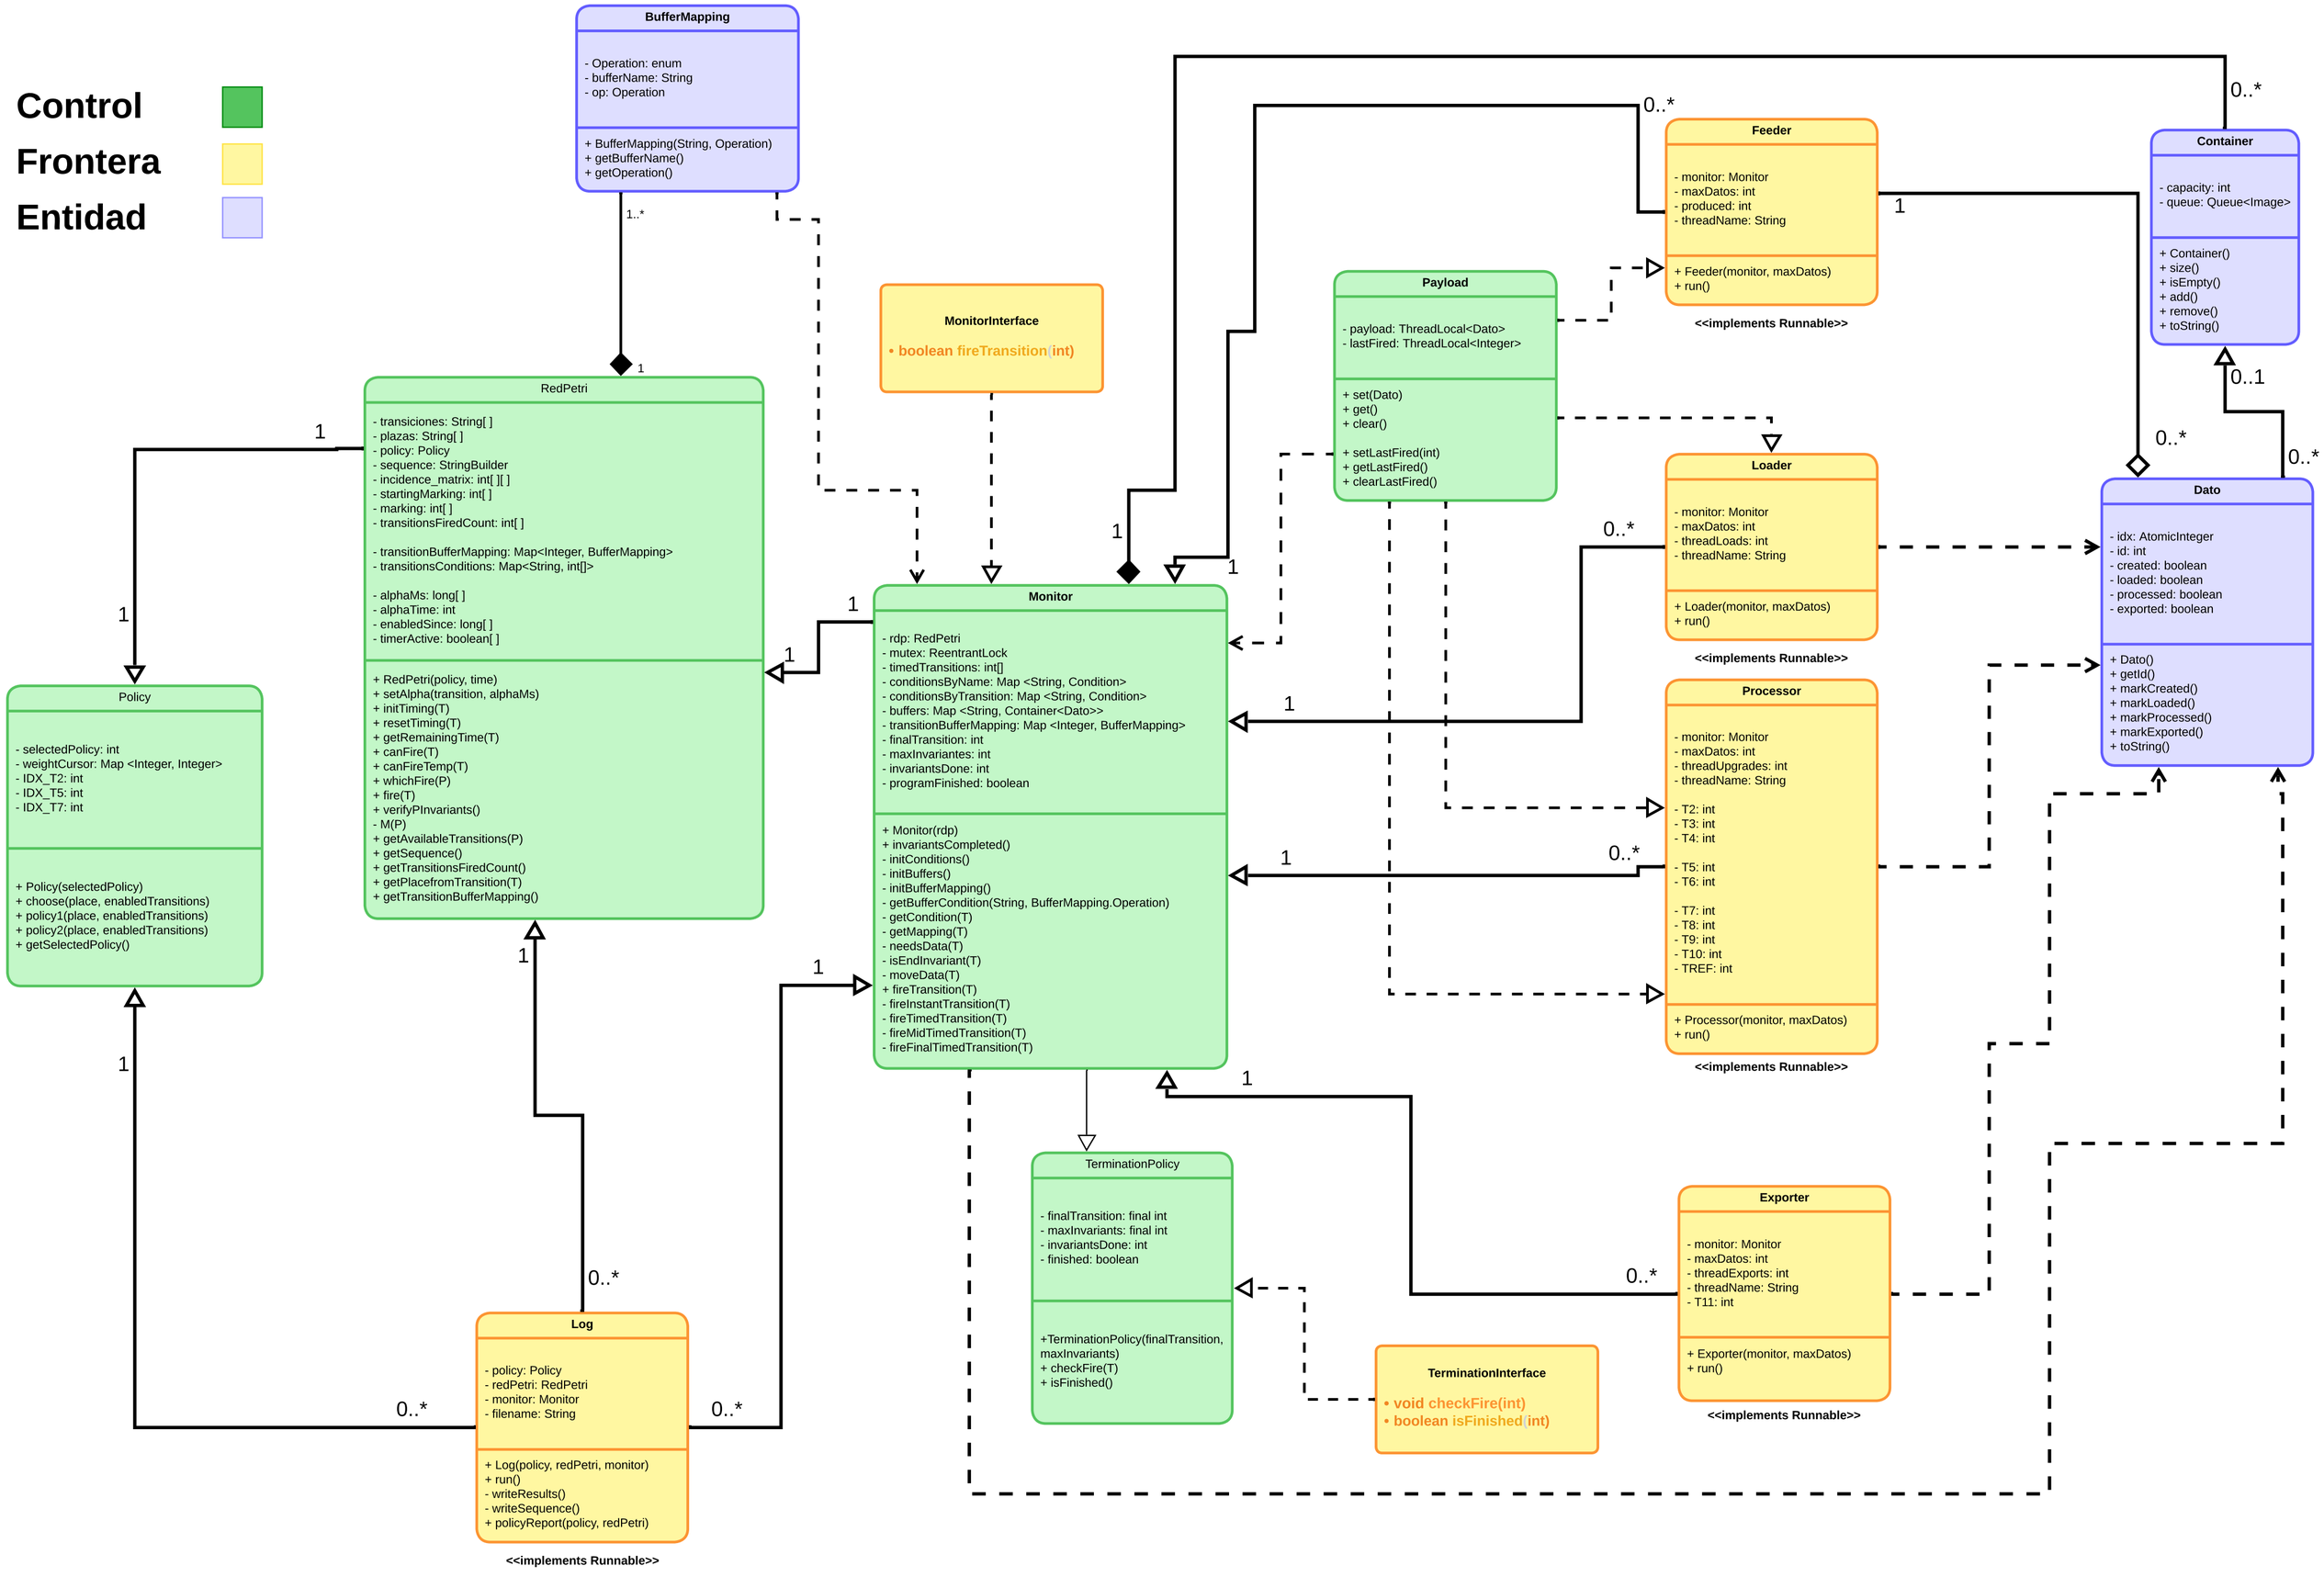
Control
Frontera
Entidad
BufferMapping
- Operation: enum
- bufferName: String
- op: Operation
+ BufferMapping(String, Operation)
+ getBufferName()
+ getOperation()
MonitorInterface
• boolean fireTransition(int)
RedPetri
- transiciones: String[ ]
- plazas: String[ ]
- policy: Policy
- sequence: StringBuilder
- incidence_matrix: int[ ][ ]
- startingMarking: int[ ]
- marking: int[ ]
- transitionsFiredCount: int[ ]
- transitionBufferMapping: Map<Integer, BufferMapping>
- transitionsConditions: Map<String, int[]>
- alphaMs: long[ ]
- alphaTime: int
- enabledSince: long[ ]
- timerActive: boolean[ ]
+ RedPetri(policy, time)
+ setAlpha(transition, alphaMs)
+ initTiming(T)
+ resetTiming(T)
+ getRemainingTime(T)
+ canFire(T)
+ canFireTemp(T)
+ whichFire(P)
+ fire(T)
+ verifyPInvariants()
- M(P)
+ getAvailableTransitions(P)
+ getSequence()
+ getTransitionsFiredCount()
+ getPlacefromTransition(T)
+ getTransitionBufferMapping()
Policy
- selectedPolicy: int
- weightCursor: Map <Integer, Integer>
- IDX_T2: int
- IDX_T5: int
- IDX_T7: int
+ Policy(selectedPolicy)
+ choose(place, enabledTransitions)
+ policy1(place, enabledTransitions)
+ policy2(place, enabledTransitions)
+ getSelectedPolicy()
Monitor
- rdp: RedPetri
- mutex: ReentrantLock
- timedTransitions: int[]
- conditionsByName: Map <String, Condition>
- conditionsByTransition: Map <String, Condition>
- buffers: Map <String, Container<Dato>>
- transitionBufferMapping: Map <Integer, BufferMapping>
- finalTransition: int
- maxInvariantes: int
- invariantsDone: int
- programFinished: boolean
+ Monitor(rdp)
+ invariantsCompleted()
- initConditions()
- initBuffers()
- initBufferMapping()
- getBufferCondition(String, BufferMapping.Operation)
- getCondition(T)
- getMapping(T)
- needsData(T)
- isEndInvariant(T)
- moveData(T)
+ fireTransition(T)
- fireInstantTransition(T)
- fireTimedTransition(T)
- fireMidTimedTransition(T)
- fireFinalTimedTransition(T)
Feeder
- monitor: Monitor
- maxDatos: int
- produced: int
- threadName: String
+ Feeder(monitor, maxDatos)
+ run()
<<implements Runnable>>
Payload
- payload: ThreadLocal<Dato>
- lastFired: ThreadLocal<Integer>
+ set(Dato)
+ get()
+ clear()
+ setLastFired(int)
+ getLastFired()
+ clearLastFired()
Loader
- monitor: Monitor
- maxDatos: int
- threadLoads: int
- threadName: String
+ Loader(monitor, maxDatos)
+ run()
<<implements Runnable>>
Container
- capacity: int
- queue: Queue<Image>
+ Container()
+ size()
+ isEmpty()
+ add()
+ remove()
+ toString()
Dato
- idx: AtomicInteger
- id: int
- created: boolean
- loaded: boolean
- processed: boolean
- exported: boolean
+ Dato()
+ getId()
+ markCreated()
+ markLoaded()
+ markProcessed()
+ markExported()
+ toString()
Processor
- monitor: Monitor
- maxDatos: int
- threadUpgrades: int
- threadName: String
- T2: int
- T3: int
- T4: int
- T5: int
- T6: int
- T7: int
- T8: int
- T9: int
- T10: int
- TREF: int
+ Processor(monitor, maxDatos)
+ run()
<<implements Runnable>>
TerminationPolicy
- finalTransition: final int
- maxInvariants: final int
- invariantsDone: int
- finished: boolean
+TerminationPolicy(finalTransition, maxInvariants)
+ checkFire(T)
+ isFinished()
TerminationInterface
• void checkFire(int)
• boolean isFinished(int)
Exporter
- monitor: Monitor
- maxDatos: int
- threadExports: int
- threadName: String
- T11: int
+ Exporter(monitor, maxDatos)
+ run()
<<implements Runnable>>
Log
- policy: Policy
- redPetri: RedPetri
- monitor: Monitor
- filename: String
+ Log(policy, redPetri, monitor)
+ run()
- writeResults()
- writeSequence()
+ policyReport(policy, redPetri)
<<implements Runnable>>
1..*
1
0..*
0..1