Technical setup instructions

Development Scope Onboarding

Quick onboarding guide for development workstations, GitHub access, SSH certificates, and GitHub Copilot Enterprise.

New updated at the bottom of the page, please make sure NodeJS (version 22) is installed on your computeres.

- Quick onboarding checklist
- 1. Required Applications
- 2. Application Installation
  - Windows users
  - macOS users
- 3. GitHub Onboarding & Access
  - Onboarding hints
- 4. GitHub Copilot Requirements
- 5. SSH Certificate Troubleshooting
- 6. Supporting Files SSH_Troubleshooting files.zip
- 7. Install NodeJS

Quick onboarding checklist

- Install the required development applications.
- Request and wait for all required REDIM roles.
- Complete the official GitHub user onboarding.
- Verify SSH certificate access.
- Verify GitHub Copilot Enterprise, model access, and sufficient AI usage allowance.

1. Required Applications

Application / component	Purpose	Installation / access
Visual Studio Code	Code editor and primary environment for working with GitHub Copilot.	Windows: Solveo MacOS: Self Service+
Git	Used to work with GitHub repositories locally. On Windows, Git Bash is required.	Windows: Solveo **MacOs: Has similar terminal by default. Users don't need it.**
Caauth-cli	Required for SSH certificate installation.	Requires `CSIN\CAAUTH_USR` in REDIM. MacOS: Self Service+. Windows: Lookup PowerShell on your pc and continue by the steps from t he official onboarding instructions.

2. Application Installation


Windows users


Install all required applications through the **Solveo** application catalog in the browser:

Instalovat software – Solveo

1. Select the required application from the software list.
2. Select **Workstation** as the environment.
3. Select **Moje zaízení**.
4. Click the field beneath **Moje zaízení**.
5. Select your device from the list. If it is missing or the list is empty, contact your Delivery Manager.
6. Add the order to the shopping basket on the right side of the page and order the software in the same way as in an ordinary online shop.
7. For additional software, repeat the steps above



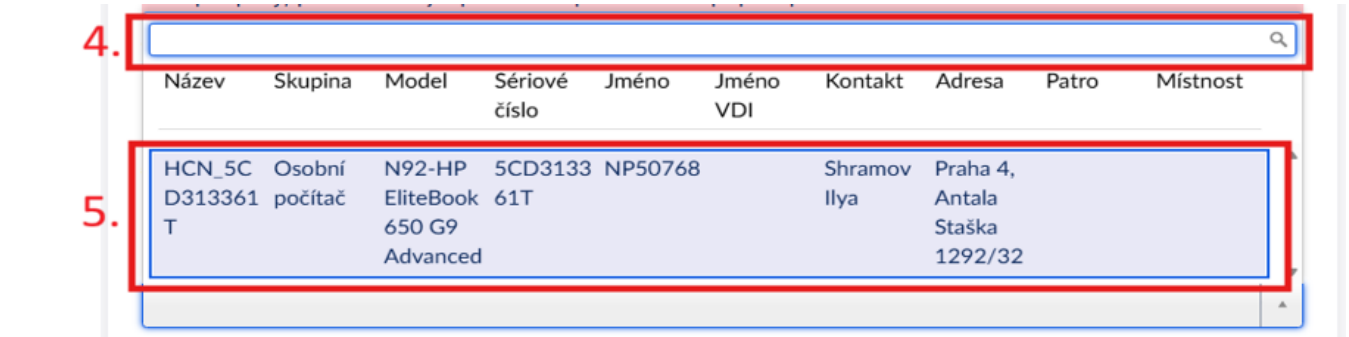

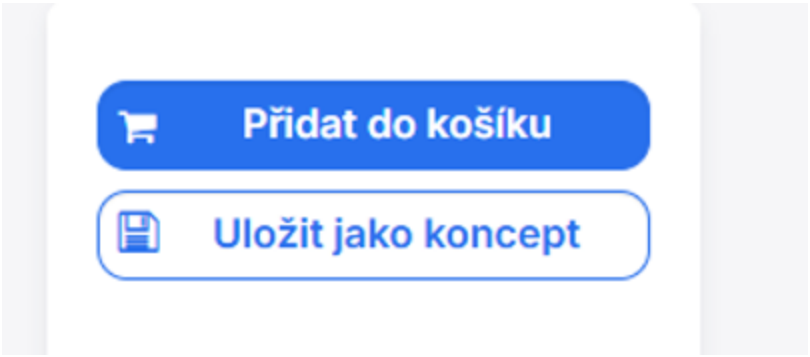



macOS users

All necessary applications can be found in the **Self Service+** application available on the Mac.

1. Open **Self Service+**.
2. Go to **Catalog**.
3. Search for the required application and install it from there.

REDIM role note: Some applications require special REDIM roles before they become visible in Self Service+. If an application is missing from the catalog, check the relevant internal Confluence page for the required application role.

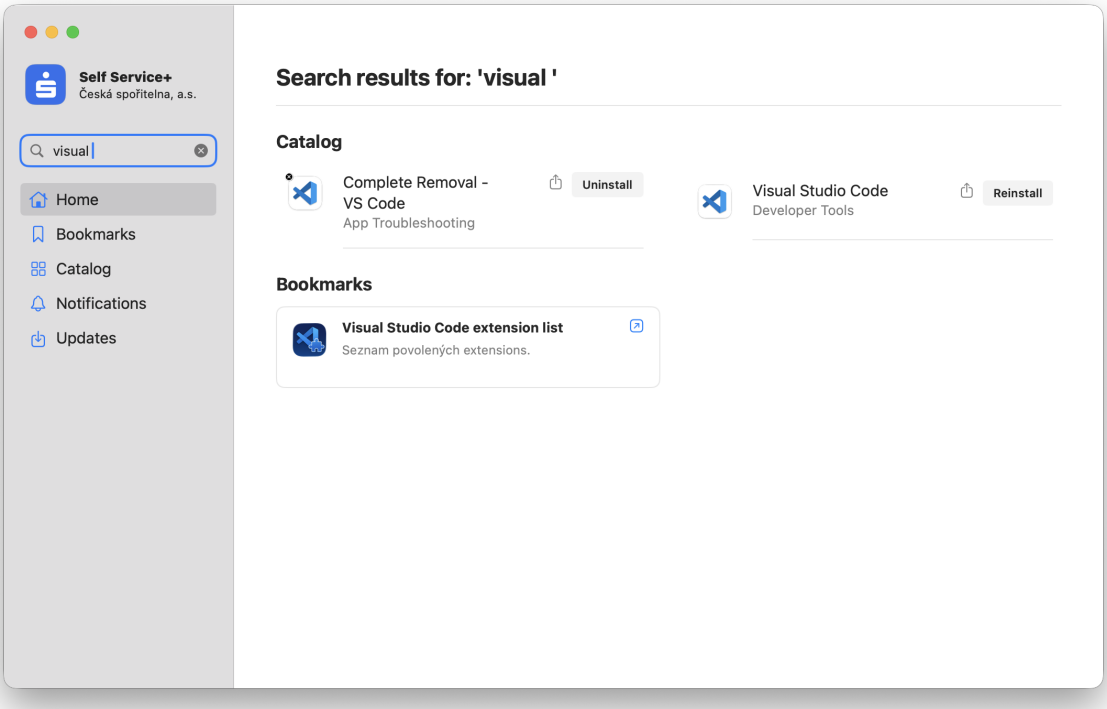

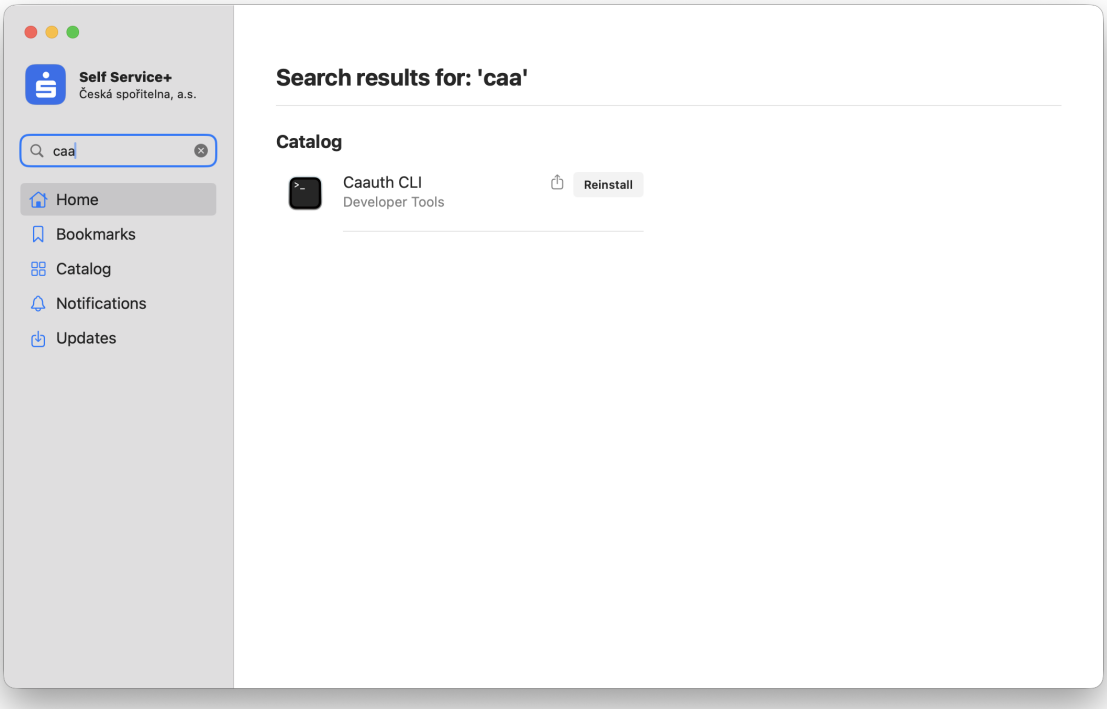

3. GitHub Onboarding & Access

For the GitHub account, organization access, SSH certificate, repository access, and GitHub Copilot Enterprise, complete the official onboarding first:

GitHub – Onboarding uživatele – GITHUB – Wiki eské Spoitelny

Onboarding hints

1. Order the REDIM roles `CSIN\vcs_github_copilot` and `CSIN\GHB_DEV_SPOCK_WRITE`.
2. For SSH certificate onboarding, make sure you REDIM role `CSIN\CAAUTH_USR` role.
3. **Wait until the roles above are approved before continuing with the remaining onboarding steps.**

Required GitHub capability	Expected state
Internal/company GitHub account	Active
Required GitHub organization	Authorized
SSH certificate	Configured and authorized
Repository access	Required repositories accessible
GitHub Copilot Enterprise	Enabled

Spock GitHub: https://github.com/csas-dev/spock-pilot
Spock Role (REDIM): CSIN\GHB_DEV_SPOCK_WRITE

Once you have all the credentials - ask github copilot directly in the VSC tool - to add and clone https://github.com/csas-dev/spock-pilot - it will use SSH to do so and walk you through the process.

4. GitHub Copilot Requirements

- GitHub Copilot Enterprise is enabled for the user.
- Sufficient AI credits / usage allowance are available.
- Required LLM models are enabled and accessible.
- Copilot is available and working in Visual Studio Code.

5. SSH Certificate Troubleshooting

Known issue: Some users may still experience an invalid or unusable SSH certificate after completing the standard installation. If SSH fails with **error 225 or 255**, follow the operating-system-specific steps below.

The `known_hosts` file required for this workaround is included in the supporting ZIP package attached to this Confluence page.

Navigate to your SSH folder:

```
/Users/<YOUR_CEN>/.ssh
```

The `.ssh` directory is hidden by default. While in your `/Users/<YOUR_CEN>` folder in Finder, press **Command + Shift + Period (+ + .)** to show hidden files.

1. Open the `.ssh` folder.
2. Copy the supplied `known_hosts` file into the `.ssh` folder. Replace the existing file if necessary.
3. Open the `config` file using **TextEdit** or another text editor.
4. Replace the entire contents of the `config` file with the configuration below.
5. Replace `<YOUR-CEN>` with your actual internal CEN.
6. Save the `config` file.

macOS SSH config

```
Host *
    Include /Users/<YOUR-CEN>/.ssh/caauth-ca-cli/*.conf

Host github.com
    Hostname    ssh.github.com
    Port        443

Host github.com
    Hostname    ssh.github.com
```

After saving the configuration, return to the terminal where you ran `caauth-cli` and test the connection again.

Supporting file: known_hosts

Navigate to your SSH folder:

```
C:\Users\<YOUR-CEN>\.ssh
```

1. Open the `.ssh` folder.
2. Copy the supplied `known_hosts` file into the `.ssh` folder. Replace the existing file if necessary.
3. Open the `config` file using Notepad or another text editor.
4. Replace the entire contents of the `config` file with the configuration below.
5. Replace `<YOUR-CEN>` with your actual internal CEN everywhere it occurs.
6. Save the `config` file.

Windows SSH config

```
Host *
      Include /c/Users/<YOUR-CEN>/.ssh/ghbca-csas/*.conf

Host github.com
    ProxyCommand    "C:\Program Files\Git\mingw64\bin\connect.exe" -H ngproxy.csin.cz:8080 %h %p

Host github.com
    ProxyCommand    "C:\Program Files\Git\mingw64\bin\connect.exe" -H ngproxy.csin.cz:8080 %h %p
    Hostname    ssh.github.com

Include C:\Users\<YOUR-CEN>\.ssh\caauth-ca-cli\*.conf
Include /c/Users/<YOUR-CEN>/.ssh/caauth-ca-cli/*.conf
```

If you closed `caauth-cli`: open it again in the terminal, complete the authorization, then navigate to **Desktop Management Test Certificate**.

Test the certificate/connection again after saving the SSH configuration.

Supporting file: known_hosts

6. Supporting Files



File	Purpose
config	SSH config file supplied for the Windows 225/255 workaround.
known_hosts	Known-hosts file supplied for the SSH workaround.


Reminder: Follow the official GitHub onboarding page first. The SSH troubleshooting section is intended for the known 225/255 issue after the standard setup has been completed.


7. Install NodeJS

In order to run the SPOCK agentic workflow, it is also important to have NodeJS (version 22) installed.

For macs:

1. macOS podporované aplikace
    a. Request a role in Redim - Windows dlaždice - role: APP_INSTALL_MACOS_NODEJS
    b. Once it is approved, in Selfservice click “Run” on Upload invertory to Yaml, once finished search for Node and install.

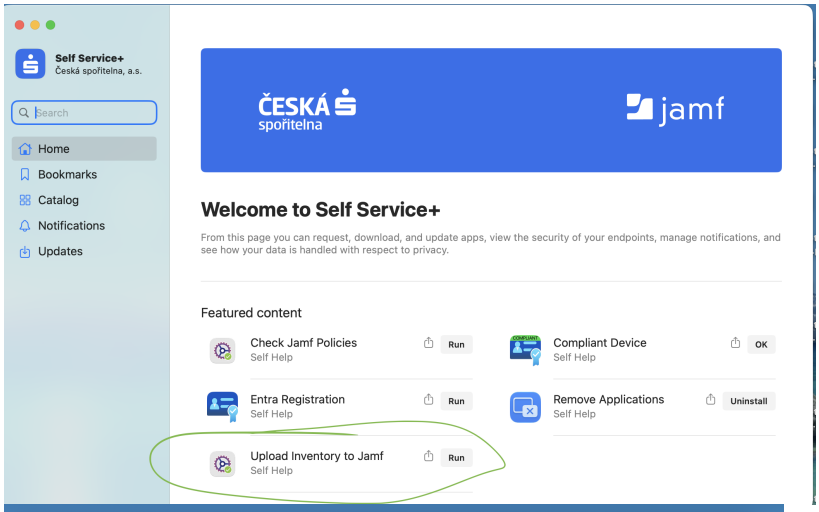

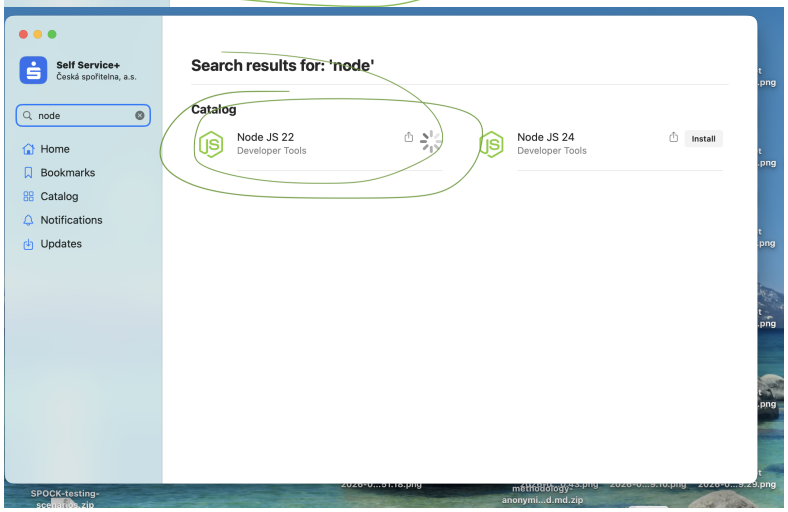

For Windows

1. **follow in SOLVEO** https://csasprod.service-now.com/esc?id=sc_cat_item&sys_id=5f8c2a80dbc4638034def5e51d96198b