


landing

```
onload() {  
  data = xhr( get /data );    // see http spec for payload format  
  display "landing" screen;  
}
```

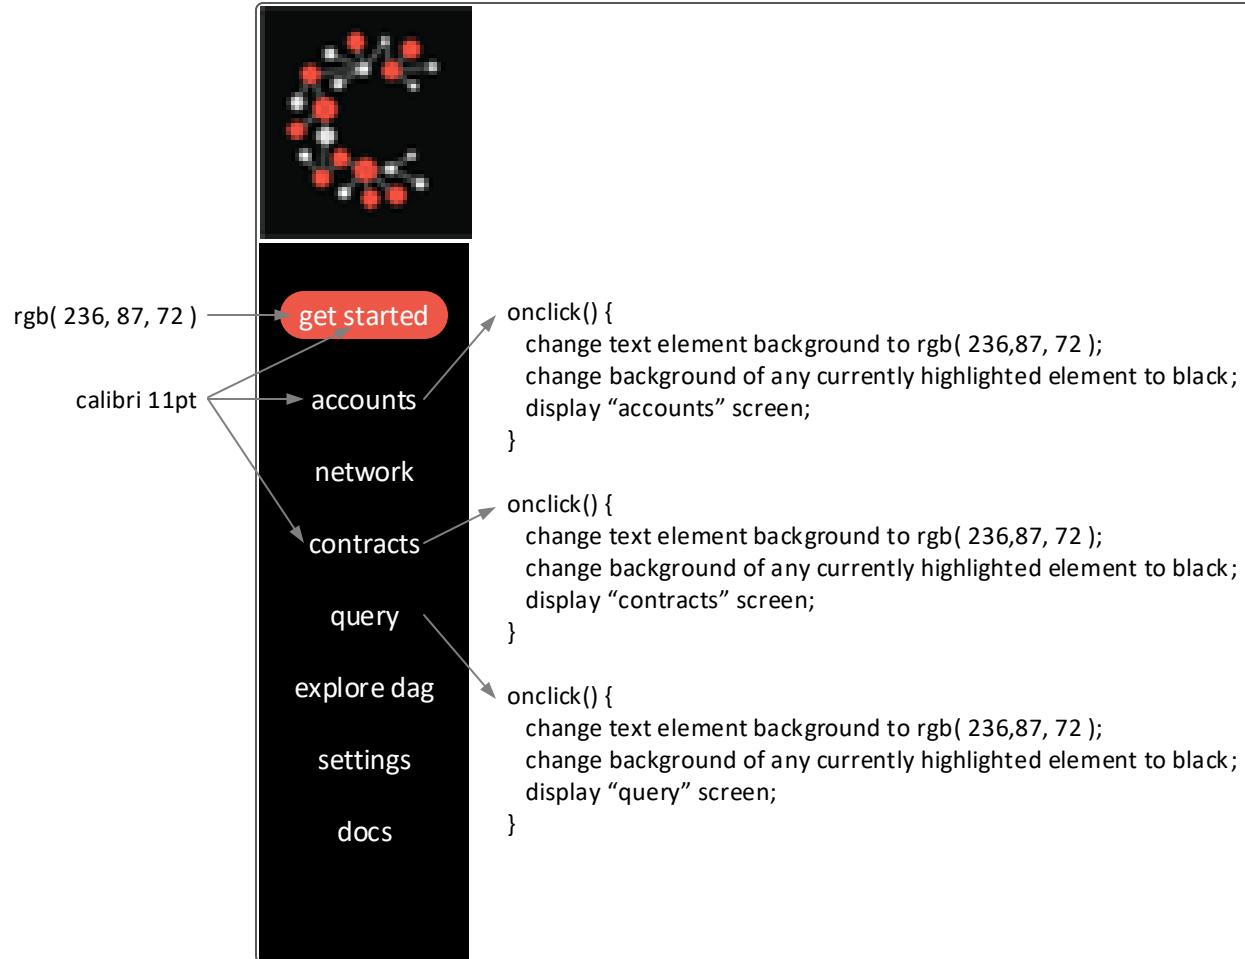

```


onclick() {
  generate public key pair; // use existing library for this
  append to "keys" array;
  display new grey html element at bottom;
  focus new element and require user to enter text (check this onblur);
  xhr( put /key, name ); // see http spec for payload format
}

```

```

onclick() {
  display file upload dialog;
  require user to enter filename or cancel;
  display new grey html element at bottom;
  focus new element and require user to enter text (check this onblur);
  xhr( post /key, name, keyFile ); // see http spec for payload format
}

```

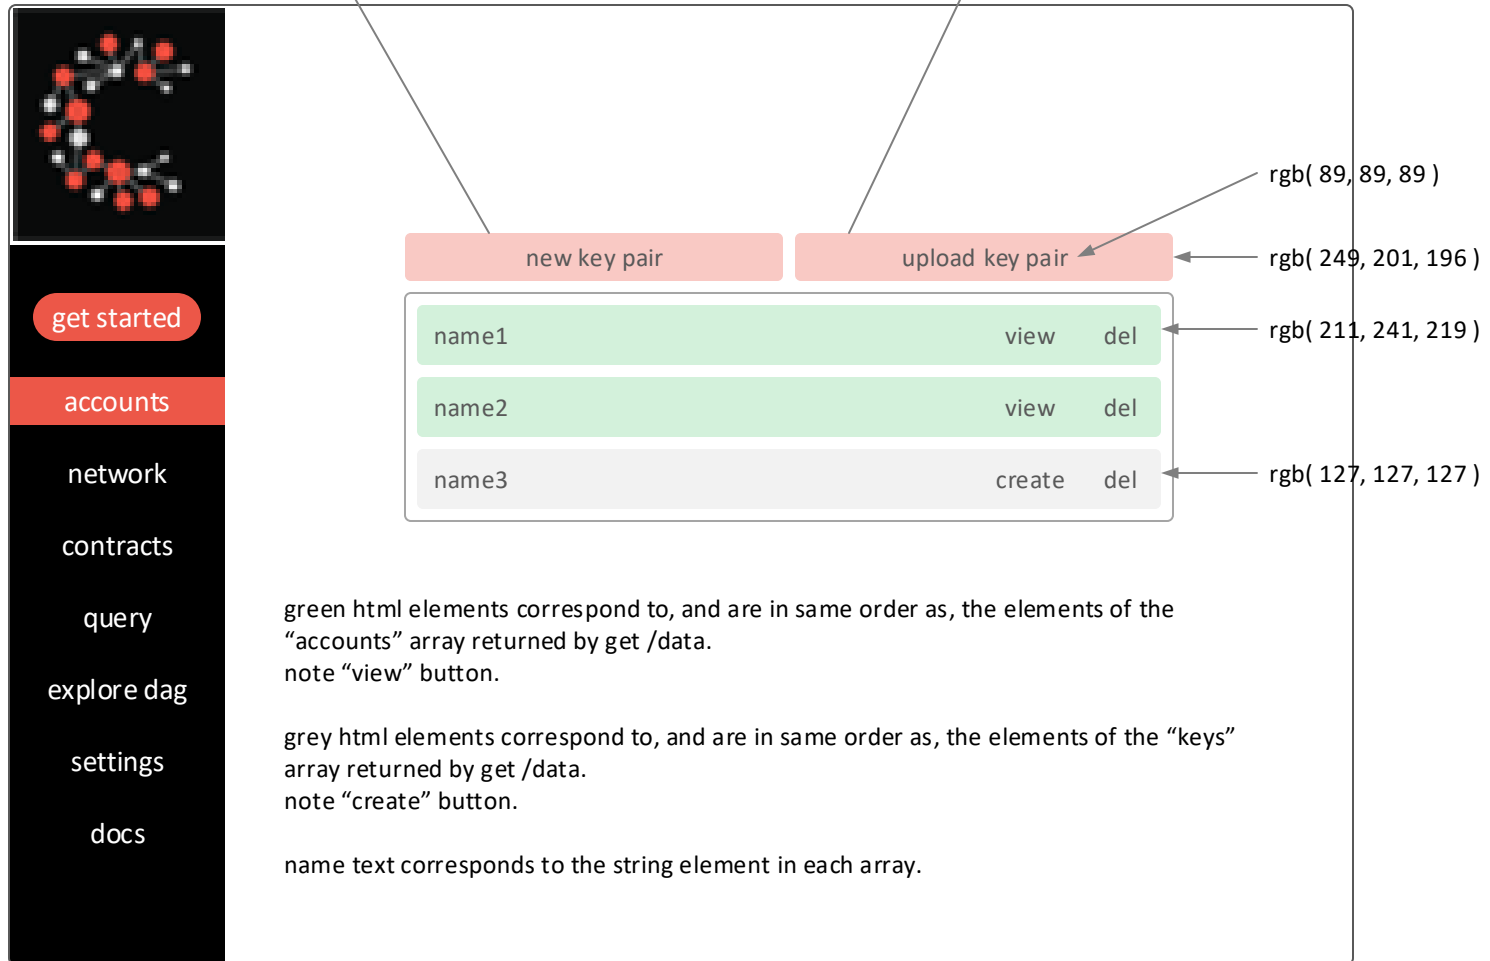

## contracts



get started

accounts

network

contracts

query

explore dag

settings

docs

### payment contracts

upload

name1

del

name2

del

### session contracts

upload

name1

del

name2

del

name3


del

payment args:

session args:

deploy

query



get started

accounts

network

contracts

query

explore dag

settings

docs

block:

key variant:

key:

path:

query

output