
```
onload() {
                                  data = xhr( get /data );
                                                           // see http spec for payload format
                                  display "landing" screen;
                                                   onclick() {
background: rgb( 236, 87, 72 )
                                   get started
                                                       change text element background to rgb( 236,87, 72 );
                                                       change background of any currently highlighted element to black;
           text: calibri 11pt
                                  accounts /
                                                       display "accounts" screen;
                                     network
                                                   onclick() {
                                                       change text element background to rgb( 236,87, 72);
                                    contracts
                                                       change background of any currently highlighted element to black;
                                                       display "contracts" screen;
                                      query
                                   explore dag
                                                   onclick() {
                                                       change text element background to rgb( 236,87, 72 );
                                     settings
                                                       change background of any currently highlighted element to black;
                                                       display "query" screen;
                                       docs
```



## background: rgb(228, 242, 242) see "contractElement.onclick()" upload payment contracts upload session contracts del name1 name3 del onclick() { display "upload contract" dialog; del name2 del name2 name1 del get started argumentsname4 del accounts see "del.onclick()" arguments network contracts see "deployButton.onclick()" 👞 see "saveButton.onclick()" deploy save query upload contract see "savedElement.onclick()" see "savedDeploy.onclick()" saved explore dag name: deploy del name1 settings browse deploy del name2 docs upload cancel deploy del name3 background: rgb(228, 228, 228) see "uploadButton.onclick()"

```
contractElement.onclick() {
                                                                                      savedElement.onclick() {
 if (any other element in parent element has shadow) remove shadow;
                                                                                        if (any other element in parent element has shadow) remove shadow;
 box-shadow( rgba( 236, 87, 72, 0.5 ), horiz: 0px, vert: 0px, blur: 8px, spread: 8px );
                                                                                        box-shadow( rgba( 236, 87, 72, 0.5 ), horiz: 0px, vert: 0px, blur: 8px, spread: 8px );
                                                                                        if (any payment element has shadow) remove shadow;
                                                                                        add box-shadow to payment element specified by saved[ name ][ payment ][ name ];
                                                                                        payment argument box = saved[ name ][ payment ][ args ];
                                                                                        if (any session element has shadow) remove shadow;
del.onclick() {
                                                                                        add box-shadow to session element specified by saved[ name ][ session ][ name ];
 remove clicked element from parent element;
                                                                                        session argument box = saved[ name ][ session ][ args ];
 xhr( delete /contract ); // see http spec for payload format
                                                                                      savedDeploy.onclick() {
                                                                                        do everything in savedElement.onclick();
deployButton.onclick() {
                                                                                        payload = saved[ name ]; // see http spec for payload format
 if ( payment element selected && session element selected ) {
                                                                                        xhr( post /contract/deploy );
   xhr( post /contract/deploy ); // see http spec for payload format
 } else {
   error popup('payment and session contracts must be specified');
                                                                                      uploadButton.onclick() {
                                                                                        if (! "name".empty() && file.selected()) {
                                                                                          read specified file;
                                                                                          wasm = base64 encode file contents;
saveButton.onclick() {
                                                                                         xhr( put /contract ); // see http spec for payload format
 if ( payment element selected && session element selected ) {
                                                                                          add new element to bottom of relevant parent element with "name";
   add new element to bottom of "saved" element with "name";
                                                                                        } else {
   saved[ name ] = { payment name, session name, payment args, session args };
                                                                                          display error popup: "name" and file must be specified;
   xhr( post /contract/save ); // see http spec for payload format
 } else {
   error popup('payment and session contracts must be specified');
```

	block: key variant:		dropdown menu containing: "address", "hash", "uref"
get started	key:		
accounts	path:		
network		query	
contracts		output	
query			
explore dag			
settings			
docs			
		xhr( get /query ); // see display returned string in } else {	y && path are not empty ) { http spec for query parameters "output" box; riant', 'key', and 'path' must be specified" );

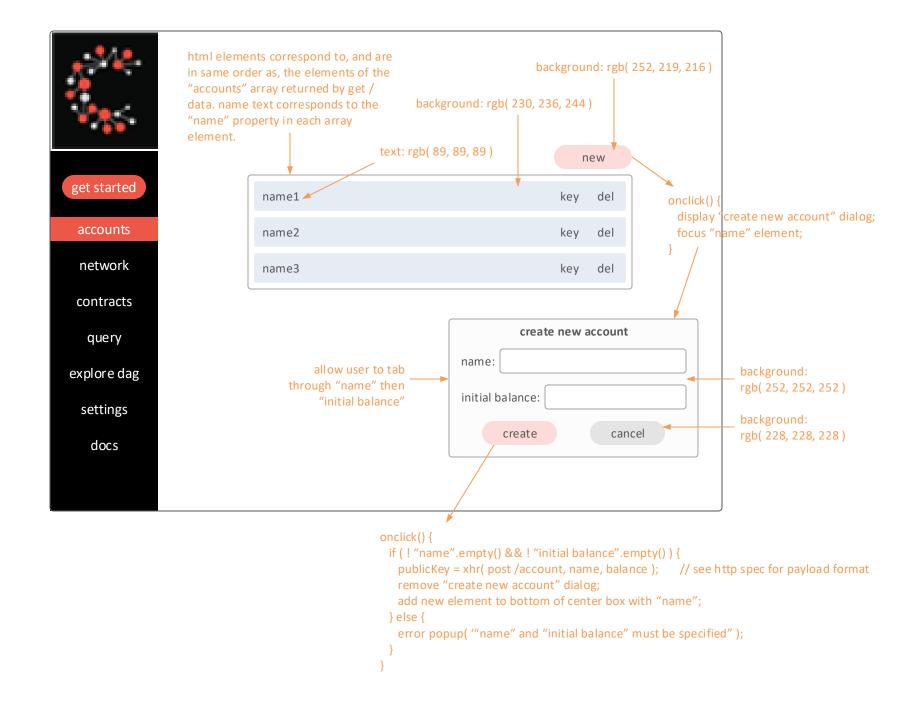