

## landing

```
onload() {
                                  data = xhr( get /data );
                                                          // see http spec for payload format
                                  display "landing" screen;
                                                   onclick() {
background: rgb( 236, 87, 72 )
                                   get started
                                                       change text element background to rgb( 236,87, 72 );
                                                       change background of any currently highlighted element to black;
           text: calibri 11pt
                                  accounts /
                                                       display "accounts" screen;
                                     network
                                                   onclick() {
                                                       change text element background to rgb( 236,87, 72);
                                    contracts
                                                       change background of any currently highlighted element to black;
                                                       display "contracts" screen;
                                      query
                                   explore dag
                                                   onclick() {
                                                       change text element background to rgb( 236,87, 72);
                                     settings
                                                       change background of any currently highlighted element to black;
                                                       display "query" screen;
                                       docs
```

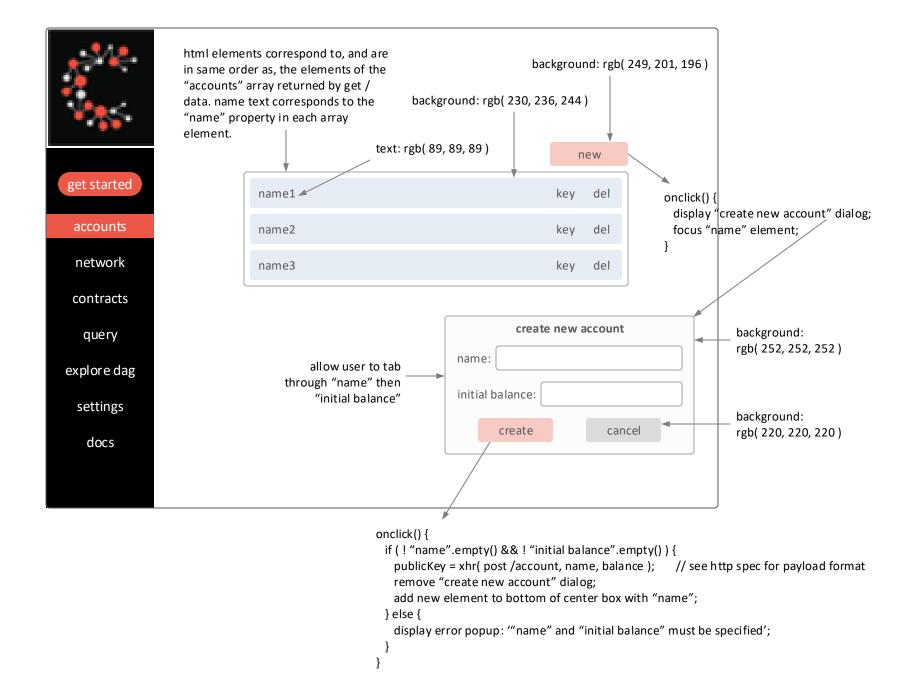

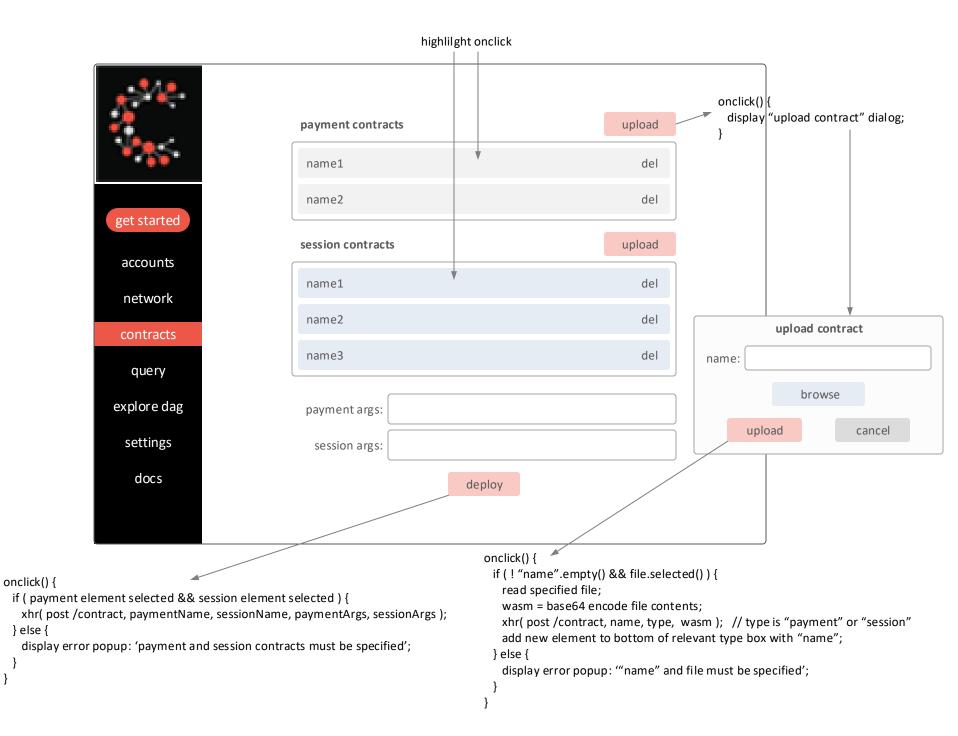

	block: ( key variant: (		
	·	<u> </u>	
get started	key:		
	path:		
accounts	patii.		
ascoanta			
network		query	
HECWOIK			
contracts		output	
query			
explore dag			
settings			
docs			