

MASTERS DISSERTATION

---

# IMPLEMENTATION OF $N$ -DETECTORS IN A GRAVITATIONAL WAVE DETECTION PIPELINE

---

Thomas Hill Almeida (21963144)\*

Supervisors: Prof. Linqing Wen,<sup>†</sup> Qi Chu<sup>†</sup>

2020-10-18

---

\*Software Engineering, University of Western Australia

<sup>†</sup>Department of Physics, University of Western Australia

## Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Research Aims . . . . .	3
<b>2</b>	<b>Literature Review</b>	<b>5</b>
2.1	$N$ -detector work in other gravitational wave detection pipelines . . . . .	5
2.2	CUDA . . . . .	6
2.3	Parallelised Complexity Analysis . . . . .	7
<b>3</b>	<b>Design process</b>	<b>9</b>
3.1	Design Constraints . . . . .	9
3.2	Employed tools . . . . .	10
3.3	Relevant code . . . . .	11
3.4	Evaluation criteria . . . . .	12
<b>4</b>	<b>Final Design</b>	<b>12</b>
4.1	Patches . . . . .	12
4.1.1	Making IF0ComboMap be sums of powers of two . . . . .	13
4.2	Testing . . . . .	14
4.3	Evaluation . . . . .	14
<b>5</b>	<b>Discussion</b>	<b>14</b>
5.1	A complexity analysis of the parallel post-processing of the SPIIR pipeline . . . . .	14
5.1.1	Maximum element reduction . . . . .	14
5.1.2	Determining the number of samples over a signal-to-noise threshold . . . . .	15
5.1.3	Transposing the input matrices . . . . .	16
5.1.4	Determining the coherent correlation and statistical value of data points . . . . .	16
5.1.5	Calculating heat skymaps . . . . .	18
5.1.6	Overall complexity . . . . .	18
5.1.7	Implications . . . . .	19
5.2	Improvements to maximum element reduction . . . . .	19
<b>6</b>	<b>Further work</b>	<b>19</b>
<b>7</b>	<b>Conclusion</b>	<b>19</b>
	<b>References</b>	<b>19</b>
<b>A</b>	<b>Patches</b>	<b>20</b>
A.1	Making IF0ComboMap be sums of powers of two . . . . .	20
A.2	Removing hard-coded detector names . . . . .	39

# 1 Introduction

Gravitational waves have been postulated to exist since Albert Einstein’s publication of his general theory of relativity, as massive accelerating objects would cause ‘ripples’ in the curvature of spacetime [1]. Direct detection of gravitational waves, however, remained beyond the reach of the scientific community until 2015, when the Laser Interferometric Gravitational-Wave Observatory (LIGO [see 2]) reported an observation on the 14th of September [3, 4].

Due to their design, the detectors in use for gravitational wave detection have a significant amount of noise from other sources, whilst the gravitational waves themselves have very weak signals. As such, a large amount of data processing must be done to the outputs produced by the detectors in order to filter and extract any possible gravitational waves. These data processors are known as “pipelines”, and have historically been created by research groups that are a part of the LIGO Scientific Collaboration (LSC [see 5]), and are used throughout observation runs for real-time data analysis.

The Summed Parallel Infinite Impulse Response (SPIIR [see 6]) pipeline, based on the SPIIR method originally implemented by Shaun Hooper in 2012, uses a number of IIR (infinite impulse response) filters to approximate possible gravitational wave signals for detection [7]. [8] states that the output of the  $i$ th IIR filter can be expressed with the equation:

$$y_k^i = a_1^i y_{k-1}^i + b_0^i x_{k-d_i}, \quad (1)$$

where  $a_1^i$  and  $b_0^i$  are coefficients,  $k$  is time in a discrete form and  $x_{k-d_i}$  denotes input with some time delay  $d_i$ . After summing the output of the filters, the resulting signal undergoes coherent post-processing (see section 5.1 and [9, chapter 4]) to determine the likelihood of an event having occurred.

The pipeline is currently thought to be the fastest of all existing pipelines, is the only pipeline that implements coherent search, and has participated in every observation run since November 2015, successfully detecting most events that were seen in more than one detector.

The SPIIR pipeline uses GStreamer, a library for composing, filtering and moving around signals, in addition to the GStreamer LIGO Algorithm Library (`gstlal`) [10]. After receiving data from the detectors, the pipeline performs data conditioning and data whitening, followed by the usage of the IIR filters. The data is then combined for post-processing, where events are given sky localization and then inserted into the LIGO event database [8].

The structure of the SPIIR pipeline can be seen in figure ??.

## 1.1 Research Aims

At the time of the start of this research, the SPIIR pipeline supported the use of two or three detectors for gravitational wave detection — the two American LIGO detectors and the Italian Virgo detector — although additional interferometers are likely to be introduced soon. This presents several issues with the existing pipeline design.

As with many of the other gravitational wave detection pipelines, providing support for additional

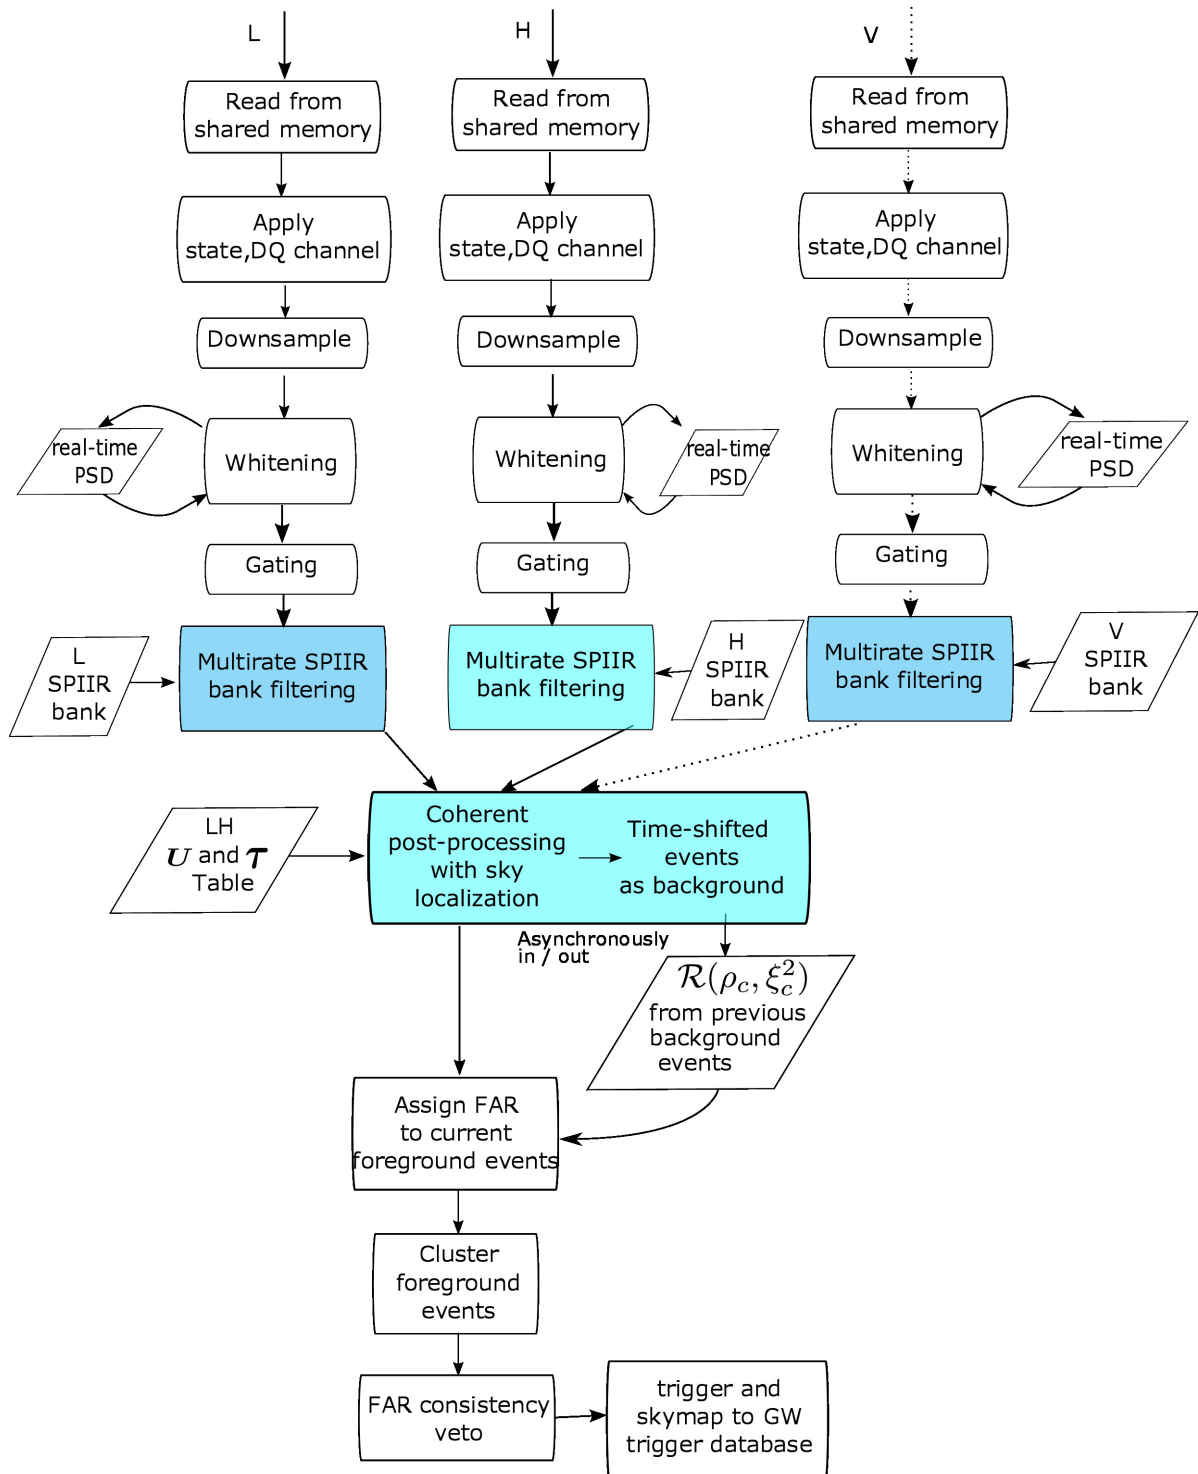


Figure 1: The structure of the SPIIR pipeline

detectors is a significant undertaking for the development team, with many hours of work and testing that need to be completed. As the number of available interferometers continues to grow, development work that could be spent on improving the optimisation, precision, or accuracy of the pipeline would instead have to be spent allowing for those detectors to be used.

Thus, this dissertation aims to layout the design and implementation work done to provide the SPIIR pipeline with the ability to support any number of detectors ( $N$ -detectors).

Section 2 shall explore the existing literature on the implementation of  $N$ -detectors in other gravitational wave detection pipelines, in addition to exploring CUDA and complexity analysis, two tools that will be used in the analysis of the final design. Section 3 will look at the existing pipeline structure and its deficiencies for implementing  $N$ -detectors. It will also determine any constraints a design for implementing  $N$ -detectors would have, and will provide a framework for evaluating the success of the resulting design. The final design will be presented in section 4, and will explore the implementation details of the design and how it interacts with the existing programming interface that SPIIR provides. A discussion about the implications of this design will be done in section 5, with additional research on those implications being presented there. Finally, section 6 will provide some suggestions for future research that can be based on this research.

## 2 Literature Review

This section explores the existing research that is relevant to this project. Section 2.1 shall explore the implementations that other gravitational wave detection pipelines have used to deal with a growing number of detectors in their algorithms and interfaces, whilst section 2.2 will explore the computational model of CUDA, the library that SPIIR uses for parallelism. Finally, section 2.3 shall explore the literature of parallel complexity analysis, which will allow for the later analysis of the pipeline in section 5.1.

### 2.1 $N$ -detector work in other gravitational wave detection pipelines

There are, of course, other gravitational wave detection pipelines that may also have to consider the issue of dealing with a growing number of detectors. As we are in the process of designing a new architecture to allow for any number of detectors to be used, it is well worth examining the methods that the other pipelines may use to shape our own design.

Most detection pipelines use a “coincidence” search to determine whether a gravitational wave event has occurred. Coincidence search, as defined by [9, chapter 3], is a process which includes finding candidates for gravitational waves from individual detectors, identifying temporal coincidences and producing measures to rank candidate events. In more simple terms, a coincidence search considers events which can be seen in a single detector, and then sanity checks that other detectors may have seen them at the same time.

In contrast, the SPIIR pipeline uses a “coherent” search to determine whether a gravitational wave event has occurred, using the maximum likelihood ratio principle to consider specific parameters of a potential signal [9, chapter 4]. As such, it is unlikely that all of the principles for dealing with additional

detectors may translate directly to being able to be used for the SPIIR pipeline, as the method of search differs.

PyCBC is one of the most well known toolkits for gravitational wave astronomy, and was one of the pipelines used in the original 2015 gravitational wave detection [11]. From an examination of the codebase of the latest version of PyCBC [12, October 2020], it can be observed that the codebase itself makes no direct mention of detectors — instead it provides a generic `Detector` class as a wrapper around LALSuite’s [13] `LALDetector` structure for validation, which in turns provides utilities for returning information about the detector as well as methods for getting readings from it.

This allows PyCBC to provide an entirely generic gravitational wave searching algorithm library for any input detectors, although the algorithm only supports using two detectors at a time, providing that the detectors are in the LALSuite library. Thus, we can note two things; for PyCBC to allow for additional detectors to be used, they simply update their dependency on the LALSuite library, and; PyCBC doesn’t quite support  $N$ -detectors in the sense described in section 1.1, instead it allows for any supported detectors to be used in a two-detector search. This means that whilst we cannot use PyCBC when considering how to support support any number of detectors within a gravitational-wave searching algorithm nor its outputs, we can use PyCBC to consider a programming interface with which to support other detectors.

GstLAL is gravitational wave detection library, that exposes components of LALSuite [13] as GStreamer elements for use in other analysis pipelines — including the SPIIR pipeline — as well as providing its own pipeline for processing raw signals from detectors into lists of gravitational wave candidates [14]. The GstLAL’s pipeline hard-codes the detector names into both its inputs and its outputs, however the algorithm used for detection itself is actually generic on which detectors are used [15, 16].

This means that the process of adding support for detectors involves changing a number of different files, as well as modifying several internal data structures [17] — which means that whilst GstLAL does not support  $N$ -detectors.

Thus any work done to design  $N$ -detector support for the SPIIR pipeline will be novel work.

## 2.2 CUDA

CUDA [18] is an extension of the C++ programming language created by NVIDIA that allows for the development of GPU-accelerated applications. In [8], the SPIIR pipeline had multiple components rewritten in CUDA to take advantage of the high number of simultaneous threads available compared to CPUs. As such, it is worth understanding the computational model of CUDA for the analysis of the SPIIR pipeline.

In CUDA, each individual sequence of instructions being executed is called a *thread*. By its nature, a highly-parallelised environment such as GPUs will run many individual threads, which are partitioned into *warps*, a group of (typically 32) threads. Warps are the smallest unit that GPUs schedule, and all threads in a warp must execute the same instruction — although each thread maintains its own instruction pointer and can branch independently from the warp at a small performance cost. The performance cost of branching within a warp means that a major optimization that does not affect

computational complexity in CUDA can be simply reducing the number of branches. Warps are further organised into thread blocks, which contain a small amount of fast memory shared between the threads in the block. Blocks in CUDA are typically executed on the same Simultaneous Multiprocessor (SM). The CUDA Programming Guide ([19]) states that the number of blocks and warps that can reside and be processed together on an SM depends on the number of registers and shared memory available on the SM, as well as on a CUDA defined maximum number of blocks and warps.

For the purpose of actual time-based computation, the maximum number of threads that can run at any given time is determined by a few factors of the CUDA runtime; the maximum number of resident warps per SM; the maximum number of resident threads per SM; the number of 32-bit registers per thread; the number of 32-bit registers per SM; the number of 32-bit registers per thread block; and the amount of shared memory in each of those divisions. Thus, one major determining factor in any speed-up given by a CUDA operation can be determined by the ability to split the workload across threads and thread blocks such that the number of registers and used memory is well balanced across threads.

### 2.3 Parallelised Complexity Analysis

As the pipeline changes to accommodate additional detectors, it is important that the impact that this has on the pipeline's runtime is considered. The SPIIR pipeline is designed to be as low latency as possible, and an asymptotic complexity analysis of components that may be impacted by the addition of new detectors allows for the measurement of the potential runtime cost of doing so. The SPIIR pipeline has been parallelised using CUDA [8], and thus determining the asymptotic complexity of components of the pipeline requires different considerations to that of a sequential program.

According to [20], the theoretical efficiency of a multi-threaded or parallelised algorithm can be measured using the metrics of 'span', 'work', 'speed-up' and 'parallelism', all of which should be considered in the context of a directed acyclic graph (DAG) of operations in the algorithm. The **work** of a parallelised computation is the total time to execute the entire computation sequentially on a single processor, and can be found by summing the total work of every vertex in the DAG. An example of **work** for a merge-sort like algorithm can be seen in figure 2, which has a work of  $O(N \log N)$ . In comparison, the **span** of a parallelised computation is the maximum time taken to complete any path in the DAG. An example of **span** for a merge-sort like algorithm can be seen in figure 3, which has a work of  $O(N)$ . It should be noted that the actual running time of a parallelised computation also depends on the number of processors available for computation and how they are allocated to perform different tasks in the DAG, and thus denoting the running time of parallelised computation on  $P$  processors as  $T_P$  is also common practice. This leads to work being denoted at  $T_1$  (the time taken to run on a single processor) and span being denoted as  $T_\infty$  (the time taken on an infinite number of processors). Another helpful metric is **speed-up**, which shows how the algorithm scales with additional processors as  $S_P = \frac{T_1}{T_P}$ . We can also then define **parallelism** as the maximum possible speed-up on an infinite number of processors, and thus as  $p = \frac{T_1}{T_\infty}$ .

Using the above definitions, we can re-derive several laws that provide lower bounds on the running time of  $T_P$ .

In one step, a computer with  $P$  processors can do  $P$  units of work, and thus in  $T_P$  time can perform

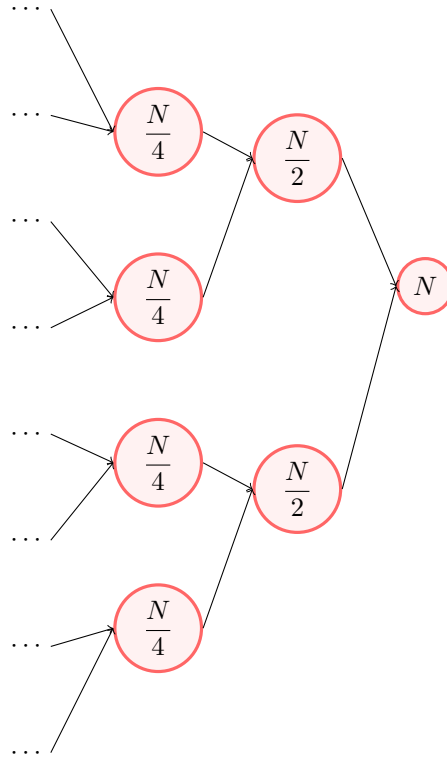


Figure 2: An example of calculating work for a merge-sort like algorithm. Summed nodes are in red.

$PT_P$  units of work. As the total work to be done as per above is  $T_1$ , the **work law** states that [20]:

$$T_P \geq \frac{T_1}{P}. \quad (2)$$

It is also evident that a computer with  $P$  processors cannot run any faster than a computer with an infinite number of processors, as the computer with an infinite number of processors can emulate a computer with  $P$  processors by using a subset of its processors, leading to the **span law** [20]:

$$T_P \geq T_\infty. \quad (3)$$

It is also useful to use the metrics of ‘cost’ and ‘efficiency’ when analysing parallel algorithms [21]. The **cost** of a parallel algorithm is minimised when all of processors are used at every step for useful computation and thus can be defined as  $C_P = P \times T_P$ . **Efficiency** is closely related to cost and describes speed-up per processor and can be defined as:

$$e_P = \frac{S_P}{P} = \frac{T_1}{C_P}. \quad (4)$$

Another helpful theorem for analysis is **Brent’s Theorem**, which states that for an algorithm that can run in parallel on  $N$  processors can be executed on  $P < N$  processors in a time of approximately [22]



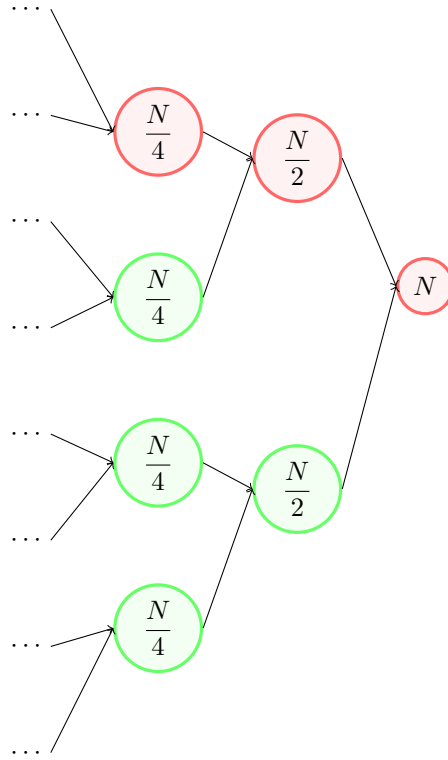


Figure 3: An example of calculating span for a merge-sort like algorithm. Summed nodes are in red.

$$T_P \leq T_N + \frac{T_1 - T_N}{P}. \quad (5)$$

This can be approximated with the upper bound of  $O(\frac{T_1}{P} + T_N)$  [21].

Determining the span, work, parallelism, efficiency and cost, and examining the application of Brent's theorem to the computations at hand will allow us to analyse the computational complexity of the SPIIR pipeline.

### 3 Design process

This section aims to layout and discuss the design process used to arrive at the final design of the  $N$ -detector implementation. Section 3.1 will discuss the various design constraints that should be factored in any design implementation, and section 3.2 will discuss the tools used throughout the design process. The code sections that will be impacted by the implementation will be explored in section 3.3, and a framework for evaluating the success of the implementation will be discussed in section 3.4.

#### 3.1 Design Constraints

In the process of designing any system or any modifications thereof, constraints on that design must be considered and factored in. This section aims to lay out and discuss the various design constraints that

should be imposed on any final design.

The below constraints are ordered in importance.

- **Output results must be unchanged**

A major measure of a gravitational-wave detection pipeline is its accuracy. Any design should not impact or modify the output results of the existing pipeline on the same data.

- **The output table format should be unchanged**

Events that are detected by the SPIIR pipeline are uploaded to the gravitational-wave candidate event database (GraceDB) using a unified table format to represent event data [23]. It is of critical importance that the SPIIR pipeline is still able to interact with GraceDB so that it can continue to have detected events considered by the wider gravitational-wave community.

- **Adding new detectors should be able to be done by a non-technical individual**

The wider gravitational-wave detection community is largely composed of physicists as opposed to software engineers. As such, any changes to the number of detectors are likely to be able to be best tested by non-technical members of the gravitational-wave community, as the expertise to ensure that the values output by the pipeline are correct are more likely to come from physicists. Any design for  $N$ -detector support should ensure that the process of adding detectors should be easy enough to be completed and tested by a non-technical individual.

- **The external interface of the pipeline should not change**

There are many developers and scientists that are using the existing SPIIR pipeline and use customised scripts that automate gravitational wave searches. The ability to support  $N$ -detectors should be a largely internal change, without needing to modify the way that other users interact with the pipeline and force modifications to existing search scripts.

- **Individual detectors should still be exposed in Python code**

There are several reasons for this constraint to be factored into any implementation. First, exposing individual detectors in the Python code allows for easier programming debugging of any values that may be incorrect, as the values of each detector would be immediately evident by the variable names instead of having to be indirectly referenced by knowledge of the data structure used to hold the group of detectors. In addition, the Python code that interacts with GraceDB iterates through the list of detectors and uses the individual detector names to collect the data required for each event. By exposing individual detectors to the Python code, none of the code that interacts with GraceDB would need to change.

## 3.2 Employed tools

There are a number of tools that were employed in the process of designing and testing the  $N$ -detector implementation. These were:

- **OzStar [24]**

“OzStar” is a computing cluster hosted at the University of Swinburne for use in gravitational-wave discovery and theoretical astrophysics. Much of the SPIIR development process occurs on OzStar,

and its head nodes were used for both building and testing the modifications made to the SPIIR pipeline.

- **LIGO DataGrid (LDG) [25]**

The LDG is the collection of clusters that the LSC uses for running the various gravitational-wave detection pipelines on live data. Testing and benchmarking (see section 5.2) were performed on the LDG as the available nodes there closely mirror those that the SPIIR pipeline will run on.

- **SPIIR scripts [26]**

“SPIIR scripts” is a collection of scripts maintained by Patrick Clearwater for use in the SPIIR development process. The `build_spiir` script from this collection was used to build the modifications made to the pipeline.

- **GWDC utils [27]**

“GWDC utils” is a collection of utilities maintained by Alex Codoreanu that are written to perform various tasks for the SPIIR pipeline. The unit tests that are exposed as a part of GWDC utils were used for testing that the modifications made to the pipeline didn’t affect its output (see section 3.1).

- **OzGrav Research utils [28, utils/]**

“OzGrav Research utils” is a collection of utilities created by Thomas Almeida to automate the process of creating callgraphs from C or CUDA code on the OzStar cluster. These were used in the generation of callgraphs which were used for the complexity analysis in section 5.1.

### 3.3 Relevant code

The relevant code sections that may need to be modified to support any number of detectors can be observed in figure ?? as any step after the individual detector SPIIR filtering is combined. This includes:

- Coherent post-processing with sky localization  
[6, `gstlal-spiir/gst/cuda/postcoh/`]
- $\mathcal{R}(\rho_c, \xi_c^2)$  from previous background events  
[6, `gstlal-spiir/gst/cuda/cohfar/cohfar_accumbgbackground.c`]
- False Alarm Rate (FAR) assignment to foreground events  
[6, `gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c`]
- Trigger and skymap to GW trigger database  
[6, `gstlal-spiir/python/pipemodules/postcoh_finalsink.py`]

In addition, the data structures that are passed between the components also need to be modified. This includes the `PostcohInspiralTable` [6, `gstlal-spiir/python/pipemodules/postcohtable/`] and the `PeakList` [6, `gstlal-spiir/gst/cuda/postcoh/postcoh.h`].

These files are mixed between several different languages; C, CUDA (see section 2.2), and Python. As such, any  $N$ -detector implementation must consider the ability to:

- **Move data structures easily between GPU and CPU memory**

CUDA provides two interfaces for allocating and managing memory across a GPU and CPU; managed memory and memory copies. Managed memory automatically propagates changes to allocated memory in a GPU or CPU to the other address space, whilst memory copies copy a block of memory from one address space to another.

The existing SPIIR pipeline uses memory copies for transferring data to and from the GPU address space, and as such the implementation of  $N$ -detectors should ensure that the existing memory copies will still function as expected. This means that flat data structures would be generally preferred, as they can be copied with a single memory copy.

- **Interoperability between Python and C code**

The `PostcohInspiralTable` is a C data structure that exposes a Python interface and the final trigger generation and uploading to GraceDB takes the data structure as an input. As such, it is vital that any changes to the `PostcohInspiralTable` are able to be used in the Python interface that it exposes.

### 3.4 Evaluation criteria

The success of a design and implementation needs to be evaluated according to some predefined criteria. The final design will be evaluated according to these criteria in section 4.3.

1. Output results must be unchanged
2. The output table format should be unchanged
3. Adding new detectors should be able to be done by a non-technical individual
  - (a) Maximum number of required edited files: 3
4. Unchanged external interface
5. Exposing of individual detectors in Python
6. Changing number of detectors compiles correctly

## 4 Final Design

This section aims to describe and expand on the final design and implementation chosen for allowing the SPIIR pipeline to work with any number of detectors.

Section 4.1 discusses the major components and changes that each source code patch makes to the codebase, and the testing that the patches went through will be described in section 4.2. The final design and implementation will be evaluated according to the criteria laid out in section 3.4 in section 4.3.

### 4.1 Patches

The patches referred to in this section can be found in appendix A.

#### 4.1.1 Making IF0ComboMap be sums of powers of two

The patch for this section can be found in appendix A.1.

Internally, the pipeline uses a static constant array defined in `gstlal-spiir/include/pipe_macro.h` called the “IF0ComboMap” to keep track of which detectors it is processing. The original ordering of the array is as follows:

- All single detectors
- All combinations of two detectors
- All combinations of three detectors

This presents a problem when adding detectors, as the indexing of the array would change such that; all combinations of two detectors are shifted by at least 1, and; all combinations of three detectors are shifted by at least  $\binom{n}{2} - \binom{n-1}{2}$ , where  $n$  is the number of detectors, etc.. Any time the number of detectors would change, then all of the locations that index the IF0ComboMap would also need to change to match, to ensure that they remain indexing the right combinations. For example, the `scan_trigger_ifos` function in `gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c` determines which detectors should be active by checking the indexes of the IF0ComboMap, and if the number of detectors change, all of the indexing done in the function will also have to change.

The IF0ComboMap is, as the name suggests, a list of all of the combinations of detectors, not including combinations of zero detectors. As a special case of the binomial expansion;  $(x + y)^n = \sum_{k=0}^n \binom{n}{k} x^k y^{n-k}$  when  $x = y = 1$ , we can note that [29];

$$\sum_{k=0}^n \binom{n}{k} = 2^n. \quad (6)$$

As per equation 6, the sum of the number of combinations of  $n$  elements is equal to  $2^n$ . This lends itself well to binary numbers, as an 8-bit binary number can represent  $2^8$  numbers or all the combinations of 8 elements — which means that we can represent all combinations of  $N$  detectors with  $N$  bits.

By having each detector represented as a single bit in a  $N$ -bit number, there are a number of advantages across the codebase that are evident as well. `popcount` (or `POPCNT`) is an instruction for x86 processors and NVIDIA GPUs that returns the number of set (1) bits in an integer, and thus the number of detectors being used can be determined with a single instruction. In addition, whether a detector is being used can be determined using a bitwise `AND` of the combination and  $2^i$ , where  $i$  is the index of the detector. These both simplify large areas of the codebase, and make up the majority of the patch in appendix A.1.

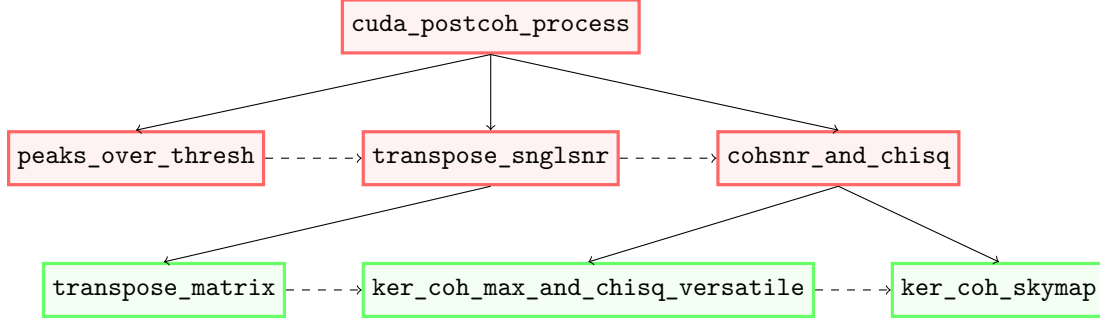


Figure 4: Simplified callgraph for coherent post-processing in the SPIIR pipeline. Function calls are represented by solid arrows, the ordering of the calls is represented by dashed arrows. GPU functions are in green boxes, and CPU functions are in red boxes.

## 4.2 Testing

## 4.3 Evaluation

# 5 Discussion

## 5.1 A complexity analysis of the parallel post-processing of the SPIIR pipeline

As discussed in 2.3, the SPIIR pipeline is designed to be as low latency as possible, and a asymptotic complexity analysis of components that may be impacted by the addition of new detectors allows for the measurements of the potential cost of doing so. This subsection aims to determine the complexity analysis of the coherent post-processing step of the SPIIR pipeline to understand the impact of increasing the number of detectors.

Coherent post-processing was introduced in [9] by Qi Chu et al as an alternative to the coincidence post-processing used by all other pipelines (see section 2.1). In [9], the computational cost of the coherent search is estimated to be  $O(2N_d^3 N_m N_p)$ , where  $N_d$  is the number of detectors,  $N_m$  is the number of sets of IIR filters (called templates), and  $N_p$  is the number of potential sky locations. Further optimizations were made to the pipeline in 2018 [8], including moving to using GPU acceleration. Whilst [8] discusses a number of constant time optimizations made to the pipeline, the computational cost of the overall process is not discussed. In addition, [8] parallelised the pipeline, leading to additional potential changes to the potential overall cost.

“OzGrav Research utils” (see section 3.2) were used to generate a callgraph to determine the data flow for this analysis [see 28, [resources/callgraph.png](#)]. A simplified version of the callgraph can be seen in figure 4.

### 5.1.1 Maximum element reduction

One of the more common operations in the SPIIR pipeline is the concept of a “maximum element reduction”. Reduction is the idea of taking some array of data and producing a single summary output from that array, whether it is the total sum of the array or the maximum value of the array and its index in the array as it is in this case.

[30] discusses the computational complexity of reduction algorithms in a parallelised context, noting that the best complexity according to Brent's Law is  $O(\frac{N}{\log N})$  threads each doing  $O(\log N)$  sequential work, resulting in a total overall cost of  $O(\frac{N}{\log N} \times \log N) = O(N)$ .

We can note from our own analysis, that the process of reduction can be parallelised by the use of a binary tree of operations, where each vertex in the binary tree combines the results of the two parent vertices. In the case of determining the maximum of two numbers, each vertex is identical in the amount of work done, and thus we can determine each vertex to be a unit of work. As there are  $N$  elements in the original array, we can note that the height of the binary tree is  $\log N$ , and each level of the binary tree has  $N_i/2$  vertices, thus the total number of vertices in the binary tree is  $\sum_{i=0}^{\log N} 2^i = N$ . Using this information, we can determine that the **work** of a parallelised reduction is  $T_1 = O(N \times 1) = O(N)$ , and that the **span** of the reduction is  $T_\infty = O(\log N \times 1) = O(\log N)$ . Thus, the **parallelism** of the reduction is:

$$p = \frac{N}{\log N}.$$

Using the span and work laws, we can observe that any algorithm using the above method is bounded by the inequalities  $O(\log N) \leq T_P, \frac{O(N)}{P} \leq T_P$ . This means that best possible time complexity with  $P$  processors is  $O(\log N)$  (equation 3). We can determine the minimum number of processors required to achieve this runtime using the formula  $T_P = O(\log N) = \frac{O(N)}{P}$ , which can be rearranged to

$$P = \frac{N}{\log N},$$

thus the time complexity cannot improve past  $P = N/\log N$  processors. We can also observe that using  $P = N/\log N$  processors gives a **cost** of  $C_P = N$ , which is identical to the sequential algorithm.

Functions that include maximum element reduction will be denoted for clarity with  $M(x)$ , where  $x$  is the size of the array being reduced.

### 5.1.2 Determining the number of samples over a signal-to-noise threshold

The coherent post-processing in SPIIR determines the number of samples over a signal-to-noise (SNR) threshold in order to not do more work than is required. The function that is used for determining the number of samples over the threshold (**peaks\_over\_thresh**) is a sequential algorithm that runs on the CPU, and shall be analysed as such, although there is an alternative GPU-based implementation that is not used.

Initially, the function performs a maximum element reduction to get the maximum SNR from the combined IIR filters (templates) for each sample. Recalling from section 5.1.1 that for maximum element reduction  $T_1 = O(N)$ , and that this operation is performed  $S$  times, where  $S$  is the number of samples, we can determine that this initial reduction has a time complexity of  $O(ST)$ , where  $T$  is the number of templates.

The function then determines the maximum SNR across the templates found from the previous step by stepping through every combination of samples and removing SNR samples that are using the same

template and have a lower SNR, resulting in a step with a time complexity of  $O(S^2)$ .

The function then determines the maximum overall SNR for the input samples ( $O(S)$ ) and cycles through every maximum SNR to cluster maxima that are close together to be a single combined maximum. The number of maxima is bounded by ( $O(\min\{S, T\})$ ) as there cannot be more maxima than there are samples or templates.

This gives the overall function a time complexity of  $O(ST + S^2 + S + \min\{S, T\})$ , which can be reduced to the dominating terms of:

$$O(ST + S^2).$$

### 5.1.3 Transposing the input matrices

The full post-processing function requires that the input matrix is transposed for better memory access such that each row is a different template, and each column is a different sample. To transpose the matrix, the GPU function `transpose_matrix` is used, thus this should be analysed as a parallel algorithm.

The algorithm in use works by breaking the original array into tiles of size  $32 \times 32$ , and then inserting the transpose of the tile into an output array. The tiles are further broken down eight processors per row, so each thread does four copies. We can conceptualise this as a DAG by observing that each tile does not depend on any other tile to be completed, and that each tile is composed of  $32 \times 8$  interdependent processors, each doing 4 units of work.

Using this observation, we can see that the *span* of the algorithm is  $T_\infty = (32 \times 8) \times 4 = O(1024) = O(1)$ , and the *work* is  $T_1 = O(ST)$ , where  $S$  is the number of samples and  $T$  is the number of templates. Thus, the *parallelism* of the transpose is  $p = ST$ .

Using the span and work laws (equations 3 and 2), we can observe that the above method is bounded by the inequalities  $O(1) \leq T_P, \frac{O(ST)}{P} \leq T_P$ . Thus it can be determined that the best possible time complexity with  $P$  processors is bounded by ratio of available processors to the size of the transposed matrix (the work law). This gives the function an overall time complexity of:

$$O\left(\frac{ST}{P}\right).$$

### 5.1.4 Determining the coherent correlation and statistical value of data points

The scoring metric of different templates and times is determined using coherent correlation and determining their statistical value using a chi squared-based distribution. These scoring metrics are performed using the GPU function `ker_coh_max_and_chisq_versatile`, and thus should be analysed as a parallelised function.

In this function, each block looks at a different SNR maximum (as discussed in section 5.1.2) and splits the threads within the blocks for operations on that peak.

### Determining the sky direction of the SNR maximum

Initially, each thread within a block looks at a different sky direction and determines the total signal-to-noise ratio (SNR) by summing the SNR of each of the detectors at that given sky direction with the relevant detector arrival time offsets. The time complexity for the calculation of SNR for a given time



offset is  $O(D + D^2)$ , where  $D$  is the number of detectors. The maximum SNR for all the sky directions is then spread across each warp and placed into shared memory before being shared across every thread in the block, which is an application of the parallelised maximum element reduction function discussed in section 5.1.1.

Thus, the **span** of determining the sky direction with the highest signal to noise ratio is  $T_\infty = O(D + D^2 + M_{T_\infty}(S))$  and the **work** is  $T_1 = O(S(D + D^2) + M_{T_1}(S))$ , where  $S$  is the number of sky directions and  $M(x)$  is the complexity of the parallelised maximum element reduction function. We can further state that the **parallelism** of this is equivalent to the number of sky directions,  $S + S/\log S$ .

### Calculating signal consistency statistics

After having determined the sky direction with the highest SNR for a given maximum, the function then calculates a signal-morphology based statistic  $\xi_D^2$  for each detector  $D$ . The statistic is a reduced  $\chi^2$  distribution with  $D \times 2 - 4$  degrees of freedom and a mean value of 1, and is given in the discrete form by:

$$\xi_D^2 = \frac{\sum_{j=-m}^m |\varrho_D[j] - \varrho_D[0]A_D[j]|^2}{\sum_{j=-m}^m (2 - 2|A_D[j]|^2)}, \quad (7)$$

where  $\varrho$  is the coherent SNR,  $A_D$  is the vector of the correlation of the given template with the output from the detector and  $2 \times m$  is the number of samples.

The numerator of the statistic is calculated by splitting the number of samples between the threads of a block, followed by combining the results of the statistic across each warp and then each block. The combination of the statistic across each warp and block is a modification of the parallelised maximum element reduction discussed in section 5.1.1 that uses addition instead of maximum as the combining binary function. Thus the **span** of calculating the statistic is  $T_\infty = O(D \times M_{T_\infty}(N))$  and its **work** is  $T_1 = O(D \times M_{T_1}(N))$ , where  $N$  is the number of samples. We can then state that the **parallelism** of calculating the statistic is equivalent to the parallelism of the reduction,  $O(N/\log N)$ .

### Generating time-shifted background noise statistics

The function then performs a number of time shifts on background noise for use with the significance estimation. The generation of a single background statistical variant is equal to the total work of the function so far, save that instead of using blocks for every peak, each warp looks at a different time shift. Thus, whilst the theoretical time complexity does not change, the number of processors available is smaller, so the actual runtime each loop is approximately the warp size slower.

### Overall computational cost

Overall, this function has a **span** of  $T_\infty = 2(D + D^2 + M_{T_\infty}(S) + DM_{T_\infty}(N))$ , and has  $T_1 = P(S(D + D^2) + M_{T_1}(S) + DM_{T_1}(N) + B(S(D + D^2) + M_{T_1}(S)))$  **work**, where  $P$  is the number of SNR maxima and  $B$  is the number of times shifts made to background noise.

### 5.1.5 Calculating heat skymaps

If the coherent SNR exceeds a threshold, the post-processing produces a skymap of the highest SNR in the GPU function `ker_coh_skymap`.

The function determines the highest maximum SNR by using the maximum element reduction technique discussed in section 5.1.1. Following this, the function re-performs the process discussed in section 5.1.4 with additional sky directions and without the reduction to generate the final skymap.

As such, this function has a **span** of  $T_\infty = M_{T_\infty}(P) + D + D^2$  and total **work** of  $T_1 = M_{T_1}(P) + S(D + D^2)$ .

### 5.1.6 Overall complexity

The total span and work of the coherent post-processing step in the SPIIR pipeline is the sum of the total spans and works of the internal functions. Conversely, we cannot determine the overall parallelism as the post-processing step spans a number individual functions that can each be run with a different set of processors. As the step to determine the number of peaks over a threshold (see section 5.1.2) is sequential, we can consider its time complexity as contributing to both the span and work of the total pipeline. Another thing to note is that the steps for determining the coherent correlation, statistic value and skymaps (sections 5.1.4 and 5.1.4) will be run for every detector.

With this in mind, we can determine that the **span** of the post-processing is:

$$\begin{aligned} T_\infty &= O(NT + N^2 + 1 + D(2(D + D^2 + \log S + D \log N) + \log P + D + D^2)) \\ &= O(NT + N^2 + D^3 + D^2 \log N + D \log S + D \log P), \end{aligned} \quad (8)$$

where  $D$  is the number of detectors,  $S$  is the number of sky directions,  $T$  is the number of templates,  $N$  is the number of samples and  $P = \max\{S, T\}$ .

The total **work** of the post-processing is:

$$\begin{aligned} T_1 &= O(NT + NT + S^2 + D(P + S(D + D^2) + P(S(D + D^2) + S + DN + B(S(D + D^2) + S)))) \\ &= O(NT + N^2 + SPD^3 + SPBD^3 + ND^2), \end{aligned} \quad (9)$$

where  $D$  is the number of detectors,  $S$  is the number of sky directions,  $T$  is the number of templates,  $N$  is the number of samples,  $B$  is the number of times shifts made to background noise and  $P = \max\{S, T\}$

### 5.1.7 Implications

## 5.2 Improvements to maximum element reduction

## 6 Further work

## 7 Conclusion

## References

- [1] *Introduction to LIGO & Gravitational Waves*. URL: <https://www.ligo.org/science/GW-GW2.php>.
- [2] *LIGO Lab: Caltech: MIT*. URL: <https://www.ligo.caltech.edu/>.
- [3] B. P. Abbott et al. “Observation of Gravitational Waves from a Binary Black Hole Merger”. In: *Phys. Rev. Lett.* 116 (6 2016), p. 061102. DOI: 10.1103/PhysRevLett.116.061102. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.116.061102>.
- [4] *LIGO Detected Gravitational Waves from Black Holes*. URL: <https://www.ligo.caltech.edu/detection>.
- [5] *LIGO Scientific Collaboration*. URL: <https://ligo.org/>.
- [6] *Summed Parallel Infinite Impulse Response Pipeline Codebase*. URL: <https://git.ligo.org/lscsoft/spiir/>.
- [7] Shaun Hooper et al. “Summed parallel infinite impulse response filters for low-latency detection of chirping gravitational waves”. eng. In: *Physical Review D - Particles, Fields, Gravitation and Cosmology* 86.2 (2012). ISSN: 1550-7998.
- [8] Xiaoyang Guo et al. “GPU-Optimised Low-Latency Online Search for Gravitational Waves from Binary Coalescences”. eng. In: vol. 2018-. EURASIP, 2018, pp. 2638–2642. ISBN: 9082797011. URL: <https://ieeexplore.ieee.org/document/8553574>.
- [9] Q. Chu. *Low-latency detection and localization of gravitational waves from compact binary coalescences*. eng. 2017.
- [10] *LSC Algorithm Library for GStreamer*. URL: <https://git.ligo.org/lscsoft/gstlal/>.
- [11] *PyCBC - Analyze gravitational-wave data, find signals, and study their parameters*. URL: <https://pycbc.org/>.
- [12] Alex Nitz et al. “gwastro/pycbc: PyCBC release v1.16.11”. In: (2020). DOI: 10.5281/zenodo.4075326.
- [13] LIGO Scientific Collaboration. *LIGO Algorithm Library - LALSuite*. free software (GPL). 2018. DOI: 10.7935/GT1W-FZ16.
- [14] *GstLAL documentation*. URL: <https://lscsoft.docs.ligo.org/gstlal/>.
- [15] Cody Messick et al. “Analysis framework for the prompt discovery of compact binary mergers in gravitational-wave data”. In: *Physical Review D* 95.4 (2017). ISSN: 2470-0029. DOI: 10.1103/PhysRevD.95.042001. URL: <http://dx.doi.org/10.1103/PhysRevD.95.042001>.

- [16] *gstlal-inspiral/gst/lal/gstlal\_itacac.c*. URL: [https://git.ligo.org/lscsoft/gstlal/-/blob/master/gstlal-inspiral/gst/lal/gstlal\\_itacac.c](https://git.ligo.org/lscsoft/gstlal/-/blob/master/gstlal-inspiral/gst/lal/gstlal_itacac.c).
- [17] Cody Messick. *Added GEO600 support ("G1") to itacac (d43bcfd6)*. URL: <https://git.ligo.org/lscsoft/gstlal/-/commit/d43bcfd6096ac4fab33114848b2d5f9ffaf6ca86>.
- [18] *CUDA Toolkit*. URL: <https://developer.nvidia.com/cuda-toolkit>.
- [19] *CUDA Programming Guide*. URL: <https://docs.nvidia.com/cuda/cuda-c-programming-guide/index.html#hardware-multithreading>.
- [20] Thomas H. Cormen et al. *Introduction to algorithms*. eng. 3rd ed. MIT electrical engineering and computer science series. Cambridge, Mass: MIT Press, pp. 779–781. ISBN: 0070131430.
- [21] Henri Casanova, Arnaud Legrand, and Yves Robert. *Parallel Algorithms*. eng. CRC Press, 2008, pp. 10–12. DOI: 10.1.1.466.8142.
- [22] John L. Gustafson. “Brent’s Theorem”. In: *Encyclopedia of Parallel Computing*. Ed. by David Padua. Boston, MA: Springer US, 2011, pp. 182–185. ISBN: 978-0-387-09766-4. DOI: 10.1007/978-0-387-09766-4\_80. URL: [https://doi.org/10.1007/978-0-387-09766-4\\_80](https://doi.org/10.1007/978-0-387-09766-4_80).
- [23] *GraceDB / The Gravitational-Wave Candidate Event Database*. URL: <https://gracedb.ligo.org/>.
- [24] *OzStar – Supercomputing at Swinburne University of Technology*. URL: <https://supercomputing.swin.edu.au/>.
- [25] *LIGO Data Grid*. URL: <https://computing.docs.ligo.org/lscdatagridweb/>.
- [26] Patrick Clearwater. *Build SPIIR / SPIIR scripts*. URL: <https://git.ligo.org/patrick.clearwater/spiir-scripts/>.
- [27] Alex Codoreanu. *GWDC Utils*. URL: [https://git.ligo.org/alex.codoreanu/gwdc\\_utils/](https://git.ligo.org/alex.codoreanu/gwdc_utils/).
- [28] Thomas Hill Almeida. “Tommoa/ozgrav-research”. In: (2020). DOI: 10.5281/zenodo.4075219.
- [29] Thomas H. Cormen et al. *Introduction to algorithms*. eng. 3rd ed. MIT electrical engineering and computer science series. Cambridge, Mass: MIT Press, pp. 1185–1186. ISBN: 0070131430.
- [30] Mark Harris. *Optimizing Parallel Reduction in CUDA*. eng. URL: <https://developer.download.nvidia.com/assets/cuda/files/reduction.pdf>.

## A Patches

### A.1 Making IFOComboMap be sums of powers of two

From b4f563eb358b77f2e130aad6655db566a2f25b5a Mon Sep 17 00:00:00 2001  
 From: Tom Almeida <tommoa256@gmail.com>  
 Date: Thu, 20 Aug 2020 12:37:16 +0800  
 Subject: [PATCH 1/2] pipe\_macro: Make IFOComboMap index with bits indicating which IFOs are being used

Previously IFOComboMap was indexed as [single detector, two detectors, three detectors, ...]. This means that checking to see how many and which detectors are in use can’t be easily done without referring back to the table, and any changes to the table can potentially break other parts of the code.

This patch changes IFOComboMap to be indexed by powers of two. That

means that any index of  $(2^i - 1)$  is a single detector, indicated by index into IFOMap. Now when using IFOComboMap, the number of detectors in use can be determined using `'__builtin_popcount(icombo + 1)'`, and whether a single detector is in use can be done with the check `'index & (icombo + 1)'`.

```
.../gst/cuda/cohfar/background_stats_utils.c | 50 ++++++-----
.../gst/cuda/cohfar/cohfar_accumbgbackground.c | 8 ++
gstlal-spiir/gst/cuda/postcoh/postcoh.c | 12 +++-
gstlal-spiir/include/pipe_macro.h | 11 +-
4 files changed, 45 insertions(+), 36 deletions(-)
```

```
diff --git a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c b/gstlal-spiir/gst/cuda/cohfar/backg
index 4a5b7ec8..45c57ec6 100644
```

```
--- a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c
```

```
+++ b/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c
```

```
@@ -39,38 +39,34 @@
```

```
#define EPSILON 1e-6

int scan_trigger_ifos(int icombo, PostcohInspiralTable *trigger) {
- int cur_ifo = 0, one_ifo_size = sizeof(char) * IFO_LEN;
+ int nifo = 0, one_ifo_size = sizeof(char) * IFO_LEN;
  char final_ifos[MAX_ALLIFO_LEN];
  gboolean pass_test = TRUE;
- if ((icombo == 6 || icombo == 3 || icombo == 4)) { // H1L1, H1V1 or H1L1V1
-   if (trigger->snglsnr_H > EPSILON) {
-     strncpy(final_ifos + IFO_LEN * cur_ifo, "H1", one_ifo_size);
-     cur_ifo++;
-   } else
-     pass_test = FALSE;
- }
- if ((icombo == 6 || icombo == 3 || icombo == 5)) { // H1L1, L1V1 or H1L1V1
-   if (trigger->snglsnr_L > EPSILON) {
-     strncpy(final_ifos + IFO_LEN * cur_ifo, "L1", one_ifo_size);
-     cur_ifo++;
-   } else
-     pass_test = FALSE;
- }
- if ((icombo == 6 || icombo == 4 || icombo == 5)) { // H1V1, L1V1 or H1L1V1
-   if (trigger->snglsnr_V > EPSILON) {
-     strncpy(final_ifos + IFO_LEN * cur_ifo, "V1", one_ifo_size);
-     cur_ifo++;
-   } else
-     pass_test = FALSE;
+ // [THA]: Because icombo is sum(1 << index) - 1, we should add one to it
+ // so that we don't need to add one in the loop.
+ ++icombo;
+ for (int i = 0; i < MAX_NIFO; ++i) {
+   // [THA]: We can determine if the IFO at IFOMap[i] is in the icombo by
+   // checking if that power of two exists in the combo
+   if (icombo & (1 << i)) {
+     // [THA]: This is a check that the data from this IFO is actually
+     // valid. If it's not valid, the number will be very *very* small
+     if ((*(&trigger->snglsnr_H + i) > EPSILON) {
+       strncpy(final_ifos + IFO_LEN * nifo, IFOMap[i].name,
+         one_ifo_size);
+       nifo++;
+     } else {
+       pass_test = FALSE;
+     }
+   }
+ }
+ if (pass_test != TRUE) {
-   strncpy(trigger->ifos, final_ifos, cur_ifo * sizeof(char) * IFO_LEN);
-   trigger->ifos[IFO_LEN * cur_ifo] = '\0';
+   strncpy(trigger->ifos, final_ifos, nifo * one_ifo_size);
+   trigger->ifos[IFO_LEN * nifo] = '\0';
+   return get_icombo(trigger->ifos);
- } else
-   return icombo;
+ } else {
```

```

+         return icombo - 1;
+     }
+ }

int get_icombo(char *ifos) {
diff --git a/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbbackground.c b/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbbackground.c
index ef3136e0..154cbda1 100644
--- a/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbbackground.c
+++ b/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbbackground.c
@@ -223,6 +223,7 @@ static GstFlowReturn cohfar_accumbbackground_chain(GstPad *pad,
    int isingle, nifo;
    for (; intable < intable_end; intable++) {
        icombo = get_icombo(intable->ifos);
+        // The combination of IFOs is invalid
        if (icombo < 0) {
            LIGOTimeGPS ligo_time;
            XLALINT8NSToGPS(&ligo_time, GST_BUFFER_TIMESTAMP(inbuf));
@@ -245,7 +246,12 @@ static GstFlowReturn cohfar_accumbbackground_chain(GstPad *pad,
            outtable++;
        } else {
            /* increment livetime if participating nifo >= 2 */
-            if (icombo > 2) {
+            // If icombo is a power of two, then there is only one participating
+            // IFO, thus we can use the property of '(x & (x-1)) != 0' to
+            // determine if we have more than one IFO participating
+            //
+            // Note that this is inverted because icombo is sum(1 << index) - 1
+            if ((icombo + 1) & icombo) {
                nifo = strlen(intable->ifos) / IFO_LEN;
                /* add single detector stats */
                get_write_ifo_mapping(IFOComboMap[icombo].name, nifo,
diff --git a/gstlal-spiir/gst/cuda/postcoh/postcoh.c b/gstlal-spiir/gst/cuda/postcoh/postcoh.c
index f724477b..85f071ff 100644
--- a/gstlal-spiir/gst/cuda/postcoh/postcoh.c
+++ b/gstlal-spiir/gst/cuda/postcoh/postcoh.c
@@ -667,16 +667,20 @@ static gboolean cuda_postcoh_sink_setcaps(GstPad *pad, GstCaps *caps) {
    data = gst_pad_get_element_private(pad);
    set_offset_per_nanosecond(data, postcoh->offset_per_nanosecond);
    set_channels(data, postcoh->channels);
-    // FIXME: need to consider non-standard ifo indexing, like HV, need
-    // testing
+    // [THA]: Non-standard IFO indexing (e.g. VH) works because 'get_icombo'
+    // doesn't care about the ordering of IFOs
    strncpy(state->all_ifos + IFO_LEN * i, data->ifo_name,
            sizeof(char) * IFO_LEN);
    }
    state->all_ifos[IFO_LEN * nifo] = '\0';
    state->ifo_combo_idx = get_icombo(state->all_ifos);
+    // [THA]: This is the only place that ifo_combo_idx is used. Perhaps remove
+    // it later to save space?
    state->ifo_combo_idx = get_icombo(state->all_ifos);
+    // [THA]: sizeof() only works for arrays that we've statically created, so
+    // we use strlen() to get the length of the combination name
    /* overwrite all_ifos to be the same with the combo in the IFOComboMap */
    strncpy(state->all_ifos, IFOComboMap[state->ifo_combo_idx].name,
            sizeof(IFOComboMap[state->ifo_combo_idx].name));
+    strlen(IFOComboMap[state->ifo_combo_idx].name);
    state->all_ifos[IFO_LEN * nifo] = '\0';

    /* initialize input_ifo_mapping, snglsnr matrix, and peak_list */
diff --git a/gstlal-spiir/include/pipe_macro.h b/gstlal-spiir/include/pipe_macro.h
index a6f20486..b6e0fc9a 100644
--- a/gstlal-spiir/include/pipe_macro.h
+++ b/gstlal-spiir/include/pipe_macro.h
@@ -13,13 +13,16 @@ typedef struct _IFOType {
    } IFOType;

    static const IFOType IFOMap[MAX_NIFO] = {
-    { "H1", 0 },
-    { "L1", 1 },
-    { "V1", 2 },
+    { "H1", 0 }, // 1 << 0 = 1

```

```

+   { "L1", 1 }, // 1 << 1 = 2
+   { "V1", 2 }, // 1 << 2 = 4
};
#define MAX_IFO_COMBOS 7 // 2^3-1
+// A combination is sum(1 << index) - 1
+// This gives us some nice mathematical properties that we can use to check
+// if an IFO exists in a given ComboMap
static const IFOType IFOComboMap[MAX_IFO_COMBOS] = {
-   { "H1", 0 }, { "L1", 1 }, { "V1", 2 }, { "H1L1", 3 },
+   { "H1", 0 }, { "L1", 1 }, { "H1L1", 2 }, { "V1", 3 },
+   { "H1V1", 4 }, { "L1V1", 5 }, { "H1L1V1", 6 },
};
/* function given a random ifo, output the index in the IFOComboMap list,

```

GitLab

From 6f7f2e00c9630a4a615d6bec63953342f93d023f Mon Sep 17 00:00:00 2001  
 From: Tom Almeida <tomma256@gmail.com>  
 Date: Wed, 26 Aug 2020 13:48:03 +0800  
 Subject: [PATCH 2/2] cohfar: Reduce the size of outputted XML files by only  
 using active IFOs

Previously, every possible combination of existing IFO was outputted as a part of the XML dump from 'cohfar'. This meant that the size of the XML dump wasn't tied to the actual number of IFOs in use, and would continue to exponentially increase in size as we increased the number of IFOs that might be in play (e.g. KAGRA, LIGO-India, etc.).

To solve this, we have moved to using the total combination (as an index into IFOComboMap) as a store of the active IFOs, and using '\_\_\_builtin\_popcount()' to get the total number of IFOs that are in use in that combination. This means that we can quickly and efficiently determine the maximum number of detectors that we actually need to print stats for, with no additional information required.

— Tom Almeida

```

.../gst/cuda/cohfar/background_stats.h          | 9 +-
.../gst/cuda/cohfar/background_stats_utils.c    | 552 ++++++-----
.../gst/cuda/cohfar/background_stats_utils.h    | 5 +-
.../gst/cuda/cohfar/cohfar_accumbground.c       | 67 +---
.../gst/cuda/cohfar/cohfar_accumbground.h       | 4 +-
.../gst/cuda/cohfar/cohfar_assignfar.c          | 6 +-
.../gst/cuda/cohfar/cohfar_assignfar.h          | 2 +-
.../gst/cuda/cohfar/cohfar_calc_fap.c           | 90 ++
8 files changed, 356 insertions(+), 379 deletions(-)

```

```

diff --git a/gstlal-spiir/gst/cuda/cohfar/background_stats.h b/gstlal-spiir/gst/cuda/cohfar/background_
index 40f50290..7f88f80e 100644

```

```

--- a/gstlal-spiir/gst/cuda/cohfar/background_stats.h
+++ b/gstlal-spiir/gst/cuda/cohfar/background_stats.h
@@ -96,14 +96,7 @@ typedef struct {
     TriggerStats **multistats;
     GString *rank_xmlname;
     GString *feature_xmlname;
-    int ncombo;
+    int icombo;
 } TriggerStatsXML;

```

```

-typedef TriggerStats **TriggerStatsPointer;
-typedef struct {
-    TriggerStatsPointer *plist;
-    int size;
-    int pos;
-} TriggerStatsPointerList;

```

```

-#endif /* __BACKGROUND_STATS_H */

```

```

diff --git a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c b/gstlal-spiir/gst/cuda/cohfar/backg
index 45c57ec6..449cf376 100644

```

```

--- a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c
+++ b/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c
@@ -1,5 +1,6 @@

```

```

/*
 * Copyright (C) 2015 Qi Chu <qi.chu@ligo.org>
 * Copyright (C) 2015 Qi Chu <qi.chu@ligo.org>,
 * 2020 Tom Almeida <tom@tommoa.me>,
 *

```

```

    * Permission is hereby granted, free of charge, to any person obtaining a
    * copy of this software and associated documentation files (the
@@ -98,11 +99,6 @@ int get_icoombo(char *ifos) {
    return -1;
}

-int get_ncoombo(int nifo) {
-    g_assert(pow(2, nifo) - 1 <= MAX_IFO_COMBOS);
-    return MAX_IFO_COMBOS;
-}

Bins1D *bins1D_long_create(double cmin, double cmax, int nbin) {
    Bins1D *bins = (Bins1D *)malloc(sizeof(Bins1D));
    bins->cmin = cmin;
@@ -187,22 +183,23 @@ void bins2D_long_destroy(Bins2D *bins) {
    free(bins);
}

-void trigger_stats_reset(TriggerStats **multistats, int ncoombo) {
-    int icoombo;
+void trigger_stats_reset(TriggerStats **multistats, int nifo) {
+    int ifo;
    FeatureStats *feature;
-    for (icoombo = 0; icoombo < ncoombo; icoombo++) {
-        feature = multistats[icoombo]->feature;
+    for (ifo = 0; ifo <= nifo; ifo++) {
+        feature = multistats[ifo]->feature;
+        gsl_vector_long_set_zero((gsl_vector_long *)feature->lgsnr_rate->data);
+        gsl_vector_long_set_zero(
+            (gsl_vector_long *)feature->lgchisq_rate->data);
+        gsl_matrix_long_set_zero(
+            (gsl_matrix_long *)feature->lgsnr_lgchisq_rate->data);
-        multistats[icoombo]->nevent = 0;
-        multistats[icoombo]->lifetime = 0;
+        multistats[ifo]->nevent = 0;
+        multistats[ifo]->lifetime = 0;
    }
}

void trigger_stats_xml_reset(TriggerStatsXML *stats) {
-    trigger_stats_reset(stats->multistats, stats->ncoombo);
+    trigger_stats_reset(stats->multistats,
+        __builtin_popcount(stats->icoombo + 1));
}

FeatureStats *feature_stats_create() {
@@ -254,32 +251,59 @@ void rank_stats_destroy(RankingStats *rank) {
    free(rank);
}

-TriggerStats **trigger_stats_create(int ncoombo) {
+TriggerStats **trigger_stats_create(int icoombo) {
+    // [THA]: We can see the number of detectors in a interferometer combination
+    // by checking the number of set bits in 'icoombo + 1'. We can do this
+    // because icoombo is one less than the power of two combination of detectors
+    // (see 'include/pipe_macro.h')
+    int nifo = __builtin_popcount(icoombo + 1);
+    // We only create TriggerStats for each individual IFO and their final
+    // total combination (e.g. (H1, L1, H1L1) or (H1, L1, V1, H1L1V1))
+    // Thus, the total number of combinations is the number of individual IFOs
+    // in the combo + 1
    TriggerStats **multistats =
        (TriggerStats **)malloc(sizeof(TriggerStats *) * ncoombo);
-
-    int icoombo = 0;
-    for (icoombo = 0; icoombo < ncoombo; icoombo++) {
-        multistats[icoombo] = (TriggerStats *)malloc(sizeof(TriggerStats));
-        TriggerStats *cur_stats = multistats[icoombo];
-        // FIXME: what if HV or LV combo
-        // printf("len %s, %d\n", IFOComboMap[icoombo].name,
-        // strlen(IFOComboMap[icoombo].name));
-        cur_stats->ifos =
-            malloc(strlen(IFOComboMap[icoombo].name) * sizeof(char));
-        strncpy(cur_stats->ifos, IFOComboMap[icoombo].name,
-            strlen(IFOComboMap[icoombo].name) * sizeof(char));
    }
}

```



```

-         // create feature
-         cur_stats->feature = feature_stats_create();
-         // our rank, cdf
-         cur_stats->rank      = rank_stats_create();
-         cur_stats->nevent    = 0;
-         cur_stats->lifetime  = 0;
+         (TriggerStats **)malloc(sizeof(TriggerStats *) * (nifo + 1));
+
+         // Allocate for the final combination (all IFOs together)
+         multistats[nifo] = (TriggerStats *)malloc(sizeof(TriggerStats));
+         TriggerStats *cur_stats = multistats[nifo];
+         cur_stats->ifos =
+             malloc(strlen(IFOComboMap[icombo].name) * sizeof(char) + 1);
+         strncpy(cur_stats->ifos, IFOComboMap[icombo].name,
+             strlen(IFOComboMap[icombo].name) * sizeof(char) + 1);
+         // create feature
+         cur_stats->feature = feature_stats_create();
+         // our rank, cdf
+         cur_stats->rank      = rank_stats_create();
+         cur_stats->nevent    = 0;
+         cur_stats->lifetime  = 0;
+
+         // Individual IFOs
+         int ifo = 0, index = 0;
+         ++icombo;
+         for (ifo = 0; ifo < MAX_NIFO; ifo++) {
+             // Is this IFO in the combo?
+             if (icombo & (1 << ifo)) {
+                 multistats[index] = (TriggerStats *)malloc(sizeof(TriggerStats));
+                 cur_stats          = multistats[index];
+                 cur_stats->ifos =
+                     malloc(strlen(IFOMap[ifo].name) * sizeof(char) + 1);
+                 strncpy(cur_stats->ifos, IFOMap[ifo].name,
+                     strlen(IFOMap[ifo].name) * sizeof(char) + 1);
+                 // create feature
+                 cur_stats->feature = feature_stats_create();
+                 // our rank, cdf
+                 cur_stats->rank      = rank_stats_create();
+                 cur_stats->nevent    = 0;
+                 cur_stats->lifetime  = 0;
+                 ++index;
+             }
+         }
+         return multistats;
    }
}

TriggerStatsXML *trigger_stats_xml_create(char *ifos, int stats_type) {
+    // Create the XML document for tracking trigger stats
+    TriggerStatsXML *stats = (TriggerStatsXML *)malloc(sizeof(TriggerStatsXML));
+    if (stats_type == STATS_XML_TYPE_BACKGROUND) {
+        stats->feature_xmlname = g_string_new(BACKGROUND_XML_FEATURE_NAME);
@@ -293,18 +317,15 @@ TriggerStatsXML *trigger_stats_xml_create(char *ifos, int stats_type) {
+        printf("create sgstats %s\n", stats->feature_xmlname->str);
    }
}

-    int nifo          = strlen(ifos) / IFO_LEN;
-    int ncombo        = get_ncombo(nifo);
-    stats->multistats  = trigger_stats_create(ncombo);
-    stats->ncombo      = ncombo;
+    int icombo        = get_icombo(ifos);
+    stats->multistats  = trigger_stats_create(icombo);
+    stats->icombo      = icombo;
    return stats;
}

-void trigger_stats_destroy(TriggerStats **multistats, int ncombo) {
-    int icombo = 0;
-    for (icombo = 0; icombo < ncombo; icombo++) {
-        TriggerStats *cur_stats = multistats[icombo];
+void trigger_stats_destroy(TriggerStats **multistats, int nifo) {
+    for (int ifo = 0; ifo <= nifo; ifo++) {
+        TriggerStats *cur_stats = multistats[ifo];
+        feature_stats_destroy(cur_stats->feature);

```

```

        cur_stats->feature = NULL;
        rank_stats_destroy(cur_stats->rank);
@@ -320,41 +341,9 @@ void trigger_stats_destroy(TriggerStats **multistats, int ncombo) {
    void trigger_stats_xml_destroy(TriggerStatsXML *stats) {
        g_string_free(stats->feature_xmlname, TRUE);
        g_string_free(stats->rank_xmlname, TRUE);
-        trigger_stats_destroy(stats->multistats, stats->ncombo);
-    }
-}
-
-TriggerStatsPointerList *trigger_stats_list_create(char *ifos) {
-    int nifo = 0, ncombo = 0, icombo = 0;
-    nifo = strlen(ifos) / IFO_LEN;
-
-    ncombo = get_ncombo(nifo);
-    TriggerStatsPointerList *stats_list =
-    (TriggerStatsPointerList *)malloc(sizeof(TriggerStatsPointerList));
-    stats_list->size = NSTATS_TO_PROMPT;
-    stats_list->pos = 0;
-    stats_list->plist = (TriggerStatsPointer *)malloc(
-        sizeof(TriggerStatsPointer) * NSTATS_TO_PROMPT);
-
-    int ilist = 0;
-    TriggerStats **stats = NULL;
-
-    for (ilist = 0; ilist < NSTATS_TO_PROMPT; ilist++) {
-        stats = (TriggerStats **)malloc(sizeof(TriggerStats *) * ncombo);
-        for (icombo = 0; icombo < ncombo; icombo++) {
-            stats[icombo] = (TriggerStats *)malloc(sizeof(TriggerStats));
-            TriggerStats *cur_stats = stats[icombo];
-            // printf("len %s, %d\n", IFOComboMap[icombo].name,
-            // strlen(IFOComboMap[icombo].name));
-            cur_stats->ifos =
-            malloc(strlen(IFOComboMap[icombo].name) * sizeof(char));
-            strncpy(cur_stats->ifos, IFOComboMap[icombo].name,
-                strlen(IFOComboMap[icombo].name) * sizeof(char));
-            cur_stats->nevent = 0;
-            cur_stats->livetime = 0;
-        }
-        stats_list->plist[ilist] = stats;
-    }
-    return stats_list;
+    trigger_stats_destroy(stats->multistats,
+        __builtin_popcount(stats->icombo + 1));
+    free(stats);
+}
+
+/*
@@ -434,14 +423,14 @@ void trigger_stats_feature_rate_add(FeatureStats *feature1,
    void trigger_stats_livetime_add(TriggerStats **stats_out,
        TriggerStats **stats_in,
        const int icombo) {
-        stats_out[icombo]->livetime += stats_in[icombo]->livetime;
+        const int index) {
+        stats_out[index]->livetime += stats_in[index]->livetime;
    }
    /*
    * background pdf direnctly from rate
    */
-void trigger_stats_livetime_inc(TriggerStats **stats, const int icombo) {
-    stats[icombo]->livetime += 1;
+void trigger_stats_livetime_inc(TriggerStats **stats, const int index) {
+    stats[index]->livetime += 1;
+}
+
+void trigger_stats_feature_rate_to_pdf_hist(FeatureStats *feature,
@@ -751,10 +740,10 @@ static void signal_stats_gen_ratemap_from_pdf(FeatureStats *feature) {
+}
+
+void signal_stats_init(TriggerStatsXML *sgstats, int source_type) {
-    int icombo, ncombo = sgstats->ncombo;
+    int ifo, nifo = __builtin_popcount(sgstats->icombo + 1);
+    if (source_type == SOURCE_TYPE_BNS) {
-        for (icombo = 0; icombo < ncombo; icombo++) {
-            TriggerStats *stats = sgstats->multistats[icombo];

```

```

+         for (ifo = 0; ifo <= nifo; ifo++) {
+             TriggerStats *stats = sgstats->multistats[ifo];
+             signal_stats_gen_pdfmap(stats->feature->lgsnr_lgchisq_pdf);
+             signal_stats_gen_ratemap_from_pdf(stats->feature);
+         }
@@ -999,99 +988,108 @@ gboolean trigger_stats_xml_from_xml(TriggerStatsXML *stats,
+     if (!g_file_test(filename, G_FILE_TEST_EXISTS)) { return FALSE; }

+     int nelelem = 10; // 4 for feature, 4 for rank, 2 for nevent, lifetime
+     int ncombo = stats->ncombo;
+     int nnode = ncombo * nelelem + 1, icombo; // 1 for hist_trials
+     int icombo = stats->icombo;
+     int nifo = __builtin_popcount(icombo + 1);
+     int nodes = nifo + 1; // top level nodes
+     int nnode = nodes * nelelem + 1, combo; // 1 for hist_trials
+     /* read rate */

+     XmlNodeStruct *xns = (XmlNodeStruct *)malloc(sizeof(XmlNodeStruct) * nnode);
+     XmlArray *array_lgsnr_rate = (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+     XmlArray *array_lgchisq_rate =
+         (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+     XmlArray *array_lgsnr_rate = (XmlArray *)malloc(sizeof(XmlArray) * nodes);
+     XmlArray *array_lgchisq_rate = (XmlArray *)malloc(sizeof(XmlArray) * nodes);
+     XmlArray *array_lgsnr_lgchisq_rate =
+         (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+     (XmlArray *)malloc(sizeof(XmlArray) * nodes);
+     XmlArray *array_lgsnr_lgchisq_pdf =
+         (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+     XmlArray *array_rank_map = (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+     XmlParam *param_nevent = (XmlParam *)malloc(sizeof(XmlParam) * ncombo);
+     XmlParam *param_lifetime = (XmlParam *)malloc(sizeof(XmlParam) * ncombo);
+     XmlArray *array_rank_rate = (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+     XmlArray *array_rank_pdf = (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+     XmlArray *array_rank_fap = (XmlArray *)malloc(sizeof(XmlArray) * ncombo);

+     int pos_xns;
+     for (icombo = 0; icombo < ncombo; icombo++) {
+         pos_xns = icombo;
+         sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+             stats->feature_xmlname->str, IFOComboMap[icombo].name,
+             SNR_RATE_SUFFIX);
+         xns[pos_xns].processPtr = readArray;
+         xns[pos_xns].data = &(array_lgsnr_rate[icombo]);

+         pos_xns += ncombo;
+         sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+             stats->feature_xmlname->str, IFOComboMap[icombo].name,
+             CHISQ_RATE_SUFFIX);
+         xns[pos_xns].processPtr = readArray;
+         xns[pos_xns].data = &(array_lgchisq_rate[icombo]);

+         pos_xns += ncombo;
+         sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+             stats->feature_xmlname->str, IFOComboMap[icombo].name,
+             SNR_CHISQ_RATE_SUFFIX);
+         xns[pos_xns].processPtr = readArray;
+         xns[pos_xns].data = &(array_lgsnr_lgchisq_rate[icombo]);

+         pos_xns += ncombo;
+         sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+             stats->feature_xmlname->str, IFOComboMap[icombo].name,
+             SNR_CHISQ_PDF_SUFFIX);
+         xns[pos_xns].processPtr = readArray;
+         xns[pos_xns].data = &(array_lgsnr_lgchisq_pdf[icombo]);

+         pos_xns += ncombo;
+         sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+             stats->rank_xmlname->str, IFOComboMap[icombo].name,
+             RANK_MAP_SUFFIX);
+         xns[pos_xns].processPtr = readArray;
+         xns[pos_xns].data = &(array_rank_map[icombo]);

+         pos_xns += ncombo;
+         sprintf((char *)xns[pos_xns].tag, "%s:%s_nevent:param",

```

```

-         stats->feature_xmlname->str, IFOComboMap[icombo].name);
-     xns[pos_xns].processPtr = readParam;
-     xns[pos_xns].data      = &(param_nevent[icombo]);
-
-     pos_xns += ncombo;
-     sprintf((char *)xns[pos_xns].tag, "%s:%s_livetime:param",
-         stats->feature_xmlname->str, IFOComboMap[icombo].name);
-     xns[pos_xns].processPtr = readParam;
-     xns[pos_xns].data      = &(param_livetime[icombo]);
-
-     pos_xns += ncombo;
-     sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
-         stats->rank_xmlname->str, IFOComboMap[icombo].name,
-         RANK_RATE_SUFFIX);
-     xns[pos_xns].processPtr = readArray;
-     xns[pos_xns].data      = &(array_rank_rate[icombo]);
-
-     pos_xns += ncombo;
-     sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
-         stats->rank_xmlname->str, IFOComboMap[icombo].name,
-         RANK_PDF_SUFFIX);
-     xns[pos_xns].processPtr = readArray;
-     xns[pos_xns].data      = &(array_rank_pdf[icombo]);
-
-     pos_xns += ncombo;
-     sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
-         stats->rank_xmlname->str, IFOComboMap[icombo].name,
-         RANK_FAP_SUFFIX);
-     xns[pos_xns].processPtr = readArray;
-     xns[pos_xns].data      = &(array_rank_fap[icombo]);
+     (XmlArray *)malloc(sizeof(XmlArray) * nodes);
+     XmlArray *array_rank_map = (XmlArray *)malloc(sizeof(XmlArray) * nodes);
+     XmlParam *param_nevent  = (XmlParam *)malloc(sizeof(XmlParam) * nodes);
+     XmlParam *param_livetime = (XmlParam *)malloc(sizeof(XmlParam) * nodes);
+     XmlArray *array_rank_rate = (XmlArray *)malloc(sizeof(XmlArray) * nodes);
+     XmlArray *array_rank_pdf  = (XmlArray *)malloc(sizeof(XmlArray) * nodes);
+     XmlArray *array_rank_fap  = (XmlArray *)malloc(sizeof(XmlArray) * nodes);
+
+     // [THA]: We hold 'index' to be the index into the various arrays that we
+     // index for printing. We also only have this many (+1)s because icombo
+     // starts from 0 and we need to make sure that the 0th combo & icombo != 0
+     // if its not in the actual combo. Thus we add 1 to get the "actual"
+     // combination and just use combo for indexing the combomap
+     int pos_xns, index;
+     for (combo = 0, index = 0; combo < icombo + 1; combo++) {
+         if ((combo + 1) & (icombo + 1) == combo + 1) {
+             pos_xns = index;
+             sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+                 stats->feature_xmlname->str, IFOComboMap[combo].name,
+                 SNR_RATE_SUFFIX);
+             xns[pos_xns].processPtr = readArray;
+             xns[pos_xns].data      = &(array_lgsnr_rate[index]);
+
+             pos_xns += nifo;
+             sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+                 stats->feature_xmlname->str, IFOComboMap[combo].name,
+                 CHISQ_RATE_SUFFIX);
+             xns[pos_xns].processPtr = readArray;
+             xns[pos_xns].data      = &(array_lgchisq_rate[index]);
+
+             pos_xns += nifo;
+             sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+                 stats->feature_xmlname->str, IFOComboMap[combo].name,
+                 SNR_CHISQ_RATE_SUFFIX);
+             xns[pos_xns].processPtr = readArray;
+             xns[pos_xns].data      = &(array_lgsnr_lgchisq_rate[index]);
+
+             pos_xns += nifo;
+             sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+                 stats->feature_xmlname->str, IFOComboMap[combo].name,
+                 SNR_CHISQ_PDF_SUFFIX);
+             xns[pos_xns].processPtr = readArray;
+             xns[pos_xns].data      = &(array_lgsnr_lgchisq_pdf[index]);

```

```

+
+     pos_xns += nifo;
+     sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+           stats->rank_xmlname->str, IFOComboMap[combo].name,
+           RANK_MAP_SUFFIX);
+     xns[pos_xns].processPtr = readArray;
+     xns[pos_xns].data      = &(array_rank_map[index]);
+
+     pos_xns += nifo;
+     sprintf((char *)xns[pos_xns].tag, "%s:%s_nevent:param",
+           stats->feature_xmlname->str, IFOComboMap[combo].name);
+     xns[pos_xns].processPtr = readParam;
+     xns[pos_xns].data      = &(param_nevent[index]);
+
+     pos_xns += nifo;
+     sprintf((char *)xns[pos_xns].tag, "%s:%s_lifetime:param",
+           stats->feature_xmlname->str, IFOComboMap[combo].name);
+     xns[pos_xns].processPtr = readParam;
+     xns[pos_xns].data      = &(param_lifetime[index]);
+
+     pos_xns += nifo;
+     sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+           stats->rank_xmlname->str, IFOComboMap[combo].name,
+           RANK_RATE_SUFFIX);
+     xns[pos_xns].processPtr = readArray;
+     xns[pos_xns].data      = &(array_rank_rate[index]);
+
+     pos_xns += nifo;
+     sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+           stats->rank_xmlname->str, IFOComboMap[combo].name,
+           RANK_PDF_SUFFIX);
+     xns[pos_xns].processPtr = readArray;
+     xns[pos_xns].data      = &(array_rank_pdf[index]);
+
+     pos_xns += nifo;
+     sprintf((char *)xns[pos_xns].tag, "%s:%s_%s:array",
+           stats->rank_xmlname->str, IFOComboMap[combo].name,
+           RANK_FAP_SUFFIX);
+     xns[pos_xns].processPtr = readArray;
+     xns[pos_xns].data      = &(array_rank_fap[index]);
+     index += 1;
+ }
+
+ XmlParam *param_hist_trials = (XmlParam *)malloc(sizeof(XmlParam) * 1);
- pos_xns      = nelem * ncombo;
+ pos_xns      = nelem * nifo;
+ GString *hist_name = g_string_new(NULL);
+ g_string_printf(hist_name, "%s:hist_trials:param",
+   stats->feature_xmlname->str);
@@ -1116,32 +1114,32 @@ gboolean trigger_stats_xml_from_xml(TriggerStatsXML *stats,
+ g_assert(array_lgsnr_rate[0].dim[0] == nbin_x);
+ g_assert(array_lgchisq_rate[0].dim[0] == nbin_y);
- for (icombo = 0; icombo < ncombo; icombo++) {
-   TriggerStats *cur_stats = multistats[icombo];
+ for (index = 0; index < nifo; index++) {
+   TriggerStats *cur_stats = multistats[index];
+   FeatureStats *feature   = cur_stats->feature;
+   RankingStats *rank      = cur_stats->rank;
+   memcpy(((gsl_vector_long *)feature->lgsnr_rate->data)->data,
-     (long *)array_lgsnr_rate[icombo].data, x_size);
+     (long *)array_lgsnr_rate[index].data, x_size);
+   memcpy(((gsl_vector_long *)feature->lgchisq_rate->data)->data,
-     (long *)array_lgchisq_rate[icombo].data, y_size);
+     (long *)array_lgchisq_rate[index].data, y_size);
+   memcpy(((gsl_matrix_long *)feature->lgsnr_lgchisq_rate->data)->data,
-     (long *)array_lgsnr_lgchisq_rate[icombo].data, xy_size);
+     (long *)array_lgsnr_lgchisq_rate[index].data, xy_size);
+   memcpy(((gsl_matrix *)feature->lgsnr_lgchisq_pdf->data)->data,
-     array_lgsnr_lgchisq_pdf[icombo].data, xy_size);
+     array_lgsnr_lgchisq_pdf[index].data, xy_size);
+   memcpy(((gsl_matrix *)rank->rank_map->data)->data,

```

```

-         array_rank_map[icombo].data, xy_size);
+         array_rank_map[index].data, xy_size);
+     memcpy(((gsl_vector_long *)rank->rank_rate->data)->data,
-         (long *)array_rank_rate[icombo].data, y_size);
+         (long *)array_rank_rate[index].data, y_size);
+     memcpy(((gsl_vector *)rank->rank_pdf->data)->data,
-         (long *)array_rank_pdf[icombo].data, y_size);
+         (long *)array_rank_pdf[index].data, y_size);
+     memcpy(((gsl_vector *)rank->rank_fap->data)->data,
-         (long *)array_rank_fap[icombo].data, y_size);
-     cur_stats->nevent = *((long *)param_nevent[icombo].data);
-     cur_stats->lifetime = *((long *)param_lifetime[icombo].data);
+     (long *)array_rank_fap[index].data, y_size);
+     cur_stats->nevent = *((long *)param_nevent[index].data);
+     cur_stats->lifetime = *((long *)param_lifetime[index].data);
+     // printf("filename %s, icombo %d, fap addr %p\n", filename, icombo,
-     // ((gsl_matrix *)cur_stats->fap->data)->data); printf("icombo %d, nevent
-     // addr %p, %p\n", icombo, (param_nevent[icombo].data),
+     // ((gsl_matrix *)cur_stats->fap->data)->data); printf("icombo %d,
+     // nevent addr %p, %p\n", icombo, (param_nevent[icombo].data),
+     // (&(param_nevent[icombo]))->data);
    }
    *hist_trials = *((int *)param_hist_trials->data);
@@ -1160,17 +1158,17 @@ gboolean trigger_stats_xml_from_xml(TriggerStatsXML *stats,
/*
 * free the allocated memory for xml reading
 */
-     for (icombo = 0; icombo < ncombo; icombo++) {
-         free(array_lgsnr_rate[icombo].data);
-         free(array_lgchisq_rate[icombo].data);
-         free(array_lgsnr_lgchisq_rate[icombo].data);
-         free(array_lgsnr_lgchisq_pdf[icombo].data);
-         free(param_nevent[icombo].data);
-         free(param_lifetime[icombo].data);
-         free(array_rank_map[icombo].data);
-         free(array_rank_rate[icombo].data);
-         free(array_rank_pdf[icombo].data);
-         free(array_rank_fap[icombo].data);
+     for (index = 0; index < nifo; index++) {
+         free(array_lgsnr_rate[index].data);
+         free(array_lgchisq_rate[index].data);
+         free(array_lgsnr_lgchisq_rate[index].data);
+         free(array_lgsnr_lgchisq_pdf[index].data);
+         free(param_nevent[index].data);
+         free(param_lifetime[index].data);
+         free(array_rank_map[index].data);
+         free(array_rank_rate[index].data);
+         free(array_rank_pdf[index].data);
+         free(array_rank_fap[index].data);
    }
    free(array_lgsnr_rate);
    free(array_lgchisq_rate);
@@ -1293,18 +1291,19 @@ gboolean trigger_stats_xml_dump(TriggerStatsXML *stats,
    }
    printf("write %s\n", stats->rank_xmlname->str);
    xmlTextWriterPtr writer = *pwriter;
-     int icombo = 0, ncombo = stats->ncombo;
-     XmlArray *array_lgsnr_rate = (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
-     int ifo = 0, nifo = __builtin_popcount(stats->icombo + 1);
-     int nnodes = nifo + 1;
-     XmlArray *array_lgsnr_rate = (XmlArray *)malloc(sizeof(XmlArray) * nnodes);
-     XmlArray *array_lgchisq_rate =
-         (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+     (XmlArray *)malloc(sizeof(XmlArray) * nnodes);
+     XmlArray *array_lgsnr_lgchisq_rate =
-         (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
+         (XmlArray *)malloc(sizeof(XmlArray) * nnodes);
+     XmlArray *array_lgsnr_lgchisq_pdf =
-         (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
-     XmlArray *array_rank_map = (XmlArray *)malloc(sizeof(XmlArray) * ncombo);
-     XmlArray *array_rank_rate = (XmlArray *)malloc(sizeof(XmlArray) * ncombo);

```

```

-   XmlArray *array_rank_pdf = (XmlArray *) malloc(sizeof(XmlArray) * ncombo);
-   XmlArray *array_rank_fap = (XmlArray *) malloc(sizeof(XmlArray) * ncombo);
+   (XmlArray *) malloc(sizeof(XmlArray) * nnodes);
+   XmlArray *array_rank_map = (XmlArray *) malloc(sizeof(XmlArray) * nnodes);
+   XmlArray *array_rank_rate = (XmlArray *) malloc(sizeof(XmlArray) * nnodes);
+   XmlArray *array_rank_pdf = (XmlArray *) malloc(sizeof(XmlArray) * nnodes);
+   XmlArray *array_rank_fap = (XmlArray *) malloc(sizeof(XmlArray) * nnodes);

    TriggerStats **multistats = stats->multistats;
    int nbins_x = multistats[0]->feature->lgsnr_lgchisq_pdf->nbins_x,
@@ -1312,61 +1311,61 @@ gboolean trigger_stats_xml_dump(TriggerStatsXML *stats,
    int x_size = sizeof(double) * nbins_x, y_size = sizeof(double) * nbins_y;
    int xy_size = sizeof(double) * nbins_x * nbins_y;

-   for (icombo = 0; icombo < ncombo; icombo++) {
-       TriggerStats *cur_stats = multistats[icombo];
+   for (ifoo = 0; ifoo < nnodes; ifoo++) {
+       TriggerStats *cur_stats = multistats[ifoo];
+       FeatureStats *feature = cur_stats->feature;
+       RankingStats *rank = cur_stats->rank;
+       // assemble lgsnr_rate
-       array_lgsnr_rate[icombo].ndim = 1;
-       array_lgsnr_rate[icombo].dim[0] = nbins_x;
-       array_lgsnr_rate[icombo].data = (long *) malloc(x_size);
-       memcpy(array_lgsnr_rate[icombo].data,
+       array_lgsnr_rate[ifoo].ndim = 1;
+       array_lgsnr_rate[ifoo].dim[0] = nbins_x;
+       array_lgsnr_rate[ifoo].data = (long *) malloc(x_size);
+       memcpy(array_lgsnr_rate[ifoo].data,
+           ((gsl_vector_long *) feature->lgsnr_rate->data)->data, x_size);
+       // assemble lgchisq_rate
-       array_lgchisq_rate[icombo].ndim = 1;
-       array_lgchisq_rate[icombo].dim[0] = nbins_y;
-       array_lgchisq_rate[icombo].data = (long *) malloc(y_size);
-       memcpy(array_lgchisq_rate[icombo].data,
+       array_lgchisq_rate[ifoo].ndim = 1;
+       array_lgchisq_rate[ifoo].dim[0] = nbins_y;
+       array_lgchisq_rate[ifoo].data = (long *) malloc(y_size);
+       memcpy(array_lgchisq_rate[ifoo].data,
+           ((gsl_vector_long *) feature->lgchisq_rate->data)->data, y_size);
+       // assemble lgsnr_lgchisq_rate
-       array_lgsnr_lgchisq_rate[icombo].ndim = 2;
-       array_lgsnr_lgchisq_rate[icombo].dim[0] = nbins_x;
-       array_lgsnr_lgchisq_rate[icombo].dim[1] = nbins_y;
-       array_lgsnr_lgchisq_rate[icombo].data = (long *) malloc(xy_size);
-       memcpy(array_lgsnr_lgchisq_rate[icombo].data,
+       array_lgsnr_lgchisq_rate[ifoo].ndim = 2;
+       array_lgsnr_lgchisq_rate[ifoo].dim[0] = nbins_x;
+       array_lgsnr_lgchisq_rate[ifoo].dim[1] = nbins_y;
+       array_lgsnr_lgchisq_rate[ifoo].data = (long *) malloc(xy_size);
+       memcpy(array_lgsnr_lgchisq_rate[ifoo].data,
+           ((gsl_matrix_long *) feature->lgsnr_lgchisq_rate->data)->data,
+           xy_size);
+       // assemble lgsnr_lgchisq_pdf
-       array_lgsnr_lgchisq_pdf[icombo].ndim = 2;
-       array_lgsnr_lgchisq_pdf[icombo].dim[0] = nbins_x;
-       array_lgsnr_lgchisq_pdf[icombo].dim[1] = nbins_y;
-       array_lgsnr_lgchisq_pdf[icombo].data = (double *) malloc(xy_size);
-       memcpy(array_lgsnr_lgchisq_pdf[icombo].data,
+       array_lgsnr_lgchisq_pdf[ifoo].ndim = 2;
+       array_lgsnr_lgchisq_pdf[ifoo].dim[0] = nbins_x;
+       array_lgsnr_lgchisq_pdf[ifoo].dim[1] = nbins_y;
+       array_lgsnr_lgchisq_pdf[ifoo].data = (double *) malloc(xy_size);
+       memcpy(array_lgsnr_lgchisq_pdf[ifoo].data,
+           ((gsl_matrix *) feature->lgsnr_lgchisq_pdf->data)->data, xy_size);
+       // assemble rank_map
-       array_rank_map[icombo].ndim = 2;
-       array_rank_map[icombo].dim[0] = nbins_x;
-       array_rank_map[icombo].dim[1] = nbins_y;
-       array_rank_map[icombo].data = (double *) malloc(x_size * y_size);
-       memcpy(array_rank_map[icombo].data,

```



```

+     array_rank_map[ifo].ndim    = 2;
+     array_rank_map[ifo].dim[0] = nbins_x;
+     array_rank_map[ifo].dim[1] = nbins_y;
+     array_rank_map[ifo].data    = (double *)malloc(x_size * y_size);
+     memcpy(array_rank_map[ifo].data,
+            ((gsl_matrix *)rank->rank_map->data)->data, xy_size);
+     // assemble rank_rate
-     array_rank_rate[icombo].ndim    = 1;
-     array_rank_rate[icombo].dim[0] = nbins_x;
-     array_rank_rate[icombo].data    = (long *)malloc(x_size);
-     memcpy(array_rank_rate[icombo].data,
+     array_rank_rate[ifo].ndim    = 1;
+     array_rank_rate[ifo].dim[0] = nbins_x;
+     array_rank_rate[ifo].data    = (long *)malloc(x_size);
+     memcpy(array_rank_rate[ifo].data,
+            ((gsl_vector_long *)rank->rank_rate->data)->data, x_size);
+     // assemble rank_pdf
-     array_rank_pdf[icombo].ndim    = 1;
-     array_rank_pdf[icombo].dim[0] = nbins_x;
-     array_rank_pdf[icombo].data    = (double *)malloc(x_size);
-     memcpy(array_rank_pdf[icombo].data,
+     array_rank_pdf[ifo].ndim    = 1;
+     array_rank_pdf[ifo].dim[0] = nbins_x;
+     array_rank_pdf[ifo].data    = (double *)malloc(x_size);
+     memcpy(array_rank_pdf[ifo].data,
+            ((gsl_vector *)rank->rank_pdf->data)->data, x_size);
+     // assemble rank_fap_
-     array_rank_fap[icombo].ndim    = 1;
-     array_rank_fap[icombo].dim[0] = nbins_x;
-     array_rank_fap[icombo].data    = (double *)malloc(x_size);
-     memcpy(array_rank_fap[icombo].data,
+     array_rank_fap[ifo].ndim    = 1;
+     array_rank_fap[ifo].dim[0] = nbins_x;
+     array_rank_fap[ifo].data    = (double *)malloc(x_size);
+     memcpy(array_rank_fap[ifo].data,
+            ((gsl_vector *)rank->rank_fap->data)->data, x_size);
+ }
@@ -1409,63 +1408,58 @@ gboolean trigger_stats_xml_dump(TriggerStatsXML *stats,
    GString *array_name = g_string_new(NULL);
    GString *param_name = g_string_new(NULL);
-   for (icombo = 0; icombo < ncombo; icombo++) {
+   for (ifo = 0; ifo < nnodes; ifo++) {
+       // write features
        g_string_printf(array_name, "%s:%s_%s:array",
-            stats->feature_xmlname->str, IFOComboMap[icombo].name,
+            stats->feature_xmlname->str, multistats[ifo]->ifos,
+            SNR_RATE_SUFFIX);
-        ligoxml_write_Array(writer, &(array_lgsnr_rate[icombo]),
-            BAD_CAST "int_8s", BAD_CAST " ",
-            BAD_CAST array_name->str);
+        ligoxml_write_Array(writer, &(array_lgsnr_rate[ifo]), BAD_CAST "int_8s",
+            BAD_CAST " ", BAD_CAST array_name->str);
        g_string_printf(array_name, "%s:%s_%s:array",
-            stats->feature_xmlname->str, IFOComboMap[icombo].name,
+            stats->feature_xmlname->str, multistats[ifo]->ifos,
+            CHISQ_RATE_SUFFIX);
-        ligoxml_write_Array(writer, &(array_lgchisq_rate[icombo]),
+        ligoxml_write_Array(writer, &(array_lgchisq_rate[ifo]),
+            BAD_CAST "int_8s", BAD_CAST " ",
+            BAD_CAST array_name->str);
        g_string_printf(array_name, "%s:%s_%s:array",
-            stats->feature_xmlname->str, IFOComboMap[icombo].name,
+            stats->feature_xmlname->str, multistats[ifo]->ifos,
+            SNR_CHISQ_RATE_SUFFIX);
-        ligoxml_write_Array(writer, &(array_lgsnr_lgchisq_rate[icombo]),
+        ligoxml_write_Array(writer, &(array_lgsnr_lgchisq_rate[ifo]),
+            BAD_CAST "int_8s", BAD_CAST " ",
+            BAD_CAST array_name->str);
        g_string_printf(array_name, "%s:%s_%s:array",

```



```

-         stats->feature_xmlname->str, IFOComboMap[icombo].name,
+         stats->feature_xmlname->str, multistats[ifo]->ifos,
+         SNR_CHISQ_PDF_SUFFIX);
-     ligoxml_write_Array(writer, &(array_lgsnr_lgchisq_pdf[icombo]),
+     ligoxml_write_Array(writer, &(array_lgsnr_lgchisq_pdf[ifo]),
+         BAD_CAST "real_8", BAD_CAST " ",
+         BAD_CAST array_name->str);

    // write rank
    g_string_printf(array_name, "%s:%s_%s:array", stats->rank_xmlname->str,
-         IFOComboMap[icombo].name, RANK_MAP_SUFFIX);
-     ligoxml_write_Array(writer, &(array_rank_map[icombo]),
-         BAD_CAST "real_8", BAD_CAST " ",
-         BAD_CAST array_name->str);
+     multistats[ifo]->ifos, RANK_MAP_SUFFIX);
+     ligoxml_write_Array(writer, &(array_rank_map[ifo]), BAD_CAST "real_8",
+         BAD_CAST " ", BAD_CAST array_name->str);
    g_string_printf(array_name, "%s:%s_%s:array", stats->rank_xmlname->str,
-         IFOComboMap[icombo].name, RANK_RATE_SUFFIX);
-     ligoxml_write_Array(writer, &(array_rank_rate[icombo]),
-         BAD_CAST "int_8s", BAD_CAST " ",
-         BAD_CAST array_name->str);
+     multistats[ifo]->ifos, RANK_RATE_SUFFIX);
+     ligoxml_write_Array(writer, &(array_rank_rate[ifo]), BAD_CAST "int_8s",
+         BAD_CAST " ", BAD_CAST array_name->str);
    g_string_printf(array_name, "%s:%s_%s:array", stats->rank_xmlname->str,
-         IFOComboMap[icombo].name, RANK_PDF_SUFFIX);
-     ligoxml_write_Array(writer, &(array_rank_pdf[icombo]),
-         BAD_CAST "real_8", BAD_CAST " ",
-         BAD_CAST array_name->str);
+     multistats[ifo]->ifos, RANK_PDF_SUFFIX);
+     ligoxml_write_Array(writer, &(array_rank_pdf[ifo]), BAD_CAST "real_8",
+         BAD_CAST " ", BAD_CAST array_name->str);
    g_string_printf(array_name, "%s:%s_%s:array", stats->rank_xmlname->str,
-         IFOComboMap[icombo].name, RANK_FAP_SUFFIX);
-     ligoxml_write_Array(writer, &(array_rank_fap[icombo]),
-         BAD_CAST "real_8", BAD_CAST " ",
-         BAD_CAST array_name->str);
+     multistats[ifo]->ifos, RANK_FAP_SUFFIX);
+     ligoxml_write_Array(writer, &(array_rank_fap[ifo]), BAD_CAST "real_8",
+         BAD_CAST " ", BAD_CAST array_name->str);

    g_string_printf(param_name, "%s:%s_nevent:param",
-         stats->feature_xmlname->str, IFOComboMap[icombo].name);
-     ((long *)param_nevent.data)[0] = multistats[icombo]->nevent;
+     stats->feature_xmlname->str, multistats[ifo]->ifos);
+     ((long *)param_nevent.data)[0] = multistats[ifo]->nevent;
    ligoxml_write_Param(writer, &param_nevent, BAD_CAST "int_8s",
+         BAD_CAST param_name->str);
    g_string_printf(param_name, "%s:%s_lifetime:param",
-         stats->feature_xmlname->str, IFOComboMap[icombo].name);
-     ((long *)param_lifetime.data)[0] = multistats[icombo]->lifetime;
+     stats->feature_xmlname->str, multistats[ifo]->ifos);
+     ((long *)param_lifetime.data)[0] = multistats[ifo]->lifetime;
    ligoxml_write_Param(writer, &param_lifetime, BAD_CAST "int_8s",
+         BAD_CAST param_name->str);
}
@@ -1501,15 +1495,15 @@ gboolean trigger_stats_xml_dump(TriggerStatsXML *stats,
    free(param_nevent.data);
    free(param_lifetime.data);
    free(param_hist_trials.data);
-     for (icombo = ncombo - 1; icombo >= 0; icombo--) {
-         freeArray(array_lgsnr_rate + icombo);
-         freeArray(array_lgchisq_rate + icombo);
-         freeArray(array_lgsnr_lgchisq_rate + icombo);
-         freeArray(array_lgsnr_lgchisq_pdf + icombo);
-         freeArray(array_rank_map + icombo);
-         freeArray(array_rank_rate + icombo);
-         freeArray(array_rank_pdf + icombo);
-         freeArray(array_rank_fap + icombo);
+     for (int node = nnodes - 1; node >= 0; node--) {

```

```

+     freeArray(array_lgsnr_rate + node);
+     freeArray(array_lgchisq_rate + node);
+     freeArray(array_lgsnr_lgchisq_rate + node);
+     freeArray(array_lgsnr_lgchisq_pdf + node);
+     freeArray(array_rank_map + node);
+     freeArray(array_rank_rate + node);
+     freeArray(array_rank_pdf + node);
+     freeArray(array_rank_fap + node);
+ }
+ free(array_lgsnr_rate);
+ free(array_lgchisq_rate);
diff --git a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.h b/gstlal-spiir/gst/cuda/cohfar/backg
index 4c5990d4..9eda6a4a 100644
--- a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.h
+++ b/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.h
@@ -1,5 +1,6 @@
/*
- * Copyright (C) 2015 Qi Chu <qi.chu@uwa.edu.au>
+ * Copyright (C) 2015 Qi Chu <qi.chu@uwa.edu.au>,
+ * 2020 Tom Almeida <tom@tommoa.me>,
+ *
+ * Permission is hereby granted, free of charge, to any person obtaining a
+ * copy of this software and associated documentation files (the
@@ -48,7 +49,7 @@ Bins2D *bins2D_create_long(double cmin_x,
                        double cmax_y,
                        int nbins_y);

-TriggerStats **trigger_stats_create(int ncombo);
+TriggerStats **trigger_stats_create(int icombo);

int bins1D_get_idx(double val, Bins1D *bins);

diff --git a/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbgbackground.c b/gstlal-spiir/gst/cuda/cohfar/cohfar
index 154cbd1..c742a658 100644
--- a/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbgbackground.c
+++ b/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbgbackground.c
@@ -1,5 +1,6 @@
/*
- * Copyright (C) 2015 Qi Chu <qi.chu@uwa.edu.au>
+ * Copyright (C) 2015 Qi Chu <qi.chu@uwa.edu.au>,
+ * 2020 Tom Almeida <tom@tommoa.me>,
+ *
+ * This program is free software; you can redistribute it and/or modify
+ * it under the terms of the GNU General Public License as published by
@@ -103,30 +104,27 @@ static void cohfar_accumbgbackground_dispose(GObject *object);

static void update_stats_icombo(PostcohInspiralTable *intable,
-                                int icombo,
-                                int ncombo,
-                                TriggerStatsXML *stats) {
+                                int icombo,
+                                int ncombo,
+                                TriggerStatsXML *stats) {
-    int nifo, isingle, write_ifo_mapping[MAX_NIFO];
-    // update the multi-IFO background at the last bin.
-    if (icombo > -1) {
+    int nifo, ifo;
+    nifo = __builtin_popcount(stats->icombo + 1);
+
+    if (stats->icombo > -1) {
+        // update the multi-IFO background at the last bin.
+        trigger_stats_feature_rate_update(
+            (double)(intable->cohsnr), (double)intable->cmbchisq,
-        stats->multistats[ncombo - 1]->feature,
-        stats->multistats[ncombo - 1]);
+        stats->multistats[nifo]->feature, stats->multistats[nifo]);
-        nifo = strlen(intable->ifos) / IFO_LEN;
-        /* add single detector stats */
-        get_write_ifo_mapping(IFOComboMap[icombo].name, nifo,
-                               write_ifo_mapping);
-
-        // update single-IFO background according the single-IFO decomposition
-        for (isingle = 0; isingle < nifo; isingle++) {
-            int write_isingle = write_ifo_mapping[isingle];
-            trigger_stats_feature_rate_update(
-                (double)(*(intable->snlsnr_H) + write_isingle)),

```

```

-         (double)((&(intable->chisq_H) + write_isingle)),
-         stats->multistats[write_isingle]->feature,
-         stats->multistats[write_isingle]);
+     int index;
+     for (ifo = 0, index = 0; ifo < MAX_NIFO; ifo++) {
+         if ((stats->icombo + 1) & (1 << ifo)) {
+             trigger_stats_feature_rate_update(
+                 (double)((&intable->snglsnr_H)[ifo]),
+                 (double)((&intable->chisq_H)[ifo]),
+                 stats->multistats[index]->feature, stats->multistats[index]);
+             ++index;
+         }
+     }
+ }
+ }
+ }
@@ -171,14 +169,14 @@ static GstFlowReturn cohfar_accumbgbackground_chain(GstPad *pad,
// TriggerStats **stats_prompt = element->stats_prompt;
// TriggerStatsPointerList *stats_list = element->stats_list;
// /* reset stats_prompt */
- // trigger_stats_reset(stats_prompt, element->ncombo);
+ // trigger_stats_reset(stats_prompt, element->nifo);
/*
 * reset stats in the stats_list in order to input new background points
 */
// int pos = stats_list->pos;
// TriggerStats **cur_stats_in_list = stats_list->plist[pos];
- // trigger_stats_reset(cur_stats_in_list, element->ncombo);
+ // trigger_stats_reset(cur_stats_in_list, element->nifo);
/*
 * calculate number of output postcoh entries
@@ -203,7 +201,7 @@ static GstFlowReturn cohfar_accumbgbackground_chain(GstPad *pad,
/* allocate extra space for prompt stats */
// int out_size = sizeof(PostcohInspiralTable) * outentries +
- // sizeof(TriegerStats) * ncombo;
+ // sizeof(TriegerStats) * (nifo + 1);
int out_size = sizeof(PostcohInspiralTable) * outentries;
result = gst_pad_alloc_buffer(srcpad, 0, out_size, caps, &outbuf);
if (result != GST_FLOW_OK) {
@@ -235,13 +233,13 @@ static GstFlowReturn cohfar_accumbgbackground_chain(GstPad *pad,
}
if (intable->is_background == FLAG_BACKGROUND) {
    update_stats_icombo(
-         intable, icombo, element->ncombo,
-         bgstats); // update the last ncombo and single IFO stats
+         intable,
+         bgstats); // update the last combination and single IFO stats
    } else if (intable->is_background
               == FLAG_FOREGROUND) { /* coherent trigger entry */
        update_stats_icombo(
-         intable, icombo, element->ncombo,
-         zlstats); // update the last ncombo and single IFO stats
+         intable,
+         zlstats); // update the last combination and single IFO stats
        memcpy(outtable, intable, sizeof(PostcohInspiralTable));
        outtable++;
    } else {
@@ -252,22 +250,15 @@ static GstFlowReturn cohfar_accumbgbackground_chain(GstPad *pad,
//
// Note that this is inverted because icombo is sum(1 << index) - 1
if ((icombo + 1) & icombo) {
-     nifo = strlen(intable->ifos) / IFO_LEN;
+     nifo = __builtin_popcount(icombo + 1);
+     /* add single detector stats */
    get_write_ifo_mapping(IFOComboMap[icombo].name, nifo,
        element->write_ifo_mapping);
-
-     for (isingle = 0; isingle < nifo; isingle++) {
-         int write_isingle = element->write_ifo_mapping[isingle];
-         trigger_stats_lifetime_inc(bgstats->multistats,
-             write_isingle);
-     }

```

```

-         trigger_stats_livetime_inc(zlstats->multistats,
-                                     write_isingle);
+         for (isingle = 0; isingle <= nifo; isingle++) {
+             trigger_stats_livetime_inc(bgstats->multistats, isingle);
+             trigger_stats_livetime_inc(zlstats->multistats, isingle);
+         }
-         trigger_stats_livetime_inc(bgstats->multistats,
-                                     element->ncombo - 1);
-         trigger_stats_livetime_inc(zlstats->multistats,
-                                     element->ncombo - 1);
-     }
    memcpy(outtable, intable, sizeof(PostcohInspiralTable));
    outtable++;
@@ -422,7 +413,7 @@ static void cohfar_accumbbackground_set_property(GObject *object,
    case PROP_IFOS:
        element->ifos = g_value_dup_string(value);
        element->nifo = strlen(element->ifos) / IFO_LEN;
-        element->ncombo = get_ncombo(element->nifo);
+        element->icombo = get_icombo(element->ifos);
        element->bgstats =
            trigger_stats_xml_create(element->ifos, STATS_XML_TYPE_BACKGROUND);
        element->zlstats =
diff --git a/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbbackground.h b/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbbackground.h
index c3480659..07cf0a5e 100644
--- a/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbbackground.h
+++ b/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbbackground.h
@@ -32,8 +32,8 @@
#include <glib.h>
#include <gst/base/gstbasetransform.h>
#include <gst/gst.h>
-#include <postcohtable.h>
#include <libxml/xmlwriter.h>
+#include <postcohtable.h>

G_BEGIN_DECLS
#define COHFAR_ACCUMBACKGROUND_TYPE (cohfar_accumbbackground_get_type())
@@ -59,7 +59,7 @@ typedef struct {
    char *ifos;
    int nifo;
-    int ncombo; // ifo combination
+    int icombo; // ifo combination
    int write_ifo_mapping[MAX_NIFO];
    TriggerStatsXML *bgstats;
    TriggerStatsXML *zlstats;
diff --git a/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c b/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c
index ef5be930..8590bf2a 100644
--- a/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c
+++ b/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c
@@ -293,9 +293,9 @@ static GstFlowReturn cohfar_assignfar_transform_ip(GstBaseTransform *trans,
    fprintf(stderr, "icombo not found, cohfar_assignfar\n");
    exit(0);
}

-    cur_stats = element->bgstats_1w->multistats[element->ncombo - 1];
+    cur_stats = element->bgstats_1w->multistats[element->nifo];
+    if (icombo > -1 && cur_stats->nevent > MIN_BACKGROUND_NEVENT) {
-        update_trigger_fars(table, element->ncombo - 1, element);
+        update_trigger_fars(table, element->nifo, element);
+    }
}

}

@@ -344,7 +344,7 @@ static void cohfar_assignfar_set_property(GObject *object,
    case PROP_IFOS:
        element->ifos = g_value_dup_string(value);
        element->nifo = strlen(element->ifos) / IFO_LEN;
-        element->ncombo = get_ncombo(element->nifo);
+        element->icombo = get_icombo(element->ifos);
        element->bgstats_1w =
            trigger_stats_xml_create(element->ifos, STATS_XML_TYPE_BACKGROUND);
        element->bgstats_1d =
diff --git a/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.h b/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.h
index c3fb3223..0471da19 100644
--- a/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.h

```

```

+++ b/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.h
@@ -54,7 +54,7 @@ typedef struct {
    char *ifos;
    int nifo;
-   int ncombo; // ifo combination
+   int icombo; // ifo combination
    int hist_trials;
    TriggerStatsXML *bgstats_2h;
    TriggerStatsXML *bgstats_1d;
diff --git a/gstlal-spiir/gst/cuda/cohfar/cohfar_calc_fap.c b/gstlal-spiir/gst/cuda/cohfar/cohfar_calc_
index 8a3fc991..49dcb142 100644
--- a/gstlal-spiir/gst/cuda/cohfar/cohfar_calc_fap.c
+++ b/gstlal-spiir/gst/cuda/cohfar/cohfar_calc_fap.c
@@ -1,5 +1,6 @@
/*
- * Copyright (C) 2015 Qi Chu <qi.chu@uwa.edu.au>
+ * Copyright (C) 2015 Qi Chu <qi.chu@uwa.edu.au>,
+ * 2020 Tom Almeida <tom@tommoa.me>,
+ *
+ * Permission is hereby granted, free of charge, to any person obtaining a
+ * copy of this software and associated documentation files (the
@@ -44,13 +45,21 @@ static void parse_opts(int argc,
    *ptype = g_strdup("all");
    *update_pdf = 0;
    int option_index = 0;
-   struct option long_opts[] = { { "input", required_argument, 0, 'i' },
-                                   { "input-format", required_argument, 0, 'f' },
-                                   { "output", required_argument, 0, 'o' },
-                                   { "ifos", required_argument, 0, 'd' },
-                                   { "type", required_argument, 0, 'u' },
-                                   { "update-pdf", no_argument, 0, 'p' },
-                                   { 0, 0, 0, 0 } };
+   struct option long_opts[] = {
+       // A comma separated list of files to use for input.
+       { "input", required_argument, 0, 'i' },
+       // The format of the input files. One of "data" or "stats".
+       { "input-format", required_argument, 0, 'f' },
+       // The name of the file to output.
+       { "output", required_argument, 0, 'o' },
+       // The IFOs to use.
+       { "ifos", required_argument, 0, 'd' },
+       // The type of stat. One of "background", "zerolag", "signal" or "all".
+       { "type", required_argument, 0, 'u' },
+       // Should we update the PDF?
+       { "update-pdf", no_argument, 0, 'p' },
+       { 0, 0, 0, 0 }
+   };
    int opt;
    while (
        (opt = getopt_long(argc, argv, "i:f:o:d:u:p:", long_opts, &option_index))
@@ -131,19 +140,18 @@ void cohfar_get_stats_from_file(gchar **in_fnames,
    TriggerStatsXML *stats_out,
    int *hist_trials) {
    gchar **ifname;
-   int icombo;
+   int ifo;
    for (ifname = in_fnames; *ifname; ifname++) {
#ifdef DEBUG
        printf("%s\n", *ifname);
#endif
        trigger_stats_xml_from_xml(stats_in, hist_trials, *ifname);
-       for (icombo = 0; icombo < stats_in->ncombo; icombo++) {
-           trigger_stats_feature_rate_add(
-               stats_out->multistats[icombo]->feature,
-               stats_in->multistats[icombo]->feature,
-               stats_out->multistats[icombo]);
+       for (ifo = 0; ifo <= __builtin_popcount(stats_in->icombo + 1); ifo++) {
+           trigger_stats_feature_rate_add(stats_out->multistats[ifo]->feature,
+               stats_in->multistats[ifo]->feature,
+               stats_out->multistats[ifo]);
+       trigger_stats_lifetime_add(stats_out->multistats,
+           stats_in->multistats, icombo);

```

```

+                                     stats_in->multistats, ifo);
+     }
+ }
}
@@ -157,7 +165,7 @@ static int get_type(gchar **ptype) {
    static int process_stats_full(
        gchar **in_fnames, int nifo, gchar **pifos, gchar **pout, int *update_pdf) {
-        int icombo, ncombo = get_ncombo(nifo), hist_trials;
+        int ifo, hist_trials;
        TriggerStatsXML *zlstats_in =
            trigger_stats_xml_create(*pifos, STATS_XML_TYPE_ZEROLAG);
        TriggerStatsXML *zlstats_out =
@@ -180,24 +188,21 @@ static int process_stats_full(
        cohfar_get_stats_from_file(in_fnames, bgstats_in, bgstats_out,
            &hist_trials);

        if (*update_pdf == 1) {
-            for (icombo = 0; icombo < ncombo; icombo++) {
+            for (ifo = 0; ifo < nifo; ifo++) {
                trigger_stats_feature_rate_to_pdf(
-                    sgstats_out->multistats[icombo]->feature);
-                trigger_stats_feature_to_rank(
-                    sgstats_out->multistats[icombo]->feature,
-                    sgstats_out->multistats[icombo]->rank);
+                    sgstats_out->multistats[ifo]->feature);
+                trigger_stats_feature_to_rank(sgstats_out->multistats[ifo]->feature,
+                    sgstats_out->multistats[ifo]->rank);

                trigger_stats_feature_rate_to_pdf(
-                    zlstats_out->multistats[icombo]->feature);
-                trigger_stats_feature_to_rank(
-                    zlstats_out->multistats[icombo]->feature,
-                    zlstats_out->multistats[icombo]->rank);
+                    zlstats_out->multistats[ifo]->feature);
+                trigger_stats_feature_to_rank(zlstats_out->multistats[ifo]->feature,
+                    zlstats_out->multistats[ifo]->rank);

                trigger_stats_feature_rate_to_pdf(
-                    bgstats_out->multistats[icombo]->feature);
-                trigger_stats_feature_to_rank(
-                    bgstats_out->multistats[icombo]->feature,
-                    bgstats_out->multistats[icombo]->rank);
+                    bgstats_out->multistats[ifo]->feature);
+                trigger_stats_feature_to_rank(bgstats_out->multistats[ifo]->feature,
+                    bgstats_out->multistats[ifo]->rank);
            }
        }
    }
}
@@ -234,18 +239,17 @@ static int process_stats_single(gchar **in_fnames,
                                gchar **pout,
                                int type,
                                int *update_pdf) {
-        int icombo, ncombo = get_ncombo(nifo), hist_trials;
+        int ifo, hist_trials;
        TriggerStatsXML *stats_in = trigger_stats_xml_create(*pifos, type);
        TriggerStatsXML *stats_out = trigger_stats_xml_create(*pifos, type);
        cohfar_get_stats_from_file(in_fnames, stats_in, stats_out, &hist_trials);
        if (*update_pdf == 1) {
-            for (icombo = 0; icombo < ncombo; icombo++) {
+            for (ifo = 0; ifo < nifo; ifo++) {
                trigger_stats_feature_rate_to_pdf(
-                    stats_out->multistats[icombo]->feature);
-                trigger_stats_feature_to_rank(
-                    stats_out->multistats[icombo]->feature,
-                    stats_out->multistats[icombo]->rank);
+                    stats_out->multistats[ifo]->feature);
+                trigger_stats_feature_to_rank(stats_out->multistats[ifo]->feature,
+                    stats_out->multistats[ifo]->rank);
            }
        }
        xmlTextWriterPtr stats_writer = NULL;
    }
}
@@ -288,24 +292,21 @@ int main(int argc, char *argv[]) {

```

```

        trigger_stats_xml_create(*pifos, STATS_XML_TYPE_BACKGROUND);
TriggerStatsXML *bgstats_out =
        trigger_stats_xml_create(*pifos, STATS_XML_TYPE_BACKGROUND);
-   int ncombo = get_ncombo(nifo);
    // FIXME: hardcoded to only update the last stats
    trigger_stats_feature_rate_update_all(
-       data_dim1, data_dim2, bgstats_out->multistats[ncombo - 1]->feature,
-       bgstats_out->multistats[ncombo - 1]);
+       data_dim1, data_dim2, bgstats_out->multistats[nifo]->feature,
+       bgstats_out->multistats[nifo]);
    trigger_stats_feature_rate_to_pdf(
-       bgstats_out->multistats[ncombo - 1]->feature);
-   trigger_stats_feature_to_rank(
-       bgstats_out->multistats[ncombo - 1]->feature,
-       bgstats_out->multistats[ncombo - 1]->rank);
+       bgstats_out->multistats[nifo]->feature);
+   trigger_stats_feature_to_rank(bgstats_out->multistats[nifo]->feature,
+       bgstats_out->multistats[nifo]->rank);
+   if (data_dim1) {
+       free(data_dim1);
+       free(data_dim2);
+   }
-   // trigger_stats_pdf_from_data(data_dim1, data_dim2,
-   // stats_out[ncombo-1]->rate->lgsnr_bins,
-   // stats_out[ncombo-1]->rate->lgchisq_bins, stats_out[ncombo-1]->pdf);
} else if (strcmp0(*pfmt, "stats") == 0) {
    if (type == STATS_XML_TYPE_ALL) {
        rc = process_stats_full(in_fnames, nifo, pifos, pout, update_pdf);
}

```

GitLab

## A.2 Removing hard-coded detector names

From 8ff7b39c3d8d3db77006e3690a04631de69df752 Mon Sep 17 00:00:00 2001

From: Tom Almeida <tomma256@gmail.com>

Date: Sun, 6 Sep 2020 12:15:59 +0800

Subject: [PATCH] postcohtable: Remove detector names from table

This change removes detector names from the various data structures that are used throughout the pipeline and ensures that all pointers into the data structures have their offsets based upon the number of interferometers.

Previously, adding support for an additional interferometer to the pipeline would involve modifying all of the below files, and would often require extensive testing to ensure that the massive number of changes that would need to be done would be correct.

With these changes, when adding interferometers, the only file that needs to be changed is 'gstlal-spiir/include/pipe\_macro.h', with the modification of 'MAX\_NIFO', 'IFOMap' and 'IFOComboMap'. By changing these variables, the next compilation of the pipeline will automatically support the new interferometer.

— Tom Almeida

.../gst/cuda/cohfar/background_stats_utils.c	2 +
.../gst/cuda/cohfar/background_stats_utils.h	19 +
.../gst/cuda/cohfar/cohfar_accumbgbackground.c	4 +
.../gst/cuda/cohfar/cohfar_assignfar.c	86 +
gstlal-spiir/gst/cuda/cohfar/ssvkernel.c	16 +
gstlal-spiir/gst/cuda/cohfar/ssvkernel.h	2 +
.../gst/cuda/cohfar/test_knn_pipeline.c	4 +
gstlal-spiir/gst/cuda/cuda_plugin.c	2 +
gstlal-spiir/gst/cuda/postcoh/postcoh.c	107 ++
gstlal-spiir/gst/cuda/postcoh/postcoh.h	68 +
.../gst/cuda/postcoh/postcoh_kernel.cu	647 +++
gstlal-spiir/gst/cuda/postcoh/postcoh_utils.c	207 +++
gstlal-spiir/gst/cuda/postcoh/postcoh_utils.h	2 +
.../gst/cuda/postcoh/postcohtable_utils.c	241 +++
gstlal-spiir/gst/cuda/spiir/spiir_kernel.cu	4 +
gstlal-spiir/include/pipe_macro.h	16 +
gstlal-spiir/include/postcohtable.h	36 +
.../python/pipemodules/postcoh_finalsink.py	35 +

```

.../pipemodules/postcohtable/Makefile.am      | 2 +-
.../pipemodules/postcohtable/_postcohtable.c  | 389 ++++++---
.../postcohtable/postcoh_table_def.py         | 132 +-
.../pipemodules/postcohtable/postcohtable.py  | 4 +-
22 files changed, 860 insertions(+), 1165 deletions(-)

diff --git a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c b/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c
index 449cf376..4c6f049d 100644
--- a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c
+++ b/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.c
@@ -52,7 +52,7 @@ int scan_trigger_ifos(int icombo, PostcohInspiralTable *trigger) {
    if (icombo & (1 << i)) {
        // [THA]: This is a check that the data from this IFO is actually
        // valid. If it's not valid, the number will be very *very* small
-        if (*(&trigger->snglsnr_H + i) > EPSILON) {
+        if (trigger->snglsnr[i] > EPSILON) {
            strncpy(final_ifos + IFO_LEN * nifo, IFOMap[i].name,
                    one_ifo_size);
            nifo++;
diff --git a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.h b/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.h
index 9eda6a4a..abe7fc7f 100644
--- a/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.h
+++ b/gstlal-spiir/gst/cuda/cohfar/background_stats_utils.h
@@ -32,6 +32,6 @@
#include <LIGOLwHeader.h>
#include <cohfar/background_stats.h>
#include <glib.h>
+#include <postcohtable.h>

Bins1D *bins1D_create_long(double cmin, double cmax, int nbin);
@@ -53,10 +53,10 @@ TriggerStats **trigger_stats_create(int icombo);

int bins1D_get_idx(double val, Bins1D *bins);

-void trigger_stats_feature_rates_update(double snr,
-                                         double chisq,
-                                         FeatureStats *feature,
-                                         TriggerStats *cur_stats);
+void trigger_stats_feature_rate_update(double snr,
+                                       double chisq,
+                                       FeatureStats *feature,
+                                       TriggerStats *cur_stats);
+double trigger_stats_get_val_from_map(double snr, double chisq, Bins2D *bins);
+int scan_trigger_ifos(int icombo, PostcohInspiralTable *trigger);
+void trigger_stats_livetime_inc(TriggerStats **stats, const int index);
+void trigger_stats_xml_reset(TriggerStatsXML *stats);
+void signal_stats_init(TriggerStatsXML *sgstats, int source_type);

void trigger_stats_feature_rates_add(FeatureStats *feature1,
                                     FeatureStats *feature2,

diff --git a/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbgbackground.c b/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbgbackground.c
index c742a658..6f8f3124 100644
--- a/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbgbackground.c
+++ b/gstlal-spiir/gst/cuda/cohfar/cohfar_accumbgbackground.c
@@ -120,8 +120,8 @@ static void update_stats_icombo(PostcohInspiralTable *intable,
    for (ifo = 0, index = 0; ifo < MAX_NIFO; ifo++) {
        if ((stats->icombo + 1) & (1 << ifo)) {
            trigger_stats_feature_rate_update(
-                (double)((&intable->snglsnr_H)[ifo]),
-                (double)((&intable->chisq_H)[ifo]),
+                (double)(intable->snglsnr[ifo]),
+                (double)(intable->chisq[ifo]),
                stats->multistats[index]->feature, stats->multistats[index]);
            ++index;
        }
    }
diff --git a/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c b/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c
index 8590bf2a..cdb5648d 100644
--- a/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c
+++ b/gstlal-spiir/gst/cuda/cohfar/cohfar_assignfar.c
@@ -133,72 +133,72 @@ static void update_trigger_fars(PostcohInspiralTable *table,

```



```

        cur_stats->rank->rank_map);
    table->rank = MAX(MAX(rank_1w, rank_1d), rank_2h);

    /* FIXME: currently hardcoded for single detectors FAR */
    cur_stats = element->bgstats_1w->multistats[0];
    far = BOUND(FLT_MIN, gen_fap_from_feature((double)table->snglsnr_H,
        (double)table->chisq_H, cur_stats)
        * cur_stats->nevent
        / (cur_stats->lifetime * hist_trials));
    table->far_h_1w = far;

    cur_stats = element->bgstats_1w->multistats[1];
    far = BOUND(FLT_MIN, gen_fap_from_feature((double)table->snglsnr_L,
        (double)table->chisq_L, cur_stats)
        * cur_stats->nevent
        / (cur_stats->lifetime * hist_trials));
    table->far_l_1w = far;

    cur_stats = element->bgstats_1w->multistats[2];
    far = BOUND(FLT_MIN, gen_fap_from_feature((double)table->snglsnr_V,
        (double)table->chisq_V, cur_stats)
        * cur_stats->nevent
        / (cur_stats->lifetime * hist_trials));
    table->far_v_1w = far;

    cur_stats = element->bgstats_1d->multistats[0];
    far = BOUND(FLT_MIN, gen_fap_from_feature((double)table->snglsnr_H,
        (double)table->chisq_H, cur_stats)
        * cur_stats->nevent
        / (cur_stats->lifetime * hist_trials));
    table->far_h_1d = far;

    cur_stats = element->bgstats_1d->multistats[1];
    far = BOUND(FLT_MIN, gen_fap_from_feature((double)table->snglsnr_L,
        (double)table->chisq_L, cur_stats)
        * cur_stats->nevent
        / (cur_stats->lifetime * hist_trials));
    table->far_l_1d = far;

    cur_stats = element->bgstats_1d->multistats[2];
    far = BOUND(FLT_MIN, gen_fap_from_feature((double)table->snglsnr_V,
        (double)table->chisq_V, cur_stats)
        * cur_stats->nevent
        / (cur_stats->lifetime * hist_trials));
    table->far_v_1d = far;

    cur_stats = element->bgstats_2h->multistats[0];
    if (cur_stats->lifetime > 0) {
        far = BOUND(
            FLT_MIN, gen_fap_from_feature((double)table->snglsnr_H,
                (double)table->chisq_H, cur_stats)
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       cur_stats = element->bgstats_1w->multistats[i];
+       far = BOUND(
+           FLT_MIN, gen_fap_from_feature((double)table->snglsnr[i],
+               (double)table->chisq[i], cur_stats)
+           * cur_stats->nevent / (cur_stats->lifetime * hist_trials));
+       table->far_h_2h = far;
+   }
    cur_stats = element->bgstats_2h->multistats[1];
    if (cur_stats->lifetime > 0) {
        far = BOUND(
            FLT_MIN, gen_fap_from_feature((double)table->snglsnr_L,
                (double)table->chisq_L, cur_stats)
            * cur_stats->nevent / (cur_stats->lifetime * hist_trials));
        table->far_l_2h = far;
    }
    cur_stats = element->bgstats_2h->multistats[2];
    if (cur_stats->lifetime > 0) {
        far = BOUND(
            FLT_MIN, gen_fap_from_feature((double)table->snglsnr_V,
                (double)table->chisq_V, cur_stats)
+       table->far_1w_sngl[i] = far;
+   }

```

```

+         cur_stats = element->bgstats_1d->multistats[i];
+         far = BOUND(
+             FLT_MIN, gen_fap_from_feature((double)table->snglsnr[i],
+                                           (double)table->chisq[i], cur_stats)
+             * cur_stats->nevent / (cur_stats->lifetime * hist_trials));
-         table->far_v_2h = far;
+         table->far_1d_sngl[i] = far;
+
+         cur_stats = element->bgstats_2h->multistats[i];
+         if (cur_stats->lifetime > 0) {
+             far = BOUND(FLT_MIN,
+                 gen_fap_from_feature((double)table->snglsnr[i],
+                                     (double)table->chisq[i], cur_stats)
+                 * cur_stats->nevent
+                 / (cur_stats->lifetime * hist_trials));
+             table->far_2h_sngl[i] = far;
+         }
+     }
+ }
}

diff --git a/gstlal-spiir/gst/cuda/cohfar/ssvkernel.c b/gstlal-spiir/gst/cuda/cohfar/ssvkernel.c
index e9c3a6a0..1b53804f 100644
--- a/gstlal-spiir/gst/cuda/cohfar/ssvkernel.c
+++ b/gstlal-spiir/gst/cuda/cohfar/ssvkernel.c
@@ -39,7 +39,7 @@
// y_hist_result: one-dimensional histogram
// result: a L*L matrix. result(i,j) =
// count(Bin_i)/h(x_j)*K[x-point(Bin_i)/h(x_j)] (each variable's meaning: see
-// document of 'Shimazakis method' part.).
+// document of 'Shimazakis method' part.).
//
//
// int main()
@@ -282,7 +282,8 @@ double CostFunction(gsl_vector *y_hist,
// for (i = 0; i < y_hist->size; i++) {
//     if (gsl_vector_get(y_hist, i) != 0) {
//         gsl_vector_set(y_hist_nz, idx, gsl_vector_get(y_hist,
-// i));
+// i));
+         gsl_vector_set(t_nz, idx, gsl_vector_get(t, i));
+         gsl_vector_set(t_nz, idx, gsl_vector_get(t, i));
+     }
// }
//
@@ -905,8 +906,8 @@ void ssvkernel(gsl_vector *x,
//     gsl_vector *xb = gsl_vector_alloc(Nb);
//     for (j = 0; j < Nb; j++) {
//         gsl_vector_set(xb, j,
-//         gsl_vector_get(x_ab, floor(gsl_ran_flat(r, 0,
-// /N))));
+//         gsl_vector_get(x_ab, floor(gsl_ran_flat(r,
+// /0, N))));
//     }
//
//     gsl_vector_histc(xb, t_dt2, y_histb);
@@ -923,7 +924,8 @@ void ssvkernel(gsl_vector *x,
//     for (j = 0; j < tin->size; j++) {
//         gsl_matrix_set(yb, i, j,
//         gsl_interp_eval(linear, t->data,
-// yb_buf->data,
+// yb_buf->data,
+// acc));
+         gsl_vector_get(tin, j), acc));
+         gsl_vector_get(tin, j),
//     }
//     gsl_vector_free(xb);
// }
@@ -934,8 +936,8 @@ void ssvkernel(gsl_vector *x,
//     gsl_sort_vector(yb_col);
//     gsl_vector_set(lower_bound, i,
//     gsl_vector_get(yb_col, floor((1 - confidence) *
-// nbs));
+// nbs));
+         gsl_vector_set(upper_bound, i,
+         floor((confidence) * nbs));
+         gsl_vector_set(upper_bound, i,
+         gsl_vector_get(yb_col,
//     floor((confidence) * nbs));

```

```

    // }
    // gsl_interp_init(linear, t->data, yv->data, t->size);
    // for (i = 0; i < tin->size; i++) {
diff —git a/gstlal-spiir/gst/cuda/cohfar/ssvkernel.h b/gstlal-spiir/gst/cuda/cohfar/ssvkernel.h
index b1beda94..71d0ae82 100644
— a/gstlal-spiir/gst/cuda/cohfar/ssvkernel.h
+++ b/gstlal-spiir/gst/cuda/cohfar/ssvkernel.h
@@ -19,7 +19,7 @@
    // y_hist_result: one-dimensional histogram
    // result: a L*L matrix. result(i,j) =
    // count(Bin_i)/h(x_j)*K[x-point(Bin_i)/h(x_j)] (each variable's meaning: see
—// document of 'Shimazakis method' part.).
+// document of 'Shimazakis method' part.).
    //

    // int main()
diff —git a/gstlal-spiir/gst/cuda/cohfar/test_knn_pipeline.c b/gstlal-spiir/gst/cuda/cohfar/test_knn_
index d42e1ee5..2432b025 100644
— a/gstlal-spiir/gst/cuda/cohfar/test_knn_pipeline.c
+++ b/gstlal-spiir/gst/cuda/cohfar/test_knn_pipeline.c
@@ -144,7 +144,7 @@ void getTemp(int *tempPtr, float *histgt0Ptr) {
    // tempPtr = {2 5 7 9 11 15 16 18 20 22 29 31 35}
    // histgt0Ptr = {0.0714 0.0714 0.0714 0.0714 0.0714 0.0714 0.0714 0.0714
-    //0.0714 0.0714 0.0714 0.0714 0.1429 }
+    // 0.0714 0.0714 0.0714 0.0714 0.1429 }
    }

    void getHistaxis(int *tempPtr, int **histaxisPtr) {
@@ -217,7 +217,7 @@ void getHwidth(float *kthDistPtr, float GlobalHband, float *hwidthPtr) {
    // For K=2
    // kthDistPtr =
    // {1.4142 1.0000 1.4142 1.0000 1.0000 1.0000 1.0000 2.0000 1.4142 1.0000 1.0000
-    //2.2361 1.0000}
+    // 2.2361 1.0000}
    }

    void getPDF(float *hwidthPtr, float *histgt0Ptr, int **histaxisPtr) {
diff —git a/gstlal-spiir/gst/cuda/cuda_plugin.c b/gstlal-spiir/gst/cuda/cuda_plugin.c
index 6b19b0b1..bb3cc412 100644
— a/gstlal-spiir/gst/cuda/cuda_plugin.c
+++ b/gstlal-spiir/gst/cuda/cuda_plugin.c
@@ -61,7 +61,7 @@ static gboolean plugin_init(GstPlugin *plugin) {
    { "cuda_iirbank", CUDA_IIRBANK_TYPE },
    //
    // { "cuda_audioresample", CUDA_AUDIO_RESAMPLE_TYPE },
    // { "gstlal_multidownsample",
-    //GSTLAL_MULTI_DOWNSAMPLE_TYPE },
+    // GSTLAL_MULTI_DOWNSAMPLE_TYPE },
    { "cuda_multiratespiir", CUDA_TYPE_MULTIRATESPIIR },
    { "cuda_postcoh", CUDA_TYPE_POSTCOH },
    { "postcoh_filesink", POSTCOH_TYPE_FILESINK },
diff —git a/gstlal-spiir/gst/cuda/postcoh/postcoh.c b/gstlal-spiir/gst/cuda/postcoh/postcoh.c
index 85f071ff..d51bff60 100644
— a/gstlal-spiir/gst/cuda/postcoh/postcoh.c
+++ b/gstlal-spiir/gst/cuda/postcoh/postcoh.c
@@ -73,8 +73,8 @@ static gboolean need_flag_gap(GstPostcohCollectData *data,
    for (i = 0; i < flag_segments->len; i++) {
        this_segment = &((FlagSegment *)flag_segments->data)[i];
        /*
-        *
-        * (1) | s | e (2)
+        *
+        * this_start (1) | s | e (2)
+        * | s
+        * | s | e
+        * | s | e
        */
@@ -114,10 +114,10 @@ static int cuda_postcoh_select_background(PeakList *pklist,
    for (itrial = 1; itrial <= hist_trials; itrial++) {
        background_cur = (itrial - 1) * max_npeak + peak_cur;
        // FIXME: consider a different threshold for 3-detector
-        // if (sqrt(pklist->cohsnr_bg[background_cur]) > cohsnr_thresh
+        // if (sqrt(pklist->cohsnr_bg[background_cur]) >

```

```

+         // coh_snr_thresh
+         /* pklist->snrglsnr_H[iifo*max_npeak + peak_cur])
-         if (sqrt(pklist->coh_snr_bg[background_cur])
+         > 1.414 + pklist->snrglsnr_H[write_ifo * max_npeak + peak_cur]) {
+         > 1.414 + pklist->snrglsnr[write_ifo][peak_cur]) {
+             left_backgrounds++;
+             GST_LOG("mark back,%d ipeak, %d itrial", ipeak, itrial);
+         } else
@@ -1207,9 +1208,7 @@ static int cuda_postcoh_select_foreground(PostcohState *state,
    peak_cur = peak_pos[ipeak];
    // FIXME: consider a different threshold for 3-detector
    if (sqrt(pklist->coh_snr[peak_cur])
-         > 1.414
-         + pklist->snrglsnr_H[write_ifo * (state->max_npeak
-         + peak_cur)]) {
+         > 1.414 + pklist->snrglsnr[write_ifo][peak_cur]) {
+         cluster_peak_pos[final_peaks++] = peak_cur;
+     } else
+         bubbled_peak_pos[bubbled_peaks++] = peak_cur;
@@ -1290,33 +1289,22 @@ static int cuda_postcoh_write_table_to_buf(CudaPostcoh *postcoh,
    len_cur = pklist->len_idx[peak_cur];
    XLALGPSAdd(&(end_time), (double)len_cur / exe_len);
    output->end_time = end_time;
    XLALGPSAdd(&(end_time),
-         (double)pklist->ntoff_H[peak_cur] / exe_len);
-     output->end_time_H = end_time;
-     end_time = output->end_time;
-     XLALGPSAdd(&(end_time),
-         (double)pklist->ntoff_L[peak_cur] / exe_len);
-     output->end_time_L = end_time;
-     end_time = output->end_time;
-     XLALGPSAdd(&(end_time),
-         (double)pklist->ntoff_V[peak_cur] / exe_len);
-     output->end_time_V = end_time;
-     output->snrglsnr_H = pklist->snrglsnr_H[peak_cur];
-     output->snrglsnr_L = pklist->snrglsnr_L[peak_cur];
-     output->snrglsnr_V = pklist->snrglsnr_V[peak_cur];
-     output->coaphase_H = pklist->coaphase_H[peak_cur];
-     output->coaphase_L = pklist->coaphase_L[peak_cur];
-     output->coaphase_V = pklist->coaphase_V[peak_cur];
-     output->chisq_H = pklist->chisq_H[peak_cur];
-     output->chisq_L = pklist->chisq_L[peak_cur];
-     output->chisq_V = pklist->chisq_V[peak_cur];
+     for (int i = 0; i < MAX_NIFO; ++i) {
+         XLALGPSAdd(&(end_time),
+             (double)pklist->ntoff[i][peak_cur] / exe_len);
+         output->end_time_sngl[i] = end_time;
+         end_time = output->end_time;
+
+         output->snrglsnr[i] = pklist->snrglsnr[i][peak_cur];
+         output->coaphase[i] = pklist->coaphase[i][peak_cur];
+         output->chisq[i] = pklist->chisq[i][peak_cur];
+     }
+     for (jifo = 0; jifo < nifo; jifo++) {
+         int write_ifo = state->write_ifo_mapping[jifo];
+         *(&output->deff_H + write_ifo) =
+         output->deff[write_ifo] =
+             sqrt(state->sigmasq[jifo][cur_tmplt_idx])
+             / ((pklist->snrglsnr_H + write_ifo * state->max_npeak
+             + peak_cur); // in MPC
+             / pklist->snrglsnr[write_ifo][peak_cur]; // in MPC
+         }
+         output->is_background = FLAG_FOREGROUND;
+         output->livetime = livetime;
@@ -1384,20 +1372,20 @@ static int cuda_postcoh_write_table_to_buf(CudaPostcoh *postcoh,
    output->skymap_fname[0] = '\0';
    output->rank = 0;
-     GST_LOG_OBJECT(postcoh,
-         "end_time_L %d, ipeak %d, peak_cur %d, len_cur %d, "
-         "tmplt_idx %d, pix_idx %d \t",
-         "snrglsnr_L %f, snrglsnr_H %f, snrglsnr_V %f, "

```

```

-             "coaphase_L %f, coaphase_H %f, coa_phase_V %f,"
-             "chisq_L %f, chisq_H %f, chisq_V %f,"
-             "cohsnr %f, nullsnr %f, cmbchisq %f\n",
-             output->end_time_L.gpsSeconds, ipeak, peak_cur,
-             len_cur, output->tmplt_idx, output->pix_idx,
-             output->snrglsnr_L, output->snrglsnr_H,
-             output->snrglsnr_V, output->coaphase_L,
-             output->coaphase_H, output->coaphase_V,
-             output->chisq_L, output->chisq_H, output->chisq_V,
-             output->cohsnr, output->>nullsnr, output->cmbchisq);
+ GST_LOG_OBJECT(
+     postcoh,
+     "end_time_sngl_0 %d, ipeak %d, peak_cur %d, len_cur %d, "
+     "tmplt_idx %d, pix_idx %d \t,"
+     "snrglsnr_0 %f, snrglsnr_1 %f, snrglsnr_2 %f,"
+     "coaphase_0 %f, coaphase_1 %f, coa_phase_2 %f,"
+     "chisq_0 %f, chisq_1 %f, chisq_2 %f,"
+     "cohsnr %f, nullsnr %f, cmbchisq %f\n",
+     output->end_time_sngl[0].gpsSeconds, ipeak, peak_cur, len_cur,
+     output->tmplt_idx, output->pix_idx, output->snrglsnr[0],
+     output->snrglsnr[1], output->snrglsnr[2], output->coaphase[0],
+     output->coaphase[1], output->coaphase[2], output->chisq[0],
+     output->chisq[1], output->chisq[2], output->cohsnr,
+     output->>nullsnr, output->cmbchisq);
+
+ XLALINT8NSToGPS(&output->epoch, ts);
+ output->deltaT = 1. / postcoh->rate;
@@ -1424,15 +1412,12 @@ static int cuda_postcoh_write_table_to_buf(CudaPostcoh *postcoh,
+     state->all_ifos + IFO_LEN * iifo, one_ifo_size);
+ output->pivotal_ifo[IFO_LEN] = '\0';
+ output->tmplt_idx = pklist->tmplt_idx[peak_cur];
-     output->snrglsnr_H = pklist->snrglsnr_bg_H[peak_cur_bg];
-     output->snrglsnr_L = pklist->snrglsnr_bg_L[peak_cur_bg];
-     output->snrglsnr_V = pklist->snrglsnr_bg_V[peak_cur_bg];
-     output->coaphase_H = pklist->coaphase_bg_H[peak_cur_bg];
-     output->coaphase_L = pklist->coaphase_bg_L[peak_cur_bg];
-     output->coaphase_V = pklist->coaphase_bg_V[peak_cur_bg];
-     output->chisq_H = pklist->chisq_bg_H[peak_cur_bg];
-     output->chisq_L = pklist->chisq_bg_L[peak_cur_bg];
-     output->chisq_V = pklist->chisq_bg_V[peak_cur_bg];
+     for (int i = 0; i < MAX_NIFO; ++i) {
+         output->snrglsnr[i] = pklist->snrglsnr_bg[i][peak_cur_bg];
+         output->coaphase[i] =
+             pklist->coaphase_bg[i][peak_cur_bg];
+         output->chisq[i] = pklist->chisq_bg[i][peak_cur_bg];
+     }
+     // output->pix_idx = pklist->pix_idx[itrial*max_npeak +
+     // peak_cur];
@@ -1448,16 +1433,16 @@ static int cuda_postcoh_write_table_to_buf(CudaPostcoh *postcoh,
+     postcoh,
+     "ipeak %d, itrial %d, len_cur %d, tmplt_idx %d, pix_idx "
+     "%d,"
-     "snrglsnr_L %f, snrglsnr_H %f, snrglsnr_V %f,"
-     "coaphase_L %f, coaphase_H %f, coa_phase_V %f,"
-     "chisq_L %f, chisq_H %f, chisq_V %f,"
+     "snrglsnr[0] %f, snrglsnr[1] %f, snrglsnr[2] %f,"
+     "coaphase[0] %f, coaphase[1] %f, coa_phase[2] %f,"
+     "chisq[0] %f, chisq[1] %f, chisq[2] %f,"
+     "cohsnr %f, nullsnr %f, cmbchisq %f\n",
+     ipeak, itrial, len_cur, output->tmplt_idx,
-     output->pix_idx, output->snrglsnr_L, output->snrglsnr_H,
-     output->snrglsnr_V, output->coaphase_L, output->coaphase_H,
-     output->coaphase_V, output->chisq_L, output->chisq_H,
-     output->chisq_V, output->cohsnr, output->>nullsnr,
-     output->cmbchisq);
+     output->pix_idx, output->snrglsnr[0], output->snrglsnr[2],
+     output->snrglsnr[2], output->coaphase[0],
+     output->coaphase[1], output->coaphase[2],
+     output->chisq[0], output->chisq[1], output->chisq[2],
+     output->cohsnr, output->>nullsnr, output->cmbchisq);
+
+ /* do not dump snr for background */

```

```

                                XLALINT8NSToGPS(&output->epoch, ts);
diff --git a/gstlal-spiir/gst/cuda/postcoh/postcoh.h b/gstlal-spiir/gst/cuda/postcoh/postcoh.h
index 0845168e..32d58dbf 100644
--- a/gstlal-spiir/gst/cuda/postcoh/postcoh.h
+++ b/gstlal-spiir/gst/cuda/postcoh/postcoh.h
@@ -88,29 +88,15 @@ typedef struct _PeakList {
    int *tmpl_idx;
    int *pix_idx;
    int *pix_idx_bg; // background Ntoff needs this, do not remove
-   int *ntoff_H;
-   int *ntoff_L;
-   int *ntoff_V;
-
-   float *snglsnr_H;
-   float *snglsnr_L;
-   float *snglsnr_V;
-   float *coaphase_H;
-   float *coaphase_L;
-   float *coaphase_V;
-   float *chisq_H;
-   float *chisq_L;
-   float *chisq_V;
-
-   float *snglsnr_bg_H;
-   float *snglsnr_bg_L;
-   float *snglsnr_bg_V;
-   float *coaphase_bg_H;
-   float *coaphase_bg_L;
-   float *coaphase_bg_V;
-   float *chisq_bg_H;
-   float *chisq_bg_L;
-   float *chisq_bg_V;
+   int *ntoff[MAX_NIFO];
+   float *snglsnr[MAX_NIFO];
+   float *coaphase[MAX_NIFO];
+   float *chisq[MAX_NIFO];
+   float *snglsnr_bg[MAX_NIFO];
+   float *coaphase_bg[MAX_NIFO];
+   float *chisq_bg[MAX_NIFO];
    float *cohnsnr;
    float *nullnsnr;
@@ -124,35 +124,25 @@ typedef struct _PeakList {
    float *nullnsnr_skymap;

    /* structure on GPU device */
+   // [THA]: It is important to note that pointers on the host device are not
+   // exposed to the GPU device. For this reason, we can't allocate d_ntoff,
+   // d_snglsnr, etc. here on the stack with sized arrays. Instead, we need
+   // to malloc is when PeakList is built.
    int *d_npeak;
    int *d_peak_pos;
    int *d_len_idx;
    int *d_tmplt_idx;
    int *d_pix_idx;
    int *d_pix_idx_bg; // background Ntoff needs this, do not remove
-   int *d_ntoff_H;
-   int *d_ntoff_L;
-   int *d_ntoff_V;
-
-   float *d_snglsnr_H;
-   float *d_snglsnr_L;
-   float *d_snglsnr_V;
-   float *d_coaphase_H;
-   float *d_coaphase_L;
-   float *d_coaphase_V;
-   float *d_chisq_H;
-   float *d_chisq_L;
-   float *d_chisq_V;
-
-   float *d_snglsnr_bg_H;
-   float *d_snglsnr_bg_L;
-   float *d_snglsnr_bg_V;
-   float *d_coaphase_bg_H;
-   float *d_coaphase_bg_L;
-   float *d_coaphase_bg_V;

```

```

- float *d_chisq_bg_H;
- float *d_chisq_bg_L;
- float *d_chisq_bg_V;
+ int **d_ntoff; // size (MAX_NIFO)
+
+ float **d_snglsnr; // size (MAX_NIFO)
+ float **d_coaphase; // size (MAX_NIFO)
+ float **d_chisq; // size (MAX_NIFO)
+
+ float **d_snglsnr_bg; // size (MAX_NIFO)
+ float **d_coaphase_bg; // size (MAX_NIFO)
+ float **d_chisq_bg; // size (MAX_NIFO)
+
+ float *d_cohsnr;
+ float *d_nullsnr;
diff --git a/gstl-spiir/gst/cuda/postcoh/postcoh_kernel.cu b/gstl-spiir/gst/cuda/postcoh/postcoh_kernel.cu
index 8c6c6d9a..513a226e 100644
--- a/gstl-spiir/gst/cuda/postcoh/postcoh_kernel.cu
+++ b/gstl-spiir/gst/cuda/postcoh/postcoh_kernel.cu
@@ -190,8 +190,8 @@ __global__ void
    peak_pos[index] = i;
    /* FIXME: could be many peak positions for one peak */
    // peak[templ] = -1;
-    // printf("peak tmplt %d, time %d, maxsnr %f, snr %f\n", templ,
-    // i, max_snr, snr);
+    // printf("peak tmplt %d, time %d, maxsnr %f, snr
+    // %f\n", templ, i, max_snr, snr);
    }
    // restemplate[i] = ((-1 + templ) + (-1 - templ) * ((max_snr > snr) * 2
    // - 1)) >> 1; ressnr[i] = (-1.0f + snr) * 0.5 + (-1.0f - snr) *
@@ -222,24 +222,27 @@ __device__ float gser(float x, float a) {
}

__global__ void ker_coh_skymap(
- float
- *cohsnr_skymap, /* OUTPUT, of size (num_triggers * num_sky_directions) */
- float
- *nullsnr_skymap, /* OUTPUT, of size (num_triggers * num_sky_directions) */
- COMPLEX_F **snr, /* INPUT, (2, 3) * data_points */
+ float *restrict
+ cohsnr_skymap, /* OUTPUT, of size (num_triggers * num_sky_directions) */
+ float *restrict
+ nullsnr_skymap, /* OUTPUT, of size (num_triggers * num_sky_directions) */
+ COMPLEX_F *restrict *restrict snr, /* INPUT, (2, 3) * data_points */
    int iifo, /* INPUT, detector we are considering */
    int nifo, /* INPUT, all detectors that are in this coherent analysis */
-    int *peak_pos, /* INPUT, place the location of the trigger */
-    float *snglsnr_H, /* INPUT, maximum single snr */
+    int *restrict peak_pos, /* INPUT, place the location of the trigger */
+    float *restrict *restrict snglsnr, /* INPUT, maximum single snr */
+    float *restrict cohsnr, /* INPUT, coherent snr */
    int npeak, /* INPUT, number of triggers */
-    float *u_map, /* INPUT, u matrix map */
-    float *toa_diff_map, /* INPUT, time of arrival difference map */
+    float *restrict u_map, /* INPUT, u matrix map */
+    float *restrict toa_diff_map, /* INPUT, time of arrival difference map */
    int num_sky_directions, /* INPUT, # of sky directions */
    int max_npeak, /* INPUT, max number of peaks */
    int len, /* INPUT, snglsnr length */
    int start_exe, /* INPUT, snglsnr start exe position */
    float dt, /* INPUT, 1/ sampling rate */
-    int ntmplt /* INPUT, number of templates */
+    int ntmplt, /* INPUT, number of templates */
+    int *restrict len_idx, /* INPUT, the length of the peaks */
+    int *restrict tmplt_idx /* INPUT, the template used for this peak */
) {
    int peak_cur, tmplt_cur, len_cur, ipeak_max;
@@ -248,7 +248,6 @@ __global__ void ker_coh_skymap(
    int map_idx, ipix, i;
    float real, imag;
    float snr_tmp, al_all = 0.0f;
-    float *cohsnr = snglsnr_H + 9 * max_npeak;
    extern __shared__ float smem[];

```

```

/* find maximum cohsnr and swope to the first pos */
@@ -304,9 +306,9 @@ __global__ void ker_coh_skymap(
    if (npeak > 0) {
        peak_cur = peak_pos[0];
        // find the len_cur from len_idx
-       len_cur = peak_pos[peak_cur + max_npeak];
+       len_cur = len_idx[peak_cur];
        // find the tmplt_cur from tmplt_idx
-       tmplt_cur = peak_pos[peak_cur + 2 * max_npeak];
+       tmplt_cur = tmplt_idx[peak_cur];

        for (int seed_pix = threadIdx.x; seed_pix < num_sky_directions;
             seed_pix += blockDim.x) {
@@ -348,23 +350,23 @@ __global__ void ker_coh_skymap(
    }

    __global__ void ker_coh_max_and_chisq_versatile(
-   COMPLEX_F **snr, /* INPUT, (2, 3) * data_points */
+   COMPLEX_F *restrict *restrict snr, /* INPUT, (2, 3) * data_points */
    int iifo, /* INPUT, detector we are considering */
    int nifo, /* INPUT, all detectors that are in this coherent analysis */
    int cur_nifo, /* INPUT, all detectors that are in this coherent analysis */
    int
        cur_ifo_bits, /* INPUT, all detectors that are in this coherent analysis */
-   int *write_ifo_mapping, /* INPUT, write-ifo-mapping */
-   int *peak_pos, /* INPUT, place the location of the trigger */
-   float *snrglsnr_H, /* INPUT, maximum single snr */
-   float *snrglsnr_bg_H, /* INPUT, maximum single snr */
-   float *cohsnr_skymap,
-   float *nullsnr_skymap,
-   int output_skymap, /* INPUT, whether to write to cohsnr_skymap and
-                       nullsnr_skymap */
+   int *restrict write_ifo_mapping, /* INPUT, write-ifo-mapping */
+   int *restrict peak_pos, /* INPUT, place the location of the trigger */
+   float *restrict *restrict snrglsnr, /* INPUT, maximum single snr */
+   float *restrict *restrict snrglsnr_bg, /* INPUT, maximum single snr */
+   int npeak, /* INPUT, number of triggers */
-   float *u_map, /* INPUT, u matrix map */
-   float *toa_diff_map, /* INPUT, time of arrival difference map */
+   float *restrict u_map, /* INPUT, u matrix map */
+   float *restrict toa_diff_map, /* INPUT, time of arrival difference map */
    int num_sky_directions, /* INPUT, # of sky directions */
    int len, /* INPUT, snrglsnr length */
    int max_npeak, /* INPUT, snrglsnr length */
@@ -372,13 +374,13 @@ __global__ void ker_coh_max_and_chisq_versatile(
    float dt, /* INPUT, 1/ sampling rate */
    int ntmplt, /* INPUT, number of templates */
    int autochisq_len, /* INPUT, auto-chisq length */
-   COMPLEX_F *
-   *autocorr_matrix, /* INPUT, autocorrelation matrix for all templates */
-   float **autocorr_norm, /* INPUT, autocorrelation normalization matrix for all
-                           templates */
+   COMPLEX_F *restrict *restrict
+   autocorr_matrix, /* INPUT, autocorrelation matrix for all templates */
+   float *restrict *restrict autocorr_norm, /* INPUT, autocorrelation
+   normalization matrix for all templates */
    int hist_trials, /* INPUT, trial number */
-   int trial_sample_inv /* INPUT, trial interval in samples */
- ) {
+   int trial_sample_inv /* INPUT, trial interval in samples */
+ ) {
    int trial_sample_inv, /* INPUT, trial interval in samples */
    int *restrict pix_idx, /* OUTPUT, sky direction index */
    int *restrict pix_idx_bg, /* OUTPUT, sky direction index for the background */
    float *restrict
        cohsnr, /* OUTPUT, the coherent SNR for combination of detectors */
    float *restrict
        nullsnr, /* OUTPUT, the nullsnr for the combination of detectors */
    float *restrict
        cmbchisq, /* OUTPUT, the chisq for the combination of detectors */
    float *restrict
        cohsnr_bg, /* OUTPUT, the coherent SNR for the background noise */
    float *restrict nullsnr_bg, /* OUTPUT, the nullsnr for the background noise */
    float *restrict

```



```

+   cmbchisq_bg, /* OUTPUT, the combined chisq for the background noise */
+   float *restrict *restrict coaphase,
+   float *restrict *restrict coaphase_bg,
+   int *restrict *restrict ntoff,
+   float *restrict *restrict chisq,
+   float *restrict *restrict chisq_bg,
+   int *restrict len_idx,
+   int *restrict tmplt_idx) {
+   int bid = blockIdx.x;
+   int bn = gridDim.x;

@@ -390,10 +407,10 @@ __global__ void ker_coh_max_and_chisq_versatile(
    // store snr_max, nullstream_max and sky_idx, each has (blockDim.x /
    // WARP_SIZE) elements
    extern __shared__ float smem[];
-   volatile float *stat_shared = &smem[0];
-   volatile float *snr_shared = &stat_shared[wn];
-   volatile float *nullstream_shared = &snr_shared[wn];
-   volatile int *sky_idx_shared = (int *)&nullstream_shared[wn];
+   volatile float *restrict stat_shared = &smem[0];
+   volatile float *restrict snr_shared = &stat_shared[wn];
+   volatile float *restrict nullstream_shared = &snr_shared[wn];
+   volatile int *restrict sky_idx_shared = (int *)&nullstream_shared[wn];

    // float *mu; // matrix u for certain sky direction
    int peak_cur, tmplt_cur, ipeak_max = 0;
@@ -408,21 +425,13 @@ __global__ void ker_coh_max_and_chisq_versatile(
    float nullstream_max, nullstream_max_tmp;
    int sky_idx = 0, sky_idx_tmp = 0;
    int i, itrial, trial_offset, output_offset, len_cur;
-   int *pix_idx = peak_pos + 3 * max_npeak;
-   int *pix_idx_bg = peak_pos + 4 * max_npeak;
-   float *coh_snr = snrglsnr_H + 9 * max_npeak;
-   float *null_snr = snrglsnr_H + 10 * max_npeak;
-   float *cmbchisq = snrglsnr_H + 11 * max_npeak;
-   float *coh_snr_bg = snrglsnr_H + (12 + 9 * hist_trials) * max_npeak;
-   float *null_snr_bg = snrglsnr_H + (12 + 10 * hist_trials) * max_npeak;
-   float *cmbchisq_bg = snrglsnr_H + (12 + 11 * hist_trials) * max_npeak;

    for (int ipeak = bid; ipeak < npeak; ipeak += bn) {
        peak_cur = peak_pos[ipeak];
        // find the len_cur from len_idx
-       len_cur = peak_pos[peak_cur + max_npeak];
+       len_cur = len_idx[peak_cur];
        // find the tmplt_cur from tmplt_idx
-       tmplt_cur = peak_pos[peak_cur + 2 * max_npeak];
+       tmplt_cur = tmplt_idx[peak_cur];

        itrial = 0;
        stat_max = 0.0;
@@ -553,14 +562,12 @@ __global__ void ker_coh_max_and_chisq_versatile(
        /* does not participate */
        /* set the ntoff; snrglsnr; and coa_phase for each detector */
        /* set the ntoff; this is actually d_ntoff_* */
        peak_pos[peak_cur]
-       + (4 + hist_trials + write_ifo_mapping[j]) * max_npeak] =
-       NtOff;
+       ntoff[write_ifo_mapping[j]][peak_cur] = NtOff;
        /* set the d_snglsnr_* */
-       snrglsnr_H[peak_cur + write_ifo_mapping[j] * max_npeak] = sqrt(
+       snrglsnr[write_ifo_mapping[j]][peak_cur] = sqrt(
            tmp_maxsnr.re * tmp_maxsnr.re + tmp_maxsnr.im * tmp_maxsnr.im);
        /* set the d_coa_phase_* */
-       snrglsnr_H[peak_cur + (3 + write_ifo_mapping[j]) * max_npeak] =
+       coaphase[write_ifo_mapping[j]][peak_cur] =
            atan2(tmp_maxsnr.im, tmp_maxsnr.re);

        for (int ishift = threadIdx.x - autocorr_half_len;
@@ -589,15 +596,14 @@ __global__ void ker_coh_max_and_chisq_versatile(
            if (srcLane == 0) {
                chisq_cur = laneChi2 / autocorr_norm[j][tmplt_cur];
                // the location of chisq_* is indexed from maxsnrglsnr
-               snrglsnr_H[peak_cur]
-               + (6 + write_ifo_mapping[j]) * max_npeak] =
-               chisq_cur;

```

Page 50 of 78

```

- COMPLEX_F *
- *autocorr_matrix, /* INPUT, autocorrelation matrix for all templates */
- float **autocorr_norm, /* INPUT, autocorrelation normalization matrix for all
- templates */
- int hist_trials, /* INPUT, trial number */
- int trial_sample_inv /* INPUT, trial interval in samples */
-) {
-     int bid = blockIdx.x;
-     int bn = gridDim.x;
-
-     int wn = blockDim.x >> LOG_WARP_SIZE;
-     int wid = threadIdx.x >> LOG_WARP_SIZE;
-
-     int srcLane = threadIdx.x & 0x1f, ipix; // binary: 11111, decimal 31
-     // store snr_max, nullstream_max and sky_idx, each has (blockDim.x /
-     // WARP_SIZE) elements
-     extern __shared__ float smem[];
-     volatile float *stat_shared = &smem[0];
-     volatile float *snr_shared = &stat_shared[wn];
-     volatile float *nullstream_shared = &snr_shared[wn];
-     volatile int *sky_idx_shared = (int *)&nullstream_shared[wn];
-
-     // float *mu; // matrix u for certain sky direction
-     int peak_cur, tmplt_cur, ipeak_max = 0;
-     COMPLEX_F dk[MAXIFOS];
-     int NtOff;
-     int map_idx;
-     float real, imag;
-     float al_all = 0.0f, chisq_cur;
-
-     float stat_max, stat_tmp;
-     float snr_max, snr_tmp;
-     float nullstream_max, nullstream_max_tmp;
-     int sky_idx = 0, sky_idx_tmp = 0;
-     int i, itrial, trial_offset, output_offset, len_cur;
-     int *pix_idx = peak_pos + 3 * max_npeak;
-     int *pix_idx_bg = peak_pos + 4 * max_npeak;
-     float *cohsnr = snrglsnr_H + 9 * max_npeak;
-     float *nullsnr = snrglsnr_H + 10 * max_npeak;
-     float *cmbchisq = snrglsnr_H + 11 * max_npeak;
-     float *cohsnr_bg = snrglsnr_H + (12 + 9 * hist_trials) * max_npeak;
-     float *nullsnr_bg = snrglsnr_H + (12 + 10 * hist_trials) * max_npeak;
-     float *cmbchisq_bg = snrglsnr_H + (12 + 11 * hist_trials) * max_npeak;
-
-     for (int ipeak = bid; ipeak < npeak; ipeak += bn) {
-         peak_cur = peak_pos[ipeak];
-         // find the len_cur from len_idx
-         len_cur = peak_pos[peak_cur + max_npeak];
-         // find the tmplt_cur from tmplt_idx
-         tmplt_cur = peak_pos[peak_cur + 2 * max_npeak];
-
-         itrial = 0;
-         stat_max = 0.0;
-         snr_max = 0.0;
-         nullstream_max = 0.0f;
-         sky_idx = 0;
-
-         for (int seed_pix = threadIdx.x;
-              seed_pix < num_sky_directions / NSKY_REDUCE_RATIO;
-              seed_pix += blockDim.x) {
-             ipix = seed_pix * NSKY_REDUCE_RATIO;
-
-             snr_tmp = 0.0;
-             al_all = 0.0;
-             // matrix u is stored in column order
-             // mu = u_map + nifo * nifo * i;
-
-             for (int j = 0; j < nifo; ++j) {
-                 /* this is a simplified algorithm to get map_idx */
-                 map_idx = iifo * nifo + j;
-                 NtOff =
-                     round(toa_diff_map[map_idx * num_sky_directions + ipix] / dt);
-                 NtOff = (j == iifo ? 0 : NtOff);
-                 // dk[j] = snr[j][((start_exe + len_cur + NtOff + len) % len) *
-                 // ntmplt + tmplt_cur ];

```

```

-         dk[j] = snr[j][tmplt_cur * len
-                 + ((start_exe + len_cur + NtOff + len) % len)];
-     }
-     for (int j = 0; j < nifo; ++j) {
-         real = 0.0f;
-         imag = 0.0f;
-         for (int k = 0; k < nifo; ++k) {
-             // transpose of u_map
-             real += u_map[(k * nifo + j) * num_sky_directions + ipix]
-                   * dk[k].re;
-             imag += u_map[(k * nifo + j) * num_sky_directions + ipix]
-                   * dk[k].im;
-         }
-         (j < 2 ? snr_tmp : al_all) += real * real + imag * imag;
-     }
-
-     stat_tmp = snr_tmp - 0.0;
-     if (stat_tmp > stat_max) {
-         stat_max = stat_tmp;
-         snr_max = snr_tmp;
-         nullstream_max = al_all;
-         sky_idx = ipix;
-     }
- }
-
- for (i = WARP_SIZE / 2; i > 0; i = i >> 1) {
-     stat_tmp = __shfl_xor(stat_max, i);
-     snr_tmp = __shfl_xor(snr_max, i);
-     nullstream_max_tmp = __shfl_xor(nullstream_max, i);
-     sky_idx_tmp = __shfl_xor(sky_idx, i);
-
-     if (stat_tmp > stat_max) {
-         stat_max = stat_tmp;
-         snr_max = snr_tmp;
-         nullstream_max = nullstream_max_tmp;
-         sky_idx = sky_idx_tmp;
-     }
- }
-
- if (srcLane == 0) {
-     stat_shared[wID] = stat_max;
-     snr_shared[wID] = snr_max;
-     nullstream_shared[wID] = nullstream_max;
-     sky_idx_shared[wID] = sky_idx;
- }
- __syncthreads();
-
- for (i = wn >> 1; i > 0; i = i >> 1) {
-     if (threadIdx.x < i) {
-         stat_tmp = stat_shared[threadIdx.x + i];
-         stat_max = stat_shared[threadIdx.x];
-
-         if (stat_tmp > stat_max) {
-             stat_shared[threadIdx.x] = stat_tmp;
-             snr_shared[threadIdx.x] = snr_shared[threadIdx.x + i];
-             nullstream_shared[threadIdx.x] =
-                 nullstream_shared[threadIdx.x + i];
-             sky_idx_shared[threadIdx.x] =
-                 sky_idx_shared[threadIdx.x + i];
-         }
-     }
-     __syncthreads();
- }
-
- if (threadIdx.x == 0) {
-     coh_snr[peak_cur] = snr_shared[0];
-     null_snr[peak_cur] = nullstream_shared[0];
-     pix_idx[peak_cur] = sky_idx_shared[0];
- }
- __syncthreads();
-
- /* chisq calculation */
-
- COMPLEX_F data, tmp_snr, tmp_autocorr, tmp_maxsnr;

```

```

-     float laneChi2          = 0.0f;
-     int  autochisq_half_len = autochisq_len / 2, peak_pos_tmp;
-
-     cmbchisq[peak_cur] = 0.0;
-
-     for (int j = 0; j < nifo; ++j) {
-         laneChi2 = 0.0f;
-         /* this is a simplified algorithm to get map_idx */
-         map_idx = iifo * nifo + j;
-
-         NtOff = round(
-             toa_diff_map[map_idx * num_sky_directions + pix_idx[peak_cur]]
-             / dt);
-         peak_pos_tmp = start_exe + len_cur + (j == iifo ? 0 : NtOff + len);
-
-         // tmp_maxsnr = snr[j][((peak_pos_tmp + len) % len) * ntplt +
-         // tmpplt_cur];
-         tmp_maxsnr = snr[j][len * tmpplt_cur + ((peak_pos_tmp + len) % len)];
-         /* set the ntoff; snrglsnr; and coa_phase for each detector */
-         /* set the ntoff; this is actually d_ntoff */
-         peak_pos[peak_cur]
-             + (4 + hist_trials + write_ifo_mapping[j]) * max_npeak] =
-             NtOff;
-         /* set the d_snglsnr */
-         snglsnr_H[peak_cur + write_ifo_mapping[j] * max_npeak] = sqrt(
-             tmp_maxsnr.re * tmp_maxsnr.re + tmp_maxsnr.im * tmp_maxsnr.im);
-         /* set the d_coa_phase */
-         snglsnr_H[peak_cur + (3 + write_ifo_mapping[j]) * max_npeak] =
-             atan2(tmp_maxsnr.im, tmp_maxsnr.re);
-
-         for (int ishift = threadIdx.x - autochisq_half_len;
-              ishift <= autochisq_half_len; ishift += blockDim.x) {
-             tmp_snr = snr[j][len * tmpplt_cur
-                 + ((peak_pos_tmp + ishift + len) % len)];
-             tmp_autocorr =
-                 autocorr_matrix[j][tmpplt_cur * autochisq_len + ishift
-                     + autochisq_half_len];
-             data.re = tmp_snr.re - tmp_maxsnr.re * tmp_autocorr.re
-                 + tmp_maxsnr.im * tmp_autocorr.im;
-             data.im = tmp_snr.im - tmp_maxsnr.re * tmp_autocorr.im
-                 - tmp_maxsnr.im * tmp_autocorr.re;
-             laneChi2 += (data.re * data.re + data.im * data.im);
-         }
-         for (int k = WARP_SIZE >> 1; k > 0; k = k >> 1) {
-             laneChi2 += __shfl_xor(laneChi2, k, WARP_SIZE);
-         }
-         if (srcLane == 0) { snr_shared[wID] = laneChi2; }
-         __syncthreads();
-         if (threadIdx.x < wn) {
-             laneChi2 = snr_shared[srcLane];
-             for (i = wn / 2; i > 0; i = i >> 1) {
-                 laneChi2 += __shfl_xor(laneChi2, i);
-             }
-             if (srcLane == 0) {
-                 chisq_cur = laneChi2 / autocorr_norm[j][tmpplt_cur];
-                 // the location of chisq_* is indexed from maxsnrglsnr
-                 snglsnr_H[peak_cur
-                     + (6 + write_ifo_mapping[j]) * max_npeak] =
-                     chisq_cur;
-
-                 cmbchisq[peak_cur] += chisq_cur;
-                 // printf("peak %d, itrial %d, cohsnr %f, nullstream %f,
-                 // ipix %d, chisq %f\n", ipeak, itrial, cohsnr[peak_cur],
-                 // nullsnr[peak_cur], pix_idx[peak_cur], cmbchisq[peak_cur]);
-             }
-         }
-         __syncthreads();
-     }
-     __syncthreads();
-
-     /*
-     *

```

```

-      * Generate background cohsnr; nullsnr; chisq
-      */
-
-      int ipix = 0, rand_range = trial_sample_inv * hist_trials - 1;
-      for (itrial = 1 + threadIdx.x / WARP_SIZE; itrial <= hist_trials;
-           itrial += blockDim.x / WARP_SIZE) {
-          snr_max = 0.0;
-          nullstream_max = 0.0;
-          sky_idx = 0;
-
-          // FIXME: try using random offset like the following
-          // trial_offset = rand()% rand_range + 1;
-          trial_offset = itrial * trial_sample_inv;
-          output_offset = peak_cur + (itrial - 1) * max_npeak;
-          for (int seed_pix = srcLane;
-               seed_pix < num_sky_directions / NSKY_REDUCE_RATIO;
-               seed_pix += WARP_SIZE) {
-              snr_tmp = 0.0;
-              al_all = 0.0;
-              // matrix u is stored in column order
-              // mu = u_map + nifo * nifo * i;
-
-              ipix = (seed_pix * NSKY_REDUCE_RATIO)
-                    + (itrial & (NSKY_REDUCE_RATIO - 1));
-              for (int j = 0; j < nifo; ++j) {
-                  /* this is a simplified algorithm to get map_idx */
-                  map_idx = iifo * nifo + j;
-
-                  NtOff = round(
-                      toa_diff_map[map_idx * num_sky_directions + ipix] / dt);
-                  // The background cohsnr should be obtained coherently as
-                  // well.
-                  int offset =
-                      (j == iifo ? 0 : NtOff - (trial_offset * (j - iifo)));
-                  // dk[j] = snr[j][((start_exe + len_cur + offset + len) %
-                  // len) * ntmpl + tmplt_cur];
-                  dk[j] =
-                      snr[j][len * tmplt_cur
-                          + ((start_exe + len_cur + offset + len) % len)];
-              }
-
-              for (int j = 0; j < nifo; ++j) {
-                  real = 0.0f;
-                  imag = 0.0f;
-                  for (int k = 0; k < nifo; ++k) {
-                      // transpose of u_map
-                      real +=
-                          u_map[(k * nifo + j) * num_sky_directions + ipix]
-                          * dk[k].re;
-                      imag +=
-                          u_map[(k * nifo + j) * num_sky_directions + ipix]
-                          * dk[k].im;
-                  }
-                  (j < 2 ? snr_tmp : al_all) += real * real + imag * imag;
-              }
-
-              stat_tmp = snr_tmp - 0.0;
-              if (stat_tmp > stat_max) {
-                  stat_max = stat_tmp;
-                  snr_max = snr_tmp;
-                  nullstream_max = al_all;
-                  sky_idx = ipix;
-              }
-          }
-
-          for (i = WARP_SIZE / 2; i > 0; i = i >> 1) {
-              stat_tmp = __shfl_xor(stat_max, i);
-              snr_tmp = __shfl_xor(snr_max, i);
-              nullstream_max_tmp = __shfl_xor(nullstream_max, i);
-              sky_idx_tmp = __shfl_xor(sky_idx, i);
-
-              if (stat_tmp > stat_max) {
-                  stat_max = stat_tmp;
-                  snr_max = snr_tmp;
-              }
-          }
-      }

```

```

-         nullstream_max = nullstream_max_tmp;
-         sky_idx         = sky_idx_tmp;
-     }
- }
- if (srcLane == 0) {
-     cohsnr_bg[output_offset] = snr_max;
-     nullsnr_bg[output_offset] = nullstream_max;
-     /* background need this for Ntoff */
-     pix_idx_bg[output_offset] = sky_idx;
- }
- __syncthreads();
-
- /* c code here
- COMPLEX_F data;
- chisq[peak_cur] = 0.0;
- int autochisq_half_len = autochisq_len / 2;
- for (int j = 0; j < nifo; ++j)
- {
-     data = 0;
-     // this is a simplified algorithm to get map_idx
-     map_idx = iifo * nifo + j;
-     NtOff = round (toa_diff_map[map_idx * num_sky_directions + ipix]
- / dt); for(int ishift=autochisq_half_len;
- ishift<=autochisq_half_len; ishift++)
-     {
-
-         data += snr[j][((start_exe + peak_cur + NtOff + ishift) % len) *
- ntmpl + tmplt_cur] - maxsglsnr[peak_cur] * autocorr_matrix[j][
- tmplt_cur * autochisq_len + ishift + autochisq_half_len];
-     }
-     chisq[peak_cur] += (data.re * data.re + data.im * data.im) /
- autocorr_norm[j][tmplt_cur];
- }
- */
- COMPLEX_F data, tmp_snr, tmp_autocorr, tmp_maxsnr;
- float laneChi2 = 0.0f;
- int autochisq_half_len = autochisq_len / 2, peak_pos_tmp;
-
- cmbchisq_bg[output_offset] = 0.0;
-
- for (int j = 0; j < nifo; ++j) {
-     laneChi2 = 0.0f;
-     /* this is a simplified algorithm to get map_idx */
-     map_idx = iifo * nifo + j;
-
-     NtOff = round(toa_diff_map[map_idx * num_sky_directions
- + pix_idx_bg[output_offset]]
- / dt);
-
-     peak_pos_tmp =
-         start_exe + len_cur
-         + (j == iifo ? 0 : NtOff - (trial_offset * (j - iifo)) + len);
-
-     // tmp_maxsnr = snr[j][((peak_pos_tmp + len) % len) * ntmpl +
- // tmplt_cur];
-     tmp_maxsnr =
-         snr[j][len * tmplt_cur + ((peak_pos_tmp + len) % len)];
-     /* set the d_snglsnr_* */
-     snglsnr_bg_H[output_offset
- + write_ifo_mapping[j] * hist_trials * max_npeak] =
-         sqrt(tmp_maxsnr.re * tmp_maxsnr.re
- + tmp_maxsnr.im * tmp_maxsnr.im);
-     /* set the d_coa_phase_* */
-     snglsnr_bg_H[output_offset
- + (3 + write_ifo_mapping[j]) * hist_trials
- * max_npeak] =
-         atan2(tmp_maxsnr.im, tmp_maxsnr.re);
-
-     for (int ishift = srcLane - autochisq_half_len;
-         ishift <= autochisq_half_len; ishift += WARP_SIZE) {
-         // tmp_snr = snr[j][((peak_pos_tmp + ishift + len) % len) *
- // ntmpl + tmplt_cur];
-         tmp_snr = snr[j][len * tmplt_cur
- + ((peak_pos_tmp + ishift + len) % len)];
-     }
- }

```

```

-         tmp_autocorr =
-             autocorr_matrix[j][tmplt_cur * autochisq_len + ishift
-                               + autochisq_half_len];
-         data.re = tmp_snr.re - tmp_maxsnr.re * tmp_autocorr.re
-             + tmp_maxsnr.im * tmp_autocorr.im;
-         data.im = tmp_snr.im - tmp_maxsnr.re * tmp_autocorr.im
-             - tmp_maxsnr.im * tmp_autocorr.re;
-         laneChi2 += (data.re * data.re + data.im * data.im);
-     }
-     for (int k = WARP_SIZE >> 1; k > 0; k = k >> 1) {
-         laneChi2 += __shfl_xor(laneChi2, k, WARP_SIZE);
-     }
-
-     if (srcLane == 0) {
-         chisq_cur = laneChi2 / autocorr_norm[j][tmplt_cur];
-         // set d_chisq_bg_* from snglsnr_bg_H
-         snglsnr_bg_H[output_offset
-             + (6 + write_ifo_mapping[j]) * hist_trials
-             * max_npeak] = chisq_cur;
-
-         cmbchisq_bg[output_offset] += chisq_cur;
-     }
-     __syncthreads();
- }
-
-     __syncthreads();
- }
-
- /* find maximum cohsnr and swope to the first pos */
- volatile float *cohsnr_shared = &smem[0];
- volatile float *ipeak_shared = &smem[blockDim.x];
- float cohsnr_max = 0.0, cohsnr_cur;
-
- if (bid == 0 && npeak > 1) {
-     /* clean up smem history */
-     cohsnr_shared[threadIdx.x] = 0.0;
-     ipeak_shared[threadIdx.x] = 0;
-     __syncthreads();
-     for (i = threadIdx.x; i < npeak; i += blockDim.x) {
-         peak_cur = peak_pos[i];
-         cohsnr_cur = cohsnr[peak_cur];
-         if (cohsnr_cur > cohsnr_max) {
-             cohsnr_shared[threadIdx.x] = cohsnr_cur;
-             ipeak_shared[threadIdx.x] = i;
-             cohsnr_max = cohsnr_cur;
-         }
-     }
-     __syncthreads();
-     for (i = blockDim.x >> 1; i > 0; i = i >> 1) {
-         if (threadIdx.x < i) {
-             cohsnr_cur = cohsnr_shared[threadIdx.x + i];
-             cohsnr_max = cohsnr_shared[threadIdx.x];
-
-             if (cohsnr_cur > cohsnr_max) {
-                 cohsnr_shared[threadIdx.x] = cohsnr_cur;
-                 ipeak_shared[threadIdx.x] = ipeak_shared[threadIdx.x + i];
-             }
-         }
-         __syncthreads();
-     }
- }
-
- /* swope the first and max peak_cur in peak_pos */
-
- if (threadIdx.x == 0) {
-     ipeak_max = ipeak_shared[0];
-     peak_cur = peak_pos[ipeak_max];
-     peak_pos[ipeak_max] = peak_pos[0];
-     peak_pos[0] = peak_cur;
- }
- }
-
- #define TRANSPOSE_TILE_DIM    32

```



```

#define TRANSPOSE_BLOCK_ROWS 8
__global__ void transpose_matrix(COMPLEX_F *idata,
COMPLEX_F *odata,
__global__ void transpose_matrix(COMPLEX_F *restrict idata,
COMPLEX_F *restrict odata,
int in_x_offset,
int in_y_offset,
int in_width,
@@ -1370,42 +906,20 @@ void cohsnr_and_chisq(PostcohState *state,
MAX(2 * threads * sizeof(float), 4 * threads / WARP_SIZE * sizeof(float));
PeakList *pklist = state->peak_list[iifo];
int npeak = pklist->npeak[0];
/*
ker_coh_max_and_chisq<<<npeak, threads, sharedsize, stream>>>(<
state->dd_snglsnr,
iifo,
state->nifo,
state->d_write_ifo_mapping,
pklist->d_peak_pos,
pklist->d_snglsnr_H,
pklist->d_snglsnr_bg_H,
pklist->d_cohsnr_skymap,
pklist->d_nullsnr_skymap,
output_skymap,
pklist->npeak[0],
state->d_U_map[gps_idx],
state->d_diff_map[gps_idx],
state->npix,
state->snglsnr_len,
state->max_npeak,
state->snglsnr_start_exe,
state->dt,
state->ntmplt,
state->autochisq_len,
state->dd_autocorr_matrix,
state->dd_autocorr_norm,
state->hist_trials,
state->trial_sample_inv);
*/
ker_coh_max_and_chisq_versatile<<<npeak, threads, sharedsize, stream>>>(<
state->dd_snglsnr, iifo, state->nifo, state->cur_nifo,
state->cur_ifo_bits, state->d_write_ifo_mapping, pklist->d_peak_pos,
pklist->d_snglsnr_H, pklist->d_snglsnr_bg_H, pklist->d_cohsnr_skymap,
pklist->d_nullsnr_skymap, output_skymap, pklist->npeak[0],
pklist->d_snglsnr, pklist->d_snglsnr_bg, pklist->npeak[0],
state->d_U_map[gps_idx], state->d_diff_map[gps_idx], state->npix,
state->snglsnr_len, state->max_npeak, state->snglsnr_start_exe, state->dt,
state->ntmplt, state->autochisq_len, state->dd_autocorr_matrix,
state->dd_autocorr_norm, state->hist_trials, state->trial_sample_inv);
state->dd_autocorr_norm, state->hist_trials, state->trial_sample_inv,
pklist->d_pix_idx, pklist->d_pix_idx_bg, pklist->d_cohsnr,
pklist->d_nullsnr, pklist->d_cmbchisq, pklist->d_cohsnr_bg,
pklist->d_nullsnr_bg, pklist->d_cmbchisq_bg, pklist->d_coaphase,
pklist->d_coaphase_bg, pklist->d_ntoff, pklist->d_chisq,
pklist->d_chisq_bg, pklist->d_len_idx, pklist->d_tmplt_idx);
CUDA_CHECK(cudaStreamSynchronize(stream));
CUDA_CHECK(cudaPeekAtLastError());
@@ -1413,10 +927,11 @@ void cohsnr_and_chisq(PostcohState *state,
if (output_skymap && state->snglsnr_max[iifo] > output_skymap) {
ker_coh_skymap<<<1, threads, sharedsize, stream>>>(<
pklist->d_cohsnr_skymap, pklist->d_nullsnr_skymap, state->dd_snglsnr,
iifo, state->nifo, pklist->d_peak_pos, pklist->d_snglsnr_H,
pklist->npeak[0], state->d_U_map[gps_idx], state->d_diff_map[gps_idx],
state->npix, state->max_npeak, state->snglsnr_len,
state->snglsnr_start_exe, state->dt, state->ntmplt);
iifo, state->nifo, pklist->d_peak_pos, pklist->d_snglsnr,
pklist->d_cohsnr, pklist->npeak[0], state->d_U_map[gps_idx],
state->d_diff_map[gps_idx], state->npix, state->max_npeak,
state->snglsnr_len, state->snglsnr_start_exe, state->dt,
state->ntmplt, pklist->d_len_idx, pklist->d_tmplt_idx);
CUDA_CHECK(cudaStreamSynchronize(stream));
CUDA_CHECK(cudaPeekAtLastError());

```

```

@@ -1427,7 +942,7 @@ void cohsnr_and_chisq(PostcohState *state,
    }
    /* copy the snr, cohsnr, nullsnr, chisq out */
-   CUDA_CHECK(cudaMemcpyAsync(pklist->snglsnr_H, pklist->d_snglsnr_H,
+   CUDA_CHECK(cudaMemcpyAsync(pklist->snglsnr[0], pklist->d_snglsnr[0],
                                sizeof(float) * (pklist->peak_floatlen),
                                cudaMemcpyDeviceToHost, stream));

diff --git a/gstlal-spiir/gst/cuda/postcoh/postcoh_utils.c b/gstlal-spiir/gst/cuda/postcoh/postcoh_util
index 555b6818..c04803ef 100644
--- a/gstlal-spiir/gst/cuda/postcoh/postcoh_utils.c
+++ b/gstlal-spiir/gst/cuda/postcoh/postcoh_utils.c
@@ -169,71 +169,107 @@ PeakList *create_peak_list(PostcohState *state, cudaStream_t stream) {
    #endif
    PeakList *pklist = (PeakList *)malloc(sizeof(PeakList));

-   int peak_intlen      = (7 + hist_trials) * max_npeak + 1;
-   int peak_floatlen    = (12 + hist_trials * 12) * max_npeak;
+   int peak_intlen = (4 + MAX_NIFO + hist_trials) * max_npeak + 1;
+   int peak_floatlen =
+   ((4 * MAX_NIFO) + (hist_trials * 4 * MAX_NIFO)) * max_npeak;
    pklist->peak_intlen = peak_intlen;
    pklist->peak_floatlen = peak_floatlen;

+   // [THA]: Why do we use 'cudaMallocManaged()' sometimes below? Well, a large
+   // number of the below pointers are to 2D arrays that we won't be accessing
+   // after setting up, but whilst we're setting them up they need to be able
+   // to be accessed on the CPU. 'cudaMallocManaged()' allows us to access the
+   // memory involved on both the CPU and GPU, which means that we can assign
+   // the pointers here instead of having to do an awkward 'cudaMemcpyAsync()'
+   // to copy across the right pointer.
+   //
+   // It's likely that there will be a small performance hit for having used
+   // 'cudaMallocManaged()' instead of doing an async copy, so if its needed
+   // to, the below code can definitely be changed and will work with
+   // 'cudaMemcpyAsync()'.
+   //
+   // FIXME: Move to 'cudaMemcpyAsync()' instead of 'cudaMallocManaged()' for a
+   // slight performance bump
+
    /* create device space for peak list for int-type variables */
    CUDA_CHECK(
        cudaMalloc((void **)&(pklist->d_npeak), sizeof(int) * peak_intlen));
    CUDA_CHECK(
        cudaMemcpyAsync(pklist->d_npeak, 0, sizeof(int) * peak_intlen, stream));
-   pklist->d_peak_pos    = pklist->d_npeak + 1;
-   pklist->d_len_idx     = pklist->d_npeak + 1 + max_npeak;
+   pklist->d_peak_pos    = pklist->d_npeak + 1 + 0 * max_npeak;
+   pklist->d_len_idx     = pklist->d_npeak + 1 + 1 * max_npeak;
+   pklist->d_tmplt_idx   = pklist->d_npeak + 1 + 2 * max_npeak;
+   pklist->d_pix_idx     = pklist->d_npeak + 1 + 3 * max_npeak;
+   pklist->d_pix_idx_bg  = pklist->d_npeak + 1 + 4 * max_npeak;
-   pklist->d_ntoff_H     = pklist->d_npeak + 1 + (4 + hist_trials) * max_npeak;
-   pklist->d_ntoff_L     = pklist->d_npeak + 1 + (5 + hist_trials) * max_npeak;
-   pklist->d_ntoff_V     = pklist->d_npeak + 1 + (6 + hist_trials) * max_npeak;
+   CUDA_CHECK(cudaMallocManaged((void **)&(pklist->d_ntoff),
+                                   sizeof(int) * MAX_NIFO,
+                                   cudaMemAttachGlobal));
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       pklist->d_ntoff[i] =
+       pklist->d_npeak + 1 + ((4 + hist_trials + i) * max_npeak);
+   }

    // printf("d_npeak %p\n", pklist->d_npeak);
    // CUDA_CHECK(cudaMemcpyAsync(pklist->d_npeak, 0, sizeof(int), stream));

    /* create device space for peak list for float-type variables */
-   CUDA_CHECK(cudaMalloc((void **)&(pklist->d_snglsnr_H),
+   CUDA_CHECK(cudaMallocManaged((void **)&(pklist->d_snglsnr),
+                                   sizeof(float) * MAX_NIFO,
+                                   cudaMemAttachGlobal));
+   CUDA_CHECK(cudaMallocManaged((void **)&(pklist->d_coaphase),
+                                   sizeof(float) * MAX_NIFO,
+                                   cudaMemAttachGlobal));

```

```

+   CUDA_CHECK(cudaMallocManaged((void **)&(pklist->d_chisq),
+   sizeof(float) * MAX_NIFO,
+   cudaMemAttachGlobal));
+   CUDA_CHECK(cudaMallocManaged((void **)&(pklist->d_snglsnr_bg),
+   sizeof(float) * MAX_NIFO,
+   cudaMemAttachGlobal));
+   CUDA_CHECK(cudaMallocManaged((void **)&(pklist->d_coaphase_bg),
+   sizeof(float) * MAX_NIFO,
+   cudaMemAttachGlobal));
+   CUDA_CHECK(cudaMallocManaged((void **)&(pklist->d_chisq_bg),
+   sizeof(float) * MAX_NIFO,
+   cudaMemAttachGlobal));
+   CUDA_CHECK(cudaMalloc((void **)&(pklist->d_snglsnr[0]),
+   sizeof(float) * peak_floatlen));
-   CUDA_CHECK(cudaMemsetAsync(pklist->d_snglsnr_H, 0,
+   CUDA_CHECK(cudaMemsetAsync(pklist->d_snglsnr[0], 0,
+   sizeof(float) * peak_floatlen, stream));
-   pklist->d_snglsnr_L = pklist->d_snglsnr_H + max_npeak;
-   pklist->d_snglsnr_V = pklist->d_snglsnr_H + 2 * max_npeak;
-   pklist->d_coaphase_H = pklist->d_snglsnr_H + 3 * max_npeak;
-   pklist->d_coaphase_L = pklist->d_snglsnr_H + 4 * max_npeak;
-   pklist->d_coaphase_V = pklist->d_snglsnr_H + 5 * max_npeak;
-   pklist->d_chisq_H = pklist->d_snglsnr_H + 6 * max_npeak;
-   pklist->d_chisq_L = pklist->d_snglsnr_H + 7 * max_npeak;
-   pklist->d_chisq_V = pklist->d_snglsnr_H + 8 * max_npeak;
-   pklist->d_cohsnr = pklist->d_snglsnr_H + 9 * max_npeak;
-   pklist->d_nullsnr = pklist->d_snglsnr_H + 10 * max_npeak;
-   pklist->d_cmbchisq = pklist->d_snglsnr_H + 11 * max_npeak;
-   pklist->d_snglsnr_bg_H = pklist->d_snglsnr_H + 12 * max_npeak;
-   pklist->d_snglsnr_bg_L =
-   pklist->d_snglsnr_H + (12 + hist_trials) * max_npeak;
-   pklist->d_snglsnr_bg_V =
-   pklist->d_snglsnr_H + (12 + 2 * hist_trials) * max_npeak;
-   pklist->d_coaphase_bg_H =
-   pklist->d_snglsnr_H + (12 + 3 * hist_trials) * max_npeak;
-   pklist->d_coaphase_bg_L =
-   pklist->d_snglsnr_H + (12 + 4 * hist_trials) * max_npeak;
-   pklist->d_coaphase_bg_V =
-   pklist->d_snglsnr_H + (12 + 5 * hist_trials) * max_npeak;
-   pklist->d_chisq_bg_H =
-   pklist->d_snglsnr_H + (12 + 6 * hist_trials) * max_npeak;
-   pklist->d_chisq_bg_L =
-   pklist->d_snglsnr_H + (12 + 7 * hist_trials) * max_npeak;
-   pklist->d_chisq_bg_V =
-   pklist->d_snglsnr_H + (12 + 8 * hist_trials) * max_npeak;
+   for (int i = 0; i < MAX_NIFO; ++i) {
+   pklist->d_snglsnr[i] = pklist->d_snglsnr[0] + (max_npeak * i);
+   pklist->d_coaphase[i] =
+   pklist->d_snglsnr[0] + (max_npeak * (i + MAX_NIFO));
+   pklist->d_chisq[i] =
+   pklist->d_snglsnr[0] + (max_npeak * (i + 2 * MAX_NIFO));
+   pklist->d_snglsnr_bg[i] =
+   pklist->d_snglsnr[0]
+   + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (i + 0 * MAX_NIFO))));
+   pklist->d_coaphase_bg[i] =
+   pklist->d_snglsnr[0]
+   + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (i + 1 * MAX_NIFO))));
+   pklist->d_chisq_bg[i] =
+   pklist->d_snglsnr[0]
+   + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (i + 2 * MAX_NIFO))));
+   }
+   pklist->d_cohsnr = pklist->d_snglsnr[0] + (3 * MAX_NIFO + 0) * max_npeak;
+   pklist->d_nullsnr = pklist->d_snglsnr[0] + (3 * MAX_NIFO + 1) * max_npeak;
+   pklist->d_cmbchisq = pklist->d_snglsnr[0] + (3 * MAX_NIFO + 2) * max_npeak;
+   pklist->d_cohsnr_bg =
-   pklist->d_snglsnr_H + (12 + 9 * hist_trials) * max_npeak;
+   pklist->d_snglsnr[0]
+   + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (0 + 3 * MAX_NIFO))));

```

```

+
+   pklist->d_nullsnr_bg =
-   pklist->d_sglsnr_H + (12 + 10 * hist_trials) * max_npeak;
+   pklist->d_sglsnr[0]
+   + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (1 + 3 * MAX_NIFO))));
+   pklist->d_cmbchisq_bg =
-   pklist->d_sglsnr_H + (12 + 11 * hist_trials) * max_npeak;
+   pklist->d_sglsnr[0]
+   + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (2 + 3 * MAX_NIFO))));
+
+   /* create host space for peak list for int-type variables */
-   // pklist->npeak = (int *)malloc(sizeof(int) * peak_intlen);
+   CUDA_CHECK(
+       cudaMallocHost((void **)&(pklist->npeak), sizeof(int) * peak_intlen));
+   memset(pklist->npeak, 0, sizeof(int) * peak_intlen);
@@ -242,49 +278,46 @@ PeakList *create_peak_list(PostcohState *state, cudaStream_t stream) {
+   pklist->tmplt_idx = pklist->npeak + 1 + 2 * max_npeak;
+   pklist->pix_idx = pklist->npeak + 1 + 3 * max_npeak;
+   pklist->pix_idx_bg = pklist->npeak + 1 + 4 * max_npeak;
-   pklist->ntoff_H = pklist->npeak + 1 + (4 + hist_trials) * max_npeak;
-   pklist->ntoff_L = pklist->npeak + 1 + (5 + hist_trials) * max_npeak;
-   pklist->ntoff_V = pklist->npeak + 1 + (6 + hist_trials) * max_npeak;
+   for (int i = 0; i < MAX_NIFO; ++i) {
+   +   pklist->ntoff[i] =
+   +   pklist->npeak + 1 + (4 + hist_trials + i) * max_npeak;
+   }
+
+   /* create host space for peak list for float-type variables */
-   // pklist->sglsnr_L = (float *)malloc(sizeof(float) * peak_floatlen);
-   CUDA_CHECK(cudaMallocHost((void **)&(pklist->sglsnr_H),
+   CUDA_CHECK(cudaMallocHost((void **)&(pklist->sglsnr[0]),
+       sizeof(float) * peak_floatlen));
-   memset(pklist->sglsnr_H, 0, sizeof(float) * peak_floatlen);
-   pklist->sglsnr_L = pklist->sglsnr_H + max_npeak;
-   pklist->sglsnr_V = pklist->sglsnr_H + 2 * max_npeak;
-   pklist->coaphase_H = pklist->sglsnr_H + 3 * max_npeak;
-   pklist->coaphase_L = pklist->sglsnr_H + 4 * max_npeak;
-   pklist->coaphase_V = pklist->sglsnr_H + 5 * max_npeak;
-   pklist->chisq_H = pklist->sglsnr_H + 6 * max_npeak;
-   pklist->chisq_L = pklist->sglsnr_H + 7 * max_npeak;
-   pklist->chisq_V = pklist->sglsnr_H + 8 * max_npeak;
-   pklist->cohsnr = pklist->sglsnr_H + 9 * max_npeak;
-   pklist->>nullsnr = pklist->sglsnr_H + 10 * max_npeak;
-   pklist->cmbchisq = pklist->sglsnr_H + 11 * max_npeak;
-   //
-   pklist->sglsnr_bg_H = pklist->sglsnr_H + 12 * max_npeak;
-   pklist->sglsnr_bg_L = pklist->sglsnr_H + (12 + hist_trials) * max_npeak;
-   pklist->sglsnr_bg_V =
-   pklist->sglsnr_H + (12 + 2 * hist_trials) * max_npeak;
-   pklist->coaphase_bg_H =
-   pklist->sglsnr_H + (12 + 3 * hist_trials) * max_npeak;
-   pklist->coaphase_bg_L =
-   pklist->sglsnr_H + (12 + 4 * hist_trials) * max_npeak;
-   pklist->coaphase_bg_V =
-   pklist->sglsnr_H + (12 + 5 * hist_trials) * max_npeak;
-   pklist->chisq_bg_H = pklist->sglsnr_H + (12 + 6 * hist_trials) * max_npeak;
-   pklist->chisq_bg_L = pklist->sglsnr_H + (12 + 7 * hist_trials) * max_npeak;
-   pklist->chisq_bg_V = pklist->sglsnr_H + (12 + 8 * hist_trials) * max_npeak;
-   pklist->cohsnr_bg = pklist->sglsnr_H + (12 + 9 * hist_trials) * max_npeak;
+   memset(pklist->sglsnr[0], 0, sizeof(float) * peak_floatlen);
+   for (int i = 0; i < MAX_NIFO; ++i) {
+   +   pklist->sglsnr[i] = pklist->sglsnr[0] + (max_npeak * i);
+   +   pklist->coaphase[i] = pklist->sglsnr[0] + (max_npeak * (i + MAX_NIFO));
+   +   pklist->chisq[i] =
+   +   pklist->sglsnr[0] + (max_npeak * (i + 2 * MAX_NIFO));
+   +
+   +   pklist->sglsnr_bg[i] =
+   +   pklist->sglsnr[0]
+   +   + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (i + 0 * MAX_NIFO))));
+   +   pklist->coaphase_bg[i] =
+   +   pklist->sglsnr[0]
+   +   + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (i + 1 * MAX_NIFO))));
+   +   pklist->chisq_bg[i] =

```

```

+         pklist->snglsnr[0]
+         + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (i + 2 * MAX_NIFO))));
+     }
+     pklist->cohsnr = pklist->snglsnr[0] + (3 * MAX_NIFO + 0) * max_npeak;
+     pklist->>nullsnr = pklist->snglsnr[0] + (3 * MAX_NIFO + 1) * max_npeak;
+     pklist->cmbchisq = pklist->snglsnr[0] + (3 * MAX_NIFO + 2) * max_npeak;
+
+     pklist->cohsnr_bg =
+     pklist->snglsnr[0]
+     + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (0 + 3 * MAX_NIFO))));
+
+     pklist->>nullsnr_bg =
-     pklist->snglsnr_H + (12 + 10 * hist_trials) * max_npeak;
+     pklist->snglsnr[0]
+     + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (1 + 3 * MAX_NIFO))));
+     pklist->cmbchisq_bg =
-     pklist->snglsnr_H + (12 + 11 * hist_trials) * max_npeak;
+     pklist->snglsnr[0]
+     + (max_npeak * ((4 * MAX_NIFO) + (hist_trials * (2 + 3 * MAX_NIFO))));
-     // printf("set peak addr %p, d_npeak addr %p\n", pklist,
-     //pklist->d_npeak); printf("hist trials %d, peak_intlen %d, peak_floatlen
-     // %d\n", hist_trials, peak_intlen, peak_floatlen);
+     /* temporary struct to store tmplt max in one max_npeak data */
+     CUDA_CHECK(cudaMalloc((void **)&(pklist->d_peak_tmplt),
+                                sizeof(float) * state->ntmplt));
@@ -820,12 +853,24 @@ static void autocorr_destroy(PostcohState *state) {
void peak_list_destroy(PeakList *pklist) {
    CUDA_CHECK(cudaFree(pklist->d_npeak));
-    CUDA_CHECK(cudaFree(pklist->d_snglsnr_L));
+    CUDA_CHECK(cudaFree(pklist->d_snglsnr[0]));
+    CUDA_CHECK(cudaFree(pklist->d_snglsnr));
+    CUDA_CHECK(cudaFree(pklist->d_coaphase));
+    CUDA_CHECK(cudaFree(pklist->d_chisq));
+    CUDA_CHECK(cudaFree(pklist->d_snglsnr_bg));
+    CUDA_CHECK(cudaFree(pklist->d_coaphase_bg));
+    CUDA_CHECK(cudaFree(pklist->d_chisq_bg));
+    CUDA_CHECK(cudaFree(pklist->d_peak_tmplt));
+    CUDA_CHECK(cudaFree(pklist->d_cohsnr_skymap));
+
+    CUDA_CHECK(cudaFreeHost(pklist->npeak));
-    CUDA_CHECK(cudaFreeHost(pklist->snglsnr_L));
+    CUDA_CHECK(cudaFreeHost(pklist->snglsnr[0]));
+    CUDA_CHECK(cudaFreeHost(pklist->snglsnr));
+    CUDA_CHECK(cudaFreeHost(pklist->coaphase));
+    CUDA_CHECK(cudaFreeHost(pklist->chisq));
+    CUDA_CHECK(cudaFreeHost(pklist->snglsnr_bg));
+    CUDA_CHECK(cudaFreeHost(pklist->coaphase_bg));
+    CUDA_CHECK(cudaFreeHost(pklist->chisq_bg));
+    CUDA_CHECK(cudaFreeHost(pklist->cohsnr_skymap));
}

diff --git a/gstlal-spiir/gst/cuda/postcoh/postcoh_utils.h b/gstlal-spiir/gst/cuda/postcoh/postcoh_util
index d9837f1c..41e2bdd9 100644
--- a/gstlal-spiir/gst/cuda/postcoh/postcoh_utils.h
+++ b/gstlal-spiir/gst/cuda/postcoh/postcoh_utils.h
@@ -15,6 +15,8 @@ void cuda_device_print(int deviceCount);

PeakList *create_peak_list(PostcohState *state, cudaStream_t stream);
+void get_write_ifo_mapping(char *ifo_combo, int nifo, int *write_ifo_mapping);
+
void cuda_postcoh_map_from_xml(char *fname,
                                PostcohState *state,
                                cudaStream_t stream);

diff --git a/gstlal-spiir/gst/cuda/postcoh/postcohtable_utils.c b/gstlal-spiir/gst/cuda/postcoh/postcoh
index db53a829..87ecf159 100644
--- a/gstlal-spiir/gst/cuda/postcoh/postcohtable_utils.c
+++ b/gstlal-spiir/gst/cuda/postcoh/postcohtable_utils.c
@@ -26,136 +26,148 @@ void postcohtable_init(XmlTable *table) {
    table->delimiter = g_string_new(",");
-    table->names = g_array_new(FALSE, FALSE, sizeof(GString));
+    table->names
+    = g_array_new(FALSE, FALSE, sizeof(GString));

```

```

+   table->type_names = g_array_new(FALSE, FALSE, sizeof(GString));
+
+   g_array_append_val(table->names, *g_string_new("postcoh:end_time"));
+   g_array_append_val(table->type_names, *g_string_new("int_4s"));
+   g_array_append_val(table->names, *g_string_new("postcoh:end_time_ns"));
-   g_array_append_val(table->names, *g_string_new("postcoh:end_time_L"));
-   g_array_append_val(table->names, *g_string_new("postcoh:end_time_ns_L"));
-   g_array_append_val(table->names, *g_string_new("postcoh:end_time_H"));
-   g_array_append_val(table->names, *g_string_new("postcoh:end_time_ns_H"));
-   g_array_append_val(table->names, *g_string_new("postcoh:end_time_V"));
-   g_array_append_val(table->names, *g_string_new("postcoh:end_time_ns_V"));
+   g_array_append_val(table->type_names, *g_string_new("int_4s"));
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_array_append_val(
+           table->names,
+           *g_string_append(g_string_new("postcoh:end_time_"), IFOMap[i].name));
+       g_array_append_val(table->type_names, *g_string_new("int_4s"));
+       g_array_append_val(
+           table->names, *g_string_append(g_string_new("postcoh:end_time_ns_"),
+                                           IFOMap[i].name));
+       g_array_append_val(table->type_names, *g_string_new("int_4s"));
+   }
+   g_array_append_val(table->names, *g_string_new("postcoh:is_background"));
+   g_array_append_val(table->type_names, *g_string_new("int_4s"));
+   g_array_append_val(table->names, *g_string_new("postcoh:livetime"));
+   g_array_append_val(table->type_names, *g_string_new("int_4s"));
+   g_array_append_val(table->names, *g_string_new("postcoh:ifos"));
+   g_array_append_val(table->type_names, *g_string_new("lstring"));
+   g_array_append_val(table->names, *g_string_new("postcoh:pivotal_ifo"));
+   g_array_append_val(table->type_names, *g_string_new("lstring"));
+   g_array_append_val(table->names, *g_string_new("postcoh:tmplt_idx"));
+   g_array_append_val(table->type_names, *g_string_new("int_4s"));
+   g_array_append_val(table->names, *g_string_new("postcoh:pix_idx"));
-   g_array_append_val(table->names, *g_string_new("postcoh:snlsnr_L"));
-   g_array_append_val(table->names, *g_string_new("postcoh:snlsnr_H"));
-   g_array_append_val(table->names, *g_string_new("postcoh:snlsnr_V"));
-   g_array_append_val(table->names, *g_string_new("postcoh:coaphase_L"));
-   g_array_append_val(table->names, *g_string_new("postcoh:coaphase_H"));
-   g_array_append_val(table->names, *g_string_new("postcoh:coaphase_V"));
-   g_array_append_val(table->names, *g_string_new("postcoh:chisq_L"));
-   g_array_append_val(table->names, *g_string_new("postcoh:chisq_H"));
-   g_array_append_val(table->names, *g_string_new("postcoh:chisq_V"));
+   g_array_append_val(table->type_names, *g_string_new("int_4s"));
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_array_append_val(
+           table->names,
+           *g_string_append(g_string_new("postcoh:snlsnr_"), IFOMap[i].name));
+       g_array_append_val(table->type_names, *g_string_new("real_4"));
+       g_array_append_val(
+           table->names,
+           *g_string_append(g_string_new("postcoh:snlsnr_"), IFOMap[i].name));
+       g_array_append_val(table->type_names, *g_string_new("real_4"));
+   }
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_array_append_val(
+           table->names,
+           *g_string_append(g_string_new("postcoh:coaphase_"), IFOMap[i].name));
+       g_array_append_val(table->type_names, *g_string_new("real_4"));
+       g_array_append_val(
+           table->names,
+           *g_string_append(g_string_new("postcoh:coaphase_"), IFOMap[i].name));
+       g_array_append_val(table->type_names, *g_string_new("real_4"));
+   }
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_array_append_val(
+           table->names,
+           *g_string_append(g_string_new("postcoh:chisq_"), IFOMap[i].name));
+       g_array_append_val(table->type_names, *g_string_new("real_4"));
+       g_array_append_val(
+           table->names,
+           *g_string_append(g_string_new("postcoh:chisq_"), IFOMap[i].name));

```



```

+     g_array_append_val(table->type_names, *g_string_new("real_4"));
+ }
+ g_array_append_val(table->names, *g_string_new("postcoh:cohsnr"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:nullsnr"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:cmbchisq"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:spearman_pval"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:fap"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:far"));
- g_array_append_val(table->names, *g_string_new("postcoh:far_l"));
- g_array_append_val(table->names, *g_string_new("postcoh:far_h"));
- g_array_append_val(table->names, *g_string_new("postcoh:far_v"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ for (int i = 0; i < MAX_NIFO; ++i) {
+     g_array_append_val(
+         table->names,
+         *g_string_append(g_string_new("postcoh:far_sngl_"), IFOMap[i].name));
+     g_array_append_val(table->type_names, *g_string_new("real_4"));
+     g_array_append_val(
+         table->names,
+         *g_string_append(g_string_new("postcoh:far_sngl_"), IFOMap[i].name));
+     g_array_append_val(table->type_names, *g_string_new("real_4"));
+ }
+ g_array_append_val(table->names, *g_string_new("postcoh:far_2h"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:far_ld"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:far_lw"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:skymap_fname"));
+ g_array_append_val(table->type_names, *g_string_new("lstring"));
+ g_array_append_val(table->names,
+     *g_string_new("postcoh:template_duration"));
- g_array_append_val(table->names, *g_string_new("postcoh:mchirp"));
- g_array_append_val(table->names, *g_string_new("postcoh:mtotal"));
- g_array_append_val(table->names, *g_string_new("postcoh:mass1"));
- g_array_append_val(table->names, *g_string_new("postcoh:mass2"));
- g_array_append_val(table->names, *g_string_new("postcoh:spin1x"));
- g_array_append_val(table->names, *g_string_new("postcoh:spin1y"));
- g_array_append_val(table->names, *g_string_new("postcoh:spin1z"));
- g_array_append_val(table->names, *g_string_new("postcoh:spin2x"));
- g_array_append_val(table->names, *g_string_new("postcoh:spin2y"));
- g_array_append_val(table->names, *g_string_new("postcoh:spin2z"));
- g_array_append_val(table->names, *g_string_new("postcoh:ra"));
- g_array_append_val(table->names, *g_string_new("postcoh:dec"));
- g_array_append_val(table->names, *g_string_new("postcoh:deff_L"));
- g_array_append_val(table->names, *g_string_new("postcoh:deff_H"));
- g_array_append_val(table->names, *g_string_new("postcoh:deff_V"));
-
- table->type_names = g_array_new(FALSE, FALSE, sizeof(GString));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("lstring"));
- g_array_append_val(table->type_names, *g_string_new("lstring"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("int_4s"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));

```

```

- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("real_4"));
- g_array_append_val(table->type_names, *g_string_new("lstring"));
- g_array_append_val(table->type_names, *g_string_new("real_8"));
+ g_array_append_val(table->names, *g_string_new("postcoh:mchirp"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:mtotal"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:mass1"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:mass2"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:spin1x"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:spin1y"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:spin1z"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:spin2x"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:spin2y"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:spin2z"));
+ g_array_append_val(table->type_names, *g_string_new("real_4"));
+ g_array_append_val(table->names, *g_string_new("postcoh:ra"));
+ g_array_append_val(table->type_names, *g_string_new("real_8"));
+ g_array_append_val(table->names, *g_string_new("postcoh:dec"));
+ g_array_append_val(table->type_names, *g_string_new("real_8"));
- g_array_append_val(table->type_names, *g_string_new("real_8"));
- g_array_append_val(table->type_names, *g_string_new("real_8"));
- g_array_append_val(table->type_names, *g_string_new("real_8"));
+ for (int i = 0; i < MAX_NIFO; ++i) {
+   g_array_append_val(
+     table->names,
+     *g_string_append(g_string_new("postcoh:deff_"), IFOMap[i].name));
+   g_array_append_val(table->type_names, *g_string_new("real_8"));
+   g_array_append_val(
+     table->names,
+     *g_string_append(g_string_new("postcoh:deff_"), IFOMap[i].name));
+   g_array_append_val(table->type_names, *g_string_new("real_8"));
+ }
}

void postcohtable_set_line(GString *line,
                          PostcohInspiralTable *table,
                          XmlTable *xtable) {
- g_string_append_printf(line, "%d%s", table->end_time_L.gpsSeconds,
- xtable->delimiter->str); // for end_time_ns
- g_string_append_printf(line, "%d%s", table->end_time_L.gpsNanoSeconds,
- xtable->delimiter->str);
- g_string_append_printf(line, "%d%s", table->end_time_L.gpsSeconds,
+ g_string_append_printf(line, "%d%s", table->end_time.gpsSeconds,
+ xtable->delimiter->str);
- g_string_append_printf(line, "%d%s", table->end_time_L.gpsNanoSeconds,

```



```

+   g_string_append_printf(line, "%d%s", table->end_time.gpsNanoSeconds,
+                           xtable->delimiter->str);
-   g_string_append_printf(line, "%d%s", table->end_time.H.gpsSeconds,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%d%s", table->end_time.H.gpsNanoSeconds,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%d%s", table->end_time.V.gpsSeconds,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%d%s", table->end_time.V.gpsNanoSeconds,
-                           xtable->delimiter->str);
-
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_string_append_printf(line, "%d%s", table->end_time_sngl[i].gpsSeconds,
+                               xtable->delimiter->str);
+       g_string_append_printf(line, "%d%s",
+                               table->end_time_sngl[i].gpsNanoSeconds,
+                               xtable->delimiter->str);
+   }
+   g_string_append_printf(line, "%d%s", table->is_background,
+                           xtable->delimiter->str);
+   g_string_append_printf(line, "%d%s", table->livetime,
+                           xtable->delimiter->str);
@@ -167,24 +179,19 @@ void postcohtable_set_line(GString *line,
+   g_string_append_printf(line, "%d%s", table->pix_idx,
+                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->snglsnr_L,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->snglsnr_H,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->snglsnr_V,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->coaphase_L,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->coaphase_H,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->coaphase_V,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->chisq_L,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->chisq_H,
-                           xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->chisq_V,
-                           xtable->delimiter->str);
+
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_string_append_printf(line, "%g%s", table->snglsnr[i],
+                               xtable->delimiter->str);
+   }
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_string_append_printf(line, "%g%s", table->coaphase[i],
+                               xtable->delimiter->str);
+   }
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_string_append_printf(line, "%g%s", table->chisq[i],
+                               xtable->delimiter->str);
+   }
+
+   g_string_append_printf(line, "%g%s", table->cohsnr, xtable->delimiter->str);
+   g_string_append_printf(line, "%g%s", table->nullsnr,
+                           xtable->delimiter->str);
@@ -195,9 +202,11 @@ void postcohtable_set_line(GString *line,
+   g_string_append_printf(line, "%g%s", table->fap, xtable->delimiter->str);
+   g_string_append_printf(line, "%g%s", table->far, xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->far_l, xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->far_h, xtable->delimiter->str);
-   g_string_append_printf(line, "%g%s", table->far_v, xtable->delimiter->str);
+
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       g_string_append_printf(line, "%g%s", table->far_sngl[i],
+                               xtable->delimiter->str);
+   }

```

```

    g_string_append_printf(line, "%g%s", table->far_2h, xtable->delimiter->str);
    g_string_append_printf(line, "%g%s", table->far_1d, xtable->delimiter->str);
    g_string_append_printf(line, "%g%s", table->far_1w, xtable->delimiter->str);
@@ -217,12 +226,10 @@ void postcohtable_set_line(GString *line,
    g_string_append_printf(line, "%g%s", table->spin2z, xtable->delimiter->str);
    g_string_append_printf(line, "%lg%s", table->ra, xtable->delimiter->str);
    g_string_append_printf(line, "%lg%s", table->dec, xtable->delimiter->str);
-    g_string_append_printf(line, "%lg%s", table->deff_L,
-                            xtable->delimiter->str);
-    g_string_append_printf(line, "%lg%s", table->deff_H,
-                            xtable->delimiter->str);
-    g_string_append_printf(line, "%lg%s", table->deff_V,
-                            xtable->delimiter->str);
+    for (int i = 0; i < MAX_NFO; ++i) {
+        g_string_append_printf(line, "%lg%s", table->deff[i],
+                                xtable->delimiter->str);
+    }
    g_string_append(line, "\n");
    // printf("%s", line->str);
diff --git a/gstlal-spiir/gst/cuda/spiir/spiir_kernel.cu b/gstlal-spiir/gst/cuda/spiir/spiir_kernel.cu
index 0c09d485..f84080f1 100644
--- a/gstlal-spiir/gst/cuda/spiir/spiir_kernel.cu
+++ b/gstlal-spiir/gst/cuda/spiir/spiir_kernel.cu
@@ -332,8 +332,8 @@ __global__ void cuda_iir_filter_kernel(COMPLEX8_F *cudaA1,
    for (i = 0; i < step_points; i += nb) {
        for (j = 0; j < nb; ++j) {
            // data = 0.01f;
-            // data = tex1Dfetch(texRef, shift+i+j);           //use texture,
-            // abandon now
+            // data = tex1Dfetch(texRef, shift+i+j);           //use
+            // texture, abandon now
            data = cudaData[shift + i + j];
            fltrOutptReal[tx] = a1.re * previousSnr.re
-                               - a1.im * previousSnr.im + b0.re * data;
diff --git a/gstlal-spiir/include/pipe_macro.h b/gstlal-spiir/include/pipe_macro.h
index b6e0fc9a..f3d82196 100644
--- a/gstlal-spiir/include/pipe_macro.h
+++ b/gstlal-spiir/include/pipe_macro.h
@@ -6,17 +6,20 @@
@@ -6,17 +6,20 @@
#define MAX_IFO_LEN 4
#endif
-#define MAX_NFO 3
+typedef struct __IFOType {
+    const char *name;
+    int index;
+} IFOType;
-static const IFOType IFOMap[MAX_NFO] = {
-    { "H1", 0 }, // 1 << 0 = 1
-    { "L1", 1 }, // 1 << 1 = 2
-    { "V1", 2 }, // 1 << 2 = 4
-};
+##define MAX_NFO 3
+##ifdef __cplusplus
+constexpr
+##endif
+static const IFOType IFOMap[MAX_NFO] = {
+    { "H1", 0 }, // 1 << 0 = 1
+    { "L1", 1 }, // 1 << 1 = 2
+    { "V1", 2 }, // 1 << 2 = 4
+};
#define MAX_IFO_COMBOS 7 // 2^3-1
// A combination is sum(1 << index) - 1
// This gives us some nice mathematical properties that we can use to check
@@ -79,7 +82,6 @@ int get_icombo(char *ifos);
#define STATS_XML_WRITE_END 3
#define STATS_XML_WRITE_FULL 4
-#define MAX(a, b) (a > b ? a : b)
#define PNOISE_MIN_LIMIT -30
#define PSIG_MIN_LIMIT -30
#define LR_MIN_LIMIT -30

```

```
diff --git a/gstlal-spiir/include/postcohtable.h b/gstlal-spiir/include/postcohtable.h
index e7833c57..f101886b 100644
```

```
--- a/gstlal-spiir/include/postcohtable.h
```

```
+++ b/gstlal-spiir/include/postcohtable.h
```

```
@@ -34,9 +34,7 @@ typedef struct tagPostcohInspiralTable {
```

```
    long process_id;
    long event_id;
    LIGOTimeGPS end_time;
-   LIGOTimeGPS end_time_H;
-   LIGOTimeGPS end_time_L;
-   LIGOTimeGPS end_time_V;
+   LIGOTimeGPS end_time_sngl[MAX_NIFO];
    INT4 is_background;
    INT4 livetime;
    CHAR ifos[MAX_ALLIFO_LEN];
```

```
@@ -44,32 +42,18 @@ typedef struct tagPostcohInspiralTable {
```

```
    INT4 tmplt_idx;
    INT4 bankid;
    INT4 pix_idx;
-   REAL4 snglsnr_H;
-   REAL4 snglsnr_L;
-   REAL4 snglsnr_V;
-   REAL4 coaphase_H;
-   REAL4 coaphase_L;
-   REAL4 coaphase_V;
-   REAL4 chisq_H;
-   REAL4 chisq_L;
-   REAL4 chisq_V;
+   REAL4 snglsnr[MAX_NIFO];
+   REAL4 coaphase[MAX_NIFO];
+   REAL4 chisq[MAX_NIFO];
    REAL4 cohsnr;
    REAL4 nullsnr;
    REAL4 cmbchisq;
    REAL4 spearman_pval;
    REAL4 fap;
-   REAL4 far_h;
-   REAL4 far_l;
-   REAL4 far_v;
-   REAL4 far_h_1w;
-   REAL4 far_l_1w;
-   REAL4 far_v_1w;
-   REAL4 far_h_1d;
-   REAL4 far_l_1d;
-   REAL4 far_v_1d;
-   REAL4 far_h_2h;
-   REAL4 far_l_2h;
-   REAL4 far_v_2h;
+   REAL4 far_sngl[MAX_NIFO];
+   REAL4 far_1w_sngl[MAX_NIFO];
+   REAL4 far_1d_sngl[MAX_NIFO];
+   REAL4 far_2h_sngl[MAX_NIFO];
    REAL4 far;
    REAL4 far_2h;
    REAL4 far_1d;
```

```
@@ -89,9 +73,7 @@ typedef struct tagPostcohInspiralTable {
```

```
    REAL4 eta;
    REAL8 ra;
    REAL8 dec;
-   REAL8 deff_H;
-   REAL8 deff_L;
-   REAL8 deff_V;
+   REAL8 deff[MAX_NIFO];
    REAL8 rank;
    REAL4 f_final;
    LIGOTimeGPS epoch;
```

```
diff --git a/gstlal-spiir/python/pipemodules/postcoh_finalsink.py b/gstlal-spiir/python/pipemodules/postcoh_finalsink.py
index e01d9021..ec1d07e1 100644
```

```
--- a/gstlal-spiir/python/pipemodules/postcoh_finalsink.py
```

```
+++ b/gstlal-spiir/python/pipemodules/postcoh_finalsink.py
```

```
@@ -468,7 +468,8 @@ class FinalSink(object):
```

```
    else:
        self.gracedb_offline_annotate = False
    if GraceDb:
-       self.gracedb_client = GraceDb(gracedb_service_url, reload_certificate=True)
+       self.gracedb_client = GraceDb(gracedb_service_url,
```

```

+                                     reload_certificate=True)
# keep a record of segments and is snapshotted
# our segments is determined by if incoming buf is GAP
@@ -554,29 +555,20 @@ class FinalSink(object):
# single far veto for high-significance trigger
# add an upper limit for the chisq for uploaded event compared to the last line, hardcoded to
ifo_active = [
-     self.candidate.chisq_H != 0 and self.candidate.chisq_H < 3,
-     self.candidate.chisq_L != 0 and self.candidate.chisq_L < 3,
-     self.candidate.chisq_V != 0 and self.candidate.chisq_V < 3,
+     chisq != 0 and chisq < 3 for chisq in self.candidate.chisq
]
ifo_fars_ok = [
-     self.candidate.far_h < self.singlefar_veto_thresh
-     and self.candidate.far_h > 0.,
-     self.candidate.far_l < self.singlefar_veto_thresh
-     and self.candidate.far_l > 0.,
-     self.candidate.far_v < self.singlefar_veto_thresh
-     and self.candidate.far_v > 0.
-
- ]
- ifo_chisqs = [
-     self.candidate.chisq_H, self.candidate.chisq_L,
-     self.candidate.chisq_V
-     far < self.singlefar_veto_thresh and far > 0.
+     for far in self.candidate.far_sngl
+ ]
if self.candidate.far < self.superevent_thresh:
    return sum([
        i for (i, v) in zip(ifo_fars_ok, ifo_active) if v
    ]) >= 2 and all(
        (lambda x:
            [i1 / i2 < self.chisq_ratio_thresh for i1 in x for i2 in x])(
            [i for (i, v) in zip(ifo_chisqs, ifo_active) if v]))
+         [i1 / i2 < self.chisq_ratio_thresh for i1 in x for i2 in x])(
+         [i for (i, v) in zip(self.candidate.chisq, ifo_active) if v
+         ]))
def appsink_new_buffer(self, elem):
    with self.lock:
@@ -739,12 +731,11 @@ class FinalSink(object):
def __set_far(self, candidate):
    candidate.far = (max(candidate.far_2h, candidate.far_1d,
        candidate.far_1w)) * self.far_factor
-     candidate.far_h = (max(candidate.far_h_2h, candidate.far_h_1d,
-         candidate.far_h_1w)) * self.far_factor
-     candidate.far_l = (max(candidate.far_l_2h, candidate.far_l_1d,
-         candidate.far_l_1w)) * self.far_factor
-     candidate.far_v = (max(candidate.far_v_2h, candidate.far_v_1d,
-         candidate.far_v_1w)) * self.far_factor
+     candidate.far_sngl = [
+         (max(fars) * self.far_factor)
+         for fars in zip(candidate.far_2h_sngl, candidate.far_1d_sngl,
+             candidate.far_1w_sngl)
+     ]
# def __lookback_far(self, candidate):
# FIXME: hard-code to check event that's < 5e-7
diff --git a/gstlal-spiir/python/pipemodules/postcohtable/Makefile.am b/gstlal-spiir/python/pipemodules
index 7038ccb4..23df433d 100644
--- a/gstlal-spiir/python/pipemodules/postcohtable/Makefile.am
+++ b/gstlal-spiir/python/pipemodules/postcohtable/Makefile.am
@@ -17,7 +17,7 @@ postcohtable_PYTHON = \
    postcohtable_LTLIBRARIES = _postcohtable_la
    _postcohtable_la_SOURCES = _postcohtable.c
- _postcohtable_la_CPPFLAGS = $(AM_CPPFLAGS) $(PYTHON_CPPFLAGS) -DMODULE_NAME=\"gstlal.pipemodules.post
+ _postcohtable_la_CPPFLAGS = $(AM_CPPFLAGS) $(LAL_CFLAGS) $(GSL_CFLAGS) $(gststreamer_CFLAGS) $(GSTLAL_C
+ _postcohtable_la_CFLAGS = $(AM_CFLAGS) $(LAL_CFLAGS) $(GSL_CFLAGS) $(gststreamer_CFLAGS) $(GSTLAL_C
    _postcohtable_la_LDFLAGS = $(AM_LDFLAGS) $(LAL_LIBS) $(GSL_LIBS) $(GSTLAL_LDFLAGS) $(PYTHON_LIBS) $(AD
diff --git a/gstlal-spiir/python/pipemodules/postcohtable/_postcohtable.c b/gstlal-spiir/python/pipemod
index 5ec05962..6ce527a0 100644
--- a/gstlal-spiir/python/pipemodules/postcohtable/_postcohtable.c
+++ b/gstlal-spiir/python/pipemodules/postcohtable/_postcohtable.c
@@ -24,6 +24,7 @@

```

```

*
*/
+##include <string.h>
#define NPY_NO_DEPRECATED_API NPY_1_7_API_VERSION
#define PY_SSIZE_T_CLEAN
@@ -31,6 +32,7 @@
#include <lal/TimeSeries.h>
#include <lal/Units.h>
#include <numpy/ndarrayobject.h>
+##include <pipe_macro.h>
#include <postcohtable.h>
#include <structmember.h>
@@ -49,6 +51,15 @@
typedef struct {
    PyObject_HEAD PostcohInspiralTable row;
    COMPLEX8TimeSeries *snr;
+   PyObject *end_time_sngl;
+   PyObject *snglsnr;
+   PyObject *coaphase;
+   PyObject *chisq;
+   PyObject *far_sngl;
+   PyObject *far_1w_sngl;
+   PyObject *far_1d_sngl;
+   PyObject *far_2h_sngl;
+   PyObject *deff;
} gstlal_GSTLALPostcohInspiral;
// static PyObject *row_event_id_type = NULL;
@@ -58,49 +69,14 @@ typedef struct {
    * Member access
    */
-static struct PyMemberDef members[] = {
+static PyMemberDef members[] = {
+   // Not dependent on the number of detectors
+   { "end_time", T_INT,
+     offsetof(gstlal_GSTLALPostcohInspiral, row.end_time.gpsSeconds), 0,
+     "end_time" },
+   { "end_time_ns", T_INT,
+     offsetof(gstlal_GSTLALPostcohInspiral, row.end_time.gpsNanoSeconds), 0,
+     "end_time_ns" },
-   { "end_time_L", T_INT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.end_time_L.gpsSeconds), 0,
-     "end_time_L" },
-   { "end_time_ns_L", T_INT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.end_time_L.gpsNanoSeconds), 0,
-     "end_time_ns_L" },
-   { "end_time_H", T_INT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.end_time_H.gpsSeconds), 0,
-     "end_time_H" },
-   { "end_time_ns_H", T_INT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.end_time_H.gpsNanoSeconds), 0,
-     "end_time_ns_H" },
-   { "end_time_V", T_INT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.end_time_V.gpsSeconds), 0,
-     "end_time_V" },
-   { "end_time_ns_V", T_INT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.end_time_V.gpsNanoSeconds), 0,
-     "end_time_ns_V" },
-   { "snglsnr_L", T_FLOAT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.snglsnr_L), 0, "snglsnr_L" },
-   { "snglsnr_H", T_FLOAT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.snglsnr_H), 0, "snglsnr_H" },
-   { "snglsnr_V", T_FLOAT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.snglsnr_V), 0, "snglsnr_V" },
-   { "coaphase_L", T_FLOAT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.coaphase_L), 0, "coaphase_L" },
-   { "coaphase_H", T_FLOAT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.coaphase_H), 0, "coaphase_H" },
-   { "coaphase_V", T_FLOAT,
-     offsetof(gstlal_GSTLALPostcohInspiral, row.coaphase_V), 0, "coaphase_V" },
-   { "chisq_L", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.chisq_L),

```

```

-     0, "chisq_L" },
-     { "chisq_H", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.chisq_H),
-     0, "chisq_H" },
-     { "chisq_V", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.chisq_V),
-     0, "chisq_V" },
-     { "is_background", T_INT,
-       offsetof(gstlal_GSTLALPostcohInspiral, row.is_background), 0,
-       "is_background" },
@@ -131,30 +107,6 @@ static struct PyMemberDef members[] = {
    "far_1w" },
    { "far", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far), 0,
    "far" },
-   { "far_h", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_h), 0,
-   "far_h" },
-   { "far_l", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_l), 0,
-   "far_l" },
-   { "far_v", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_v), 0,
-   "far_v" },
-   { "far_h_1w", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_h_1w),
-   0, "far_h_1w" },
-   { "far_l_1w", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_l_1w),
-   0, "far_l_1w" },
-   { "far_v_1w", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_v_1w),
-   0, "far_v_1w" },
-   { "far_h_1d", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_h_1d),
-   0, "far_h_1d" },
-   { "far_l_1d", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_l_1d),
-   0, "far_l_1d" },
-   { "far_v_1d", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_v_1d),
-   0, "far_v_1d" },
-   { "far_h_2h", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_h_2h),
-   0, "far_h_2h" },
-   { "far_l_2h", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_l_2h),
-   0, "far_l_2h" },
-   { "far_v_2h", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.far_v_2h),
-   0, "far_v_2h" },
-   { "rank", T_DOUBLE, offsetof(gstlal_GSTLALPostcohInspiral, row.rank), 0,
-   "rank" },
-   { "template_duration", T_DOUBLE,
@@ -185,12 +137,6 @@ static struct PyMemberDef members[] = {
    { "ra", T_DOUBLE, offsetof(gstlal_GSTLALPostcohInspiral, row.ra), 0, "ra" },
    { "dec", T_DOUBLE, offsetof(gstlal_GSTLALPostcohInspiral, row.dec), 0,
    "dec" },
-   { "deff_L", T_DOUBLE, offsetof(gstlal_GSTLALPostcohInspiral, row.deff_L), 0,
-   "deff_L" },
-   { "deff_H", T_DOUBLE, offsetof(gstlal_GSTLALPostcohInspiral, row.deff_H), 0,
-   "deff_H" },
-   { "deff_V", T_DOUBLE, offsetof(gstlal_GSTLALPostcohInspiral, row.deff_V), 0,
-   "deff_V" },
-   { "f_final", T_FLOAT, offsetof(gstlal_GSTLALPostcohInspiral, row.f_final),
-   0, "f_final" },
-   { "_process_id", T_LONG,
@@ -198,9 +144,28 @@ static struct PyMemberDef members[] = {
    "process_id (long)" },
    { "_event_id", T_LONG, offsetof(gstlal_GSTLALPostcohInspiral, row.event_id),
    0, "event_id (long)" },
-   {
-   NULL,
-   }
+
+   // Things that are done single detector are ndarrays
+   { "end_time_sngl", T_OBJECT_EX,
+   offsetof(gstlal_GSTLALPostcohInspiral, end_time_sngl), 0,
+   "end_time_sngl" },
+   { "snrglsnr", T_OBJECT_EX, offsetof(gstlal_GSTLALPostcohInspiral, snrglsnr),
+   0, "snrglsnr" },
+   { "coaphase", T_OBJECT_EX, offsetof(gstlal_GSTLALPostcohInspiral, coaphase),
+   0, "coaphase" },
+   { "chisq", T_OBJECT_EX, offsetof(gstlal_GSTLALPostcohInspiral, chisq), 0,
+   "chisq" },

```

```

+   { "far_sngl", T_OBJECT_EX, offsetof(gstlal_GSTLALPostcohInspiral, far_sngl),
+     0, "far_sngl" },
+   { "far_1w_sngl", T_OBJECT_EX,
+     offsetof(gstlal_GSTLALPostcohInspiral, far_1w_sngl), 0, "far_1w_sngl" },
+   { "far_1d_sngl", T_OBJECT_EX,
+     offsetof(gstlal_GSTLALPostcohInspiral, far_1d_sngl), 0, "far_1d_sngl" },
+   { "far_2h_sngl", T_OBJECT_EX,
+     offsetof(gstlal_GSTLALPostcohInspiral, far_2h_sngl), 0, "far_2h_sngl" },
+   { "deff", T_OBJECT_EX, offsetof(gstlal_GSTLALPostcohInspiral, deff), 0,
+     "deff" },
+   { NULL },
+ };

struct pylal_inline_string_description {
@@ -210,7 +175,7 @@ struct pylal_inline_string_description {
    static PyObject *pylal_inline_string_get(PyObject *obj, void *data) {
        const struct pylal_inline_string_description *desc = data;
-       char *s = (void *)obj + desc->offset;
+       char *s = (char *)obj + desc->offset;

        if ((ssize_t)strlen(s) >= desc->length) {
            /* something's wrong, obj probably isn't a valid address */
@@ -222,7 +187,7 @@ static PyObject *pylal_inline_string_get(PyObject *obj, void *data) {
    static int pylal_inline_string_set(PyObject *obj, PyObject *val, void *data) {
        const struct pylal_inline_string_description *desc = data;
        char *v
            = PyString_AsString(val);
-       char *s = (void *)obj + desc->offset;
+       char *s = (char *)obj + desc->offset;

        if (!v) return -1;
        if ((ssize_t)strlen(v) >= desc->length) {
@@ -238,7 +203,7 @@ static int pylal_inline_string_set(PyObject *obj, PyObject *val, void *data) {
    static PyObject *snr_component_get(PyObject *obj, void *data) {
        COMPLEX8TimeSeries *snr = ((gstlal_GSTLALPostcohInspiral *)obj)->snr;
-       const char *name = data;
+       const char *name = (const char *)data;

        if (!snr) {
            PyErr_SetString(PyExc_ValueError, "no snr time series available");
@@ -274,7 +239,7 @@ static PyObject *snr_component_get(PyObject *obj, void *data) {
        return NULL;
    }

- static struct PyGetSetDef getset [] = {
+ #define SINGLE 11
+ static struct PyGetSetDef getset [SINGLE + 10 * MAX_NIFO + 1] = {
    { "ifos", pylal_inline_string_get, pylal_inline_string_set, "ifos",
      &(struct pylal_inline_string_description) {
        offsetof(gstlal_GSTLALPostcohInspiral, row.ifos), MAX_ALLIFO_LEN } },
@@ -301,11 +267,11 @@ static struct PyGetSetDef getset [] = {
    { "_snr_data_length" },
    { "_snr_data", snr_component_get, NULL, ".snr.data", "_snr_data" },

-   {
-       NULL,
-   }
+   { NULL }
+ };

+ struct lal_array {
+     Py_ssize_t offset;
+     Py_ssize_t index;
+ };

+ static PyObject *pylal_double_array_get(PyObject *obj, void *data) {
+     const struct lal_array *desc = data;
+     double *d = (double *)((char *)obj + desc->offset) + desc->index;
+     if (!d) {
+         PyErr_Format(PyExc_ValueError, "float doesn't exist!");
+         return NULL;
+     }
+     return PyFloat_FromDouble(*d);
+ }

```

```

+static int pylal_double_array_set(PyObject *obj, PyObject *val, void *data) {
+    const struct lal_array *desc = data;
+    double v = PyFloat_AsDouble(val);
+    double *d = (double *)((char *)obj + desc->offset) + desc->index;
+    if (!d) {
+        PyErr_Format(PyExc_ValueError, "float doesn't exist!");
+        return -1;
+    }
+    *d = v;
+    return 0;
+}
+static PyObject *pylal_float_array_get(PyObject *obj, void *data) {
+    const struct lal_array *desc = data;
+    float *f = (float *)((char *)obj + desc->offset) + desc->index;
+    if (!f) {
+        PyErr_Format(PyExc_ValueError, "float doesn't exist!");
+        return NULL;
+    }
+    return PyFloat_FromDouble((double)*f);
+}
+static int pylal_float_array_set(PyObject *obj, PyObject *val, void *data) {
+    const struct lal_array *desc = data;
+    double v = PyFloat_AsDouble(val);
+    float *f = (float *)((char *)obj + desc->offset) + desc->index;
+    if (!f) {
+        PyErr_Format(PyExc_ValueError, "float doesn't exist!");
+        return -1;
+    }
+    *f = (float)v;
+    return 0;
+}
+static PyObject *pylal_int_array_get(PyObject *obj, void *data) {
+    const struct lal_array *desc = data;
+    int *i = (int *)((char *)obj + desc->offset) + desc->index;
+    if (!i) {
+        PyErr_Format(PyExc_ValueError, "int doesn't exist!");
+        return NULL;
+    }
+    return PyInt_FromLong((long)*i);
+}
+static int pylal_int_array_set(PyObject *obj, PyObject *val, void *data) {
+    const struct lal_array *desc = data;
+    int v = (int)PyInt_AsLong(val);
+    int *i = (int *)((char *)obj + desc->offset) + desc->index;
+    if (!i) {
+        PyErr_Format(PyExc_ValueError, "float doesn't exist!");
+        return -1;
+    }
+    *i = (int)v;
+    return 0;
+}
+void prepare_getset() {
+    int offset = SINGLE;
+    for (int i = 0; i < MAX_NIFO; ++i) {
+        char *var = "chisq_";
+        char *name = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+        struct lal_array *data =
+            (struct lal_array *)malloc(sizeof(struct lal_array));
+        data->offset = offsetof(gstlal_GSTLALPostcohInspiral, row.chisq);
+        data->index = i;
+        strcpy(name, var);
+        strcat(name, IFOMap[i].name);
+        PyGetSetDef def = { name, pylal_float_array_get, pylal_float_array_set,
+                             name, data };
+        getset[offset++] = def;
+        var = "snglsnr_";
+        name = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);

```



```

+     data          = (struct lal_array *)malloc(sizeof(struct lal_array));
+     data->offset   = offsetof(gstlal_GSTLALPostcohInspiral, row.snglsnr);
+     data->index    = i;
+     strcpy(name, var);
+     strcat(name, IFOMap[i].name);
+     def.name       = name;
+     def.doc        = name;
+     def.closure    = data;
+     getset[offset++] = def;
+
+     var           = "coaphase_";
+     name          = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+     data          = (struct lal_array *)malloc(sizeof(struct lal_array));
+     data->offset   = offsetof(gstlal_GSTLALPostcohInspiral, row.coaphase);
+     data->index    = i;
+     strcpy(name, var);
+     strcat(name, IFOMap[i].name);
+     def.name       = name;
+     def.doc        = name;
+     def.closure    = data;
+     getset[offset++] = def;
+
+     var           = "far_sngl_";
+     name          = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+     data          = (struct lal_array *)malloc(sizeof(struct lal_array));
+     data->offset   = offsetof(gstlal_GSTLALPostcohInspiral, row.far_sngl);
+     data->index    = i;
+     strcpy(name, var);
+     strcat(name, IFOMap[i].name);
+     def.name       = name;
+     def.doc        = name;
+     def.closure    = data;
+     getset[offset++] = def;
+
+     var           = "far_1d_sngl_";
+     name          = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+     data          = (struct lal_array *)malloc(sizeof(struct lal_array));
+     data->offset   = offsetof(gstlal_GSTLALPostcohInspiral, row.far_1d_sngl);
+     data->index    = i;
+     strcpy(name, var);
+     strcat(name, IFOMap[i].name);
+     def.name       = name;
+     def.doc        = name;
+     def.closure    = data;
+     getset[offset++] = def;
+
+     var           = "far_1w_sngl_";
+     name          = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+     data          = (struct lal_array *)malloc(sizeof(struct lal_array));
+     data->offset   = offsetof(gstlal_GSTLALPostcohInspiral, row.far_1w_sngl);
+     data->index    = i;
+     strcpy(name, var);
+     strcat(name, IFOMap[i].name);
+     def.name       = name;
+     def.doc        = name;
+     def.closure    = data;
+     getset[offset++] = def;
+
+     var           = "far_2h_sngl_";
+     name          = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+     data          = (struct lal_array *)malloc(sizeof(struct lal_array));
+     data->offset   = offsetof(gstlal_GSTLALPostcohInspiral, row.far_2h_sngl);
+     data->index    = i;
+     strcpy(name, var);
+     strcat(name, IFOMap[i].name);
+     def.name       = name;
+     def.doc        = name;
+     def.closure    = data;
+     getset[offset++] = def;
+
+     var           = "deff_";
+     name          = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+     data          = (struct lal_array *)malloc(sizeof(struct lal_array));
+     data->offset   = offsetof(gstlal_GSTLALPostcohInspiral, row.deff);

```

```

+         data->index = i;
+         strcpy(name, var);
+         strcat(name, IFOMap[i].name);
+         def.name = name;
+         def.get = pylal_double_array_get;
+         def.set = pylal_double_array_set;
+         def.doc = name;
+         def.closure = data;
+         getset[offset++] = def;
+
+         var = "end_time_sngl_";
+         name = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+         data = (struct lal_array *)malloc(sizeof(struct lal_array));
+         data->offset =
+             offsetof(gstlal_GSTLALPostcohInspiral, row.end_time_sngl);
+         data->index = i * 2;
+         strcpy(name, var);
+         strcat(name, IFOMap[i].name);
+         def.name = name;
+         def.get = pylal_int_array_get;
+         def.set = pylal_int_array_set;
+         def.doc = name;
+         def.closure = data;
+         getset[offset++] = def;
+
+         var = "end_time_ns_sngl_";
+         name = (char *)malloc(strlen(IFOMap[i].name) + strlen(var) + 1);
+         data = (struct lal_array *)malloc(sizeof(struct lal_array));
+         data->offset =
+             offsetof(gstlal_GSTLALPostcohInspiral, row.end_time_sngl);
+         data->index = i * 2 + 1;
+         strcpy(name, var);
+         strcat(name, IFOMap[i].name);
+         def.name = name;
+         def.get = pylal_int_array_get;
+         def.set = pylal_int_array_set;
+         def.doc = name;
+         def.closure = data;
+         getset[offset++] = def;
+     }
+     PyGetSetDef def = { NULL };
+     getset[offset] = def;
+ }
+
+ // static Py_ssize_t getreadbuffer(PyObject *self, Py_ssize_t segment, void
+ // **ptrptr)
+ // {
+ @@ -339,10 +509,10 @@ static struct PyGetSetDef getset [] = {
+     */
+     static PyObject *__new__(PyTypeObject *type, PyObject *args, PyObject *kwargs) {
+ -         gstlal_GSTLALPostcohInspiral *new =
+ +         gstlal_GSTLALPostcohInspiral *ret =
+             (gstlal_GSTLALPostcohInspiral *)PyType_GenericNew(type, args, kwargs);
+
+ -         if (!new) return NULL;
+ +         if (!ret) return NULL;
+
+         /* link the event_id pointer in the row table structure
+          * to the event_id structure */
+ @@ -352,13 +522,22 @@ static PyObject *__new__(PyTypeObject *type, PyObject *args, PyObject *kwargs) {
+         // new->event_id_i = 0;
+
+         /* done */
+ -         return (PyObject *)new;
+ +         return (PyObject *)ret;
+     }
+
+     static void __del__(PyObject *self) {
+ -         if (((gstlal_GSTLALPostcohInspiral *)self)->snr)
+ -             XLALDestroyCOMPLEX8TimeSeries(
+ -                 ((gstlal_GSTLALPostcohInspiral *)self)->snr);
+ +         gstlal_GSTLALPostcohInspiral *typed_self =
+ +             (gstlal_GSTLALPostcohInspiral *)self;
+ +         if (typed_self->snr) XLALDestroyCOMPLEX8TimeSeries(typed_self->snr);
+ +         Py_DECREF(typed_self->end_time_sngl);

```

```

+   Py_DECREF(typed_self->snglsnr);
+   Py_DECREF(typed_self->coaphase);
+   Py_DECREF(typed_self->chisq);
+   Py_DECREF(typed_self->far_sngl);
+   Py_DECREF(typed_self->far_1w_sngl);
+   Py_DECREF(typed_self->far_1d_sngl);
+   Py_DECREF(typed_self->far_2h_sngl);
+   Py_DECREF(typed_self->deff);
+   Py_TYPE(self)->tp_free(self);
}

@@ -366,6 +545,8 @@ static PyObject *from_buffer(PyObject *cls, PyObject *args) {
    const char *data;
    Py_ssize_t length;
    PyObject *result;
+   npy_intp dims[1] = { MAX_NIFO };
+   npy_intp end_time_dims[2] = { 2, MAX_NIFO };

    if (!PyArg_ParseTuple(args, "s#", (const char **)&data, &length))
        return NULL;
@@ -397,6 +578,36 @@ static PyObject *from_buffer(PyObject *cls, PyObject *args) {
    * gstlal_GSTLALPostcohInspiral item*/
    ((gstlal_GSTLALPostcohInspiral *)item)->row =
        (PostcohInspiralTable)*gstlal_postcohinspiral;

+   // Set the single-detector arrays
+   ((gstlal_GSTLALPostcohInspiral *)item)->end_time_sngl =
+       PyArray_SimpleNewFromData(1, end_time_dims, NPY_INT,
+                                   gstlal_postcohinspiral->end_time_sngl);
+   ((gstlal_GSTLALPostcohInspiral *)item)->snglsnr =
+       PyArray_SimpleNewFromData(1, dims, NPY_FLOAT,
+                                   gstlal_postcohinspiral->snglsnr);
+   ((gstlal_GSTLALPostcohInspiral *)item)->coaphase =
+       PyArray_SimpleNewFromData(1, dims, NPY_FLOAT,
+                                   gstlal_postcohinspiral->coaphase);
+   ((gstlal_GSTLALPostcohInspiral *)item)->chisq =
+       PyArray_SimpleNewFromData(1, dims, NPY_FLOAT,
+                                   gstlal_postcohinspiral->chisq);
+   ((gstlal_GSTLALPostcohInspiral *)item)->far_sngl =
+       PyArray_SimpleNewFromData(1, dims, NPY_FLOAT,
+                                   gstlal_postcohinspiral->far_sngl);
+   ((gstlal_GSTLALPostcohInspiral *)item)->far_1w_sngl =
+       PyArray_SimpleNewFromData(1, dims, NPY_FLOAT,
+                                   gstlal_postcohinspiral->far_1w_sngl);
+   ((gstlal_GSTLALPostcohInspiral *)item)->far_1d_sngl =
+       PyArray_SimpleNewFromData(1, dims, NPY_FLOAT,
+                                   gstlal_postcohinspiral->far_1d_sngl);
+   ((gstlal_GSTLALPostcohInspiral *)item)->far_2h_sngl =
+       PyArray_SimpleNewFromData(1, dims, NPY_FLOAT,
+                                   gstlal_postcohinspiral->far_2h_sngl);
+   ((gstlal_GSTLALPostcohInspiral *)item)->deff =
+       PyArray_SimpleNewFromData(1, dims, NPY_DOUBLE,
+                                   gstlal_postcohinspiral->deff);

    /* duplicate the SNR time series if we have length? */
    if (gstlal_postcohinspiral->snr_length) {
        const size_t nbytes = sizeof(gstlal_postcohinspiral->snr[0])
@@ -479,8 +690,20 @@ PyMODINIT_FUNC init_postcohtable(void) {
    PyObject *module = Py_InitModule3(
        MODULE_NAME, NULL, "Wrapper for LAL's PostcohInspiralTable type.");

+   prepare_getset();
+   import_array();

+   PyObject *ifo_map = PyList_New(MAX_NIFO);
+   Py_INCREF(ifo_map);
+   for (int i = 0; i < MAX_NIFO; ++i) {
+       PyObject *str =
+           PyString_FromStringAndSize(IFOMap[i].name, strlen(IFOMap[i].name));
+       assert(str);
+       Py_INCREF(str);
+       PyList_SetItem(ifo_map, i, str);
+   }
}

```

```

+ PyModule_AddObject(module, "ifo_map", ifo_map);
+
+ /* Cached ID types */
+ // process_id_type = pylal_get_ilwdchar_class("process", "process_id");
+ // row_event_id_type = pylal_get_ilwdchar_class("postcoh", "event_id");
diff --git a/gstlal-spiir/python/pipemodules/postcohtable/postcoh_table_def.py b/gstlal-spiir/python/pi
index e7d88349..45e7034f 100644
--- a/gstlal-spiir/python/pipemodules/postcohtable/postcoh_table_def.py
+++ b/gstlal-spiir/python/pipemodules/postcohtable/postcoh_table_def.py
@@ -4,84 +4,78 @@ from glue.ligolw import ilwd
from glue.ligolw import dbtables
from lal import LIGOTimeGPS
from xml.sax.xmlreader import AttributesImpl
+from itertools import chain
# so they can be inserted into a database
dbtables.ligolwtypes.ToPyType["ilwd:char"] = unicode

PostcohInspiralID = ilwd.get_ilwdchar_class(u"postcoh", u"event_id")
+import postcohtable
+
# need to be consistent with the table defined in postcohinspiral_table.h
class PostcohInspiralTable(table.Table):
    tableName = "postcoh"
    validcolumns = {
        "process_id": "ilwd:char",
        "event_id": "ilwd:char",
        "end_time": "int_4s",
        "end_time_ns": "int_4s",
        "end_time_L": "int_4s",
        "end_time_ns_L": "int_4s",
        "end_time_H": "int_4s",
        "end_time_ns_H": "int_4s",
        "end_time_V": "int_4s",
        "end_time_ns_V": "int_4s",
        "snrglsnr_L": "real_4",
        "snrglsnr_H": "real_4",
        "snrglsnr_V": "real_4",
        "coaphase_L": "real_4",
        "coaphase_H": "real_4",
        "coaphase_V": "real_4",
        "chisq_L": "real_4",
        "chisq_H": "real_4",
        "chisq_V": "real_4",
        "is_background": "int_4s",
        "livetime": "int_4s",
        "ifos": "lstring",
        "pivotal_ifo": "lstring",
        "tmplt_idx": "int_4s",
        "bankid": "int_4s",
        "pix_idx": "int_4s",
        "cohsnr": "real_4",
        "nullsnr": "real_4",
        "cmbchisq": "real_4",
        "spearman_pval": "real_4",
        "fap": "real_4",
        "far_h": "real_4",
        "far_l": "real_4",
        "far_v": "real_4",
        "far_h_1w": "real_4",
        "far_l_1w": "real_4",
        "far_v_1w": "real_4",
        "far_h_1d": "real_4",
        "far_l_1d": "real_4",
        "far_v_1d": "real_4",
        "far_h_2h": "real_4",
        "far_l_2h": "real_4",
        "far_v_2h": "real_4",
        "far": "real_4",
        "far_2h": "real_4",
        "far_1d": "real_4",
        "far_1w": "real_4",
        "skymap_fname": "lstring",
        "template_duration": "real_8",
        "mass1": "real_4",
        "mass2": "real_4",
        "mchirp": "real_4",
        "mtotal": "real_4",
    }

```

```

-         "spin1x": "real_4",
-         "spin1y": "real_4",
-         "spin1z": "real_4",
-         "spin2x": "real_4",
-         "spin2y": "real_4",
-         "spin2z": "real_4",
-         "eta": "real_4",
-         "f_final": "real_4",
-         "ra": "real_8",
-         "dec": "real_8",
-         "deff_L": "real_8",
-         "deff_H": "real_8",
-         "deff_V": "real_8",
-         "rank": "real_8"
-     }
+     validcolumns = dict(
+         chain(
+             [
+                 ("process_id", "ilwd:char"),
+                 ("event_id", "ilwd:char"),
+                 ("end_time", "int_4s"),
+                 ("end_time_ns", "int_4s"),
+                 ("is_background", "int_4s"),
+                 ("livetime", "int_4s"),
+                 ("ifos", "lstring"),
+                 ("pivotal_ifo", "lstring"),
+                 ("tmplt_idx", "int_4s"),
+                 ("bankid", "int_4s"),
+                 ("pix_idx", "int_4s"),
+                 ("cohsnr", "real_4"),
+                 ("nullsnr", "real_4"),
+                 ("cmbchisq", "real_4"),
+                 ("spearman_pval", "real_4"),
+                 ("fap", "real_4"),
+                 ("far", "real_4"),
+                 ("far_2h", "real_4"),
+                 ("far_1d", "real_4"),
+                 ("far_1w", "real_4"),
+                 ("skymap_fname", "lstring"),
+                 ("template_duration", "real_8"),
+                 ("mass1", "real_4"),
+                 ("mass2", "real_4"),
+                 ("mchirp", "real_4"),
+                 ("mtotal", "real_4"),
+                 ("spin1x", "real_4"),
+                 ("spin1y", "real_4"),
+                 ("spin1z", "real_4"),
+                 ("spin2x", "real_4"),
+                 ("spin2y", "real_4"),
+                 ("spin2z", "real_4"),
+                 ("eta", "real_4"),
+                 ("f_final", "real_4"),
+                 ("ra", "real_8"),
+                 ("dec", "real_8"),
+                 ("rank", "real_8"),
+             ],
+             list(("deff_" + name, "real_8") for name in postcohtable.ifo_map),
+             list(("far_sngl_" + name, "real_4")
+                 for name in postcohtable.ifo_map),
+             list(("far_2h_sngl_" + name, "real_4")
+                 for name in postcohtable.ifo_map),
+             list(("far_1d_sngl_" + name, "real_4")
+                 for name in postcohtable.ifo_map),
+             list(("far_1w_sngl_" + name, "real_4")
+                 for name in postcohtable.ifo_map),
+             list(("snglsnr_" + name, "real_4")
+                 for name in postcohtable.ifo_map),
+             list(("coaphase_" + name, "real_4")
+                 for name in postcohtable.ifo_map),
+             list(("chisq_" + name, "real_4") for name in postcohtable.ifo_map),
+             list(("end_time_sngl_" + name, "int_4s")

```

```

+         for name in postcohtable.ifo_map),
+         list(("end_time_ns_sngl_" + name, "int_4s")
+             for name in postcohtable.ifo_map),
+     ))
+     constraints = "PRIMARY KEY (event_id)"
+     next_id = PostcohInspiralsID(0)
diff --git a/gstlal-spiir/python/pipemodules/postcohtable/postcohtable.py b/gstlal-spiir/python/pipemod
index d1a2c31b..b43183f3 100644
--- a/gstlal-spiir/python/pipemodules/postcohtable/postcohtable.py
+++ b/gstlal-spiir/python/pipemodules/postcohtable/postcohtable.py
@@ -21,7 +21,9 @@ from glue.ligolw import lsctables
import lal
from . import _postcohtable
-__all__ = ["GSTLALPostcohInspirals"]
+__all__ = ["GSTLALPostcohInspirals", "ifo_map"]
+
+ifo_map = _postcohtable.ifo_map
class GSTLALPostcohInspirals(_postcohtable.GSTLALPostcohInspirals):

```

GitLab