

# Laminar fMRI pipeline

## DOCUMENTATION

Tommy Clausner

last updated on June 21, 2018

# Contents

<b>1</b>	<b>Before starting</b>	<b>6</b>
1.1	Pre- requisites . . . . .	6
1.2	Folder structure . . . . .	6
1.3	How things work . . . . .	7
<b>2</b>	<b>Suggested order of operations</b>	<b>7</b>
2.1	Pre-processing . . . . .	7
2.2	Co-registration and masks . . . . .	8
2.3	Retinotopy . . . . .	8
2.4	laminar separation . . . . .	9
2.5	EEG processing . . . . .	10
<b>3</b>	<b>qsub</b>	<b>11</b>
<b>4</b>	<b>Helper files</b>	<b>14</b>
4.1	acquisition_parameters.txt . . . . .	14
4.2	b02b0.cnf . . . . .	14
4.3	params.mat . . . . .	14
4.4	images.mat . . . . .	14
<b>5</b>	<b>Scripts explained (support for runonqsub.sh: Q)</b>	<b>14</b>
5.1	getToolboxes.sh . . . . .	14
5.2	runonqsub.sh . . . . .	15
5.3	cleanscriptsfolder.sh . . . . .	15
5.4	liveupdateqsub.sh . . . . .	15
5.5	waitForJobs.sh . . . . .	16
5.6	makenewsubject.sh . . . . .	16
5.7	setupfolders.sh (Q) . . . . .	16
5.8	do_preparefunctionals.sh (Q) . . . . .	16
5.9	do_realignment.sh (Q) . . . . .	16
5.10	do_distcorr.sh (Q) . . . . .	17
5.11	do_applysimplifiedistcorr.sh (Q) . . . . .	17
5.12	do_preparecoregistration.sh (Q) . . . . .	18
5.13	do_correctavgdifff.sh (Q) . . . . .	18
5.14	do_fsrecon.sh (Q) . . . . .	18
5.15	do_coregistration.sh . . . . .	18
5.16	do_coregistration.m . . . . .	19
5.17	do_makemasksandlabels.sh (Q) . . . . .	19
5.18	do_movesinglevolume.sh . . . . .	19
5.19	do_tseriesinterpolation.sh . . . . .	20
5.20	do_tseriesinterpolation.m . . . . .	20
5.21	do_split_analyzePRF.sh . . . . .	20

5.22	do_analyzePRF.sh . . . . .	21
5.23	do_analyzePRF.m . . . . .	21
5.24	combine_split_PRF_results.sh . . . . .	21
5.25	combine_split_PRF_results.m . . . . .	21
5.26	make_PRF_overlays.sh . . . . .	21
5.27	make_PRF_overlays.m . . . . .	22
5.28	makeOverlays.sh (Q) . . . . .	22
5.29	GUI2ROIs.sh . . . . .	22
5.30	labels2masks.sh (Q) . . . . .	23
5.31	expandROIs.sh . . . . .	23
5.32	expandROIs.m . . . . .	23
5.33	tc_expandVoxelSelection.m . . . . .	23
5.34	do_getLayers.sh . . . . .	23
5.35	do_getLayers.m . . . . .	23
5.36	do_getLayerWeights.sh . . . . .	23
5.37	do_getLayerWeights.m . . . . .	23
5.38	do_EEGpreprocessing.sh . . . . .	23
5.39	do_EEGpreprocessing.m . . . . .	23
5.40	do_EEGprepareFS.sh . . . . .	24
5.41	do_EEGprepareHeadmodel.sh . . . . .	24
5.42	do_EEGprepareHeadmodel.m . . . . .	24
5.43	do_EEGelectrodeRegistration.m . . . . .	24
5.44	do_EEGprepareSourcemodel.sh . . . . .	25
5.45	do_EEGprepareSourcemodel.m . . . . .	25
5.46	do_EEGtimelock.sh . . . . .	25
5.47	do_EEGtimelock.m . . . . .	25
5.48	do_EEGsplitBeamformer.sh . . . . .	25
5.49	do_EEGbeamformer.sh . . . . .	25
5.50	do_EEGbeamformer.m . . . . .	25
5.51	do_EEGsplitVirtualChannel.sh . . . . .	25
5.52	do_EEGvirtualChannel.sh . . . . .	26
5.53	do_EEGvirtualChannel.m . . . . .	26
5.54	do_EEGsplitFreqOnVirtChan.sh . . . . .	26
5.55	do_EEGfreqOnVirtChan.sh . . . . .	26
5.56	do_EEGfreqOnVirtChan.m . . . . .	26
5.57	do_EEGfreqChanSelect.sh . . . . .	26
5.58	do_EEGfreqChanSelect.m . . . . .	27
5.59	EEGvisualizeVirtualChannel.m . . . . .	27
<b>6</b>	<b>How to: Selecting visual areas based on pRF mapping</b>	<b>27</b>
<b>7</b>	<b>How to: Pipelines</b>	<b>27</b>
7.1	Scripts . . . . .	27
7.2	Tommy's Scriptinator 3000 TM . . . . .	27

**List of Figures**

1	Coregistration and distortion correction visual depiction . . . . .	9
2	Initial folder structure as required for the analysis . . . . .	13
3	Pre-processing Pipeline . . . . .	28
4	Segmentation Pipeline . . . . .	29
5	Retinotopy Pipeline . . . . .	30
6	Laminar definition Pipeline . . . . .	31

**List of Tables**

1	Approximated time and memory requirements when running on qsub . .	12
2	Specifications for creating headmodel . . . . .	24

# 1 Before starting

## 1.1 Pre- requisites

- analysePRF (<http://kendrickkay.net/analyzePRF/>)
- FieldTrip (<https://github.com/fieldtrip/fieldtrip>)
- FreeSurfer (<https://surfer.nmr.mgh.harvard.edu/>)
- FSL (<https://fsl.fmrib.ox.ac.uk/fsl/fslwiki>)
- knkutils (<https://github.com/kendrickkay/knkutils/>)
- MATLAB R2015a or later (<https://nl.mathworks.com/products/matlab.html>)
- MRICron (<https://www.nitrc.org/projects/mricron>)
- Open fMRI Analysis (<https://github.com/TimVanMourik/OpenFmriAnalysis>)
- Pipeline (<https://github.com/Washington-University/Pipeline>)
- SPM (<http://www.fil.ion.ucl.ac.uk/spm/>)
- tc\_functions (optional; [https://github.com/TommyClausner/tc\\_functions](https://github.com/TommyClausner/tc_functions))
- Tommy's Scriptinator 3000 TM (optional; <https://github.com/TommyClausner/Scriptinator>)
- VistaSoft (<https://github.com/vistalab/vistasoft>)
- Workbench (<https://github.com/Washington-University/Workbench>)

Use e.g. MRICron's dicom2nii to convert raw MRI data to NifTi files.

Call the function "getToolboxes.sh" to download (most of) the software automatically into a folder called toolboxes/ located in the folder from where the function was called (see Section 5.1 and Figure 2)

## 1.2 Folder structure

The general folder structure is set up by a call to setupfolders.sh (see also Figure 2)

- Functional data must be located in rawData/niftis/**functionals**/
- Anatomical data must be located in in rawData/niftis/**t1**/
- Inverted functional data must be located in in rawData/niftis/**inverted**/
- Proton density data must be located in in rawData/niftis/**pd**/
- Inverted proton density data must be located in in rawData/niftis/**pdinverted**/

## 1.3 How things work

Parts of the analysis run in Bash shell scripts. Those can be called from their root directory using "sh scriptname.sh" (excl. quotation marks). Each step within the analysis has a different subfolder containing the respective results of this step. Leading numbers indicate in which logical order the corresponding shell scripts should be executed. Note that all files created by each respective step are stored in the corresponding folder. However files that need to be preset (e.g. config files) must be located in A\_helperfiles. Note Further, that the entire analysis can be broken down to a few sub-pipelines. Those are explained in an individual section.

Since most operations can be grouped into bigger chunks or "pipelines", all subsections below are wrapped into pipeline scripts, calling them in the respective order. Additionally a file having the extension .pipe stores the pipeline information in a format readable with Tommy's Scriptinator 3000 TM. This is a java based tool, that can be used to represent and store scripts and their dependencies including a graphical representation. See Section 7.2 of this document for more information.

## 2 Suggested order of operations

This document builds upon the analysis rational used during our own analyses. It is build upon the technical facilities of the DCCN (Radboud University Nijmegen, 2018). Hence a copy-paste workflow will only work on a very similar infrastructure.

- makenewssubject.sh
- copy NifTi files to the correct location (see Section 1.2)
- open terminal (the following are terminal commands)
- cd PATH/SUBJECTFOLDER/B\_scripts
- sh runonqsub.sh 32gb do\_preparefunctionals.sh

### 2.1 Pre-processing

Data will be motion and field distortion corrected. An inplane template for the functional scans to be used for the co-registration will be created.

maximum memory required	approx time required
64GB	$\approx 6h$

- sh runonqsub.sh 32gb do\_realignment.sh
- sh runonqsub.sh 32gb do\_distcorr.sh

- sh runonqsub.sh 64gb do\_applysimplifiedistcorr.sh
- sh runonqsub.sh 16gb do\_preparecoregistration.sh
- sh do\_correctavgdiff.sh
- using pipeline: sh preprocessing.sh

## 2.2 Co-registration and masks

Data will be co-registered to the anatomical T1 scan based on the gray and white matter boundaries. Furthermore partial and full brain masks will be created, including gray and white matter and brain.

maximum memory required	approx time required
16GB	$\approx 6.5h$

- sh runonqsub.sh 16gb do\_fsrecon.sh
- sh do\_coregistration.sh
- sh runonqsub.sh 16gb do\_makemasksandlabels.sh
- using pipeline: sh CoregistrationAndAnatMasks.sh

## 2.3 Retinotopy

Population receptive field mapping. Estimates retinotopic mapping from screen to cortical locations. This is to be done in order to obtain boundaries for visual areas such as V1, V2 and V3. First the fMRI time series will be interpolated (cubic) to match the number of frames presented during the stimulation. Afterwards pRF mapping will be analyzed and parameters will be written to volume files (NiFTI) and surface files for use with FreeSurfer.

maximum memory required	approx time required
64GB (480GB)	$\approx 8h$

- sh do\_tseriesinterpolation.sh
- sh do\_split\_analyzePRF.sh
- sh combine\_split\_PRF\_results.sh
- sh make\_PRF\_overlays.sh
- sh runonqsub.sh 16gb makeOverlays.sh
- using pipeline: sh retinotopy.sh



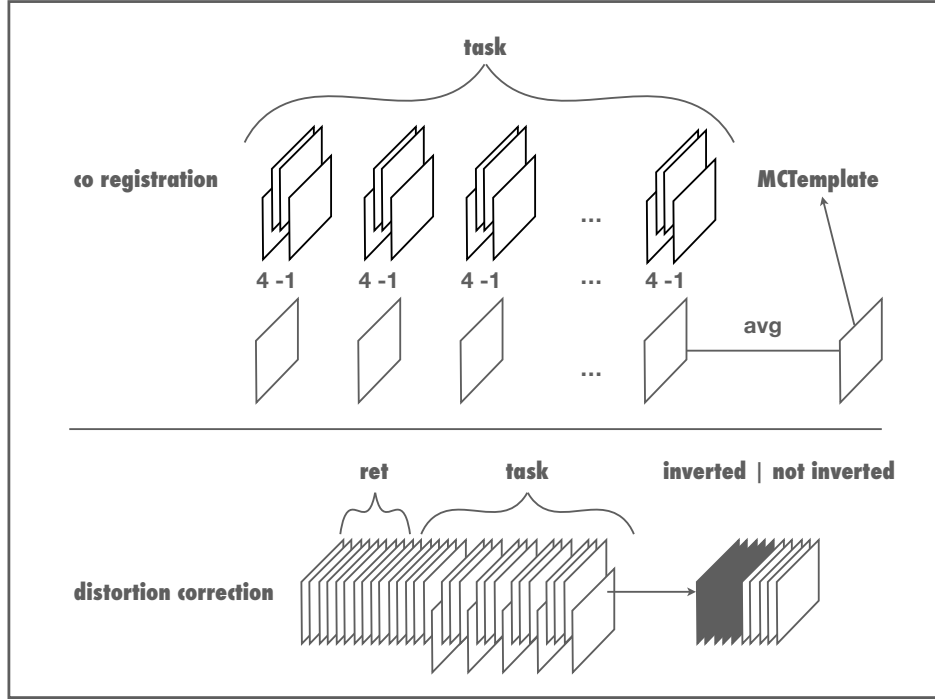


Figure 1: Coregistration and distortion correction visual depiction

## 2.4 laminar separation

Gray matter boundaries will be used to compute cortical layer separation. First `tksurfer` is used to "draw" occipital ROIs based on the retinotopic mapping. Those regions will be transformed into gray matter masks such that an individual masks for V1, V2, V3 for each hemisphere exists. Cortical layer separation yields a probability map for each voxel to lay within a specifcially spaced area between gray matter boundaries. Thus a layer specific ROI specific map is created for each ROI by multiplying the ROI map with each of the layer probability maps. The results are 4D mask volumes separating the layer probabilities in the 4th dimension.

maximum memory required	approx time required
16GB	$\approx 0.5h + user$

- `sh GUI2ROIs.sh`
- `sh labels2masks.sh`
- `sh expandROIs.sh`
- `sh do_getLayers.sh`

- sh do\_getLayerWeights.sh
- using pipeline: sh laminar.sh

## 2.5 EEG processing

The raw EEG signal will be transformed into virtual channel data by applying a LCMV beamformer. Frequencies of interest ( $\alpha$ ,  $\beta$ ,  $\gamma$ ) are defined that  $8\text{ Hz} \leq \alpha \leq 12\text{ Hz}$ ;  $18\text{ Hz} \leq \beta \leq 28\text{ Hz}$ ;  $60\text{ Hz} \leq \gamma \leq 80\text{ Hz}$ . Since the covariance matrices of the noise will differ significantly for lower and higher frequencies, the data will be band pass filtered for low and high frequencies separately. This will be achieved by using pass bands of  $2 - 32\text{ Hz}$  and  $30 - 100\text{ Hz}$  respectively.

A FEM forward model will be used as well as a anatomical constraint source model.

maximum memory required	approx time required
$> 960\text{ GB}$	$\approx 24h + user$

- sh do\_EEGpreprocessing.sh
- (sh runonqsub.sh 16gb do\_fsrecon.sh)
- sh do\_EEGprepareFS.sh
- sh do\_EEGprepareHeadmodel.sh
- sh do\_EEGelectrodeRegistration.m (inside a MATLAB instance)
- sh do\_EEGprepareSourcemodel.sh
- sh do\_EEGtimelock.sh
- sh do\_EEGsplitBeamformer.sh
- sh do\_EEGsplitVirtualChannel.sh
- sh do\_EEGsplitFreqOnVirtChan.sh
- sh do\_EEGfreqChanSelect.sh

### 3 qsub

Scripts that are flagged with the (Q) can be run as a qsub job.

When running the computation on the cluster use the wrapper function runonqsub.sh

Note that some scripts send a MATLAB script to the qsub cluster. Thus they cannot be run using runonqsub.sh, but instead create their own job.

Some scripts are present as scriptnameQsub.sh Those scripts contain an internal Qsub-wrapper and do the same as sh runonqsub.sh XXgb scriptname.sh

the following requirements on memory and computation time can be expected:

script	memory required	time required
do_preparefunctionals.sh	32GB	$\approx 10min$
do_realignment.sh	32GB	$\approx 30min$
do_distcorr.sh	32GB	$\approx 15min$
do_applysimplifiedistcorr.sh	32GB	$\approx 30min$
do_preparecoregistration.sh	16GB	$\approx 4.5h$
do_correctavgdifff.sh	4GB	$\approx 3sec$
do_fsrecon.sh	16GB	$\approx 6h$
do_coregistration.sh	16GB	$\approx 30min$
do_makemasksandlabels.sh	16GB	$\approx 1min$
do_tseriesinterpolation.sh	64GB	$\approx 20min$
do_split_analyzePRF.sh	480GB	$\approx 7h$
do_analyzePRF.sh	6GB	$\approx 7h$
combine_split_PRf_results.sh	64GB	$\approx 10min$
make_PRf_overlays.sh	16GB	$\approx 10min$
makeOverlays.sh	16GB	$\approx 5min$
GUI2ROIs.sh	8GB	user dependent
labels2masks.sh	8GB	$\approx 10s$
expandROIs.sh	16GB	$\approx 3min$
do_getLayers.sh	16GB	$\approx 20min$
do_getLayerWeights.sh	16GB	$\approx 5min$
do_EEGpreprocessing.sh	16GB	$\approx 30min$
do_EEGprepareFS.sh	8GB	$\approx XXXmin$
do_EEGprepareHeadmodel.sh	32GB	$\approx XXXmin$
do_EEGelectrodeRegistration.sh	16GB	user dependent
do_EEGprepareSourcemodel.sh	32GB	$\approx XXXmin$
do_EEGtimelock.sh	16GB	$\approx 5min$
do_EEGsplitBeamformer.sh	480GB	$\approx 5h$
do_EEGbeamformer.sh	60GB	$\approx 5h$
do_EEGsplitVirtualChannel.sh	240GB	$\approx 5h$
do_EEGvirtualChannel.sh	30GB	$\approx 5h$
do_EEGsplitFreqOnVirtChan.sh	960GB	$\approx 5h$
do_EEGfreqOnVirtChan.sh	60GB	$\approx 5h$
do_EEGfreqChanSelect.sh	128GB	$\approx 30min$

Table 1: Approximated time and memory requirements for the respective script to run. Note that everything that is more than 4GB should be run on the cluster. Use runonqsub.sh for that purpose.

Figure 2: Initial folder structure as required for the analysis

```

Analysis folder
├── toolboxes/
│   └── see Section 1.1
├── S#/ (set up by setupfolders.sh or when created using makenewsubject.sh)
│   ├── 0_freesurfer/
│   ├── 1_realignment/
│   ├── 2_coregistration/
│   ├── 3_distcorrection/
│   ├── 4_retinotopy/
│   ├── 5_laminar/
│   ├── 6_EEG/
│   ├── A_helperfiles/
│   │   ├── acquisition_parameters.txt
│   │   ├── b02b0.cnf
│   │   ├── b02b0_example_fsl.cnf
│   │   ├── params.mat
│   │   └── images.mat
│   ├── B_scripts/
│   │   ├── *.m
│   │   ├── *.pipe
│   │   └── *.sh
│   ├── C_miscResults/
│   └── rawData/
│       ├── niftis/
│       │   ├── functionals/
│       │   ├── inverted/
│       │   ├── pd/
│       │   ├── pdinverted/
│       │   └── t1/
│       ├── eegfiles/
│       ├── electrodes/
│       │   ├── photogrammetry/
│       │   │   ├── 3Dobject/
│       │   │   ├── photographs/
│       │   │   │   └── masks/
│       │   └── photoscanfiles/
│       ├── polhemus/
│       └── eyetrackerfiles/
├── template_session/
│   ├── metascripts/
│   ├── template_helperfiles/
│   │   ├── acquisition_parameters.txt
│   │   ├── b02b0.cnf
│   │   ├── b02b0_example_fsl.cnf
│   │   ├── params.mat
│   │   └── images.mat
│   └── template_scripts/
│       ├── *.m
│       ├── *.pipe
│       └── *.sh
├── makenewsubject.sh
└── getToolboxes.sh

```

## 4 Helper files

There are several helper files that are needed in order to perform the analysis:

### 4.1 acquisition\_parameters.txt

indicating the respective acquisition parameters per volume needed in order to perform the distortion correction. One line indicates the respective parameter setting for the respective volume (1st line corresponds to 1st volume, etc.)

e.g.:

```
0 1 0 0.042  
0 -1 0 0.042
```

The first 3 columns indicate the respective phase coding direction the last column some weird value, that is only important if it changes. Otherwise it's fine to use any value as long as it is the same.

### 4.2 b02b0.cnf

Settings for distortion correction.

Needed in order to set the parameters for the distortion correction (example provided by FSL).

### 4.3 params.mat

Parameters used for retinotopy scans as obtained from VistaDisp.

### 4.4 images.mat

Stimuli used for retinotopy scans. Stimuli file must be such that each frame is represented as a binary image. The matrix must be of shape  $Y \times X \times T$  where  $X$  and  $Y$  are the image dimensions in pixel and  $T$  is the respective number of frames.

## 5 Scripts explained (support for runonqsub.sh: Q)

### 5.1 getToolboxes.sh

Downloads all necessary toolboxes into a folder called toolboxes/ or displays a URL where the user has to download the software manually (see Section 1.1). That is FSL and SPM have to be downloaded manually due to required user registration. Place them in the same directory as the other toolboxes or install as required.

## 5.2 runonqsub.sh

Initiates a qsub session and sends it to the cluster. This is necessary, since scripts running on the cluster are copied to a different directory, but within scripts all directories are relative. runonqsub.sh must hence be run in a "normal" session not using a non-interactive qsub, giving the respective script that was intended to run as an argument. runonqsub will then set everything up correctly. Further you have to specify the amount of memory needed.

example: `sh runonqsub.sh 32gb myscript.sh`

Additional arguments can be passed after the script.

example: `sh runonqsub.sh 32gb myscript.sh myargument`

Under the hood:

- a qsub session is initiated like so: `qsub -l walltime=24:00:00,mem=$1 -F "$DIR ${@:3}" $DIR/$2`
- \$DIR is the current absolute path to B\_scripts
- \$1 is the amount of memory used (e.g. 32gb)
- \$2 is the respective script to run (e.g. myscript.sh)
- \${@:3} is all following arguments that are parsed to the script
- every time runonqsub.sh is called the absolute path is forwarded to the script (-F \$DIR) in order to keep the relative dependencies clear

## 5.3 cleanscriptsfolder.sh

Since qsub puts a output + error log into /B\_ scripts cleanscriptsfolder.sh can be used to move all qsub outputs to /B\_scripts/qsuboutput

## 5.4 liveupdateqsub.sh

Submits a qstat -u user request every second.

example: `sh liveupdateqsub.sh tomcla`

exit command by hitting ctrl+c

## 5.5 waitForJobs.sh

Checks all currently running jobs (`qstat -u user`) and waits until the last script up until this point has finished.

## 5.6 makenewsubject.sh

executable script (double click to execute)

Creates a new subject (S#) folder structure in order to get all folder dependencies right. It automatically detects folders called "*Snumber*" and creates a new folder incrementing *number* by one.

## 5.7 setupfolders.sh (Q)

Sets up the necessary folder structure for the analysis (within a subject folder). This function is automatically called when using `makenewsubject.sh`

## 5.8 do\_preparefunctionals.sh (Q)

Prepares functional data, i.e. removes the first 4 and the last x volumes of every set of functionals, where x is the number of volumes acquired after the stimulation ended. If files were modified (i.e. if volumes were deleted), the original file will remain in `/niftis/functionals/old`

## 5.9 do\_realignment.sh (Q)

Merges and motion corrects all files in `/niftis/functionals` using the average volume of all task volumes.

`numberofvolumes.txt` is written to `/A_helperfiles` giving information about which sets had how many volumes. The first column corresponds to `dim4` from `fsinfo`

Under the hood:

- `fslmerge` is called to create a combined `.nii` for all files in `niftis/functionals/*sparse*` - files are merged along the 4th dimension
- a `.txt` file is created saving which files were merged and how many volumes were in there
- `mcflirt` is used on the combined data doing the motion correction based on the average volume across all task blocks



- all results are stored in /1\_realignment
- results have the extension "\_mcf"

## 5.10 do\_distcorr.sh (Q)

Uses the average volume of the inverted set of images in /niftis/inverted as reference for *inverted*

Uses as many volumes  $n$  as there were in /niftis/inverted. Respective volumes are selected starting from the last going in  $4 \times n$  steps backward. Hence the resulting average of this set was computed over the 4th volume of each of  $n$  last sets in the normal images. Simplified (all 1 are selected):

for n=5

0,0,0,0,...,0,0,0,1,0,0,0,1,0,0,0,1,0,0,0,1,0,0,0,1

Both (normalavg and invertedavg) will be used to estimate the distortion correction.

Under the hood:

- reference volumes (normal + inverted) are selected in order to do the field distortion estimate (selection: see above).
- selected reference volumes are merged into a single file (/3\_distcorrection/all\_b0.nii.gz)
- topup is called using the merged (normal + inverted) .nii and performs field mapping according to the specifications in /A\_helperfiles/b02b0.cnf using the acquisition parameters specified in acquisition\_parameters.txt
- all results are stored in /3\_distcorrection

## 5.11 do\_applysimplifiedistcorr.sh (Q)

Applies distortion correction to all functional data.

Under the hood:

- distortion correction is applied to the full set of functionals using the OUTPUT of topup (topup [...] -out=OUTPUT) as well as acquisition\_parameters.txt (Using -method=jac)
- all results are stored in /3\_distcorrection
- all results have the prefix "corrected\_"

## 5.12 do\_preparecoregistration.sh (Q)

Computes a reference volume (MCTemplate) used as the basis to co-register with the anatomical image. This image is computed by splitting the entire set of task volumes into chunks of 4. In each chunk the 1st volume is subtracted from the 4th. This procedure yields a pseudo-T1 contrast. All chunk differences are then averaged to form "MCTemplate"

## 5.13 do\_correctavgdiff.sh (Q)

Due to the subtraction of the 1st from the 4th volume the area outside the brain has the highest value. In order to correct this the lowest value will be shifted to zero the a certain part of the higher values are cut (e.g. 0.975).

The result should be checked using "fsleyes ../2\_coregistration/Inplane/MCTemplateThr\*.nii.gz" to ensure that the area outside the brain is nulled. Note that it can happen that some areas within the brain are nulled as well. If they are not too wide spread they do not affect later co-registration.

## 5.14 do\_fsrecon.sh (Q)

Performs segmentation using Freesurfer.

If running on OSX the script assumes:

FREESURFER\_HOME=/Applications/freesurfer

If running on linux the script assumes:

FREESURFER\_HOME=/opt/freesurfer/version

The target image that is used for the segmentation must be located in /niftis/t1

Under the hood:

- calls recon-all -i /niftis/t1/\* -subjid 0\_freesurfer -all
- all results are stored in /0\_freesurfer

## 5.15 do\_coregistration.sh

Will submit a qsub session using MATLAB, that in turn will be using FreeSurfer (bbregister) and OpenFmriAnalysis to perform a linear and non-linear boundary registration. Movie files of the respective co-registration are stored in /C\_miscResults

The file used to execute MATLAB commands is /B\_scripts/do\_coregistration.m Note that it will be modified using the correct folder settings, which yields tmp.m that will be called and removed after MATLAB was closed.

## 5.16 do\_coregistration.m

The script doing the actual co-registration. Uses wrapper functions from OpenFmriAnalysis to evoke FreeSurfers bregister and computes a recursive boundary based registration.

The results are several files storing the boundaries as a point cloud, and the respective transformation in different formats.

Under the hood:

- calls bregister
- results are stored in /2\_coregistration
- yields boundaries.mat, matrix.mat, bregister.dat, transmat.txt, transmatinv.txt

## 5.17 do\_makemasksandlabels.sh (Q)

example: sh do\_makemasksandlabels.sh

Uses FreeSurfer reconstruction to create masks for CSF, gray matter and white matter and creates labeled volume for use within retinotopy containing left / right + gray / white matter. All masks will be created as full-brain and partial-brain masks.

If the orientation needs to be changed, parse the respective FreeSurfer compatible orientation parameter ([https://surfer.nmr.mgh.harvard.edu/pub/docs/html/mri\\_convert.help.xml.html](https://surfer.nmr.mgh.harvard.edu/pub/docs/html/mri_convert.help.xml.html))

Under the hood:

- moves anatomical volumes to functional space calling do\_movesinglevolume.sh InputVolume.nii.gz transmat.txt OutputVolume.nii.gz
- results are stored in /2\_coregistration
- coregistered functional masks have the prefix "fct" and the suffix "coreg"

## 5.18 do\_movesinglevolume.sh

Simple wrapper function to apply a transformation from one volumetric space to another, given a transformation matrix.

Under the hood:

- `flirt -applyxfm -in $1 -ref $1 -init $2 -out $3`
- \$1: volume to move
- \$2: transformation matrix in form of a .txt file containing a  $4 \times 4$  transformation matrix

## 5.19 do\_tseriesinterpolation.sh

Wrapper function for do\_tseriesinterpolation.m Variables used by do\_tseriesinterpolation.m can be defined in the header section of the script.

Under the hood:

- submits a MATLAB job using qsub calling do\_tseriesinterpolation.m using the below settings
- default number of blocks: 3
- default TR: 2.7s
- default Mask Threshold: 0.01
- default rescaled stimulus size: 100px

## 5.20 do\_tseriesinterpolation.m

Interpolates time series for retinotopy scans to match the number of frames during the stimulation (cubic interpolation). The new TR will be  $TR_{new} = \frac{TR_{old} N_{volumes}}{N_{imageframes}}$ . The function implements "tseriesinterp" from the analyzePRF toolbox. The data will be normalized to percent signal change.

Furthermore all images will be downsampled to the predefined size (e.g. 100px)

Under the hood:

- interpolates time series of functional data to match the numer of frames during the stimulation
- results: tIntData.mat (interpolated time series)
- results: mask.mat (volume mask)
- results: voxelindices.mat (indices of mask voxels, ratio between  $N_{imageframes}$  and  $N_{volumes}$ , mask threshold)
- results: downsampled images

## 5.21 do\_split\_analyzePRF.sh

Wrapper function to call do\_analyzePRF.sh The function calls a predefined number of instances of do\_analyzePRF.sh to run on the cluster, submitted using qsub. Per default 80 jobs requesting 6 GB of memory each (see Section 5.22), will be spawned. This procedure speeds up the population receptive field estimation significantly and would be otherwise impractical on high resolution functional data.

## 5.22 do\_analyzePRF.sh

Wrapper function to call do\_analyzePRF.m Spawns a qsub job using 6GB of memory (default) and runs a specific part of a set of parts. The first input argument is the part that is to be computed and the second input argument is the sum of all parts.

example: sh do\_analyzePRF.sh 1 5

example 2: sh do\_analyzePRF.sh 1 1

## 5.23 do\_analyzePRF.m

Computes pRF mapping implementing "analyzePRF" from the analyzePRF toolbox. It can be decided whether to average across blocks or if the estimates shall be done for each block separately and averaging the results. Note, that running the analysis on separate blocks slows down computation time, but to my experience yields slightly better results.

Under the hood:

- estimates pRFs
- computes pRF mapping for part x of X by splitting the list of indices and selecting the corresponding set
- set avgdata=1 to average data before the analysis (otherwise it will be averaged afterwards)
- result: structure containing pRF parameters of part x of X

## 5.24 combine\_split\_PRF\_results.sh

Wrapper function for combine\_split\_PRF\_results.m Combines split results from do\_split\_analyzePRF.sh (see Section 5.21). Note that the exact amount of parts that the data was split into must be defined here (default: 80).

## 5.25 combine\_split\_PRF\_results.m

Combines split results from do\_split\_analyzePRF.sh (see Section 5.21) into a single MATLAB file. Note that given the respective numerical naming of all parts (x\_of\_X) parts will be concatenated along values of x. After this operation split parts will be deleted.

## 5.26 make\_PRF\_overlays.sh

Wrapper function for make\_PRF\_overlays.m

## 5.27 make\_PRF\_overlays.m

Takes result of pRF mapping and creates .nii files for separate parameters (ang, ecc, expt, r2, rfsz, xpos, ypos). The data will be saved in ../4\_retinotopy as parameter-Name\_map.nii

Under the hood:

- angle ( $\theta$ ) will be divided by 180 and multiplied by  $\pi$
- eccentricity ( $r$ ) will be divided by the image size (in px) and multiplied by the original value range ( $^\circ$  visual angle; default: 7). Only ecc values that have a positive  $R^2$  and are smaller than the defined field of view, will be written to file. All other values will be set to *NaN*
- X position (xpos)  $\cos(\theta) \cdot r$
- Y position (ypos)  $\sin(\theta) \cdot r$

## 5.28 makeOverlays.sh (Q)

Makes FreeSurfer compatible overlays from NiFTI files. Calls FreeSurfer's "mri\_vol2surf" in order to transform a volumetric .nii file into a surface file. This will be done for both hemispheres separately. Parameters transformed to surface files are: ang, ecc, xpos, ypos, r2

Under the hood:

- `mri_vol2surf -src $DIR/4_retinotopy/ang_map.nii -srcreg $DIR/2_coregistration/bbregister.dat -hemi ?h -surf pial -out $DIR/4_retinotopy/?h.ang.mgh -out_type paint`
- `-src`: NiFTI to be transformed
- `-srcreg`: result from "bbregister" of do\_coregistration.sh (default: bbregister.dat)
- `-hemi`: respective hemisphere (lh for left hemisphere or rh for right hemisphere)
- `-surf`: surface used as reference (obtained from FreeSurfer in ../0\_freesurfer/surf/)
- `-out`: output file name
- `-out_type`: influences how the file is outputted (see "mri\_vol2surf -help" for more information)

## 5.29 GUI2ROIs.sh

This script spawns an instance for tksurfer (FreeSurfer)

### 5.30 labels2masks.sh (Q)

### 5.31 expandROIs.sh

### 5.32 expandROIs.m

### 5.33 tc\_expandVoxelSelection.m

### 5.34 do\_getLayers.sh

### 5.35 do\_getLayers.m

### 5.36 do\_getLayerWeights.sh

### 5.37 do\_getLayerWeights.m

### 5.38 do\_EEGpreprocessing.sh

Wrapper function for running do\_EEGpreprocessing.m via qsub

### 5.39 do\_EEGpreprocessing.m

Does a basic preprocessing to the data. First trigger values will be extracted and trials are defined according to the specifications in the script. Further only EEG channels are selected. The Data is downsampled to 1024  $Hz$ . This in-between step is stored. Afterwards the data is further split into different sets of band pass filtered data. Note, that the noise structure will be different for high and low frequencies and thus this step is highly recommendable. Per default two band pass filters are chosen ( $2 - 32 Hz$  and  $30 - 100 Hz$ ). The baseline period will be from  $-0.5 s$  until  $-0.1 s$  relative to the stimulus onset. For the high frequency case a dft filter to filter line noise is applied. Using the default version of this function will store the computed data using the respective filter settings as a prefix. However if desired trials can / should be excluded in this step as well.

Under the hood (uses the following fieldtrip functions):

- ft\_definetrial (sets up trial definition according to predefined trigger values in the data)
- ft\_preprocessing (selects EEG channel)
- ft\_redefinetrial (defines channel and creates trials)
- ft\_resampleddata (downsampling)
- ft\_preprocessing (frequency filters)
- (ft\_rejectvisual()) (trial rejection)

## 5.40 do\_EEGprepareFS.sh

Prepares FreeSurfer output such that it can be used for the creation of the headmodel / sourcemodel.

## 5.41 do\_EEGprepareHeadmodel.sh

Wrapper function for running do\_EEGprepareHeadmodel.m via Qsub

## 5.42 do\_EEGprepareHeadmodel.m

Creates volume conduction model either as finite-element model (FEM) or boundary element model (BEM). Per default all scripts are set up to use a FEM model. The respective MRI file to use will be 0\_freesurfer/mri/orig\_nu.mgz

Models will have the following properties: Underlying FieldTrip functions are:

Model	Property	Value
FEM mesh	cfg.output	{'gray','white','csf','skull','scalp'}
	cfg.scalpsmooth	10
	cfg.method	'hexahedral'
	cfg.shift	0.3
FEM	cfg.method	'simbio'
	cfg.conductivity	[0.33 0.14 1.79 0.01 0.43]
BEM mesh	cfg.output	{'brain','skull','scalp'}
	cfg.method	'projectmesh'
	cfg.numvertices	[1000 2000 3000]
BEM	cfg.method	'openmeeg'
	cfg.conductivity	[0.33 0.01 0.43]

Table 2: Specifications for creating headmodel.

- ft\_volumesegment (segments anatomical data into distinct structures (e.g. skull))
- ft\_prepare\_mesh (sets up 3D mesh for head model preparation)
- ft\_prepare\_headmodel (creates the conductivity model)

## 5.43 do\_EEGelectrodeRegistration.m

This function cannot be run using Qsub or a headless MATLAB instance, since it requires user interaction via a graphical user interface. The script will load the respective data, save and exit (after the user is done). Since this script is just a wrapper function for ft\_electroderealign I will refer to the corresponding FieldTrip documentation: [http://www.fieldtriptoolbox.org/reference/ft\\_electroderealign](http://www.fieldtriptoolbox.org/reference/ft_electroderealign)



## 5.44 do\_EEGprepareSourcemodel.sh

Wrapper function for running do\_EEGprepareSourcemodel.m via Qsub

## 5.45 do\_EEGprepareSourcemodel.m

Sets up sourcemodel (dipole model) for source analysis using the result of do\_EEGprepareFS.sh

## 5.46 do\_EEGtimelock.sh

Wrapper function for running do\_EEGtimelock.m via Qsub

## 5.47 do\_EEGtimelock.m

Average (re-) referencing, timelock analysis and noise covariance estimation for the data. Estimates noise between  $-0.5$  s until  $-0.1$  s relative to the stimulus onset. Basically a wrapper function to call ft\_timelockanalysis using `cfg.keeptrials = 'yes'`. See [http://www.fieldtriptoolbox.org/reference/ft\\_timelockanalysis](http://www.fieldtriptoolbox.org/reference/ft_timelockanalysis) for more information.

## 5.48 do\_EEGsplitBeamformer.sh

Wrapper function to call do\_EEGbeamformer.sh The function calls a predefined number of instances of do\_EEGbeamformer.sh to run on the cluster, submitted using qsub. Per default 8 jobs requesting 62 GB of memory each, will be spawned. This procedure speeds up the processing significantly and would be otherwise impractical.

## 5.49 do\_EEGbeamformer.sh

Wrapper function for running do\_EEGbeamformer.m via Qsub

## 5.50 do\_EEGbeamformer.m

Performing LCMV beamforming on the data. Since the grid size will be scaled to match the functional (high-res) data, scanning the full space would require too much computation time. Hence a ROI mask is used, that is in the present case the white matter voxels in V1, as obtained from retinotopy scans. Noise regularization was set to 10%

## 5.51 do\_EEGsplitVirtualChannel.sh

Wrapper function to call do\_EEGvirtualChannel.sh The function calls a predefined number of instances of do\_EEGvirtualChannel.sh to run on the cluster, submitted using qsub. Per default 8 jobs requesting 30 GB of memory each, will be spawned. This procedure

speeds up the processing significantly and would be otherwise impractical.

## **5.52 do\_EEGvirtualChannel.sh**

Wrapper function for running do\_EEGvirtualChannel.m via Qsub

## **5.53 do\_EEGvirtualChannel.m**

Computes virtual channel time series, by multiplying the data with the previously computed spatial filters.

## **5.54 do\_EEGsplitFreqOnVirtChan.sh**

Wrapper function to call do\_EEGfreqOnVirtChan.sh The function calls a predefined number of instances of do\_EEGfreqOnVirtChan.sh to run on the cluster, submitted using qsub. Per default 16 jobs requesting 60 GB of memory each, will be spawned. This procedure speeds up the processing significantly and would be otherwise impractical.

## **5.55 do\_EEGfreqOnVirtChan.sh**

Wrapper function for running do\_EEGfreqOnVirtChan.m via Qsub

## **5.56 do\_EEGfreqOnVirtChan.m**

Computes time-frequency analysis for virtual channel data using ft\_freqanalysis. For more information see [http://www.fieldtriptoolbox.org/reference/ft\\_freqanalysis](http://www.fieldtriptoolbox.org/reference/ft_freqanalysis).

## **5.57 do\_EEGfreqChanSelect.sh**

Wrapper function for running do\_EEGfreqChanSelect.m via Qsub

**5.58 do\_EEGfreqChanSelect.m**

**5.59 EEGvisualizeVirtualChannel.m**

## **6 How to: Selecting visual areas based on pRF mapping**

## **7 How to: Pipelines**

### **7.1 Scripts**

### **7.2 Tommy's Scriptinator 3000 TM**

Tommy's Scriptinator 3000 TM is a graphical user interface that allows drag and drop based arrangements of scripts on a canvas. The code of the script as well as defined variables can directly be viewed by double clicking one of the icons representing a script (examples below). This way analysis pipelines can easily be comprehended and shared. Tommy's Scriptinator 3000 TM can be downloaded from:

<https://github.com/TommyClausner/Scriptinator/>

It requires at least JDK9 or newer to be installed:

<http://www.oracle.com/technetwork/java/javase/downloads/>

After downloading the repository from GitHub, one can start the program by double clicking Scriptinator.jar. All further help will be provided from there.

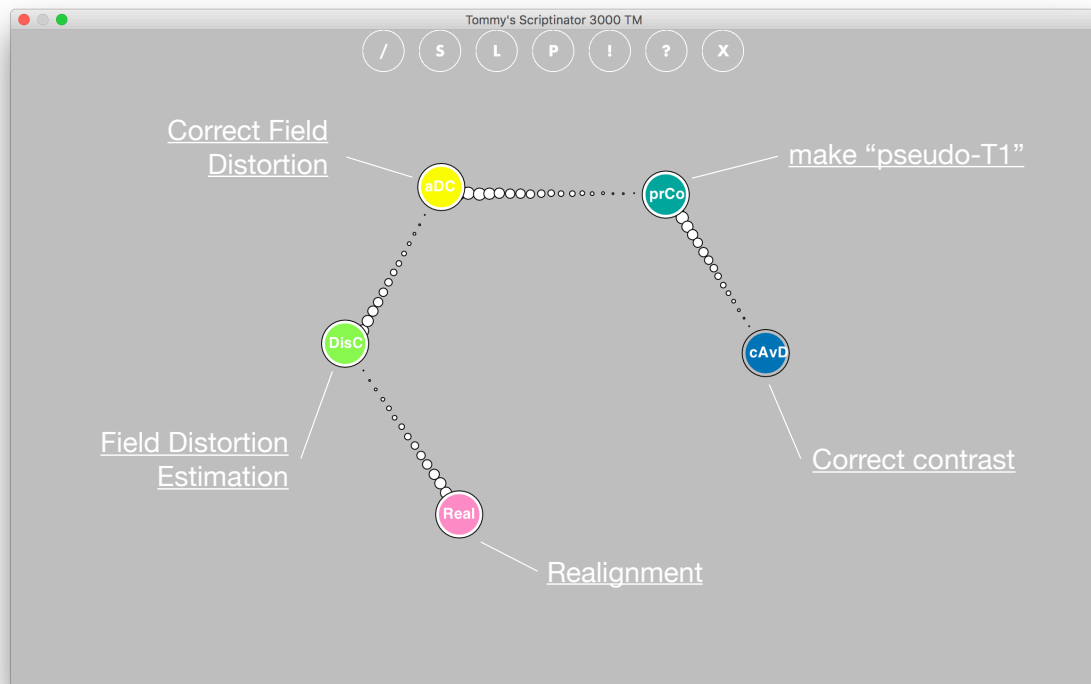


Figure 3: Example pipeline for the pre-processing, using Tommy's Scriptinator 3000 TM: preprocessing.pipe

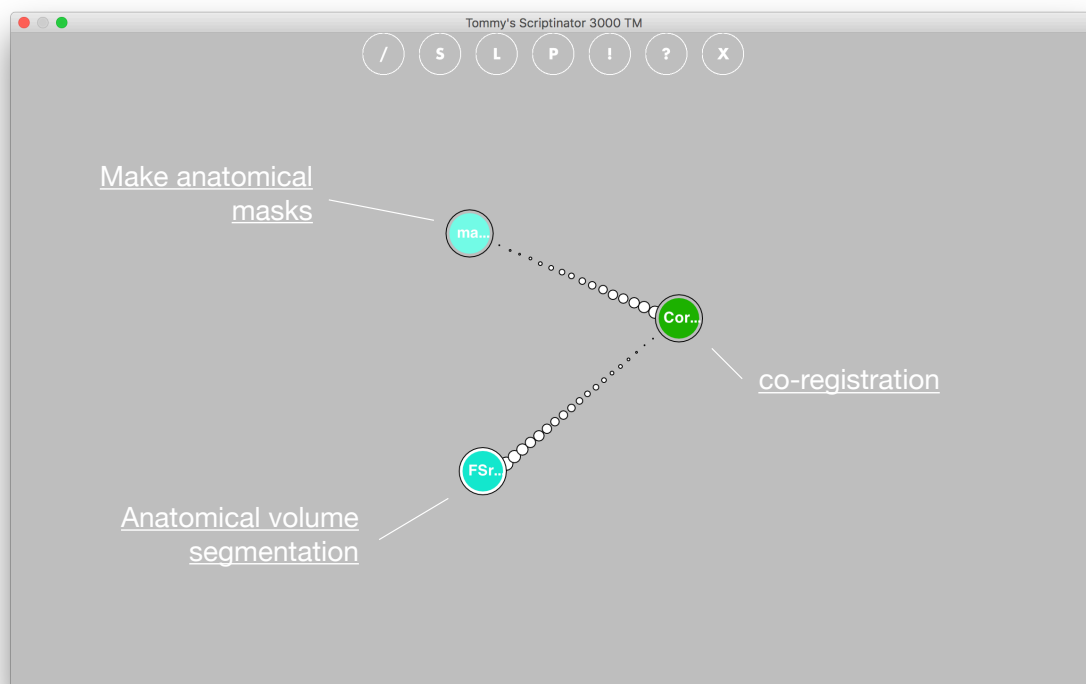


Figure 4: Example pipeline for the anatomical segmentation, using Tommy's Scriptinator 3000 TM: CoregistrationAndAnatMasks.pipe

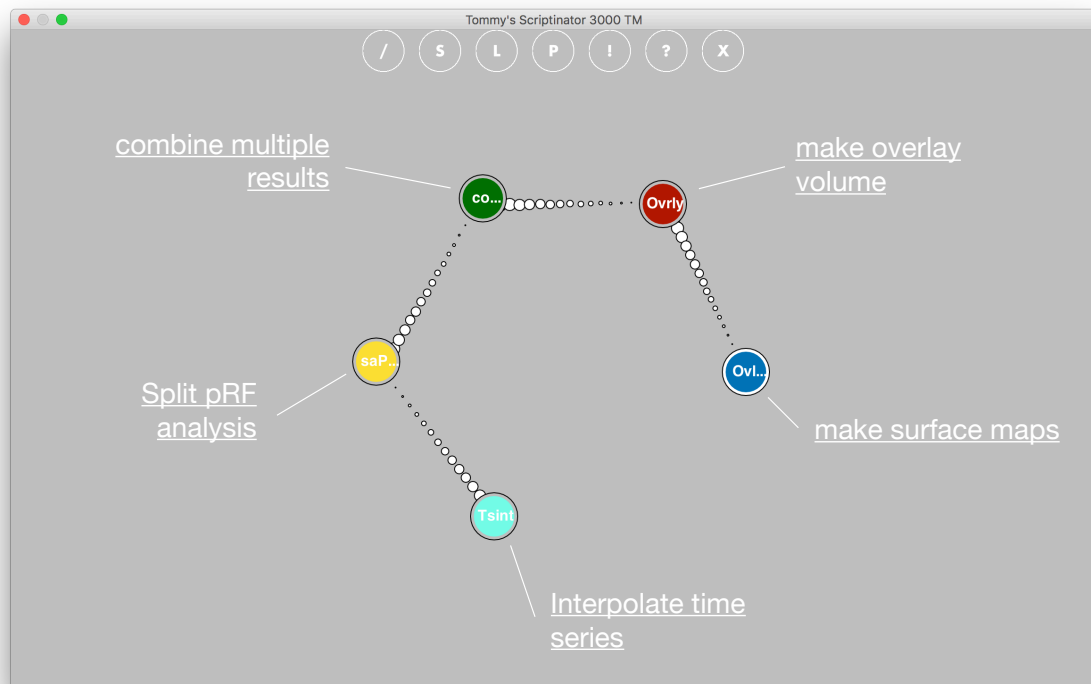


Figure 5: Example pipeline for the retinotopy, using Tommy's Scriptinator 3000 TM: retinotopy.pipe

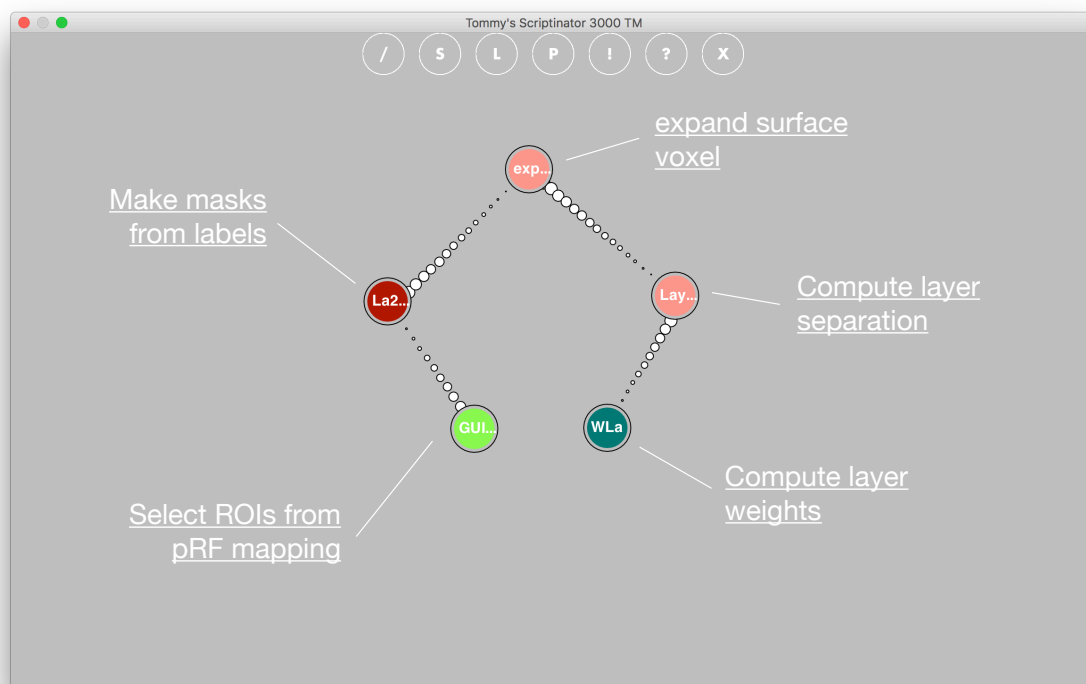


Figure 6: Example pipeline for the cortical layer definition, using Tommy's Scriptinator 3000 TM: laminar.pipe