# **IT5100B**

Industry Readiness Stream Processing

#### **LECTURE 6**

High Throughput Stream Processing


**FOO** Yong Qi yongqi@nus.edu.sg

#### **CONTENTS**

- High Throughput Stream Processing
- Flink vs Kafka Streams
- Stateful Stream Processing

# HIGH THROUGHPUT STREAM PROCESSING


# KAFKA STREAMS

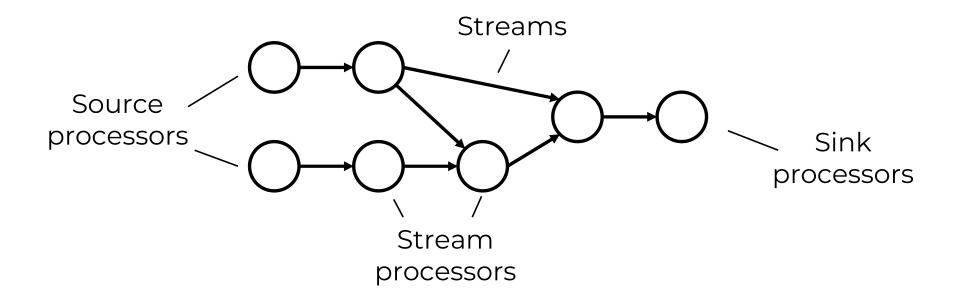

Kafka Streams applications great for deploying microservices that process event streams in Kafka

## KAFKA STREAMS

#### PARALLELISM IN KAFKA STREAMS

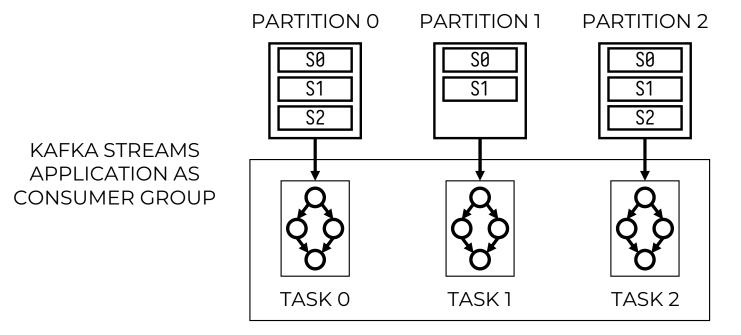

Kafka Streams leverage partitioning of Kafka topics, achieving parallelism

#### STREAM PROCESSING IN THE WILD

What if we have the following requirements:


- High throughput distributed stream processing (heavy processing on large number of events per second)
- Different data sources and sinks than just Kafka (Hadoop, ElasticSearch, Databases etc.)
- Fault-tolerant stateful stream processing

## APACHE FLINK®

#### STREAM PROCESSING ENGINE

Framework and distributed processing engine for stateful computations over unbounded and bounded (batches) data streams

## APACHE FLINK®

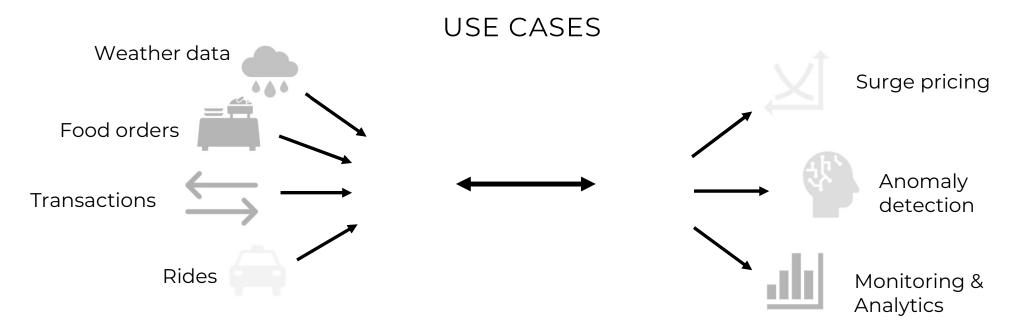

Companies like Uber, Gojek and Lyft use Apache Kafka + Apache Flink (and forks) for many real-time services: traffic monitoring, primetime + heatmaps, fraud detection, ride receipts, driver incentives, anomaly detection etc.

## **APACHE FLINK®**

Other data sources (HBase, Druid etc.)


ML

Alibaba uses Flink for machine learning, monitoring and others; Flink offers more powerful stream processing features and different sources and sinks!

Analytics, Search

Engine etc.


# **FLINK TASKS**

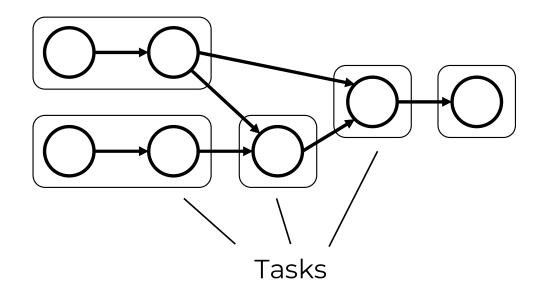

Unlike Kafka Streams, Flink topology is broken into tasks that can be run on separate machines

## FLINK CLUSTER

#### SESSION CLUSTERS

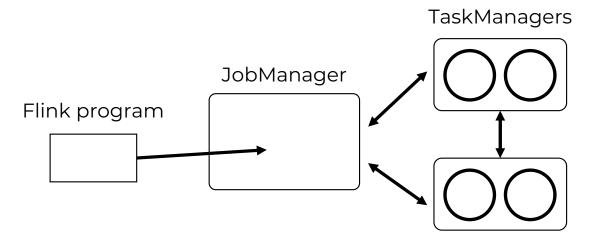

Flink cluster consists of one or more JobManagers (coordination) and one or more TaskManagers (running tasks); task slots in TaskManagers run tasks

In Session Cluster, Flink cluster is always running; submit jobs to JobManager to let Flink run the job

## FLINK CLUSTER

#### WITH DOCKER

Get new docker-compose.yaml file on Canvas and use docker-compose to run the cluster (comes with Kafka and Flink)


docker-compose up -d

You may choose to scale the number of task managers: docker-compose scale taskmanager=<N>

# WRITING FLINK JOBS

- Flink has poor backwards compatibility; you must use the right versions for everything
- Use the pom.xml files in Canvas and create the Java project using Mayen
- Change the mainClass in the pom.xml file to your main class
- Use mvn package to package your code into a JAR file for submission to your Flink JobManager

# FLINK JOB GRAPH

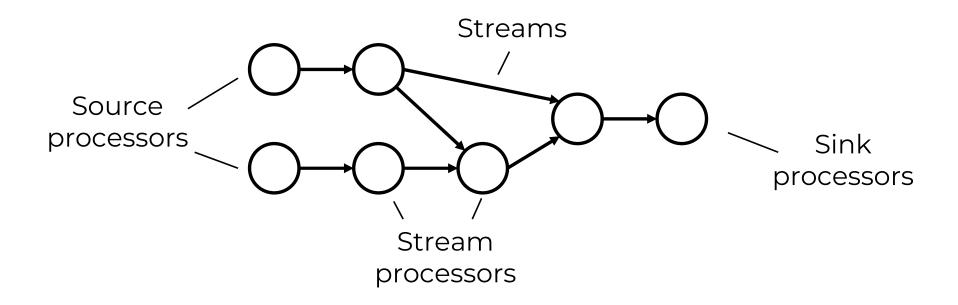

Just like Kafka Streams, a Flink Job creates a job graph / topology that processes streams

#### **OUR FIRST FLINK JOB**

ALMOST IDENTICAL (EXCEPT NAMES) TO KAFKA STREAMS

First step is to configure the source and sink connectors

## **OUR FIRST FLINK JOB**

ALMOST IDENTICAL (EXCEPT NAMES) TO KAFKA STREAMS

```
KafkaSink<KafkaEvent> sink = KafkaSink.<KafkaEvent>builder()
    .setBootstrapServers(BOOTSTRAP_SERVERS)
    .setRecordSerializer(new KafkaEventSerializer(SINK_TOPIC))
    .setTransactionalIdPrefix("flink")
    .build();
```

First step is to configure the source and sink connectors

#### **OUR FIRST FLINK JOB**

ALMOST IDENTICAL (EXCEPT NAMES) TO KAFKA STREAMS

Building the job looks almost the same as doing processing with Stream, Flux and KStream!

# **KEY POINT #1**

Writing Flink jobs is very similar to writing Kafka Streams Applications!

# FLINK VS KAFKA STREAMS

## FAULT-TOLERANCE & PARALLELISM

- Flink supports checkpoints—globally consistent snapshots of state over stateful computations
- Flink operators can live on different machines, streams elements are serialized

For simplicity, let your data classes be POJOs (Plain-Old Java Objects)

- Default constructor
- Public fields

## **DEPLOYMENT MODEL & CONNECTORS**


#### Kafka Streams

- Relies on Kafka for fault tolerance
- Only connects to Kafka
- Stream processing microservices

#### Flink

- Has its own checkpointing system
- Has a variety of connectors
- Stream processing cluster

## WATERMARKS & TIME



Flink allows you to customize the strategy for determining stream time by customizing watermark emission

If working with time-sensitive operations, define watermarking strategy

#### **EXAMPLE APPLICATION**







You work in the safety department of a real estate corporation monitoring IoT temperature sensor devices

Alert personnel of fires in the building: sensors that read above 40 degrees average in a one minute window is potentially a fire

(for solutions, see Canvas)

# STATEFUL STREAM PROCESSING

## STATEFUL STREAM PROCESSING

A lot of stream processing is stateful (output depends on not just one event, but previous event values)

Flink exposes powerful fault-tolerant <u>state API</u> to manage stream processing state

#### STATEFUL STREAM PROCESSING

**EXAMPLE APPLICATION** 



You are working in the financial services industry; detect potentially fraudulent transactions using the following heuristic:

If a big transaction (>\$500) is made right after a small one (<\$0.10), transaction is fraudulent

(for solutions, see Canvas)

# **KEY POINT #2**

Flink exposes rich APIs for general purpose stream processing, such as working with state, ML etc.

#### **CONTENTS**

- High Throughput Stream Processing
- Flink vs Kafka Streams
- Stateful Stream Processing

#### **KEY POINTS**

- Writing Flink jobs is very similar to writing Kafka Streams Applications!
- Flink exposes rich APIs for general purpose stream processing, such as working with state, ML etc.