Computer Graphics 10: 3D Object Representations

Contents


In today's lecture we are going to start to look at how objects are modelled in 3D


- Polyhedra
- Quadric surfaces
- Sweep representations
- Constructive solid geometry methods

Polyhedra

- Objects are simply a set of surface polygons that enclose an object interior
- Simplest and fastest way to render objects
- Often referred to as standard graphics objects
- In many cases packages allow us to define objects as curved surfaces etc. but actually convert these to polygon meshes for display
- To define polyhedra we simply define the vertices of the polygons required

Polyhedra (cont...)

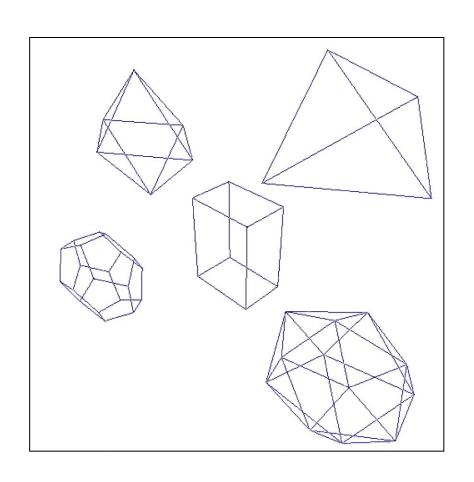

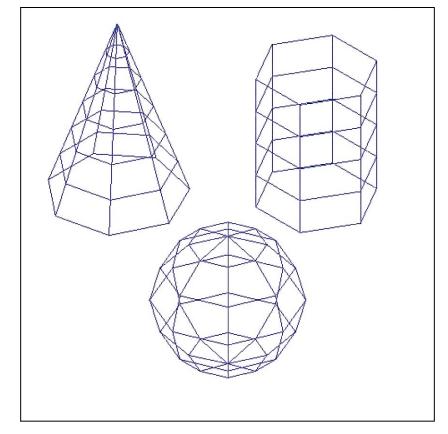


Quadric Surfaces


A frequently used class of objects are quadric surfaces

These are 3D surfaces described using quadratic equations

Quadric surfaces include:

- Spheres
- Ellipsoids
- Tori
- Paraboloids
- Hyperboloids





Quadric Surfaces - Spheres

A spherical surface with radius r centred on the origin is defined as the set of points (x, y, z) that satisfy the equation

$$x^2 + y^2 + z^2 = r^2$$

This can also be done in parametric form using latitude and longitude angles

$$x = r \cos \phi \cos \theta$$


$$y = r \cos \phi \sin \theta$$

$$z = r \sin \phi$$

$$-\frac{\pi}{2} \le \phi \le \frac{\pi}{2}$$

$$-\pi \le \theta \le \pi$$

Quadric Surfaces – Spheres (cont...)

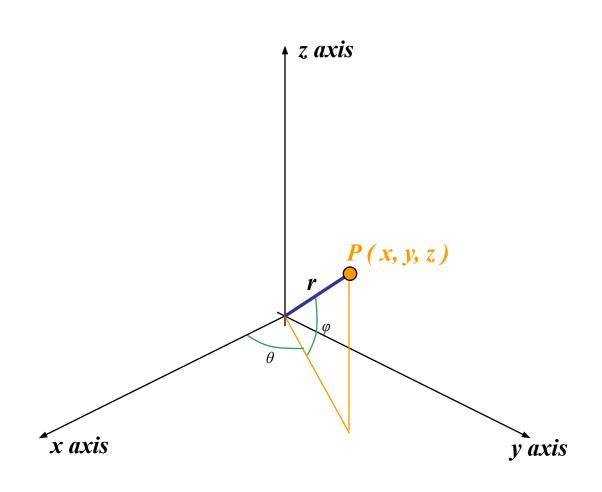



Sweep Representations


Sweep representations are useful for constructing 3 dimensional objects that possess translational, rotational or other symmetries


Objects are specified as a 2 dimensional shape and a sweep that moves that shape through a region of space

Sweep Representations - Examples







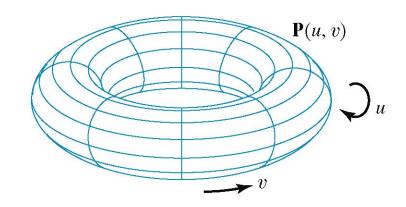


Constructive Solid Geometry Methods


Constructive Solid Geometry (CSG) performs solid modelling by generating a new object from two three dimensional objects using a set operation


Valid set operations include

- Union
- Intersection
- Difference

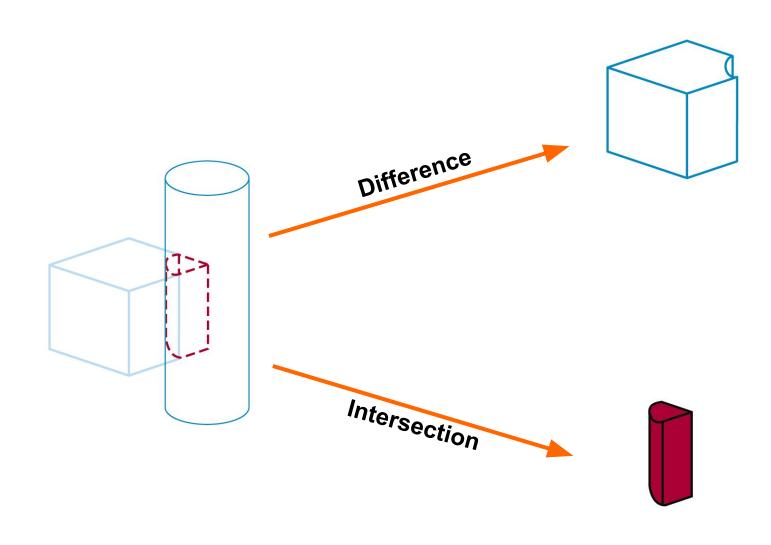

- CSG usually starts with a small set of primitives such as blocks, pyramids, spheres and cones
- Two objects re initially created and combined using some set operation to create a new object
- This object can then be combined with another primitive to make another new object
- This process continues until modelling complete

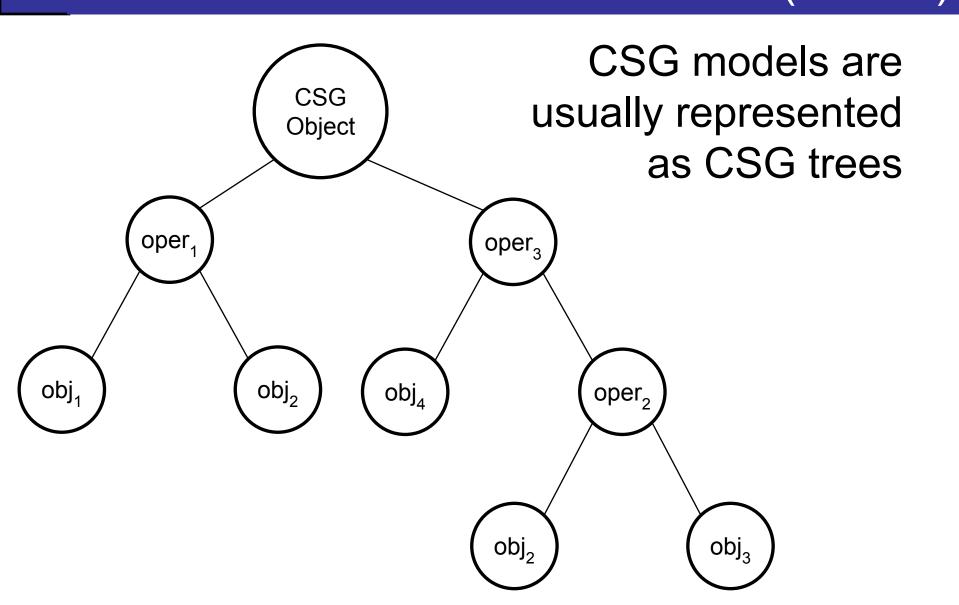

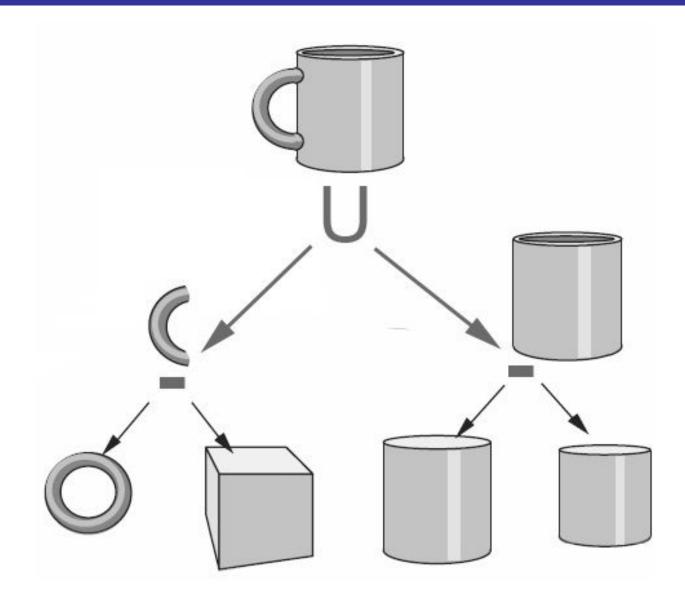


Ray-Casting

Ray-casting is typically used to implement CSG operators when objects are described with boundary representations

Ray casting is applied by determining the objects that are intersected by a set of parallel lines emanating from the xy plane along the z axis

The xy plane is referred to as the **firing plane**

Ray-Casting (cont...)

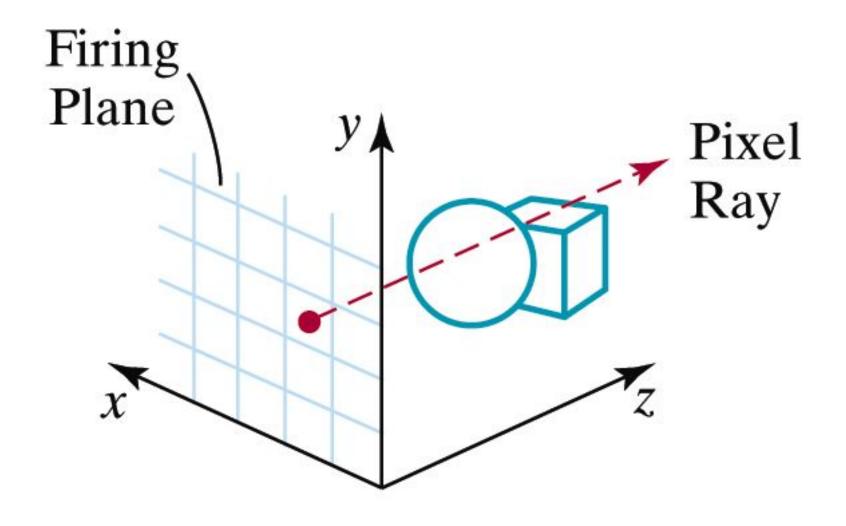




Ray-Casting (cont...)

Surface intersections along each ray are calculated and these are sorted according to distance from the firing plane

The surface limits for the composite object are then determined by the specified set operation

Ray Casting Example

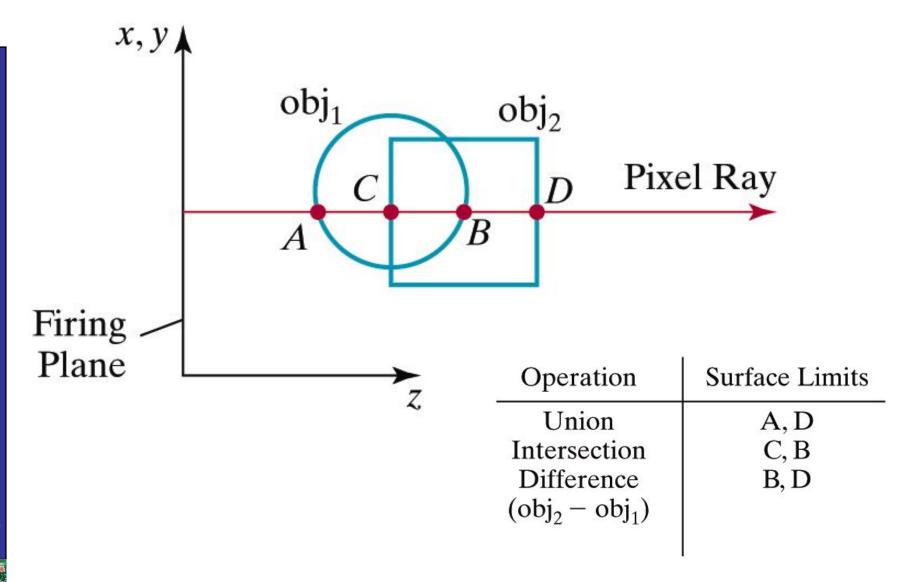

Summary

- In today's lecture we began to look at how objects are modelled in 3D
- Polyhedra are by far the most common modelling technique, but there are many others
- Often more exotic modelling techniques are used in a modelling phase, but the resultant models are converted to polyhedra before rendering
- Next time we will look at more modelling techniques