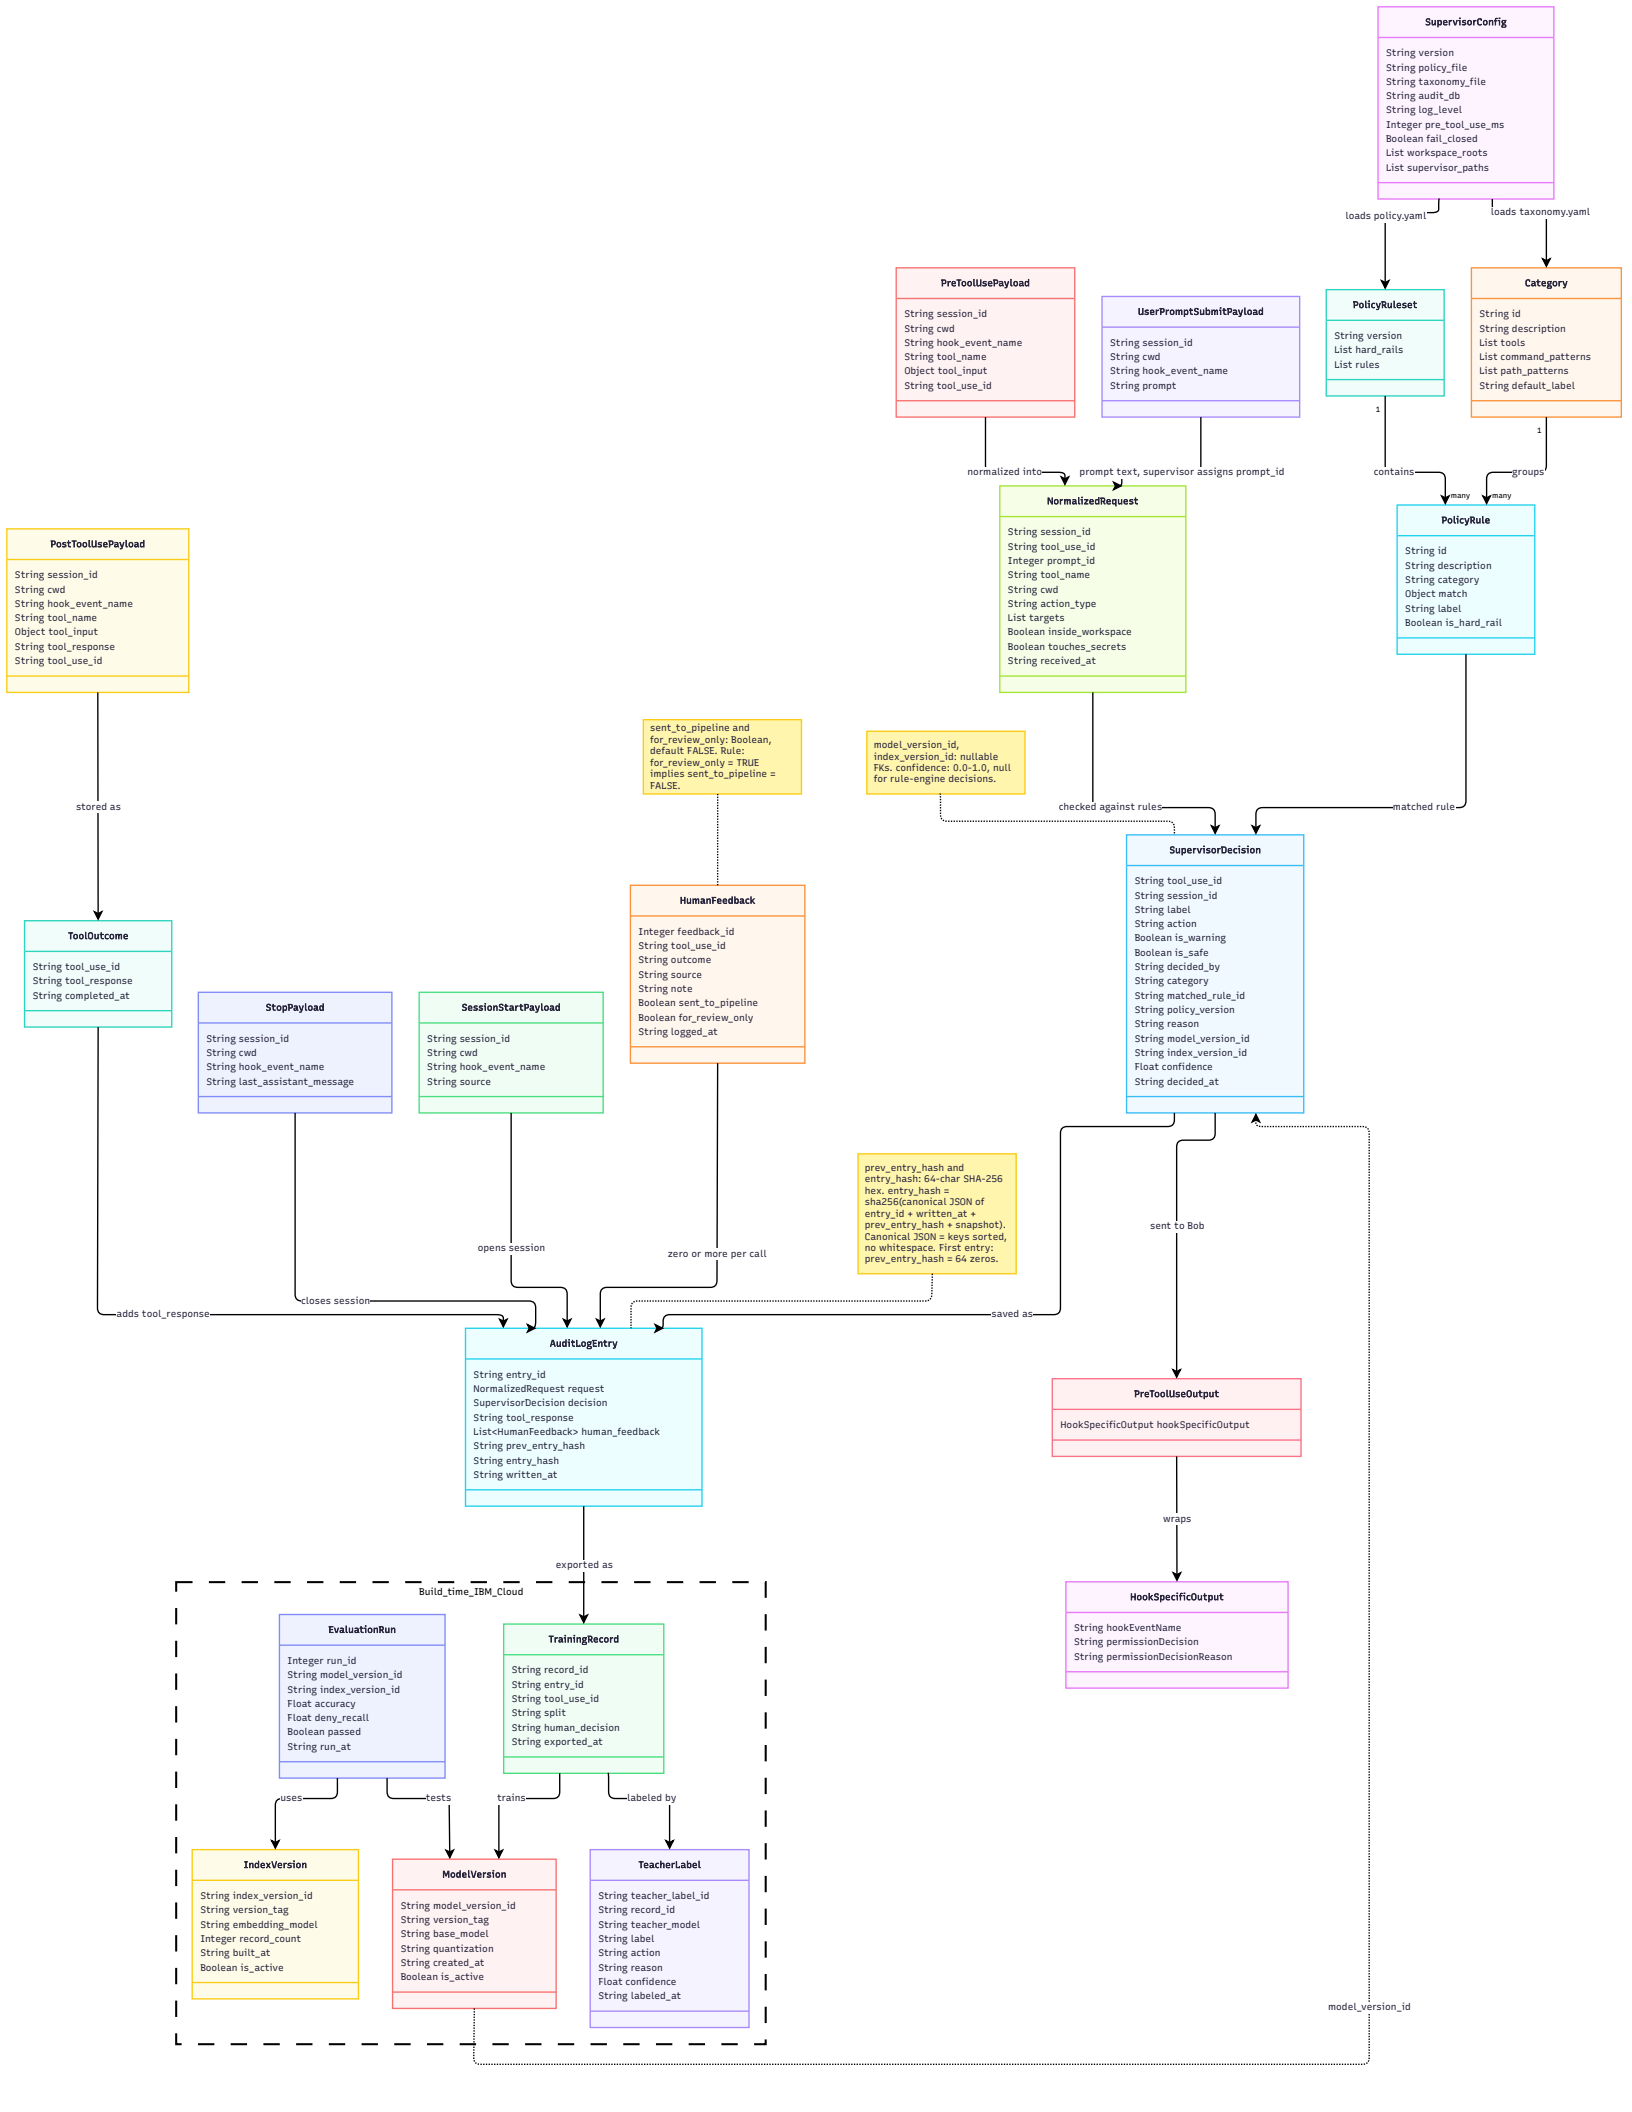

SupervisorConfig
String version
String policy_file
String taxonomy_file
String audit_db
String log_level
Integer pre_tool_use_ms
Boolean fail_closed
List workspace_roots
List supervisor_paths
loads policy.yaml
loads taxonomy.yaml
PreToolUsePayload
String session_id
String cwd
String hook_event_name
String tool_name
Object tool_input
String tool_use_id
UserPromptSubmitPayload
String session_id
String cwd
String hook_event_name
String prompt
PolicyRuleset
String version
List hard_rails
List rules
Category
String id
String description
List tools
List command_patterns
List path_patterns
String default_label
1
1
normalized into
prompt text, supervisor assigns prompt_id
contains
groups
many
many
NormalizedRequest
String session_id
String tool_use_id
Integer prompt_id
String tool_name
String cwd
String action_type
List targets
Boolean inside_workspace
Boolean touches_secrets
String received_at
PolicyRule
String id
String description
String category
Object match
String label
Boolean is_hard_rail
PostToolUsePayload
String session_id
String cwd
String hook_event_name
String tool_name
Object tool_input
String tool_response
String tool_use_id
sent_to_pipeline and for_review_only: Boolean, default FALSE. Rule: for_review_only = TRUE implies sent_to_pipeline = FALSE.
model_version_id, index_version_id: nullable FKs. confidence: 0.0–1.0, null for rule-engine decisions.
stored as
checked against rules
matched rule
SupervisorDecision
String tool_use_id
String session_id
String label
String action
Boolean is_warning
Boolean is_safe
String decided_by
String category
String matched_rule_id
String policy_version
String reason
String model_version_id
String index_version_id
Float confidence
String decided_at
HumanFeedback
Integer feedback_id
String tool_use_id
String outcome
String source
String note
Boolean sent_to_pipeline
Boolean for_review_only
String logged_at
ToolOutcome
String tool_use_id
String tool_response
String completed_at
StopPayload
String session_id
String cwd
String hook_event_name
String last_assistant_message
SessionStartPayload
String session_id
String cwd
String hook_event_name
String source
prev_entry_hash and entry_hash: 64-char SHA-256 hex. entry_hash = sha256(canonical JSON of entry_id + written_at + prev_entry_hash + snapshot). Canonical JSON = keys sorted, no whitespace. First entry: prev_entry_hash = 64 zeros.
opens session
zero or more per call
sent to Bob
adds tool_response
closes session
saved as
AuditLogEntry
String entry_id
NormalizedRequest request
SupervisorDecision decision
String tool_response
List<HumanFeedback> human_feedback
String prev_entry_hash
String entry_hash
String written_at
PreToolUseOutput
HookSpecificOutput hookSpecificOutput
wraps
HookSpecificOutput
String hookEventName
String permissionDecision
String permissionDecisionReason
exported as
Build_time_IBM_Cloud
EvaluationRun
Integer run_id
String model_version_id
String index_version_id
Float accuracy
Float deny_recall
Boolean passed
String run_at
TrainingRecord
String record_id
String entry_id
String tool_use_id
String split
String human_decision
String exported_at
uses
tests
trains
labeled by
IndexVersion
String index_version_id
String version_tag
String embedding_model
Integer record_count
String built_at
Boolean is_active
ModelVersion
String model_version_id
String version_tag
String base_model
String quantization
String created_at
Boolean is_active
TeacherLabel
String teacher_label_id
String record_id
String teacher_model
String label
String action
String reason
Float confidence
String labeled_at
model_version_id