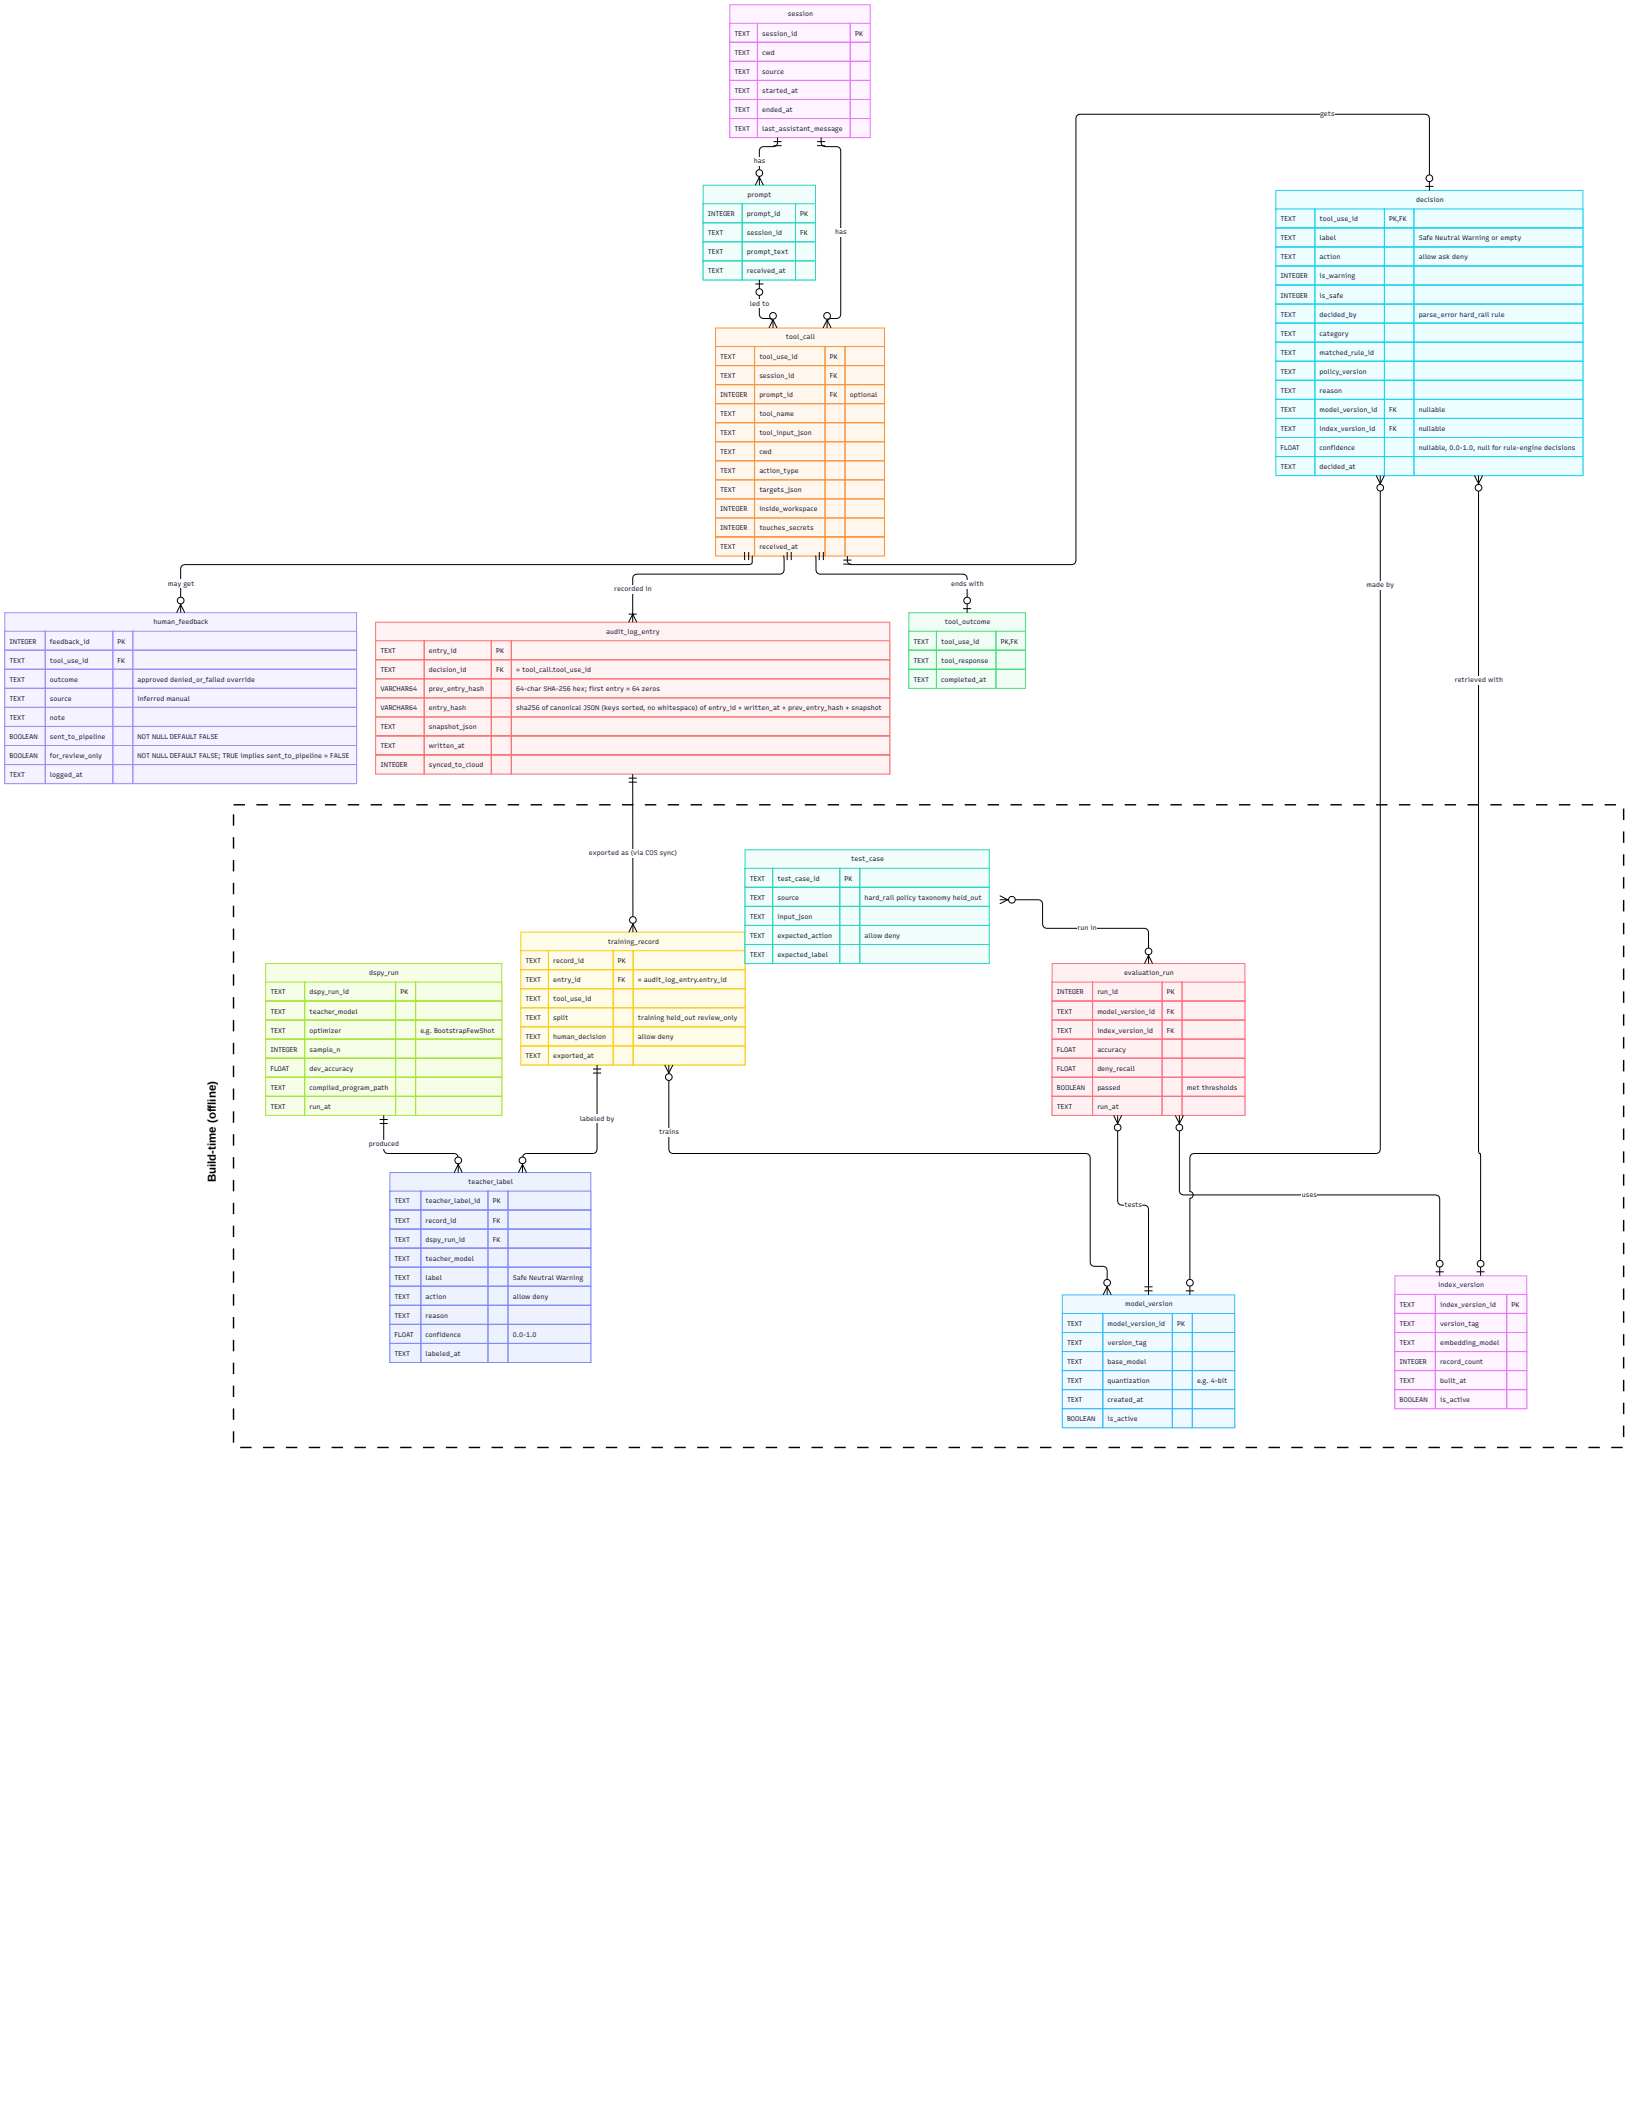

session
TEXT session_id PK
TEXT cwd
TEXT source
TEXT started_at
TEXT ended_at
TEXT last_assistant_message
has
has
prompt
INTEGER prompt_id PK
TEXT session_id FK
TEXT prompt_text
TEXT received_at
led to
tool_call
TEXT tool_use_id PK
TEXT session_id FK
INTEGER prompt_id FK optional
TEXT tool_name
TEXT tool_input_json
TEXT cwd
TEXT action_type
TEXT targets_json
INTEGER inside_workspace
INTEGER touches_secrets
TEXT received_at
gets
decision
TEXT tool_use_id PK,FK
TEXT label Safe Neutral Warning or empty
TEXT action allow ask deny
INTEGER is_warning
INTEGER is_safe
TEXT decided_by parse_error hard_rail rule
TEXT category
TEXT matched_rule_id
TEXT policy_version
TEXT reason
TEXT model_version_id FK nullable
TEXT index_version_id FK nullable
FLOAT confidence nullable, 0.0-1.0, null for rule-engine decisions
TEXT decided_at
may get
recorded in
ends with
made by
retrieved with
human_feedback
INTEGER feedback_id PK
TEXT tool_use_id FK
TEXT outcome approved denied_or_failed override
TEXT source inferred manual
TEXT note
BOOLEAN sent_to_pipeline NOT NULL DEFAULT FALSE
BOOLEAN for_review_only NOT NULL DEFAULT FALSE; TRUE implies sent_to_pipeline = FALSE
TEXT logged_at
audit_log_entry
TEXT entry_id PK
TEXT decision_id FK = tool_call.tool_use_id
VARCHAR64 prev_entry_hash 64-char SHA-256 hex; first entry = 64 zeros
VARCHAR64 entry_hash sha256 of canonical JSON (keys sorted, no whitespace) of entry_id + written_at + prev_entry_hash + snapshot
TEXT snapshot_json
TEXT written_at
INTEGER synced_to_cloud
tool_outcome
TEXT tool_use_id PK,FK
TEXT tool_response
TEXT completed_at
Build-time (offline)
exported as (via COS sync)
test_case
TEXT test_case_id PK
TEXT source hard_rail policy taxonomy held_out
TEXT input_json
TEXT expected_action allow deny
TEXT expected_label
run in
training_record
TEXT record_id PK
TEXT entry_id FK = audit_log_entry.entry_id
TEXT tool_use_id
TEXT split training held_out review_only
TEXT human_decision allow deny
TEXT exported_at
evaluation_run
INTEGER run_id PK
TEXT model_version_id FK
TEXT index_version_id FK
FLOAT accuracy
FLOAT deny_recall
BOOLEAN passed met thresholds
TEXT run_at
dspy_run
TEXT dspy_run_id PK
TEXT teacher_model
TEXT optimizer e.g. BootstrapFewShot
INTEGER sample_n
FLOAT dev_accuracy
TEXT compiled_program_path
TEXT run_at
produced
labeled by
trains
tests
uses
teacher_label
TEXT teacher_label_id PK
TEXT record_id FK
TEXT dspy_run_id FK
TEXT teacher_model
TEXT label Safe Neutral Warning
TEXT action allow deny
TEXT reason
FLOAT confidence 0.0-1.0
TEXT labeled_at
model_version
TEXT model_version_id PK
TEXT version_tag
TEXT base_model
TEXT quantization e.g. 4-bit
TEXT created_at
BOOLEAN is_active
index_version
TEXT index_version_id PK
TEXT version_tag
TEXT embedding_model
INTEGER record_count
TEXT built_at
BOOLEAN is_active