

ONLINE FURNITURE STORE

Project Report Submitted By

TONY JOSEPH

Reg. No: AJC20MCA-2082

In Partial fulfillment for the Award of the Degree Of

**MASTER OF COMPUTER APPLICATIONS
(MCA)**

APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY



**AMAL JYOTHI COLLEGE OF ENGINEERING
KANJIRAPPALLY**

[Affiliated to APJ Abdul Kalam Technological University, Kerala. Approved by AICTE, Accredited by NAAC with 'A' grade. Koovappally, Kanjirappally, Kottayam, Kerala – 686518]

2021-2022

DEPARTMENT OF COMPUTER APPLICATIONS
AMAL JYOTHI COLLEGE OF ENGINEERING
KANJIRAPPALLY



CERTIFICATE

This is to certify that the Project report, “**ONLINE FURNITURE STORE**” is the bonafide work of **TONY JOSEPH (Reg.No:AJC20MCA-2082)** in partial fulfilment of the requirements for the award of the Degree of Master of Computer Applications under APJ Abdul Kalam Technological University during the year 2021-22.

Ms. Navyamol K T
Internal Guide

Ms. Grace Joseph
Coordinator

Rev Fr. Dr. Rubin Thottupurathu Jose
Head of the Department

DECLARATION

I hereby declare that the project report “**ONLINE FURNITURE STORE**” is a bonafided work done at Amal Jyothi College of Engineering, towards the partial fulfilment of the requirements for the award of the Degree of Master of Computer Applications (MCA) from APJ Abdul Kalam Technological University, during the academic year 2021-2022.

Date:

KANJIRAPPALLY

TONY JOSEPH

Reg. No: AJC20MCA-2082

ACKNOWLEDGEMENT

First and foremost, I thank God almighty for his eternal love and protection throughout the project. I take this opportunity to express my gratitude to all who helped me in completing this project successfully. It has been said that gratitude is the memory of the heart. I wish to express my sincere gratitude to our manager **Rev. Fr. Dr. Mathew Paikatt** and Principal **Dr. Lillykutty Jacob** for providing good faculty for guidance.

I owe a great depth of gratitude towards our Head of the Department **Rev. Fr. Dr. Rubin Thottupurathu Jose** for helping us. I extend my whole hearted thanks to the project coordinator **Ms. Grace Joseph** for their valuable suggestions and for overwhelming concern and guidance from the beginning to the end of the project. I would also like to express sincere gratitude to my guide, **Ms. Navyamol K T** for her inspiration and helping hand.

I thank our beloved teachers for their cooperation and suggestions that helped me throughout the project. I express my thanks to all my friends and classmates for their interest, dedication, and encouragement shown towards the project. I convey my hearty thanks to my family for the moral support, suggestions, and encouragement to make this venture a success.

TONY JOSEPH

ABSTRACT

Online Furniture Store is an online application to manage and purchase furniture products. The customer can make order and pay through online. The project is built at the administrative end and thus only the administrator is guaranteed access. In this system the customer can book products easily. The system is user-friendly. The website displays all the information about furniture including furniture description, price and delivery information. The purpose of the project is to build an application program to reduce the manual work for managing the sales, booking etc...

Project Modules

- **Customer profile module:** Here customer can view his orders and billing records. Anyone can view furniture details but to purchase furniture user need to be registered to the system by entering name, email-id, password etc...
- **Furniture Module:** In the furniture module customer can view all the furniture list with name, image, description, price.
- **Shopping cart module:** If the customer likes a product, he may add it to his shopping cart.
- **Payment module:** Customer can select any payment option that he wish to like credit card or cash on delivery. Customer receives a copy of the shopping receipt once the transaction is successful.
- **Dashboard module:** It is for store administrator and only he can manage whole website like managing products, customers, orders etc...

CONTENTS

Sl. No	Topic	Page No
1	INTRODUCTION	1
1.1	PROJECT OVERVIEW	2
1.2	PROJECT SPECIFICATION	2
2	SYSTEM STUDY	4
2.1	INTRODUCTION	5
2.2	EXISTING SYSTEM	6
2.3	DRAWBACKS OF EXISTING SYSTEM	6
2.4	PROPOSED SYSTEM	6
2.5	ADVANTAGES OF PROPOSED SYSTEM	7
3	REQUIREMENT ANALYSIS	8
3.1	FEASIBILITY STUDY	9
3.1.1	ECONOMICAL FEASIBILITY	9
3.1.2	TECHNICAL FEASIBILITY	10
3.1.3	BEHAVIORAL FEASIBILITY	10
3.2	SYSTEM SPECIFICATION	11
3.2.1	HARDWARE SPECIFICATION	11
3.2.2	SOFTWARE SPECIFICATION	11
3.3	SOFTWARE DESCRIPTION	11
3.3.1	PHP	11
3.3.2	MYSQL	12
4	SYSTEM DESIGN	14
4.1	INTRODUCTION	15
4.2	UML DIAGRAM	15
4.2.1	USE CASE DIAGRAM	16
4.2.2	SEQUENCE DIAGRAM	18
4.3	USER INTERFACE DESIGN	20
4.4	DATA BASE DESIGN	24
5	SYSTEM TESTING	30
5.1	INTRODUCTION	31
5.2	TEST PLAN	32
5.2.1	UNIT TESTING	32
5.2.2	INTEGRATION TESTING	33
5.2.3	VALIDATION TESTING	33
5.2.4	USER ACCEPTANCE TESTING	34
6	IMPLEMENTATION	35
6.1	INTRODUCTION	36
6.2	IMPLEMENTATION PROCEDURE	37

6.2.1	USER TRAINING	37
6.2.2	TRAINING ON APPLICATION SOFTWARE	37
6.2.3	SYSTEM MAINTENANCE	38
7	CONCLUSION & FUTURE SCOPE	39
7.1	CONCLUSION	40
7.2	FUTURE SCOPE	40
8	BIBLIOGRAPHY	41
9	APPENDIX	43
9.1	SAMPLE CODE	44
9.2	SCREEN SHOTS	59

List of Abbreviation

IDE	-	Integrated Development Environment
HTML	-	Hyper Text Markup Language.
CSS	-	Cascading Style Sheet
SQL	-	Structured Query Language
UML	-	Unified Modeling Language

CHAPTER 1

INTRODUCTION

1.1 PROJECT OVERVIEW

The main concept of “**ONLINE FURNITURE STORE**” is to allow the customer to shop furniture of their desire virtually using the Internet. The information pertaining to the products are stored on an RDBMS at the server side. The Server process the customers and the items are shipped to the address submitted by them. The application was designed into two modules first is for the customers who wish to buy the articles. Second is for the storekeepers who maintains and updates the information pertaining to the articles and those of the customers. The end user of this product is a departmental store where the application is hosted on the web and the administrator maintains the database. The application which is deployed at the customer database, the details of the items are brought forward from the database for the customer view based on the selection through the menu and the database of all the products are updated at the end of each transaction. Data entry into the application can be done through various screens designed for various levels of users. Once the authorized personnel feed the relevant data into the system, several reports could be generated as per the security.

1.2 PROJECT SPECIFICATION

The proposed system is made to help the customers for an easy and convenient way of buying furniture and also helps sellers to increase their sale and income source. We will also provide users to give feedbacks, they can view the seller details, payment details, complaint details etc.

The system includes 5 modules. They are:

1. Customer profile module:

Here customer can view his orders and billing records. Anyone can view furniture details but to purchase furniture user need to be registered to the system by entering name, email-id, password etc...

2. Furniture Module:

In the furniture module customer can view all the furniture list with name, image, description, and price.

3. Shopping cart module:

If the customer likes a product, he may add it to his shopping cart.

4. Payment module:

Customer can select any payment option that he wish to like credit card or cash on delivery.

Customer receives a copy of the shopping receipt once the transaction is successful.

5. Dashboard module:

It is for store administrator and only he can manage whole website like managing products, customers, orders etc...

CHAPTER 2

SYSTEM STUDY

2.1 INTRODUCTION

System analysis is a process of gathering and interpreting facts, diagnosing problems and the information to recommend improvements on the system. It is a problem solving activity that requires intensive communication between the system users and system developers. System analysis or study is an important phase of any system development process. The system is studied to the minute's detail and analyzed. The system analyst plays the role of the interrogator and dwells deep into the working of the present system. The system is viewed as a whole and the input to the system are identified. The outputs from the organizations are traced to the various processes. System analysis is concerned with becoming aware of the problem, identifying the relevant and decisional variables, analyzing and synthesizing the various factors and determining an optimal or at least a satisfactory solution or program of action.

A detailed study of the process must be made by various techniques like interviews, questionnaires etc. The data collected by these sources must be scrutinized to arrive to a conclusion. The conclusion is an understanding of how the system functions. This system is called the existing system. Now the existing system is subjected to close study and problem areas are identified. The designer now functions as a problem solver and tries to sort out the difficulties that the enterprise faces. The solutions are given as proposals. The proposal is then weighed with the existing system analytically and the best one is selected. The proposal is presented to the user for an endorsement by the user. The proposal is reviewed on user request and suitable changes are made. This is loop that ends as soon as the user is satisfied with proposal.

Preliminary study is the process of gathering and interpreting facts, using the information for further studies on the system. Preliminary study is problem solving activity that requires intensive communication between the system users and system developers. It does various feasibility studies. In these studies, a rough figure of the system activities can be obtained, from which the decision about the strategies to be followed for effective system study and analysis can be taken.

2.2 EXISTING SYSTEM

Existing system is not a fully automated system. The current system to purchase furniture is to visit the shop in person and from the available products, customer needs to choose an item and do the payment. The shop owner needs to keep all records as paper works. The proposed system rectify the drawbacks of the present system.

It is necessary to modify the existing system in order to include additional information and make the system efficient, flexible and secure. Using the new system customers can order their desired furniture from the available list, can sort furniture according to their categories etc. and administrator can manage orders.

2.3 DRAWBACKS OF EXISTING SYSTEM

- Less convenient in managing product details and orders.
- Delivery often delayed with no progress visibility.
- Human effort is needed.
- Chances of irrecoverable data loss.
- Less convenient for customers.

2.4 PROPOSED SYSTEM

Our designed online shopping system provides a 24×7 service that is customers can surf the website, place orders anytime they wish to. The proposed system is defined to meets all the disadvantages of the existing system. It is necessary to have a system that is more user friendly and user attractive for business growth; on such consideration the system is proposed.

The purpose of this system is to save time, save money. Through online shopping one can save his valuable time. One can watch and select things he wants to buy. Through online shopping we can save our money because prices are less than market prices and we receive our items at our home. No need to go anywhere and do shopping. We can enquire different varieties of furniture online and we can choose which one we want.

2.5 ADVANTAGES OF PROPOSED SYSTEM

The system is very simple in design and to implement. The system requires very low system resources and the system will work in almost all configurations. It has got following features:

➤ **Online shopping saves time:**

Customers do not have to stand in queues in cash counters to pay for the products that have been purchased by them. They can shop from their home or workplace and do not have to spend time travelling.

➤ **Better security:**

For data to remain secure measures must be taken to prevent unauthorized access. Security means that data are protected from various forms of destruction. The system security problem can be divided into four related issues: security, integrity, privacy and confidentiality. Username and password requirement to sign in ensures security. It will also provide data security as we are using the secured databases for maintaining the documents.

➤ **Ensure data accuracy:**

The proposed system eliminates the manual errors while entering the details of the users during the registration.

➤ **Better service:**

The system will avoid the burden of hard copy storage. We can also conserve the time and human resources for doing the same task. The data can be maintained for longer period with no loss of data.

CHAPTER 3

REQUIREMENT ANALYSIS

3.1 FEASIBILITY STUDY

Feasibility study is made to see if the project on completion will serve the purpose of the organization for the amount of work, effort and the time that spend on it. Feasibility study lets the developer foresee the future of the project and the usefulness. A feasibility study of a system proposal is according to its workability, which is the impact on the organization, ability to meet their user needs and effective use of resources. Thus, when a new application is proposed it normally goes through a feasibility study before it is approved for development.

The document provides the feasibility of the project that is being designed and lists various areas that were considered very carefully during the feasibility study of this project such as Technical, Economic and Operational feasibilities. The following are its features:

3.1.1 Economical Feasibility

The developing system must be justified by cost and benefit. Criteria to ensure that effort is concentrated on project, which will give best, return at the earliest. One of the factors, which affect the development of a new system, is the cost it would require.

The following are some of the important financial questions asked during preliminary investigation:

- The costs conduct a full system investigation.
- The cost of the hardware and software.
- The benefits in the form of reduced costs or fewer costly errors.

The proposed system is developed as part of project work, there is no manual cost to spend for the proposed system. Also all the resources are already available, it give an indication of the system is economically possible for development.

The cost of project, ONLINE FURNITURE STORE was divided according to the system used, its development cost and cost for hosting the project. According to all the calculations the project was developed in a low cost. As it is completely developed using open source software.

3.1.2 Technical Feasibility

The system must be evaluated from the technical point of view first. The assessment of this feasibility must be based on an outline design of the system requirement in the terms of input, output, programs and procedures. Having identified an outline system, the investigation must go on to suggest the type of equipment, required method developing the system, of running the system once it has been designed.

Technical issues raised during the investigation are:

- Does the existing technology sufficient for the suggested one?
- Can the system expand if developed?

The project should be developed such that the necessary functions and performance are achieved within the constraints. The project requires High Resolution Scanning device and utilizes Cryptographic techniques. Through the technology may become obsolete after some period of time, due to the fact that newer version of same software supports older versions, the system may still be used. So there are minimal constraints involved with this project. The system has been developed using PHP in front end and MySQL in server in back end, the project is technically feasible for development. The system has been developed using PHP in front end and MySQL in server in back end, the project is technically feasible for development. The System used was also of good performance of Processor Intel i3 core; RAM 4GB and, Hard disk of 1TB.

3.1.3 Behavioural Feasibility

The proposed system includes the following questions:

- Is there sufficient support for the users?
- Will the proposed system cause harm?

The project would be beneficial because it satisfies the objectives when developed and installed. All behavioural aspects are considered carefully and conclude that the project is behaviourally feasible.

ONLINE FURNITURE STORE, GUI is simple so that users can easily use it. ONLINE FURNITURE STORE is simple enough so that no training is needed.

3.2 SYSTEM SPECIFICATION

3.2.1 Hardware Specification

Processor	-	Intel core i3
RAM	-	4 GB
Hard disk	-	1 TB

3.2.2 Software Specification

Front End	-	HTML, CSS
Backend	-	MYSQL
Client on PC	-	Windows 7 and above.
Technologies used	-	JS, HTML5, Bootstrap, JQuery, PHP, CSS

3.3 SOFTWARE DESCRIPTION

3.3.1 PHP

PHP is a server side scripting language designed for web development but also used as a general purpose programming language. PHP is now installed on more than 244 million websites and 2.1 million web servers. Originally created by Rasmus Lerdorf in 1995, the reference implementation of PHP is now produced by the PHP group. While PHP originally stood for personal Home page, it now stands for PHP: Hypertext Preprocessor, a recursive acronym. PHP code is interpreted by a web server with a PHP processor module which generates the resulting web page. PHP commands can be embedded directly into a HTML source document rather than calling an external file to process data. It has also evolved to include a command-line interface capability and can be used in standalone incompatible with the GNU General Public License (GPL) due to restrictions on the usage of the term PHP. PHP can be deployed on most web servers and also as a standalone shell on almost every operating system and platform, free of charge.

3.3.2 MySQL

MySQL, the most popular Open Source SQL database management system, is developed, distributed, and supported by Oracle Corporation. The MySQL Web site provides the latest information about MySQL software.

- **MySQL is a database management system.**

A database is a structured collection of data. It may be anything from a simple shopping list to a picture gallery or the vast amounts of information in a corporate network. To add, access, and process data stored in a computer database, you need a database management system such as MySQL Server. Since computers are very good at handling large amounts of data, database management systems play a central role in computing, as standalone utilities, or as parts of other applications.

- **MySQL databases are relational.**

A relational database stores data in separate tables rather than putting all the data in one big storeroom. The database structures are organized into physical files optimized for speed. The logical model, with objects such as databases, tables, views, rows, and columns, offers a flexible programming environment. You set up rules governing the relationships between different data fields, such as one-to-one, one-to-many, unique, required or optional, and “pointers” between different tables. The database enforces these rules, so that with a well-designed database, your application never sees inconsistent, duplicate, orphan, out-of-date, or missing data. The SQL part of “MySQL” stands for “Structured Query Language”. SQL is the most common standardized language used to access databases. Depending on your programming environment, you might enter SQL directly (for example, to generate reports), embed SQL statements into code written in another language, or use a language-specific API that hides the SQL syntax. SQL is defined by the ANSI/ISO SQL Standard. The SQL standard has been evolving since 1986 and several versions exist. In this manual, “SQL92” refers to the standard released in 1992, “SQL: 1999” refers to the standard released in 1999, and “SQL: 2003” refers to the current version of the standard. We use the phrase “the SQL standard” to mean the current version of the SQL Standard at any time.

- **MySQL software is Open Source.**

Open Source means that it is possible for anyone to use and modify the software. Anybody can download the MySQL software from the Internet and use it without paying anything. If you wish, you may study the source code and change it to suit your needs. The MySQL software uses the GPL (GNU General Public License), to define what you may and may not do with the software in different situations. If you feel uncomfortable with the GPL or need to embed MySQL code into a commercial application, you can buy a commercially licensed version from us. See the MySQL Licensing Overview for more information.

- **The MySQL Database Server is very fast, reliable, scalable, and easy to use.**

If that is what you are looking for, you should give it a try. MySQL Server can run comfortably on a desktop or laptop, alongside your other applications, web servers, and so on, requiring little or no attention. If you dedicate an entire machine to MySQL, you can adjust the settings to take advantage of all the memory, CPU power, and I/O capacity available.

- **MySQL Server works in client/server or embedded systems.**

The MySQL Database Software is a client/server system that consists of a multithreaded SQL server that supports different backends, several different client programs and libraries, administrative tools, and a wide range of application programming interfaces (APIs). We also provide MySQL Server as an embedded multi-threaded library that you can link into your application to get a smaller, faster, easier-to-manage standalone product.

CHAPTER 4

SYSTEM DESIGN

4.1 INTRODUCTION

Design is the first step into the development phase for any engineered product or system. Design is a creative process. A good design is the key to effective system. The term “design” is defined as “the process of applying various techniques and principles for the purpose of defining a process or a system in sufficient detail to permit its physical realization”. It may be defined as a process of applying various techniques and principles for the purpose of defining a device, a process or a system in sufficient detail to permit its physical realization. Software design sits at the technical kernel of the software engineering process and is applied regardless of the development paradigm that is used. The system design develops the architectural detail required to build a system or product. As in the case of any systematic approach, this software too has undergone the best possible design phase fine tuning all efficiency, performance and accuracy levels. The design phase is a transition from a user oriented document to a document to the programmers or database personnel. System design goes through two phases of development: Logical and Physical Design.

4.2 UML DIAGRAM

UML is a standard language for specifying, visualizing, constructing, and documenting the artefacts of software systems. UML was created by the Object Management Group (OMG) and UML 1.0 specification draft was proposed to the OMG in January 1997.

UML stands for Unified Modeling Language. UML is different from the other common programming languages such as C++, Java, COBOL, etc. UML is a pictorial language used to make software blueprints. UML can be described as a general purpose visual modeling language to visualize, specify, construct, and document software system. Although UML is generally used to model software systems, it is not limited within this boundary. It is also used to model non-software systems as well. For example, the process flow in a manufacturing unit, etc. UML is not a programming language but tools can be used to generate code in various languages using UML diagrams. UML has a direct relation with object oriented analysis and design. After some standardization, UML has become an OMG standard. All the elements, relationships are used to make a complete UML diagram and the diagram represents a system. The visual effect of the UML diagram is the most important part of the entire process. All the other elements are used to make it complete. UML includes the following nine diagrams.

- Class diagram
- Object diagram
- Use case diagram
- Sequence diagram
- Collaboration diagram
- Activity diagram
- Statechart diagram
- Deployment diagram
- Component diagram

4.2.1 USE CASE DIAGRAM

A use case diagram is a graphic depiction of the interactions among the elements of a system. A use case is a methodology used in system analysis to identify, clarify, and organize system requirements. In this context, the term "system" refers to something being developed or operated, such as a mail-order product sales and service Web site. Use case diagrams are employed in UML (Unified Modeling Language), a standard notation for the modeling of real-world objects and systems.


System objectives can include planning overall requirements, validating a hardware design, testing and debugging a software product under development, creating an online help reference, or performing a consumer-service-oriented task. For example, use cases in a product sales environment would include item ordering, catalog updating, payment processing, and customer relations. A use case diagram contains four components.

- The boundary, which defines the system of interest in relation to the world around it.
- The actors, usually individuals involved with the system defined according to their roles.
- The use cases, which are the specific roles are played by the actors within and around the system.
- The relationships between and among the actors and the use cases.

Use case diagrams are drawn to capture the functional requirements of a system. After identifying the above items, we have to use the following guidelines to draw an efficient use case diagram.

- The name of a use case is very important. The name should be chosen in such a way so that it can identify the functionalities performed.
- Give a suitable name for actors.
- Show relationships and dependencies clearly in the diagram.
- Do not try to include all types of relationships, as the main purpose of the diagram is to identify the requirements.
- Use notes whenever required to clarify some important points.

USE CASE DIAGRAM

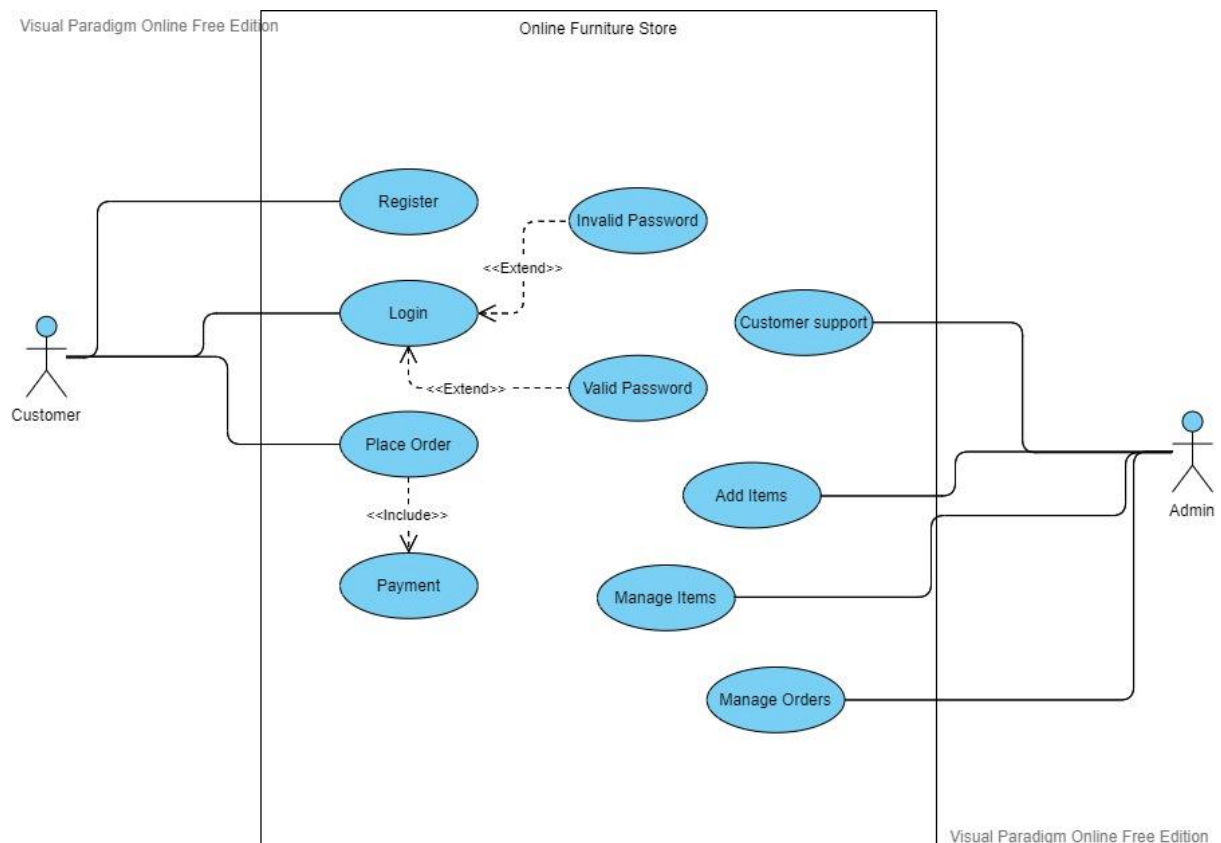

4.2.2 SEQUENCE DIAGRAM

A sequence diagram simply depicts interaction between objects in a sequential order i.e. the order in which these interactions take place. We can also use the terms event diagrams or event scenarios to refer to a sequence diagram. Sequence diagrams describe how and in what order the objects in a system function. These diagrams are widely used by businessmen and software developers to document and understand requirements for new and existing systems.

Sequence Diagram Notations:

- i. **Actors** – An actor in a UML diagram represents a type of role where it interacts with the system and its objects. It is important to note here that an actor is always outside the scope of the system we aim to model using the UML diagram. We use actors to depict various roles including human users and other external subjects. We represent an actor in a UML diagram using a stick person notation. We can have multiple actors in a sequence diagram.
- ii. **Lifelines** – A lifeline is a named element which depicts an individual participant in a sequence diagram. So basically each instance in a sequence diagram is represented by a lifeline. Lifeline elements are located at the top in a sequence diagram.
- iii. **Messages** - Communication between objects is depicted using messages. The messages appear in a sequential order on the lifeline. We represent messages using arrows. Lifelines and messages form the core of a sequence diagram. Messages can be broadly classified into the following categories:
 - Synchronous messages
 - Asynchronous Messages
 - Create message
 - Delete Message
 - Self-Message
 - Reply Message
 - Found Message


- Lost Message

iv. **Guards** – To model conditions we use guards in UML. They are used when we need to restrict the flow of messages on the pretext of a condition being met. Guards play an important role in letting software developers know the constraints attached to a system or a particular process.

Uses of sequence diagrams –

- Used to model and visualize the logic behind a sophisticated function, operation or procedure
- They are also used to show details of UML use case diagrams.
- Used to understand the detailed functionality of current or future systems.
- Visualise how messages and tasks move between objects or components in a system.

SEQUENCE DIAGRAM

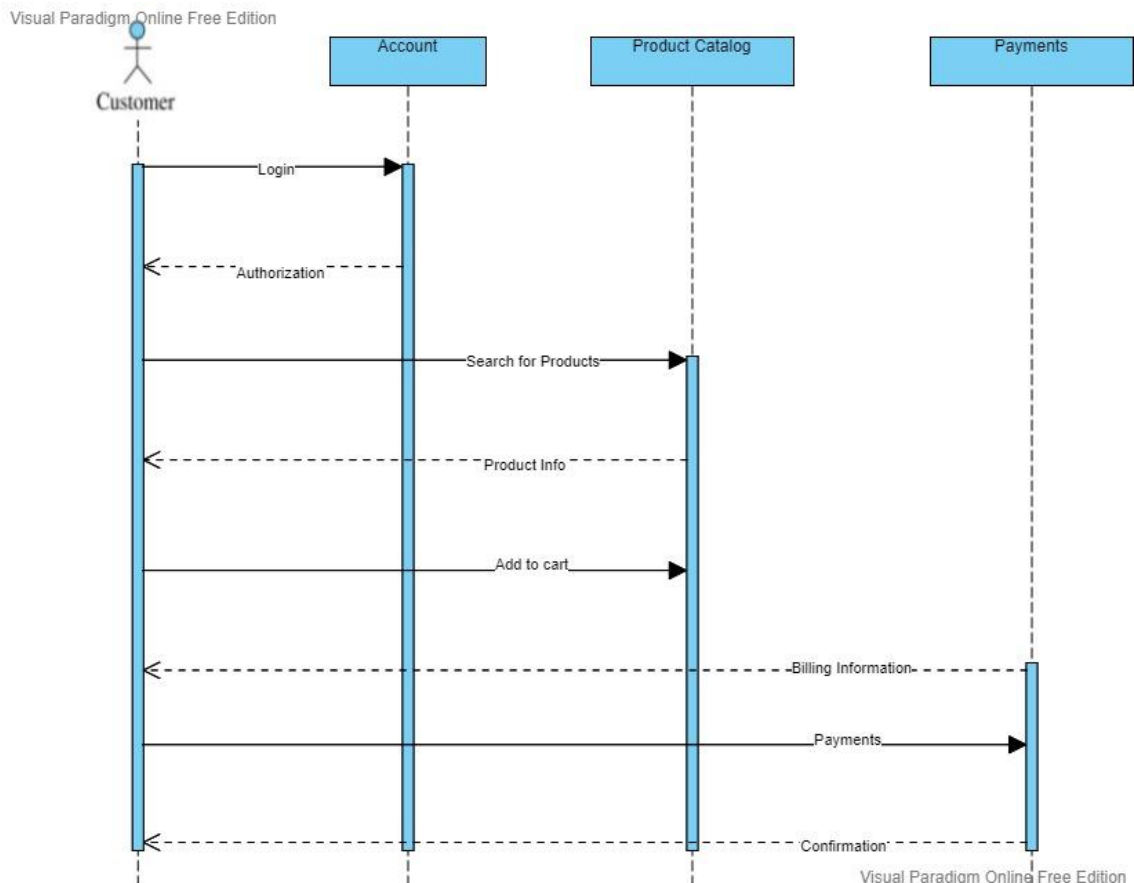

4.3 USER INTERFACE DESIGN

4.3.1-INPUT DESIGN

Form Name: Customer Registration

Register

Name

Mobile No

Address

Pincode

E-Mail Address

Password

Confirm Password

☐ I agree to the [Terms and Conditions](#)

Register

Already have an account? [Login](#)

Form Name: Customer/Admin Login

Login

E-Mail Address

Password

[Forgot Password?](#)

☐ Remember Me

Login

Don't have an account? [Create One](#)

Form Name: Admin add item

Add item

Name

Description

Price

Quantity

Choose category


Dealer Information

Choose Image

No file chosen

4.3.2 OUTPUT DESIGN

Admin/Customer Login

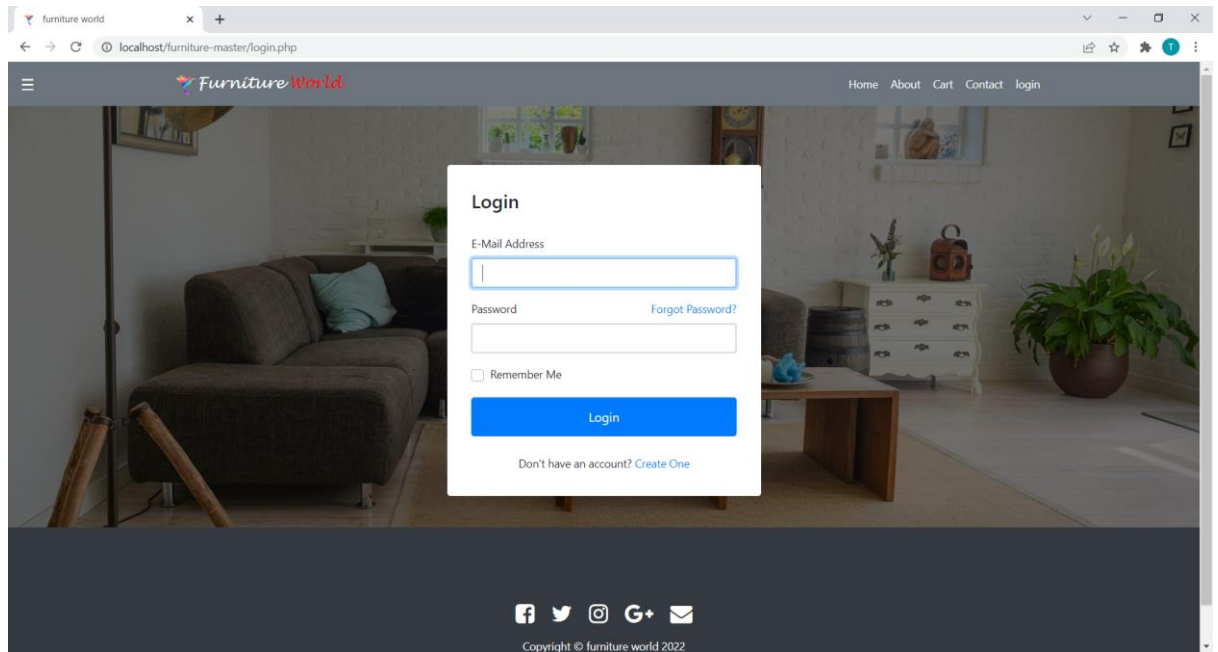

The screenshot shows a web browser window with the URL `localhost/furniture-master/login.php`. The page features a background image of a modern living room with a brown sofa, a wooden coffee table, and a potted plant. A white login form is centered on the page. The form has a title "Login" and fields for "E-Mail Address" and "Password". There is a "Remember Me" checkbox and a "Forgot Password?" link. A blue "Login" button is at the bottom of the form. Below the button, there is a link "Don't have an account? Create One". The website's header includes the "Furniture World" logo and navigation links: Home, About, Cart, Contact, and login. The footer contains social media icons for Facebook, Twitter, Instagram, and Google+, along with a copyright notice: "Copyright © furniture world 2022".

login

E-Mail Address

Password [Forgot Password?](#)

☐ Remember Me

Login


Don't have an account? [Create One](#)

Home About Cart Contact login

Facebook Twitter Instagram Google+ Email

Copyright © furniture world 2022

Customer Registration

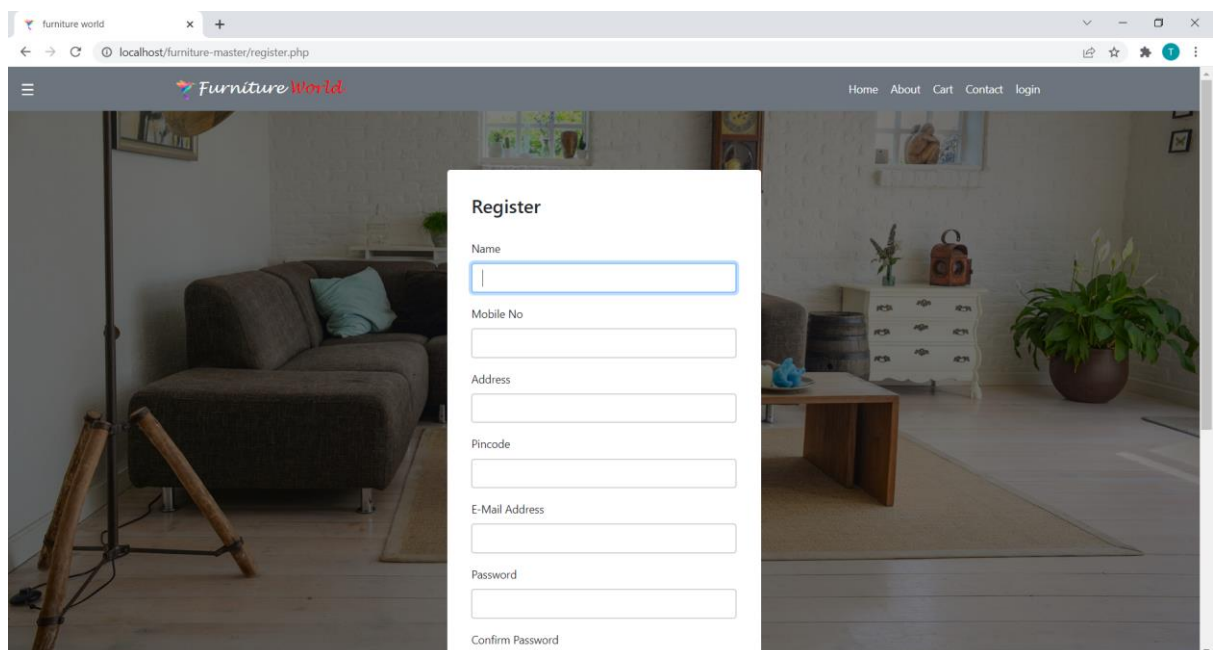

The screenshot shows a web browser window with the URL `localhost/furniture-master/register.php`. The page features the same background image of a modern living room as the login page. A white registration form is centered on the page. The form has a title "Register" and fields for "Name", "Mobile No", "Address", "Pincode", "E-Mail Address", "Password", and "Confirm Password". The website's header includes the "Furniture World" logo and navigation links: Home, About, Cart, Contact, and login. The footer contains social media icons for Facebook, Twitter, Instagram, and Google+, along with a copyright notice: "Copyright © furniture world 2022".

Register

Name

Mobile No

Address

Pincode

E-Mail Address

Password


Confirm Password

Home About Cart Contact login

Facebook Twitter Instagram Google+ Email

Copyright © furniture world 2022

Customer Home Screen

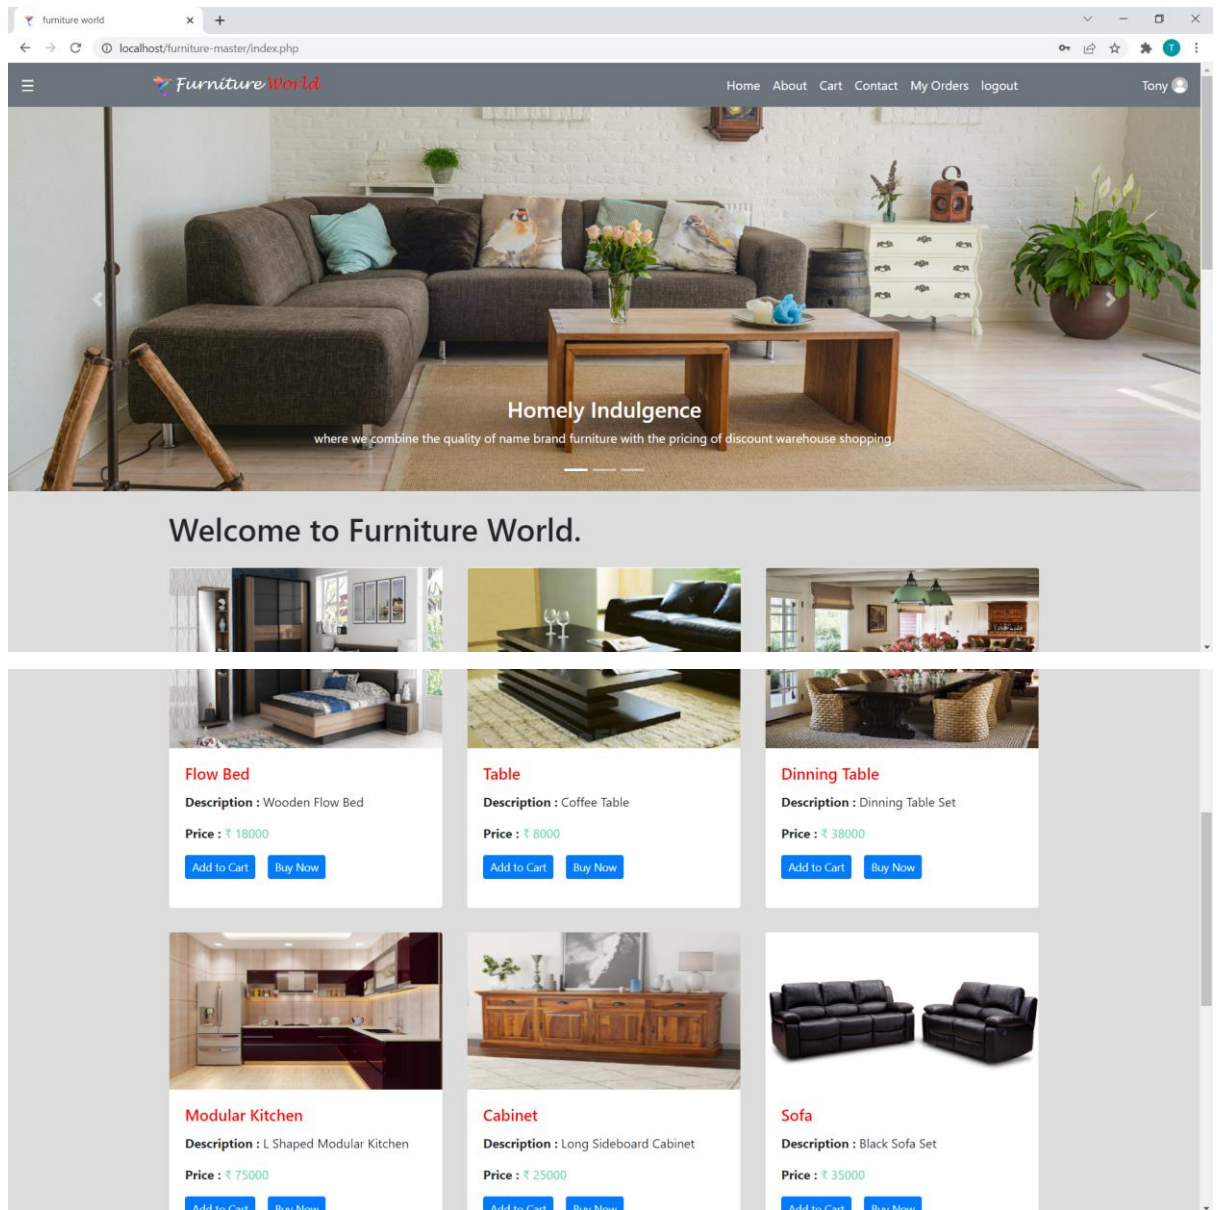

4.4 DATABASE DESIGN

A database is an organized mechanism that has the capability of storing information through which a user can retrieve stored information in an effective and efficient manner. The data is the purpose of any database and must be protected.

The database design is a two level process. In the first step, user requirements are gathered together and a database is designed which will meet these requirements as clearly as possible. This step is called Information Level Design and it is taken independent of any individual DBMS.

In the second step, this Information level design is transferred into a design for the specific DBMS that will be used to implement the system in question. This step is called Physical Level Design, concerned with the characteristics of the specific DBMS that will be used. A database design runs parallel with the system design. The organization of the data in the database is aimed to achieve the following two major objectives.

- Data Integrity
- Data independence

4.6.1 Relational Database Management System (RDBMS)

A relational model represents the database as a collection of relations. Each relation resembles a table of values or file of records. In formal relational model terminology, a row is called a tuple, a column header is called an attribute and the table is called a relation. A relational database consists of a collection of tables, each of which is assigned a unique name. A row in a table represents a set of related values.

Relations, Domains & Attributes

A table is a relation. The rows in a table are called tuples. A tuple is an ordered set of n elements. Columns are referred to as attributes. Relationships have been set between every table in the database. This ensures both Referential and Entity Relationship Integrity. A

domain D is a set of atomic values. A common method of specifying a domain is to specify a data type from which the data values forming the domain are drawn. It is also useful to specify a name for the domain to help in interpreting its values.

Every value in a relation is atomic, that is not decomposable.

Relationships

- Table relationships are established using Key. The two main keys of prime importance are Primary Key & Foreign Key. Entity Integrity and Referential Integrity Relationships can be established with these keys.
- Entity Integrity enforces that no Primary Key can have null values.
- Referential Integrity enforces that no Primary Key can have null values.
- Referential Integrity for each distinct Foreign Key value, there must exist a matching Primary Key value in the same domain. Other key are Super Key and Candidate Keys.

4.6.2 Normalization

Data are grouped together in the simplest way so that later changes can be made with minimum impact on data structures. Normalization is formal process of data structures in manners that eliminates redundancy and promotes integrity. Normalization is a technique of separating redundant fields and breaking up a large table into a smaller one. It is also used to avoid insertion, deletion, and updating anomalies. Normal form in data modelling use two concepts, keys and relationships. A key uniquely identifies a row in a table. There are two types of keys, primary key and foreign key. A primary key is an element or a combination of elements in a table whose purpose is to identify records from the same table. A foreign key is a column in a table that uniquely identifies record from a different table. All the tables have been normalized up to the third normal form. As the name implies, it denotes putting things in the normal form. The application developer via normalization tries to achieve a sensible organization of data into proper tables and columns and where names can be easily correlated to the data by the user. Normalization eliminates repeating groups at data and thereby avoids data redundancy which proves to be a great burden on the computer resources. These include:

- Normalize the data.

- Choose proper names for the tables and columns.
- Choose the proper name for the data.

First Normal Form

The First Normal Form states that the domain of an attribute must include only atomic values and that the value of any attribute in a tuple must be a single value from the domain of that attribute. In other words 1NF disallows “relations within relations” or “relations as attribute values within tuples”. The only attribute values permitted by 1NF are single atomic or indivisible values. The first step is to put the data into First Normal Form. This can be done by moving data into separate tables where the data is of similar type in each table. Each table is given a Primary Key or Foreign Key as per requirement of the project. In this we form new relations for each non-atomic attribute or nested relation. This eliminated repeating groups of data. A relation is said to be in first normal form if only if it satisfies the constraints that contain the primary key only.

Second Normal Form

According to Second Normal Form, for relations where primary key contains multiple attributes, no non-key attribute should be functionally dependent on a part of the primary key. In this we decompose and setup a new relation for each partial key with its dependent attributes. Make sure to keep a relation with the original primary key and any attributes that are fully functionally dependent on it. This step helps in taking out data that is only dependent on a part of the key. A relation is said to be in second normal form if and only if it satisfies all the first normal form conditions for the primary key and every non-primary key attributes of the relation is fully dependent on its primary key alone.

Third Normal Form

According to Third Normal Form, Relation should not have a non-key attribute functionally determined by another non-key attribute or by a set of non-key attributes. That is, there should be no transitive dependency on the primary key. In this we decompose and set up relation that includes the non-key attributes that functionally determines other non-key attributes. This step is taken to get rid of anything that does not depend entirely on the Primary Key. A relation is said to be in third normal form if only if it is in second normal

form and more over the non key attributes of the relation should not be depend on other non-key attribute.

TABLE DESIGN

Name: tbl_login

Primary Key: login_id

Field	Datatype	Description
login_id	int(11)	primary key
username	varchar(25)	username
password	varchar(255)	password
type	varchar(5)	user type
status	tinyint(1)	status of user

Name: tbl_users

Primary_Key: user_id

Foreign_key: login_id references tbl_login(login_id)

Field	Datatype	Description
user_id	int(11)	primary key
login_id	int(11)	foreign_key
name	varchar(35)	full name
email	varchar(45)	email
mobile	varchar(12)	mobile no
address	varchar(200)	address
pincode	int(6)	pincode

Name: tbl_categories

Primary Key: cat_id

Field	Datatype	Description
cat_id	int(11)	primary key
cat_name	varchar(35)	category name
status	tinyint(1)	category status

Name: tbl_subcategories

Primary Key: s_id

Foreign_key: cat_id references tbl_categories (cat_id)

Field	Datatype	Description
s_id	int(11)	primary key
cat_id	int(11)	foreign_key
subcat_name	varchar(35)	subcategory name
status	tinyint(1)	subcategory status

Name: tbl_products

Primary Key: p_id

Foreign Key: s_id references tbl_subcategories(s_id)

Field	Datatype	Description
p_id	int(11)	primary key
s_id	Int(11)	foreign key
p_name	varchar(55)	product name
p_description	varchar(255)	product description
p_price	int(11)	product price
p_quantity	int(11)	product quantity
dealer	varchar(255)	dealer details
add_date	date	product add date
p_img	varchar(255)	product images
status	tinyint(1)	product status

Name: tbl_cart

Primary Key: cart_id

Foreign Key: user_id references tbl_login(login_id), p_id references tbl_products(p_id)

Field	Datatype	Description
cart_id	int(11)	primary key
user_id	int(11)	foreign key
p_id	int(11)	foreign key
p_img	varchar(255)	product image
p_name	varchar(55)	product name
p_price	int(11)	product price
quantity	int(11)	product quantity
total_price	int(11)	total price

Name: tbl_orders

Primary Key: order_id

Foreign Key: user_id references tbl_login(login_id), p_id references tbl_products(p_id)

Field	Datatype	Description
order_id	int(11)	primary key
user_id	int(11)	foreign key
p_id	int(11)	foreign key
p_img	varchar(255)	product image
p_name	varchar(55)	product name
p_price	int(11)	product price
quantity	int(11)	product quantity
total_price	int(11)	total price
order_date	date	product order date
is_delivered	varchar (3)	product deliver status

Name: tbl_bankdetails

Primary Key: b_id

Foreign Key: login_id references tbl_login(login_id)

Field	Datatype	Description
b_id	int(11)	primary key
login_id	int(11)	foreign key
card_holder_name	varchar(55)	card holder name
card_number	varchar(25)	card number
expiry_date	varchar(20)	card expiry date
cvv	int(11)	cvv

CHAPTER 5

SYSTEM TESTING

5.1 INTRODUCTION

Software Testing is the process of executing software in a controlled manner, in order to answer the question - Does the software behave as specified? Software testing is often used in association with the terms verification and validation. Validation is the checking or testing of items, includes software, for conformance and consistency with an associated specification. Software testing is just one kind of verification, which also uses techniques such as reviews, analysis, inspections, and walkthroughs. Validation is the process of checking that what has been specified is what the user actually wanted.

Other activities which are often associated with software testing are static analysis and dynamic analysis. Static analysis investigates the source code of software, looking for problems and gathering metrics without actually executing the code. Dynamic analysis looks at the behavior of software while it is executing, to provide information such as execution traces, timing profiles, and test coverage information.

Testing is a process of executing a program with the intent of finding an error. Testing is a set of activity that can be planned in advanced and conducted systematically. Testing begins at the module level and work towards the integration of entire computers based system. Nothing is complete without testing, as it vital success of the system testing objectives, there are several rules that can serve as testing objectives. They are:

- A good test case is one that has high possibility of finding an undiscovered error.
- A successful test is one that uncovers an undiscovered error.

If a testing is conducted successfully according to the objectives as stated above, it would uncover errors in the software. Also testing demonstrate that the software function appear to be working according to the specification, that performance requirement appear to have been met. There are three ways to test program.

- For correctness
- For implementation efficiency
- For computational complexity

Test for correctness are supposed to verify that a program does exactly what it was designed to do. This is much more difficult than it may at first appear, especially for large programs.

5.2 TEST PLAN

A test plan implies a series of desired course of action to be followed in accomplishing various testing methods. The Test Plan acts as a blue print for the action that is to be followed. The software engineers create a computer program, its documentation and related data structures. The software developers is always responsible for testing the individual units of the programs, ensuring that each performs the function for which it was designed. There is an independent test group (ITG) which is to remove the inherent problems associated with letting the builder to test the thing that has been built. The specific objectives of testing should be stated in measurable terms. So that the mean time to failure, the cost to find and fix the defects, remaining defect density or frequency of occurrence and test work-hours per regression test all should be stated within the test plan.

The levels of testing include:

- ❖ Unit testing
- ❖ Integration Testing
- ❖ Data validation Testing
- ❖ Output Testing

5.2.1 Unit Testing

Unit testing focuses verification effort on the smallest unit of software design – the software component or module. Using the component level design description as a guide, important control paths are tested to uncover errors within the boundary of the module. The relative complexity of tests and uncovered scope established for unit testing. The unit testing is white-box oriented, and step can be conducted in parallel for multiple components. The modular interface is tested to ensure that information properly flows into and out of the program unit under test. The local data structure is examined to ensure that data stored temporarily maintains its integrity during all steps in an algorithm's execution. Boundary

conditions are tested to ensure that all statements in a module have been executed at least once. Finally, all error handling paths are tested.

Tests of data flow across a module interface are required before any other test is initiated. If data do not enter and exit properly, all other tests are moot. Selective testing of execution paths is an essential task during the unit test. Good design dictates that error conditions be anticipated and error handling paths set up to reroute or cleanly terminate processing when an error does occur. Boundary testing is the last task of unit testing step. Software often fails at its boundaries.

Unit testing was done in Sell-Soft System by treating each module as separate entity and testing each one of them with a wide spectrum of test inputs. Some flaws in the internal logic of the modules were found and were rectified. After coding each module is tested and run individually. All unnecessary code were removed and ensured that all modules are working, and gives the expected result.

5.2.2 Integration Testing

Integration testing is systematic technique for constructing the program structure while at the same time conducting tests to uncover errors associated with interfacing. The objective is to take unit tested components and build a program structure that has been dictated by design. The entire program is tested as whole. Correction is difficult because isolation of causes is complicated by vast expanse of entire program. Once these errors are corrected, new ones appear and the process continues in a seemingly endless loop. After performing unit testing in the System all the modules were integrated to test for any inconsistencies in the interfaces. Moreover differences in program structures were removed and a unique program structure was evolved.

5.2.3 Validation Testing or System Testing

This is the final step in testing. In this the entire system was tested as a whole with all forms, code, modules and class modules. This form of testing is popularly known as Black Box testing or System tests.

Black Box testing method focuses on the functional requirements of the software. That is, Black Box testing enables the software engineer to derive sets of input conditions that will fully exercise all functional requirements for a program.

Black Box testing attempts to find errors in the following categories; incorrect or missing functions, interface errors, errors in data structures or external data access, performance errors and initialization errors and termination errors.

5.2.4 Output Testing or User Acceptance Testing

The system considered is tested for user acceptance; here it should satisfy the firm's need. The software should keep in touch with perspective system; user at the time of developing and making changes whenever required. This done with respect to the following points:

- Input Screen Designs
- Output Screen Designs

The above testing is done taking various kinds of test data. Preparation of test data plays a vital role in the system testing. After preparing the test data, the system under study is tested using that test data. While testing the system by which test data errors are again uncovered and corrected by using above testing steps and corrections are also noted for future use.

CHAPTER 6

IMPLEMENTATION

6.1 INTRODUCTION

Implementation is the stage of the project where the theoretical design is turned into a working system. It can be considered to be the most crucial stage in achieving a successful new system gaining the users confidence that the new system will work and will be effective and accurate. It is primarily concerned with user training and documentation. Conversion usually takes place about the same time the user is being trained or later. Implementation simply means convening a new system design into operation, which is the process of converting a new revised system design into an operational one.

At this stage the main work load, the greatest upheaval and the major impact on the existing system shifts to the user department. If the implementation is not carefully planned or controlled, it can create chaos and confusion.

Implementation includes all those activities that take place to convert from the existing system to the new system. The new system may be a totally new, replacing an existing manual or automated system or it may be a modification to an existing system. Proper implementation is essential to provide a reliable system to meet organization requirements. The process of putting the developed system in actual use is called system implementation. This includes all those activities that take place to convert from the old system to the new system. The system can be implemented only after through testing is done and if it is found to be working according to the specifications. The system personnel check the feasibility of the system. The more complex the system being implemented, the more involved will be the system analysis and design effort required to implement the three main aspects: education and training, system testing and changeover.

The implementation state involves the following tasks:

- Careful planning.
- Investigation of system and constraints.
- Design of methods to achieve the changeover.

6.2 IMPLEMENTATION PROCEDURES

Implementation of software refers to the final installation of the package in its real environment, to the satisfaction of the intended uses and the operation of the system. In many organizations someone who will not be operating it, will commission the software development project. In the initial stage people doubt about the software but we have to ensure that the resistance does not build up, as one has to make sure that:

- The active user must be aware of the benefits of using the new system.
- Their confidence in the software is built up.
- Proper guidance is imparted to the user so that he is comfortable in using the application.

Before going ahead and viewing the system, the user must know that for viewing the result, the server program should be running in the server. If the server object is not up running on the server, the actual process won't take place.

6.2.1 User Training

User training is designed to prepare the user for testing and converting the system. To achieve the objective and benefits expected from computer based system, it is essential for the people who will be involved to be confident of their role in the new system. As system becomes more complex, the need for training is more important. By user training the user comes to know how to enter data, respond to error messages, interrogate the database and call up routine that will produce reports and perform other necessary functions.

6.2.2 Training on the Application Software

After providing the necessary basic training on computer awareness the user will have to be trained on the new application software. This will give the underlying philosophy of the use of the new system such as the screen flow, screen design type of help on the screen, type of errors while entering the data, the corresponding validation check at each entry and the ways to correct the date entered. It should then cover information needed by the specific user/group to use the system or part of the system while imparting the training of the program on

the application. This training may be different across different user groups and across different levels of hierarchy.

6.2.3 System Maintenance

Maintenance is the enigma of system development. The maintenance phase of the software cycle is the time in which a software product performs useful work. After a system is successfully implemented, it should be maintained in a proper manner. System maintenance is an important aspect in the software development life cycle. The need for system maintenance is for it to make adaptable to the changes in the system environment. Software maintenance is of course, far more than "Finding Mistakes".

CHAPTER 7

CONCLUSION AND FUTURE SCOPE

7.1 CONCLUSION

The current system working technology is old fashioned and there is no usage of commonly used technologies like internet, digital money. The proposed system introduces facility for customer to buy furniture from the comfort of their home. Provides lots of advantages like surfing furniture, filtering according to their needs, enhanced user interface, payment options, add feedback, daily progress report option, and complaint status and many more.

7.2 FUTURE SCOPE

- The proposed system can be designed in such a way that the payment should be done in online mode.
- Administrator can able to export order details as excel or PDF .
- Customers can able to do advanced search options.
- Customers can able to add reviews, complaints and feedbacks etc.
- Customers can able to add complaints and feedbacks etc.

CHAPTER 8

BIBLIOGRAPHY

REFERENCES:

- Learning PHP, MySQL & JavaScript: With JQuery, CSS & HTML5 by Robin Nixon.
- IEEE Std 1016 Recommended Practice for Software Design Descriptions.

WEBSITES:

- https://www.w3schools.com/howto/howto_js_sidenav.asp
- <https://stackoverflow.com/questions/12611148/how-to-export-data-to-an-excel-file-using-phpexcel>
- <https://datatables.net/examples/styling/bootstrap4>
- <https://online.visual-paradigm.com/w/aqrgnihd/drive/#infoart:proj=0&dashboard>
<https://phppot.com/php/generate-pdf-from-mysql-data-using-fpdf/>

CHAPTER 9

APPENDIX

9.1 SAMPLE CODE

login.php

```
<?php
error_reporting(0);
session_start();
require("conn.php");
include("header.php");

if(isset($_POST['submit']))
{
    $user=$_POST['user'];
    $psw=$_POST['psw'];

    $result=mysqli_query($conn, "SELECT * FROM tbl_login WHERE username = '$user'") or
die(mysqli_error($conn));
    if(mysqli_num_rows($result) > 0)
    {
        while($row = mysqli_fetch_array($result))
        {

            if(password_verify($psw, $row['password']))
            {

                $_SESSION['user']=$row['login_id'];
                $_SESSION['psw']=$row['password'];
                if($row['type']=='user')
                {
                    echo "<script type='text/javascript'>window.location.href='index.php';</script>";
                }
                else
                {
                    echo "<script
type='text/javascript'>window.location.href='cp/addCategory.php';</script>";
                }
            }
            else
            {

                $message = "username or password is incorrect";

            }

        }
    }
    else
    {

        $message = "username or password is incorrect";

    }
}
```

```
?>

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="author" content="Kodinger">
  <meta name="viewport" content="width=device-width,initial-scale=1">
  <title>My Login Page</title>
  <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.3.1/css/bootstrap.min.css" integrity="sha384-
ggOyR0iXCbMQv3Xipma34MD+dH/1fQ784/j6cY/iJTQUOhcWr7x9JvoRxT2MZw1T"
crossorigin="anonymous">
  <link rel="stylesheet" type="text/css" href="css/my-login.css">
</head>

<body class="my-login-page">
  <section class="h-100">
    <div class="container h-100">
      <div class="row justify-content-md-center h-100">
        <div class="card-wrapper">
          <div class="brand">

            </div>
            <div class="card fat">
              <div class="card-body">
                <h4 class="card-title">Login</h4>
                <form method="POST" class="my-login-validation" novalidate="">
                  <div class="form-group">
                    <label for="email">E-Mail Address</label>
                    <input id="email" type="email" class="form-control" name="user" value=""
required autofocus>
                    <div class="invalid-feedback">
                      Email is invalid
                    </div>
                  </div>

                  <div class="form-group">
                    <label for="password">Password
                    <a href="forgot_password.php" class="float-right">
                      Forgot Password?
                    </a>
                  </label>
                  <input id="password" type="password" class="form-control" name="psw"
required >
                    <span><?php if(isset($message)){echo "<font
color='red'>$message</font>";}?></span>
                    <div class="invalid-feedback">
                      Password is required
                    </div>
                  </div>

                  <div class="form-group">
                    <div class="custom-checkbox custom-control">
```

```

        <input type="checkbox" name="remember" id="remember"
class="custom-control-input">
        <label for="remember" class="custom-control-label">Remember
Me</label>
    </div>
</div>

<div class="form-group m-0">
    <button type="submit" name='submit' class="btn btn-primary btn-block">
        Login
    </button>
</div>
<div class="mt-4 text-center">
    Don't have an account? <a href="register.php">Create One</a>
</div>
</form>
</div>
</div>
<div class="footer">

</div>
</div>
</div>
</div>
</section>

<script src="https://code.jquery.com/jquery-3.3.1.slim.min.js" integrity="sha384-
q8i/X+965DzO0rT7abK41JStQIAqVgRVzpbzo5smXKp4YfRvH+8abtTE1Pi6jizo"
crossorigin="anonymous"></script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.14.7/umd/popper.min.js"
integrity="sha384-
UO2eT0CpHqdSJQ6hJty5KVphtPhzWj9WO1cLHTMga3JDZwrnQq4sF86dIHNDz0W1"
crossorigin="anonymous"></script>
<script src="https://stackpath.bootstrapcdn.com/bootstrap/4.3.1/js/bootstrap.min.js"
integrity="sha384-
JjSmVgyd0p3pXB1rRibZUAYoIIy6OrQ6VrjIEaFf/nJGzLxFDsf4x0xIM+B07jRM"
crossorigin="anonymous"></script>
<script src="js/my-login.js"></script>
</body>
</html>
<?php
include("footer.php");
?>

```

index.php

```

<?php
require("conn.php");
include("header.php");
if(isset($_REQUEST['id'])){
    $sid=$_REQUEST['id'];

```

```

//$sql="select * from tbl_products JOIN tbl_categories ON tbl_products.cat_id =
tbl_categories.cat_id where s_id='$sid';
$sql="select * from tbl_products where s_id='$sid';

$query=mysqli_query($conn,$sql) or die(mysqli_error($conn));
}else{
    $sql="select * from tbl_products LEFT JOIN tbl_subcategories ON tbl_products.s_id =
tbl_subcategories.s_id ";
    $query=mysqli_query($conn,$sql);
}
?>
<html>
<head>
<script src="https://cdn.jsdelivr.net/npm/jquery@3.5.1/dist/jquery.slim.min.js"></script>
<script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"></script>
<script
src="https://cdn.jsdelivr.net/npm/bootstrap@4.6.1/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>
<div class="body">
    <header>
        <div id="carouselExampleIndicators" class="carousel slide" data-ride="carousel">
            <ol class="carousel-indicators">
                <li data-target="#carouselExampleIndicators" data-slide-to="0" class="active"></li>
                <li data-target="#carouselExampleIndicators" data-slide-to="1"></li>
                <li data-target="#carouselExampleIndicators" data-slide-to="2"></li>
            </ol>
            <div class="carousel-inner" role="listbox">
                <!-- Slide One -->
                <div class="carousel-item active" style="background-image: url('img/bg1.jpeg')">
                    <div class="carousel-caption d-none d-md-block">
                        <h3>Homely Indulgence </h3>
                        <p>where we combine the quality of name brand furniture with the pricing of discount
warehouse shopping.</p>
                    </div>
                </div>
                <!-- Slide Two -->
                <div class="carousel-item" style="background-image: url('img/bg2.jpeg')">
                    <div class="carousel-caption d-none d-md-block">
                        <h3>Best Sellers</h3>
                        <p>This is a best website by Furniture online.</p>
                    </div>
                </div>
                <!-- Slide Three -->
                <div class="carousel-item" style="background-image: url('img/bg3.jpeg')">
                    <div class="carousel-caption d-none d-md-block">
                        <h3>Save Money</h3>
                        <p>we have the best discount.</p>
                    </div>
                </div>
            </div>
            <a class="carousel-control-prev" href="#carouselExampleIndicators" role="button" data-
slide="prev">
                <span class="carousel-control-prev-icon" aria-hidden="true"></span>

```

```

        <span class="sr-only">Previous</span>
    </a>
    <a class="carousel-control-next" href="#carouselExampleIndicators" role="button" data-
slide="next">
        <span class="carousel-control-next-icon" aria-hidden="true"></span>
        <span class="sr-only">Next</span>
    </a>
</div>
</header>

<!-- Page Content -->
<div class="container">

    <!-- Prduct -->
    <h1 class="my-4">Welcome to Furniture World.</h1>

    <!-- start Product Item -->
    <div class="row">
        <!-- item 1-->
    <?php
    while($result=mysqli_fetch_array($query))
    {
        ?>
        <div class='col-lg-4 col-sm-6 portfolio-item'>
            <a href="#"><div class='card h-80'> <img width='700' height='200' class='card-img-top'
src='img/<?php echo $result['p_img'];?>' alt=""></a>
            <div class='card-body'>
                <h5 class='card-title'>
                    <a href="#"><?php echo $result['p_name'];?></a>
                </h5>
                <p class='card-text'>Description : <span class='card-Category'><?php echo
$result['p_description'];?></span> </p>
                <p class='card-text'>Price : <span class='card-price'>&#8377;&nbsp;<?php echo
$result['p_price'];?></span> </p>
                <?php if($result['p_quantity']<5)
                {
                    ?>
                    <p style="color:red;">Out of Stock</p>
                <?php
                }
                ?>
                <p><form method='post' action='addtocart.php'><input type='hidden' name='pid'
value="<?php echo $result['p_id'];?>"><button type='submit' class='btn btn-primary btn-sm'>Add
to Cart</button>&nbsp;<button type='submit' class='btn btn-primary btn-sm'>Buy
Now</button></form></p>
            </div>
        </div>
    </div>
    <?php
    }
    ?>
</form>
</div>
<!-- /.row -->

```



```

    </div>
    <!-- /.container -->
</div>
</body>
</html>
<?php
include("footer.php");
?>

```

addtocart.php

```

<?php
session_start();
require("conn.php");
include("header.php");
if ((!isset($_SESSION['user'])) && (!isset($_SESSION['psw'])))
{
    echo "<script>alert('Please login to add items to
cart');window.location.href='index.php'</script>";
}
$userid=$_SESSION['user'];
if(isset($_POST['pid']))
{
    $pid=$_REQUEST['pid'];
    $sq=mysqli_query($conn,"select p_quantity from tbl_products where p_id='$pid'");
    $rs=mysqli_fetch_array($sq);
    if($rs['p_quantity']<5)
    {
        echo "<script>alert('Currently out of stock');window.location.href='index.php'</script>";
        exit;
    }
    $chkq=mysqli_query($conn,"select * from tbl_cart where p_id='$pid' and user_id='$userid'") or
die(mysqli_error($conn));
    $count=mysqli_num_rows($chkq);
    if($count==0)
    {
        $sql=mysqli_query($conn, "select * from tbl_products where p_id='$pid'") or
die(mysqli_error($conn));
        $result=mysqli_fetch_array($sql);
        $img=$result['p_img'];
        $pname=$result['p_name'];
        $pprice=$result['p_price'];
        $total=$result['p_price'];
        mysqli_query($conn,"INSERT INTO `tbl_cart` ( `user_id`, `p_id`, `p_img`, `p_name`,
`p_price`, `quantity`, `total_price`) VALUES ('$userid', '$pid', '$img', '$pname', '$pprice', 1,
'$total');") or die(mysqli_error($conn));
    }
    else
    {
        echo "<script>alert('Item already added');</script>";
    }
}
if(isset($_POST['quantitychange']))

```

```

{
    $qty=$_POST['quantitychange'];
    $cartid=$_POST['cartid'];
    $q=mysqli_query($conn,"select * from tbl_cart where user_id='$userid' and cart_id='$cartid'");
    $r2=mysqli_fetch_array($q);
    $total=$qty*$r2['p_price'];
    mysqli_query($conn,"update tbl_cart set quantity='$qty', total_price='$total' where
cart_id='$cartid'") or die(mysqli_error($conn));

}
if(isset($_POST['removeitem']))
{
    $cartid=$_POST['cartid'];
    $q=mysqli_query($conn,"DELETE FROM `tbl_cart` WHERE `tbl_cart`.`cart_id` = '$cartid'") or
die(mysqli_error($conn));
    if($q)
    {
        echo "<script>alert('Item removed from cart');window.location.href='addtocart.php';</script>";
    }
}
if(isset($_POST['placeorder']))
{
    $r=mysqli_query($conn,"select quantity,p_id from tbl_cart where user_id='$userid'");
    while($qt=mysqli_fetch_array($r))
    {
        echo $quan=$qt['quantity'];
        echo $pid=$qt['p_id'];
        mysqli_query($conn,"update tbl_products set p_quantity=p_quantity-$quan where p_id=$pid")
or die(mysqli_error($conn));
    }

    $date=date("Y-m-d");
    $order=mysqli_query($conn,"INSERT INTO tbl_orders( `user_id`, `p_id`, `p_img`, `p_name`,
`p_price`, `quantity`, `total_price`, `order_date`, `is_delivered` )
SELECT `user_id`, `p_id`, `p_img`, `p_name`, `p_price`, `quantity`, `total_price`, '$date', 'NO'
FROM tbl_cart where user_id='$userid'
ORDER BY cart_id ASC ") or die(mysqli_error($conn));
    mysqli_query($conn,"DELETE FROM `tbl_cart` WHERE `tbl_cart`.`user_id` = '$userid'") or
die(mysqli_error($conn));
    if($order)
    {
        echo "<script>alert('Order placed
successfully');window.location.href='userorders.php';</script>";
    }
}
?>
<html>
<head>
<style>
.removebtn{
    border:none;
    cursor:pointer;
}
</style>

```

```

</head>
<body>
<br><br><br><br><br><br>
<div class="row justify-content-center">
<div class="col-auto">
<table class="table table-bordered ">
  <thead>
    <tr>
      <th scope="col"></th>
      <th scope="col">Product Name</th>
      <th scope="col">Quantity</th>
      <th scope="col">Unit Price</th>
      <th scope="col">Total Price</th>
      <th scope="col">Remove</th>
    </tr>
  </thead>
  <tbody>
    <?php
      $grandtotal=0;
      $sql=mysqli_query($conn, "select * from tbl_cart where user_id='$userid'");
      while($result=mysqli_fetch_array($sql))
      {
        ?><form method='post'>
          <tr>
            <td><img src='img/<?php echo $result['p_img']; ?>' height='95px' width='150px'></td>
            <td class='align-middle'><?php echo $result['p_name'] ?></td>
            <td class='align-middle'>
              <input type='hidden' name='cartid' value='<?php echo $result['cart_id']; ?>' />
              <select name='quantitychange' onchange="this.form.submit()">
                <option <?php if($result["quantity"]==1) echo "selected";?> value="1">1</option>
                <option <?php if($result["quantity"]==2) echo "selected";?> value="2">2</option>
                <option <?php if($result["quantity"]==3) echo "selected";?> value="3">3</option>
                <option <?php if($result["quantity"]==4) echo "selected";?> value="4">4</option>
                <option <?php if($result["quantity"]==5) echo "selected";?> value="5">5</option>
              </select>
            </td>
            <td class='align-middle'><?php echo $result['p_price']; ?></td>
            <td class='align-middle'><?php echo "&#377;".$result["p_price"]*$result["quantity"];
?></td>
            <td class='align-middle'><input type='hidden' name='cartid' value='<?php echo
$result['cart_id'];?>' ><button type='submit' name='removeitem' class='removebtn'></button></td>
          </tr>
        </form>
      <?php
        $grandtotal += ($result["p_price"]*$result["quantity"]);
      }
    ?>
    <tr>
      <td colspan="6" align="right">
        <strong>GRAND TOTAL: <?php echo "&#377;".$grandtotal; ?></strong>
      </td>
    </tr>
  </tbody>
</table>

```

```

</tbody>
</table>
<a href="index.php"><button class="btn btn-primary">Continue Shopping</button></a><form
method="post"><button type='submit' name='placeorder' class="btn btn-warning pull-right"
>Order Now</button></form>
</div>
</div>
</body>
<br><br><br><br><br><br><br><br><br>
</html>
<?php
include("footer.php");
?>

```

addItem.php

```

<?php
session_start();
require("../conn.php");
include("header2.php");
//-----
if ((!isset($_SESSION['user'])) && (!isset($_SESSION['psw'])))
{
    header('location:../index.php');
}
else{
    $sql="select * from tbl_products";
    $query1=mysqli_query($conn,$sql);
}
if(isset($_POST['submit']))
{
    $sid=$_POST['sid'];
    $name=$_POST['fname'];
    $description=$_POST['fdescription'];
    $price=$_POST['fprice'];
    $quantity=$_POST['quantity'];
    $dealer=$_POST['dealer'];
    $adate=date("Y-m-d");
    $filepath=pathinfo($_FILES['file']['name']) ;
    $extension=$filepath['extension'];

    $iname= date('H-i-s').'.$extension;
    $path='../img/'.$iname;
    move_uploaded_file($_FILES['file']['tmp_name'],$path);

    $sqlInsert="INSERT INTO tbl_products(`s_id`,`p_name`,`p_description`,`p_price`
    ,`p_quantity`,`dealer`,`add_date`,`p_img`,`p_status`) VALUES ('$sid', '$name', '$description',
    '$price', '$quantity', '$dealer', '$adate', '$iname', '1')";

    $queryInsert=mysqli_query($conn,$sqlInsert) or die(mysqli_error($conn));
    if($queryInsert)
        echo "<script type='text/javascript'>alert('data inserted successfully');</script>";
}

```

```

echo "<script>window.location.href='addItem.php';</script>";
}
if(isset($_POST['delete']))
{
    var_dump($_POST['id']);
    $sql="delete from tbl_products where p_id=".$_POST['id'];
    $query=mysqli_query($conn,$sql) or die(mysqli_error($conn));
    echo "<script>alert('Deleted Successfully');</script>";
    echo "<script>window.location.href='addItem.php';</script>";
}

?>
<html>
    <head>
        <!-- <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/twitter-bootstrap/4.5.2/css/bootstrap.css"> -->
        <link rel="stylesheet" href="https://cdn.datatables.net/1.11.3/css/dataTables.bootstrap4.min.css">
        <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.5.1/jquery.min.js"></script>
        <script src="https://code.jquery.com/jquery-3.5.1.js"></script>
        <script src="https://cdn.datatables.net/1.11.3/js/jquery.dataTables.min.js"></script>
        <script src="https://cdn.datatables.net/1.11.3/js/dataTables.bootstrap4.min.js"></script>
        <script type="text/javascript">
            $(document).ready(function() {
                $('#example').DataTable();
            });
        function check()
        {
            if (document.getElementById('quantity').value>100)
            {
                document.getElementById('message').style.color = 'red';
                document.getElementById('message').innerHTML = 'please enter a valid quantity';
            }
            else
            {
                document.getElementById('message').style.color = '';
                document.getElementById('message').innerHTML = '';
            }
        }
        var _validFileExtensions = [".jpg", ".jpeg", ".bmp", ".gif", ".png"];
        function ValidateSingleInput(oInput) {
            if (oInput.type == "file") {
                var sFileName = oInput.value;
                if (sFileName.length > 0) {
                    var blnValid = false;
                    for (var j = 0; j < _validFileExtensions.length; j++) {
                        var sCurExtension = _validFileExtensions[j];
                        if (sFileName.substr(sFileName.length - sCurExtension.length,
                            sCurExtension.length).toLowerCase() == sCurExtension.toLowerCase()) {
                            blnValid = true;
                            break;
                        }
                    }
                }
            }
        }
    }

```

```

        if (!blnValid) {
            alert("Sorry, file is invalid, allowed extensions are: " + _validFileExtensions.join(", "));
            oInput.value = "";
            return false;
        }
    }
    return true;
}
</script>
</head>
<body>
<!-- Page Content -->
<div class="container">

    <!-- Page Heading/Breadcrumbs -->
    <h1 class="mt-4 mb-3">Add
        <small>item</small>
    </h1>
    <!-- start div form -->
    <div class="row">
        <div class="col-lg-6 col-md-6">
<!-- ----- start form ----- -->
        <form method="post" enctype="multipart/form-data">
            <!-- Name -->
            <div class="form-group">
                <label for="Nameitem">Name</label>
                <input name="fname" type="text" required="required" class="form-control"
id="Nameitem" placeholder="chair">
            </div>
            <!-- Description -->
            <div class="form-group">
                <label for="Descriptionitem">Description</label>
                <input name="fdescription" type="text" required="required" class="form-control"
id="Descriptionitem" placeholder="Say something about product">
            </div>
            <!-- price -->
            <div class="form-group">
                <label for="priceitem">Price</label>
                <input name="fprice" type="text" required="required" class="form-control"
id="priceitem" placeholder=" 98.9">
            </div>
            <div class="form-group">
                <label for="priceitem">Quantity</label>
                <input name="quantity" type="number" required="required" class="form-control"
onkeyup="check();" id="quantity" placeholder="100">
            </div>
            <span id='message'></span>
        </div>
        <div class="col-lg-6 col-md-6">
            <!-- Category -->
            <div class="form-group">
                <label class="pt-2 pb-4 text-center" for="categories">Choose category</label>

```

```

        <select class="form-control" id="categories" name="sid" required>
            <option value="">select</option>
            <?php
                $sql="select * from tbl_subcategories";
                $query=mysqli_query($conn,$sql);
                while($row = mysqli_fetch_array($query, MYSQLI_ASSOC)){ ?>
                    <option value="<?php echo $row['s_id'];?>"><?php echo
($row['subcat_name']); ?></option>
                <?php }
            ?>
        </select>
    </div>
    <div class="form-group">
        <label class="pt-2 pb-4 text-center" for="categories">Dealer Information</label>
        <input name="dealer" type="text" required="required" class="form-control"
id="Nameitem" placeholder="Dealer Info">
    </div>
    <!-- File -->
    <div class="form-group">
        <label for="exampleFormControlFile1">Choose Image</label>
        <input type="file" class="form-control-file" onchange="ValidateSingleInput(this);"
id="exampleFormControlFile1" name="file">
    </div>

    <!-- Submit -->
    <button type="submit" name='submit' class="btn btn-success ">Add New </button>

    </form>
</div>
<!-- end div form -->
<!-- /.row -->
<div class="row">
    <div class="col-lg-12" style="margin-top: 50px; margin-bottom: 50px;">
        <h2>All items</h2>
        <!--Start table -->
        <table id="example" class="table table-striped table-bordered" style="width:100%" >
            <thead>
                <tr>
                    <th scope="col">ID</th>
                    <th scope="col">Name</th>
                    <th scope="col">Description</th>
                    <th scope="col">Add Date</th>
                    <th scope="col">Price</th>
                    <th scope="col">Dealer Information</th>
                    <th scope="col">Image</th>
                    <th scope="col">Drop</th>
                </tr>
            </thead>
            <tbody>

<?php
while($result=mysqli_fetch_array($query1))
{

```

```

echo'<tr><form method="post">;
echo "<td>".$result['p_id']. "</td>";
echo "<td>".$result['p_name']. "</td>";
echo "<td>".$result['p_description']. "</td>";
echo "<td>".$result['add_date']. "</td>";
echo "<td style='color:red;'>&#8377;&nbsp;".$result['p_price'] . "</td>";
echo "<td>".$result['dealer']. "</td>";
echo "<td><img src='../img/' . $result['p_img'] . '" height='55px' width='100px'></td>";
echo "<td><input type='hidden' name='id' value='".$result['p_id']."'><input type='submit'
name='delete' value='Delete' class='btn btn-danger btn-sm'></td></tr></form>";
//echo "<td><a href=deleteitem.php?id='".$result['p_id']."'><button>Delete</button></a>";
}
?>
</tbody>
</table>
<!--end table -->
</div>
</div>
<!-- /.row -->
</div>
<!-- /.container -->
</form>
</body>
<?php
include("../footer.php")
?>

```

manageorders.php

```

<?php
session_start();
require("../conn.php");
include("header2.php");
if ((isset($_SESSION['user'])) && (!isset($_SESSION['psw'])))
{
    header('location:../index.php');
}
else{
    $query1=mysqli_query($conn,"SELECT * FROM `tbl_orders` join tbl_users on
tbl_users.login_id=tbl_orders.user_id where tbl_orders.is_delivered='NO'") or
die(mysqli_error($conn));
}
if(isset($_POST['remove']))
{
    $orderid=$_POST['id'];
    mysqli_query($conn,"update tbl_orders set is_delivered='YES' where order_id='$orderid'");
    echo "<script>alert('Moved to order history');window.location.href='orders.php'</script>";
}
?>
<html>
<head>
<link rel="stylesheet" href="https://cdn.datatables.net/1.11.3/css/dataTables.bootstrap4.min.css">
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.5.1/jquery.min.js"></script>
<script src="https://code.jquery.com/jquery-3.5.1.js"></script>

```



```


<script src="https://cdn.datatables.net/1.11.3/js/jquery.dataTables.min.js"></script>
<script src="https://cdn.datatables.net/1.11.3/js/dataTables.bootstrap4.min.js"></script>
<script type="text/javascript">
$(document).ready(function() {
$(#example').DataTable();
} );
</script>
</head>
<body>
<div class="container">
<div class="row">
<div class="col-lg-12" style="margin-top: 50px; margin-bottom: 50px;">
<form action="exportexcel.php" method=post><button type="submit" name="dataExport"
value="Export to excel" class="btn btn-success">Export To Excel</button></form>
<br>
<table id="example" class="table table-striped table-bordered" style="width:100%" >
<thead>
<tr>
<th scope="col">Sl no</th>
<th scope="col">Name</th>
<th scope="col">Address</th>
<th scope="col">Contact</th>
<th scope="col">Item</th>
<th scope="col">Quantity</th>
<th scope="col">Price</th>
<th scope="col">Order_date</th>
<th scope="col">Image</th>
<th scope="col">Action</th>
</tr>
</thead>
<tbody>
<?php
$i=1;
while($result=mysqli_fetch_array($query1))
{
echo<tr><form method="post">';
echo "<td>". $i."</td>";
echo "<td>". $result['name']."</td>";
echo "<td>". $result['address']."</td>";
echo "<td>". $result['mobile']."</td>";
echo "<td>". $result['p_name']."</td>";
echo "<td>". $result['quantity']."</td>";
echo "<td style='color:red;'>&#8377;&nbsp;". $result['total_price'] ."</td>";
echo "<td>". $result['order_date']."</td>";
echo "<td><img src='../img/' . $result['p_img'] .'' height='55px' width='100px'></td>";
echo "<td><input type='hidden' name='id' value='". $result['order_id']."'><input type='submit'
name='remove' value='Remove' class='btn btn-danger btn-sm'></td></tr></form>";
$i++;
}
?>
</tbody>
</table>
<!--end table -->
</div>

```

```
</div>
<!-- /.row -->
</div>
<!-- /.container -->
</body>
<br><br><br><br><br><br><br>
<?php
include("../footer.php")
?>
```



9.2 SCREENSHOTS

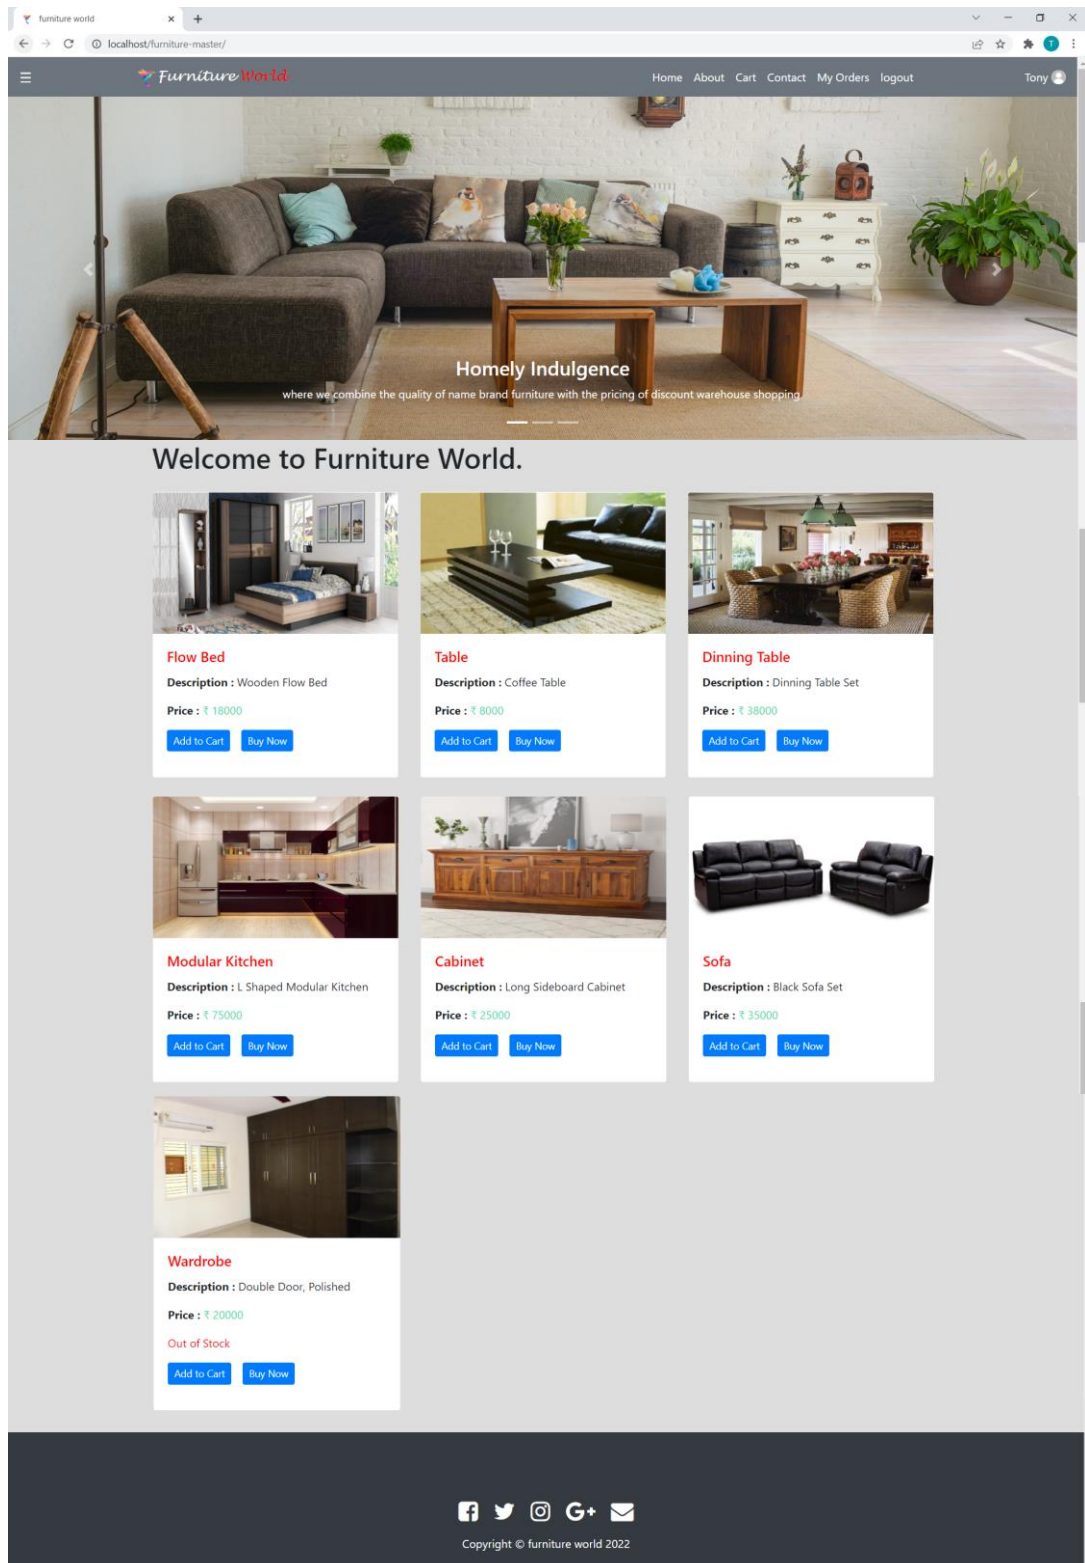Home page



Add to cart page




Screenshot of the 'Add to cart' page in the Furniture World online store. The page shows a shopping cart with one item: a wooden cabinet. The cart table has columns for Product Name, Quantity, Unit Price, Total Price, and Remove. The cabinet is priced at ₹25000. The grand total is ₹25000. There are buttons for 'Continue Shopping' and 'Order Now'.

	Product Name	Quantity	Unit Price	Total Price	Remove
	Cabinet	1	25000	₹25000	
					GRAND TOTAL: ₹25000

[Continue Shopping](#) [Order Now](#)

Payment page

Screenshot of the 'Payment page' in the Furniture World online store. The page shows a 'CREDIT/DEBIT CARD PAYMENT' form with fields for Card Number, Expiry Date, CVV, and Card Holder Name. There is a 'MAKE PAYMENT' button.

CREDIT/DEBIT CARD PAYMENT   

CARD NUMBER

EXPIRY DATE CVV
09 / 25 ***

CARD HOLDER NAME

[MAKE PAYMENT](#)

Add items page





Add item

Name	Choose category
<input type="text" value="chair"/>	<input type="text" value="select"/>
Description	Dealer Information
<input type="text" value="Say something about product"/>	<input type="text" value="Dealer Info"/>
Price	Choose Image
<input type="text" value="98.9"/>	<input type="button" value="Choose File"/> No file chosen
Quantity	<input type="button" value="Add New"/>
<input type="text" value="100"/>	

Manage orders page

Export To Excel
Export as pdf

Show entries
 Search:



Sl no	Name	Address	Contact	Item	Quantity	Price	Order_date	Image	Action
1	Jomeesh Jose	30, 1st Floor, Sarang Street, Khokha Bazar, Mandvi	9878987656	Modular Kitchen	1	₹ 75000	2022-02-17		Remove
2	Jobin Joseph	Plot No 90, Shere Punjab Co-op Soc., Mahakali Caves Road, Chakala, Andheri (west)	8976456789	Flow Bed	1	₹ 18000	2022-02-17		Remove
3	Jils Jacob	524, S.v.p Road, Opera House	7867546798	Sofa	1	₹ 35000	2022-02-17		Remove
4	Jils Jacob	524, S.v.p Road, Opera House	7867546798	Table	1	₹ 8000	2022-02-17		Remove

Showing 1 to 4 of 4 entries
Previous
1
Next

Order history page


Export To Excel
Export as pdf

Show entries
 Search:

Sl no	Name	Address	Contact	Item	Quantity	Price	Order_date	Image
1	Tony Joseph	125,10th Main, 1st Block, Jayanagar	9876564312	Cabinet	1	₹ 25000	2022-02-12	
2	sujith Raman	new delhi	9496986778	Table	1	₹ 8000	2022-02-16	

Showing 1 to 2 of 2 entries
Previous
1
Next

PDF document

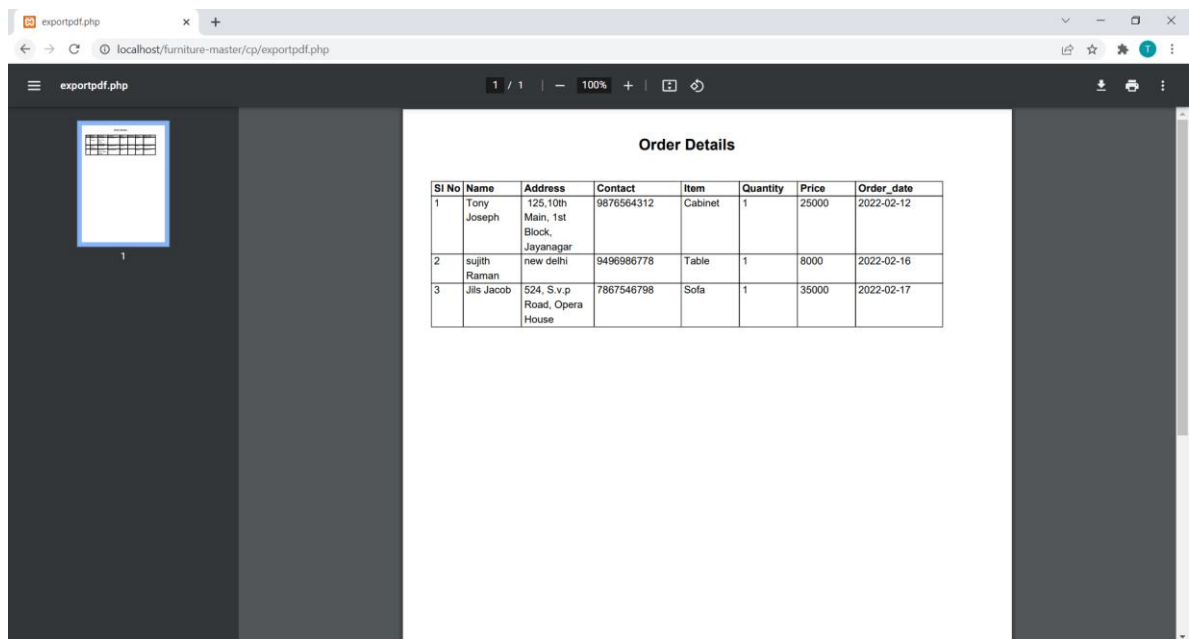

Excel document

SI no	Name	Address	Contact	Item	Quantity	Price	Order Date
1	Jomeesh Jose	30, 1st Floor, Sarang Street, Khokha Bazar, Mandvi	9878987656	Modular Kitchen	1	75000	17-02-2022
2	Jobin Joseph	Plot No 90, Shree Punjabi Co-op Soc., Mahakali Caves Road, Chakala, Andh	8976456789	Flow Bed	1	18000	17-02-2022
3	Jils Jacob	524, S.v.p Road, Opera House	7867546798	Table	1	8000	17-02-2022
4	Jomeesh Jose	30, 1st Floor, Sarang Street, Khokha Bazar, Mandvi	9878987656	Dinning Table	1	38000	21-02-2022

