# Sage Reference Manual: Arithmetic Subgroups of $\mathrm{SL}_2(\mathbf{Z})$

Release 7.5

**The Sage Development Team** 

# CONTENTS

| 1  | Arithmetic subgroups (finite index subgroups of $\mathrm{SL}_2(\mathbf{Z})$ ) | 3  |
|----|---|----|
| 2  | Arithmetic subgroups defined by permutations of cosets                        | 15 |
| 3  | Elements of Arithmetic Subgroups  | 37 |
| 4  | Congruence arithmetic subgroups of $\mathrm{SL}_2(\mathbf{Z})$                | 41 |
| 5  | Congruence Subgroup $\Gamma_H(N)$   | 45 |
| 6  | Congruence Subgroup $\Gamma_1(N)$   | 53 |
| 7  | Congruence Subgroup $\Gamma_0(N)$   | 61 |
| 8  | Congruence Subgroup $\Gamma(N)$   | 67 |
| 9  | The modular group $\mathrm{SL}_2(\mathbf{Z})$                                 | 71 |
| 10 | Farey Symbol for arithmetic subgroups of $\mathrm{PSL}_2(\mathbf{Z})$         | 73 |
| 11 | Cython helper functions for congruence subgroups                              | 83 |
| 12 | Indices and Tables  | 87 |

This chapter describes the basic functionality for finite index subgroups of the modular group  $\mathrm{SL}_2(\mathbf{Z}).$ 

CONTENTS 1

2 CONTENTS

# ARITHMETIC SUBGROUPS (FINITE INDEX SUBGROUPS OF $SL_2(\mathbf{Z})$ )

```
class sage.modular.arithgroup.arithgroup_generic. ArithmeticSubgroup
    Bases: sage.groups.old.Group
```

Base class for arithmetic subgroups of  $SL_2(\mathbf{Z})$ . Not intended to be used directly, but still includes quite a few general-purpose routines which compute data about an arithmetic subgroup assuming that it has a working element testing routine.

#### Element

alias of ArithmeticSubgroupElement

```
are_equivalent (x, y, trans=False)
```

Test whether or not cusps x and y are equivalent modulo self. If self has a reduce\_cusp() method, use that; otherwise do a slow explicit test.

If trans = False, returns True or False. If trans = True, then return either False or an element of self mapping x onto y.

#### **EXAMPLE:**

```
sage: Gamma0(7).are_equivalent(Cusp(1/3), Cusp(0), trans=True)
[ 3 -1]
[-14 5]
sage: Gamma0(7).are_equivalent(Cusp(1/3), Cusp(1/7))
False
```

# as\_permutation\_group ()

Return self as an arithmetic subgroup defined in terms of the permutation action of  $SL(2, \mathbf{Z})$  on its right cosets.

This method uses Todd-Coxeter enumeration (via the method  $todd\_coxeter()$ ) which can be extremely slow for arithmetic subgroups with relatively large index in  $SL(2, \mathbf{Z})$ .

```
sage: G = Gamma(3)
sage: P = G.as_permutation_group(); P
Arithmetic subgroup of index 24
sage: G.ncusps() == P.ncusps()
True
sage: G.nu2() == P.nu2()
True
sage: G.nu3() == P.nu3()
True
sage: G.an_element() in P
True
```

```
sage: P.an_element() in G
True
```

# coset\_reps ( G=None)

Return right coset representatives for self  $\setminus$  G, where G is another arithmetic subgroup that contains self. If G = None, default to G = SL2Z.

For generic arithmetic subgroups G this is carried out by Todd-Coxeter enumeration; here G is treated as a black box, implementing nothing but membership testing.

#### **EXAMPLES:**

#### cusp\_data ( c)

Return a triple (g, w, t) where g is an element of self generating the stabiliser of the given cusp, w is the width of the cusp, and t is 1 if the cusp is regular and -1 if not.

# **EXAMPLES:**

```
sage: Gamma1(4).cusp_data(Cusps(1/2))
(
[ 1 -1]
[ 4 -3], 1, -1
)
```

# cusp\_width ( c)

Return the width of the orbit of cusps represented by c.

# **EXAMPLES:**

```
sage: Gamma0(11).cusp_width(Cusps(oo))
1
sage: Gamma0(11).cusp_width(0)
11
sage: [Gamma0(100).cusp_width(c) for c in Gamma0(100).cusps()]
[100, 1, 4, 1, 1, 1, 4, 25, 1, 1, 4, 1, 25, 4, 1, 4, 1, 1]
```

# cusps ( algorithm='default')

Return a sorted list of inequivalent cusps for self, i.e. a set of representatives for the orbits of self on  $\mathbb{P}^1(\mathbf{Q})$ . These should be returned in a reduced form where this makes sense.

# INPUT:

•algorithm - which algorithm to use to compute the cusps of self. 'default' finds representatives for a known complete set of cusps. 'modsym' computes the boundary map on the space of weight two modular symbols associated to self, which finds the cusps for self in the process.

#### **EXAMPLES:**

```
sage: Gamma0(36).cusps()
[0, 1/18, 1/12, 1/9, 1/6, 1/4, 1/3, 5/12, 1/2, 2/3, 5/6, Infinity]
sage: Gamma0(36).cusps(algorithm='modsym') == Gamma0(36).cusps()
True
sage: GammaH(36, [19,29]).cusps() == Gamma0(36).cusps()
True
sage: Gamma0(1).cusps()
[Infinity]
```

#### dimension cusp forms (k=2)

Return the dimension of the space of weight k cusp forms for this group. This is given by a standard formula in terms of k and various invariants of the group; see Diamond + Shurman, "A First Course in Modular Forms", section 3.5 and 3.6. If k is not given, default to k = 2.

For dimensions of spaces of cusp forms with character for Gamma1, use the standalone function dimension\_cusp\_forms().

For weight 1 cusp forms this function only works in cases where one can prove solely in terms of Riemann-Roch theory that there aren't any cusp forms (i.e. when the number of regular cusps is strictly greater than the degree of the canonical divisor). Otherwise a NotImplementedError is raised.

# **EXAMPLE:**

#### dimension eis (k=2)

Return the dimension of the space of weight k Eisenstein series for this group, which is a subspace of the space of modular forms complementary to the space of cusp forms.

# INPUT:

•k - an integer (default 2).

#### **EXAMPLES:**

```
sage: GammaH(33,[2]).dimension_eis()
7
sage: GammaH(33,[2]).dimension_eis(3)
0
sage: GammaH(33, [2,5]).dimension_eis(2)
3
sage: GammaH(33, [4]).dimension_eis(1)
4
```

# dimension\_modular\_forms ( k=2)

Return the dimension of the space of weight k modular forms for this group. This is given by a standard formula in terms of k and various invariants of the group; see Diamond + Shurman, "A First Course in Modular Forms", section 3.5 and 3.6. If k is not given, defaults to k = 2.

For dimensions of spaces of modular forms with character for Gamma1, use the standalone function dimension\_modular\_forms().

For weight 1 modular forms this function only works in cases where one can prove solely in terms of Riemann-Roch theory that there aren't any cusp forms (i.e. when the number of regular cusps is strictly greater than the degree of the canonical divisor). Otherwise a NotImplementedError is raised.

#### **EXAMPLE:**

# farey\_symbol ()

Return the Farey symbol associated to this subgroup. See the farey\_symbol module for more information.

#### **EXAMPLE:**

```
sage: Gamma1(4).farey_symbol()
FareySymbol(Congruence Subgroup Gamma1(4))
```

# gen(i)

Return the i-th generator of self, i.e. the i-th element of the tuple self.gens().

#### **EXAMPLES:**

```
sage: SL2Z.gen(1)
[1 1]
[0 1]
```

# generalised\_level ()

Return the generalised level of self, i.e. the least common multiple of the widths of all cusps.

If self is *even*, Wohlfart's theorem tells us that this is equal to the (conventional) level of self when self is a congruence subgroup. This can fail if self is odd, but the actual level is at most twice the generalised level. See the paper by Kiming, Schuett and Verrill for more examples.

# EXAMPLE:

In the following example, the actual level is twice the generalised level. This is the group  $G_2$  from Example 17 of K-S-V.

```
sage: G = CongruenceSubgroup(8, [ [1,1,0,1], [3,-1,4,-1] ])
sage: G.level()
8
```

```
sage: G.generalised_level()
4
```

# generators ( algorithm='farey')

Return a list of generators for this congruence subgroup. The result is cached.

#### INPUT:

•algorithm (string): either farey or todd-coxeter.

If algorithm is set to "farey", then the generators will be calculated using Farey symbols, which will always return a *minimal* generating set. See <code>farey\_symbol</code> for more information.

If algorithm is set to "todd-coxeter", a simpler algorithm based on Todd-Coxeter enumeration will be used. This is *exceedingly* slow for general subgroups, and the list of generators will be far from minimal (indeed it may contain repetitions).

#### EXAMPLE:

```
sage: Gamma(2).generators()
[
[1 2] [ 3 -2] [-1 0]
[0 1], [ 2 -1], [ 0 -1]
]
sage: Gamma(2).generators(algorithm="todd-coxeter")
[
[1 2] [-1 0] [ 1 0] [-1 0] [-1 2] [-1 0] [1 0]
[0 1], [ 0 -1], [-2 1], [ 0 -1], [-2 3], [ 2 -1], [ 2 1]
]
```

# gens ( \*args, \*\*kwds)

Return a tuple of generators for this congruence subgroup.

The generators need not be minimal. For arguments, see *generators* ().

# **EXAMPLES:**

```
sage: SL2Z.gens()
(
[ 0 -1] [1 1]
[ 1 0], [0 1]
)
```

# genus ()

Return the genus of the modular curve of self.

```
sage: Gamma1(5).genus()
0
sage: Gamma1(31).genus()
26
sage: Gamma1(157).genus() == dimension_cusp_forms(Gamma1(157), 2)
True
sage: GammaH(7, [2]).genus()
0
sage: [Gamma0(n).genus() for n in [1..23]]
[0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 0, 0, 1, 1, 0, 1, 0, 1, 1, 1, 2, 2]
sage: [n for n in [1..200] if Gamma0(n).genus() == 1]
[11, 14, 15, 17, 19, 20, 21, 24, 27, 32, 36, 49]
```

#### index ()

Return the index of self in the full modular group.

#### **EXAMPLES:**

```
sage: Gamma0(17).index()
18
sage: sage.modular.arithgroup.congroup_generic.CongruenceSubgroup(5).index()
Traceback (most recent call last):
...
NotImplementedError
```

#### is abelian ()

Return True if this arithmetic subgroup is abelian.

Since arithmetic subgroups are always nonabelian, this always returns False.

#### **EXAMPLES:**

```
sage: SL2Z.is_abelian()
False
sage: Gamma0(3).is_abelian()
False
sage: Gamma1(12).is_abelian()
False
sage: GammaH(4, [3]).is_abelian()
False
```

#### is\_congruence()

Return True if self is a congruence subgroup.

#### **EXAMPLE:**

# is\_even ()

Return True precisely if this subgroup contains the matrix -1.

# **EXAMPLES:**

```
sage: SL2Z.is_even()
True
sage: Gamma0(20).is_even()
True
sage: Gamma1(5).is_even()
False
sage: GammaH(11, [3]).is_even()
False
```

# is finite()

Return True if this arithmetic subgroup is finite.

Since arithmetic subgroups are always infinite, this always returns False.

```
sage: SL2Z.is_finite()
False
sage: Gamma0(3).is_finite()
False
sage: Gamma1(12).is_finite()
False
sage: GammaH(4, [3]).is_finite()
```

# is\_normal()

Return True precisely if this subgroup is a normal subgroup of SL2Z.

#### **EXAMPLES:**

```
sage: Gamma(3).is_normal()
True
sage: Gamma1(3).is_normal()
False
```

#### is\_odd()

Return True precisely if this subgroup does not contain the matrix -1.

#### **EXAMPLES:**

```
sage: SL2Z.is_odd()
False
sage: Gamma0(20).is_odd()
False
sage: Gamma1(5).is_odd()
True
sage: GammaH(11, [3]).is_odd()
True
```

# is\_parent\_of (x)

Check whether this group is a valid parent for the element x. Required by Sage's testing framework.

# **EXAMPLE:**

```
sage: Gamma(3).is_parent_of(ZZ(1))
False
sage: Gamma(3).is_parent_of([1,0,0,1])
False
sage: Gamma(3).is_parent_of(SL2Z([1,1,0,1]))
False
sage: Gamma(3).is_parent_of(SL2Z(1))
True
```

# is\_regular\_cusp ( c)

Return True if the orbit of the given cusp is a regular cusp for self, otherwise False. This is automatically true if -1 is in self.

```
sage: Gamma1(4).is_regular_cusp(Cusps(1/2))
False
sage: Gamma1(4).is_regular_cusp(Cusps(00))
True
```

#### is\_subgroup ( right)

Return True if self is a subgroup of right, and False otherwise. For generic arithmetic subgroups this is done by the absurdly slow algorithm of checking all of the generators of self to see if they are in right.

# **EXAMPLES:**

# ncusps ()

Return the number of cusps of this arithmetic subgroup. This is provided as a separate function since for dimension formulae in even weight all we need to know is the number of cusps, and this can be calculated very quickly, while enumerating all cusps is much slower.

#### **EXAMPLES:**

# ngens ()

Return the size of the minimal generating set of self returned by generators ().

# **EXAMPLES:**

```
sage: Gamma0(22).ngens()
8
sage: Gamma1(14).ngens()
13
sage: GammaH(11, [3]).ngens()
3
sage: SL2Z.ngens()
2
```

#### nirregcusps ()

Return the number of cusps of self that are "irregular", i.e. their stabiliser can only be generated by elements with both eigenvalues -1 rather than +1. If the group contains -1, every cusp is clearly regular.

#### **EXAMPLES:**

# nregcusps ()

Return the number of cusps of self that are "regular", i.e. their stabiliser has a generator with both eigenvalues +1 rather than -1. If the group contains -1, every cusp is clearly regular.

```
sage: sage.modular.arithgroup.arithgroup_generic.ArithmeticSubgroup.

→nregcusps(Gamma1(4))
2
```

#### nu2 ()

Return the number of orbits of elliptic points of order 2 for this arithmetic subgroup.

#### **EXAMPLES:**

# **nu3**()

Return the number of orbits of elliptic points of order 3 for this arithmetic subgroup.

#### **EXAMPLES:**

We test that a bug in handling of subgroups not containing -1 is fixed:

#### order ()

Return the number of elements in this arithmetic subgroup.

Since arithmetic subgroups are always infinite, this always returns infinity.

# **EXAMPLES:**

```
sage: SL2Z.order()
+Infinity
sage: Gamma0(5).order()
+Infinity
sage: Gamma1(2).order()
+Infinity
sage: GammaH(12, [5]).order()
+Infinity
```

# projective index()

Return the index of the image of self in  $PSL_2(\mathbf{Z})$ . This is equal to the index of self if self contains -1, and half of this otherwise.

This is equal to the degree of the natural map from the modular curve of self to the j-line.

```
sage: Gamma0(5).projective_index()
6
```

```
sage: Gamma1(5).projective_index()
12
```

# reduce\_cusp ( c)

Given a cusp  $c \in \mathbb{P}^1(\mathbf{Q})$ , return the unique reduced cusp equivalent to c under the action of self, where a reduced cusp is an element  $\frac{r}{s}$  with r,s coprime non-negative integers, s as small as possible, and r as small as possible for that s.

NOTE: This function should be overridden by all subclasses.

#### **EXAMPLES:**

# sturm\_bound ( weight=2)

Returns the Sturm bound for modular forms of the given weight and level this subgroup.

#### INPUT:

```
•weight - an integer \geq 2 (default: 2)
```

#### **EXAMPLES:**

```
sage: Gamma0(11).sturm_bound(2)
sage: Gamma0(389).sturm_bound(2)
sage: Gamma0(1).sturm_bound(12)
sage: Gamma0(100).sturm_bound(2)
sage: Gamma0(1).sturm_bound(36)
sage: Gamma0(11).sturm_bound()
sage: Gamma0(13).sturm_bound()
sage: Gamma0(16).sturm_bound()
sage: GammaH(16,[13]).sturm_bound()
sage: GammaH(16,[15]).sturm_bound()
16
sage: Gamma1(16).sturm_bound()
sage: Gamma1(13).sturm_bound()
28
sage: Gamma1(13).sturm_bound(5)
70
```

FURTHER DETAILS: This function returns a positive integer n such that the Hecke operators  $T_1,\ldots,T_n$  acting on cusp forms generate the Hecke algebra as a  $\mathbf{Z}$ -module when the character is trivial or quadratic. Otherwise,  $T_1,\ldots,T_n$  generate the Hecke algebra at least as a  $\mathbf{Z}[\varepsilon]$ -module, where  $\mathbf{Z}[\varepsilon]$  is the ring generated by the values of the Dirichlet character  $\varepsilon$ . Alternatively, this is a bound such that if two cusp forms

associated to this space of modular symbols are congruent modulo  $(\lambda, q^n)$ , then they are congruent modulo  $\lambda$ .

#### REFERENCES:

- •See the Agashe-Stein appendix to Lario and Schoof, *Some computations with Hecke rings and deformation rings*, Experimental Math., 11 (2002), no. 2, 303-311.
- •This result originated in the paper Sturm, *On the congruence of modular forms*, Springer LNM 1240, 275-280, 1987.

REMARK: Kevin Buzzard pointed out to me (William Stein) in Fall 2002 that the above bound is fine for  $\Gamma_1(N)$  with character, as one sees by taking a power of f. More precisely, if  $f \cong 0 \pmod p$  for first s coefficients, then  $f^r \cong 0 \pmod p$  for first  $s^r$  coefficients. Since the weight of  $f^r$  is  $r \cdot k(f)$ , it follows that if  $s \geq b$ , where b is the Sturm bound for  $\Gamma_0(N)$  at weight k(f), then  $f^r$  has valuation large enough to be forced to be 0 at r \* k(f) by Sturm bound (which is valid if we choose r correctly). Thus  $f \cong 0 \pmod p$ . Conclusion: For  $\Gamma_1(N)$  with fixed character, the Sturm bound is *exactly* the same as for  $\Gamma_0(N)$ .

A key point is that we are finding  $\mathbf{Z}[\varepsilon]$  generators for the Hecke algebra here, not **Z**-generators. So if one wants generators for the Hecke algebra over **Z**, this bound must be suitably modified (and I'm not sure what the modification is).

#### **AUTHORS:**

•William Stein

#### to\_even\_subgroup ( )

Return the smallest even subgroup of  $SL(2, \mathbf{Z})$  containing self.

#### **EXAMPLE:**

# todd\_coxeter ( G=None, on\_right=True)

Compute coset representatives for self \ G and action of standard generators on them via Todd-Coxeter enumeration.

If G is None, default to SL2Z. The method also computes generators of the subgroup at same time.

#### INPUT:

- •G intermediate subgroup (currently not implemented if different from SL(2,Z))
- •on\_right boolean (default: True) if True return right coset enumeration, if False return left one.

This is *extremely* slow in general.

# **OUTPUT**:

- •a list of coset representatives
- •a list of generators for the group
- •1 list of integers that correspond to the action of the standard parabolic element [[1,1],[0,1]] of  $SL(2, \mathbf{Z})$  on the cosets of self.
- •s list of integers that correspond to the action of the standard element of order 2 [[0,-1],[1,0]] on the cosets of self.

# **EXAMPLES:**

```
sage: L = SL2Z([1,1,0,1])
sage: S = SL2Z([0,-1,1,0])
sage: G = Gamma(2)
sage: reps, gens, 1, s = G.todd_coxeter()
sage: len(reps) == G.index()
sage: all(reps[i] * L * ~reps[l[i]] in G for i in range(6))
sage: all(reps[i] * S * ~reps[s[i]] in G for i in range(6))
True
sage: G = Gamma0(7)
sage: reps, gens, l, s = G.todd_coxeter()
sage: len(reps) == G.index()
True
sage: all(reps[i] * L * ~reps[l[i]] in G for i in range(8))
sage: all(reps[i] * S * ~reps[s[i]] in G for i in range(8))
True
sage: G = Gamma1(3)
sage: reps, gens, l, s = G.todd_coxeter(on_right=False)
sage: len(reps) == G.index()
True
sage: all(~reps[l[i]] * L * reps[i] in G for i in range(8))
sage: all(~reps[s[i]] * S * reps[i] in G for i in range(8))
True
sage: G = Gamma0(5)
sage: reps, gens, 1, s = G.todd_coxeter(on_right=False)
sage: len(reps) == G.index()
sage: all(~reps[l[i]] * L * reps[i] in G for i in range(6))
sage: all(~reps[s[i]] * S * reps[i] in G for i in range(6))
True
```

sage.modular.arithgroup.arithgroup\_generic.is\_ArithmeticSubgroup (x)
Return True if x is of type ArithmeticSubgroup.

```
sage: from sage.modular.arithgroup.all import is_ArithmeticSubgroup
sage: is_ArithmeticSubgroup(GL(2, GF(7)))
False
sage: is_ArithmeticSubgroup(Gamma0(4))
True
```

# ARITHMETIC SUBGROUPS DEFINED BY PERMUTATIONS OF COSETS

A subgroup of finite index H of a finitely generated group G is completely described by the action of a set of generators of G on the right cosets  $H \setminus G = \{Hg\}_{g \in G}$ . After some arbitrary choice of numbering one can identify the action of generators as elements of a symmetric group acting transitively (and satisfying the relations of the relators in G). As  $SL_2(\mathbf{Z})$  has a very simple presentation as a central extension of a free product of cyclic groups, one can easily design algorithms from this point of view.

The generators of  $SL_2(\mathbf{Z})$  used in this module are named as follows  $s_2$ ,  $s_3$ , l, r which are defined by

$$s_2 = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix}, \quad s_3 = \begin{pmatrix} 0 & 1 \\ -1 & 1 \end{pmatrix}, \quad l = \begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix}, \quad r = \begin{pmatrix} 1 & 0 \\ 1 & 1 \end{pmatrix}.$$

Those generators satisfy the following relations

$$s_2^2 = s_3^3 = -1, \quad r = s_2^{-1} l^{-1} s_2.$$

In particular not all four are needed to generate the whole group  $SL_2(\mathbf{Z})$ . Three couples which generate  $SL_2(\mathbf{Z})$  are of particular interest:

- (l,r) as they are also semigroup generators for the semigroup of matrices in  $SL_2(\mathbf{Z})$  with non-negative entries,
- $(l, s_2)$  as they are closely related to the continued fraction algorithm,
- $(s_2, s_3)$  as the group  $PSL_2(\mathbf{Z})$  is the free product of the finite cyclic groups generated by these two elements.

Part of these functions are based on Chris Kurth's *KFarey* package [Kur2008]. For tests see the file sage.modular.arithgroup.tests.

#### **REFERENCES:**

- [ASD1971]
- [Gor2009]
- [HL2014]
- [Hsu1996]
- [Hsu1997]
- [KSV2011]
- [Kul1991]
- [Kur2008]
- [KL2008]
- [Ver]

#### Todo

- · modular Farey symbols
- computation of generators of a modular subgroup with a standard surface group presentation. In other words,
   compute a presentation of the form

$$\langle x_i, y_i, c_j | \prod_i [x_i, y_i] \prod_j c_j^{\nu_j} = 1 \rangle$$

where the elements  $x_i$  and  $y_i$  are hyperbolic and  $c_i$  are parabolic ( $\nu_i = \infty$ ) or elliptic elements ( $\nu_i < \infty$ ).

- computation of centralizer.
- generation of modular (even) subgroups of fixed index.

#### **AUTHORS**:

- Chris Kurth (2008): created KFarey package
- David Loeffler (2009): adapted functions from KFarey for inclusion into Sage
- · Vincent Delecroix (2010): implementation for odd groups, new design, improvements, documentation
- David Loeffler (2011): congruence testing for odd subgroups, enumeration of liftings of projective subgroups
- David Loeffler & Thomas Hamilton (2012): generalised Hsu congruence test for odd subgroups

```
sage.modular.arithgroup_arithgroup_perm. ArithmeticSubgroup_Permutation ( L=None, R=None, S2=None, S3=None, re-la-bel=False, check=True)
```

Construct a subgroup of  $SL_2(\mathbf{Z})$  from the action of generators on its right cosets.

Return an arithmetic subgroup knowing the action, given by permutations, of at least two standard generators on the its cosets. The generators considered are the following matrices:

$$s_2 = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix}, \quad s_3 = \begin{pmatrix} 0 & 1 \\ -1 & 1 \end{pmatrix}, \quad l = \begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix}, \quad r = \begin{pmatrix} 1 & 0 \\ 1 & 1 \end{pmatrix}.$$

An error will be raised if only one permutation is given. If no arguments are given at all, the full modular group  $SL(2, \mathbf{Z})$  is returned.

# INPUT:

- •S2, S3, L, R permutations action of matrices on the right cosets (each coset is identified to an element of  $\{1, \ldots, n\}$  where 1 is reserved for the identity coset).
- •relabel boolean (default: False) if True, renumber the cosets in a canonical way.
- •check boolean (default: True) check that the input is valid (it may be time efficient but less safe to set it to False)

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2)(3,4)",S3="(1,2,3)")
sage: G
Arithmetic subgroup with permutations of right cosets
```

```
S2=(1,2)(3,4)
S3=(1,2,3)
L=(1,4,3)
R=(2,4,3)
sage: G.index()

sage: G = ArithmeticSubgroup_Permutation(); G
Arithmetic subgroup with permutations of right cosets
S2=()
S3=()
L=()
R=()
Sage: G == SL2Z
True
```

# Some invalid inputs:

```
sage: ArithmeticSubgroup_Permutation(S2="(1,2)")
Traceback (most recent call last):
...
ValueError: Need at least two generators
sage: ArithmeticSubgroup_Permutation(S2="(1,2)",S3="(3,4,5)")
Traceback (most recent call last):
...
ValueError: Permutations do not generate a transitive group
sage: ArithmeticSubgroup_Permutation(L="(1,2)",R="(1,2,3)")
Traceback (most recent call last):
...
ValueError: Wrong relations between generators
sage: ArithmeticSubgroup_Permutation(S2="(1,2,3,4)",S3="()")
Traceback (most recent call last):
...
ValueError: S2^2 does not equal to S3^3
sage: ArithmeticSubgroup_Permutation(S2="(1,4,2,5,3)", S3="(1,3,5,2,4)")
Traceback (most recent call last):
...
ValueError: S2^2 = S3^3 must have order 1 or 2
```

# The input checks can be disabled for speed:

A subgroup of  $SL_2(\mathbf{Z})$  defined by the action of generators on its coset graph.

The class stores the action of generators  $s_2, s_3, l, r$  on right cosets Hg of a finite index subgroup  $H < SL_2(\mathbf{Z})$ . In particular the action of  $SL_2(\mathbf{Z})$  on the cosets is on right.

$$s_2 = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix}, \quad s_3 = \begin{pmatrix} 0 & 1 \\ -1 & 1 \end{pmatrix}, \quad l = \begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix}, \quad r = \begin{pmatrix} 1 & 0 \\ 1 & 1 \end{pmatrix}.$$

# TEST:

```
sage: s2 = PermutationGroupElement('(1,2)(3,4)(5,6)')
sage: s3 = PermutationGroupElement('(1,3,5)(2,4,6)')
sage: G = ArithmeticSubgroup_Permutation(S2=s2, S3=s3)
sage: G.S2() == s2
True
sage: G.S3() == s3
True
sage: G == ArithmeticSubgroup_Permutation(L=G.L(), R=G.R())
sage: G == ArithmeticSubgroup_Permutation(L=G.L(), S2=G.S2())
sage: G == ArithmeticSubgroup_Permutation(L=G.L(), S3=G.S3())
sage: G == ArithmeticSubgroup_Permutation(R=G.R(), S2=G.S2())
sage: G == ArithmeticSubgroup_Permutation(R=G.R(), S3=G.S3())
sage: G == ArithmeticSubgroup_Permutation(S2=G.S2(), S3=G.S3())
sage: G = ArithmeticSubgroup_Permutation(S2='',S3='')
sage: TestSuite(G).run()
sage: S2 = '(1,2)(3,4)(5,6)'
sage: S3 = '(1,2,3)(4,5,6)'
sage: G = ArithmeticSubgroup_Permutation(S2=S2, S3=S3)
sage: TestSuite(G).run()
```

#### **L**()

Return the action of the matrix l as a permutation of cosets.

$$l = \begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix}$$

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2)",S3="(1,2,3)")
sage: G.L()
(1,3)
```

# **R**()

Return the action of the matrix r as a permutation of cosets.

$$r = \begin{pmatrix} 1 & 0 \\ 1 & 1 \end{pmatrix}$$

#### **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2)",S3="(1,2,3)")
sage: G.R()
(2,3)
```

#### S2 (

Return the action of the matrix  $s_2$  as a permutation of cosets.

$$s_2 = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix}$$

#### **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2)",S3="(1,2,3)")
sage: G.S2()
(1,2)
```

**S3**()

Return the action of the matrix  $s_3$  as a permutation of cosets.

$$s_3 = \begin{pmatrix} 0 & 1 \\ -1 & 1 \end{pmatrix},$$

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2)",S3="(1,2,3)")
sage: G.S3()
(1,2,3)
```

#### congruence\_closure ()

Returns the smallest congruence subgroup containing self. If self is congruence, this is just self, but represented as a congruence subgroup data type. If self is not congruence, then it may be larger.

In practice, we use the following criterion: let m be the generalised level of self. If this subgroup is even, let n=m, else let n=2m. Then any congruence subgroup containing self contains  $\Gamma(n)$  (a generalisation of Wohlfahrt's theorem due to Kiming, Verrill and Schuett). So we compute the image of self modulo n and return the preimage of that.

**Note:** If you just want to know if the subgroup is congruence or not, it is *much* faster to use *is\_congruence()*.

# EXAMPLE:

# INPUT:

- •right\_cosets bool (default: False) right or left coset graph
- •s2\_edges bool (default: True) put edges associated to s2
- •s3\_edges bool (default: True) put edges associated to s3
- •l\_edges bool (default: False) put edges associated to l
- •r edges bool (default: False) put edges associated to r
- •s2\_label, s3\_label, l\_label, r\_label the labels to put on the edges corresponding to the generators action. Use None for no label.

#### **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2)",S3="()")
sage: G
Arithmetic subgroup with permutations of right cosets
S2=(1,2)
S3=()
L=(1,2)
R=(1,2)
sage: G.index()
2
sage: G.coset_graph()
Looped multi-digraph on 2 vertices
```

#### generalised\_level ()

Return the generalised level of this subgroup.

The *generalised level* of a subgroup of the modular group is the least common multiple of the widths of the cusps. It was proven by Wohlfart that for even congruence subgroups, the (conventional) level coincides with the generalised level. For odd congruence subgroups the level is either the generalised level, or twice the generalised level [KSV2011].

#### **EXAMPLES:**

```
sage: G = Gamma(2).as_permutation_group()
sage: G.generalised_level()
2
sage: G = Gamma0(3).as_permutation_group()
sage: G.generalised_level()
3
```

# index ()

Returns the index of this modular subgroup in the full modular group.

#### **EXAMPLES:**

```
sage: G = Gamma(2)
sage: P = G.as_permutation_group()
sage: P.index()
sage: G.index() == P.index()
True
sage: G = Gamma0(8)
sage: P = G.as_permutation_group()
sage: P.index()
12
sage: G.index() == P.index()
True
sage: G = Gamma1(6)
sage: P = G.as_permutation_group()
sage: P.index()
sage: G.index() == P.index()
True
```

#### is\_congruence ()

Return True if this is a congruence subgroup, and False otherwise.

#### ALGORITHM:

Uses Hsu's algorithm [Hsu1996]. Adapted from Chris Kurth's implementation in KFarey [Kur2008].

For *odd* subgroups, Hsu's algorithm still works with minor modifications, using the extension of Wohlfarht's theorem due to Kiming, Schuett and Verrill [KSV2011]. See [HL2014] for details.

The algorithm is as follows. Let G be a finite-index subgroup of  $SL(2, \mathbf{Z})$ , and let L and R be the permutations of the cosets of G given by the elements  $\begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix}$  and  $\begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix}$ . Let N be the generalized level of G (if G is even) or twice the generalized level (if G is odd). Then:

•if N is odd, G is congruence if and only if the relation

$$(LR^{-1}L)^2 = (R^2L^{1/2})^3$$

holds, where 1/2 is understood as the multiplicative inverse of 2 modulo N.

•if N is a power of 2, then G is congruence if and only if the relations

$$\begin{array}{ll} (LR^{-1}L)^{-1}S(LR^{-1}L)S=1 & (A1) \\ S^{-1}RS=R^{25} & (A2) \\ (LR^{-1}L)^2=(SR^5LR^{-1}L)^3 & (A3) \end{array}$$

hold, where  $S = L^{20}R^{1/5}L^{-4}R^{-1}$ , 1/5 being the inverse of 5 modulo N.

•if N is neither odd nor a power of 2, seven relations (B1-7) hold, for which see [HL2014], or the source code of this function.

If the Sage verbosity flag is set (using set\_verbose()), then extra output will be produced indicating which of the relations (A1-3) or (B1-7) is not satisfied.

# **EXAMPLES:**

Test if  $SL_2(\mathbf{Z})$  is congruence:

```
sage: a = ArithmeticSubgroup_Permutation(L='',R='')
sage: a.index()
1
sage: a.is_congruence()
True
```

This example is congruence – it is  $\Gamma_0(3)$  in disguise:

```
sage: S2 = SymmetricGroup(4)
sage: 1 = S2((2,3,4))
sage: r = S2((1,3,4))
sage: G = ArithmeticSubgroup_Permutation(L=1,R=r)
sage: G
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,4)
S3=(1,4,2)
L=(2,3,4)
R=(1,3,4)
sage: G.is_congruence()
True
```

This one is noncongruence:

```
sage: import sage.modular.arithgroup.arithgroup_perm as ap
sage: ap.HsuExample10().is_congruence()
False
```

The following example (taken from [KSV2011]) shows that a lifting of a congruence subgroup of  $PSL(2, \mathbf{Z})$  to a subgroup of  $SL(2, \mathbf{Z})$  need not necessarily be congruence:

In fact G is a lifting to  $SL(2, \mathbf{Z})$  of the group  $\bar{\Gamma}_0(6)$ :

```
sage: G.to_even_subgroup() == Gamma0(6)
True
```

#### is\_normal()

Test whether the group is normal

# **EXAMPLES:**

```
sage: G = Gamma(2).as_permutation_group()
sage: G.is_normal()
True

sage: G = Gamma1(2).as_permutation_group()
sage: G.is_normal()
False
```

# perm\_group ( )

Return the underlying permutation group.

The permutation group returned is isomorphic to the action of the generators  $s_2$  (element of order two),  $s_3$  (element of order 3), l (parabolic element) and r (parabolic element) on right cosets (the action is on the right).

# **EXAMPLE:**

# permutation\_action (x)

Given an element x of  $SL_2(\mathbf{Z})$ , compute the permutation of the cosets of self given by right multiplication by x.

# EXAMPLE:

```
sage: import sage.modular.arithgroup.arithgroup_perm as ap
sage: ap.HsuExample10().permutation_action(SL2Z([32, -21, -67, 44]))
(1,4,6,2,10,5,3,7,8,9)
```

# random\_element ( initial\_steps=30)

Returns a random element in this subgroup.

The algorithm uses a random walk on the Cayley graph of  $SL_2(\mathbf{Z})$  stopped at the first time it reaches the subgroup after at least initial\_steps steps.

# INPUT:

•initial\_steps - positive integer (default: 30)

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2='(1,3)(4,5)',S3='(1,2,5)(3,4,6)')
sage: all(G.random_element() in G for _ in range(10))
True
```

# relabel (inplace=True)

Relabel the cosets of this modular subgroup in a canonical way.

The implementation of modular subgroup by action of generators on cosets depends on the choice of a numbering. This function provides canonical labels in the sense that two equal subgroups with different labels are relabeled the same way. The default implementation relabels the group itself. If you want to get a relabeled copy of your modular subgroup, put to False the option inplace.

# ALGORITHM:

We give an overview of how the canonical labels for the modular subgroup are built. The procedure only uses the permutations S3 and S2 that define the modular subgroup and can be used to renumber any transitive action of the symmetric group. In other words, the algorithm construct a canonical representative of a transitive subgroup in its conjugacy class in the full symmetric group.

- 1. The identity is still numbered 0 and set the current vertex to be the identity.
- 2. Number the cycle of S3 the current vertex belongs to: if the current vertex is labeled n then the numbering in such way that the cycle becomes  $(n, n+1, \ldots, n+k)$ .
- 3. Find a new current vertex using the permutation S2. If all vertices are relabeled then it's done, otherwise go to step 2.

```
sage: S2 = "(1,2)(3,4)(5,6)"; S3 = "(1,2,3)(4,5,6)"
sage: G1 = ArithmeticSubgroup_Permutation(S2=S2,S3=S3); G1
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,4)(5,6)
S3 = (1, 2, 3) (4, 5, 6)
L=(1,4,5,3)
R = (2, 4, 6, 3)
sage: G1.relabel(); G1
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,4)(5,6)
S3 = (1, 2, 3) (4, 5, 6)
L=(1,4,5,3)
R=(2,4,6,3)
sage: S2 = "(1,2)(3,5)(4,6)"; S3 = "(1,2,3)(4,5,6)"
sage: G2 = ArithmeticSubgroup_Permutation(S2=S2,S3=S3); G2
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,5)(4,6)
S3 = (1, 2, 3) (4, 5, 6)
L=(1,5,6,3)
R=(2,5,4,3)
sage: G2.relabel(); G2
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,4)(5,6)
S3 = (1, 2, 3) (4, 5, 6)
L=(1,4,5,3)
```

```
R=(2,4,6,3)
sage: S2 = "(1,2)(3,6)(4,5)"; S3 = "(1,2,3)(4,5,6)"
sage: G3 = ArithmeticSubgroup_Permutation(S2=S2,S3=S3); G3
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,6)(4,5)
S3=(1,2,3)(4,5,6)
L=(1,6,4,3)
R=(2,6,5,3)
sage: G4 = G3.relabel(inplace=False)
sage: G4
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,4)(5,6)
S3 = (1, 2, 3) (4, 5, 6)
L=(1,4,5,3)
R = (2, 4, 6, 3)
sage: G3 is G4
False
```

#### TESTS:

```
sage: S2 = "(1,2)(3,6)(4,5)"
sage: S3 = "(1,2,3)(4,5,6)"
sage: G = ArithmeticSubgroup_Permutation(S2=S2,S3=S3)
sage: H = G.relabel(inplace=False)
sage: G is H
False
sage: G._S2 is H._S2 or G._S3 is H._S3 or G._L is H._L or G._R is H._R
False
sage: G.relabel(inplace=False) is H
sage: H.relabel(inplace=False) is H
sage: G.relabel(); G
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,4)(5,6)
S3=(1,2,3)(4,5,6)
L=(1,4,5,3)
R=(2,4,6,3)
sage: G.relabel(inplace=False) is G
True
```

#### surgroups ( )

Return an iterator through the non-trivial intermediate groups between  $SL(2, \mathbf{Z})$  and this finite index group.

```
True
```

The principal congruence group  $\Gamma(3)$  has thirteen surgroups:

class sage.modular.arithgroup\_arithgroup\_perm. EvenArithmeticSubgroup\_Permutation ( S2, S3,

S3, L, R, canon-

ical labels=Fal

Bases: sage.modular.arithgroup.arithgroup\_perm.ArithmeticSubgroup\_Permutation\_class

An arithmetic subgroup of  $SL(2, \mathbf{Z})$  containing -1, represented in terms of the right action of  $SL(2, \mathbf{Z})$  on its cosets.

#### **EXAMPLES:**

Construct a noncongruence subgroup of index 7 (the smallest possible):

```
sage: a2 = SymmetricGroup(7)([(1,2),(3,4),(6,7)]); a3 =_
→SymmetricGroup(7)([(1,2,3),(4,5,6)])
sage: G = ArithmeticSubgroup_Permutation(S2=a2, S3=a3); G
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,4)(6,7)
S3=(1,2,3)(4,5,6)
L=(1,4,7,6,5,3)
R=(2,4,5,7,6,3)
sage: G.index()
7
sage: G.dimension_cusp_forms(4)
1
sage: G.is_congruence()
False
```

Convert some standard congruence subgroups into permutation form:

```
sage: G = Gamma0(8).as_permutation_group()
sage: G.index()
12
sage: G.is_congruence()
True

sage: G = Gamma0(12).as_permutation_group()
sage: G
Arithmetic subgroup of index 24
sage: G.is_congruence()
True
```

The following is the unique index 2 even subgroup of  $SL_2(\mathbf{Z})$ :

```
sage: w = SymmetricGroup(2)([2,1])
sage: G = ArithmeticSubgroup_Permutation(L=w, R=w)
sage: G.dimension_cusp_forms(6)
1
sage: G.genus()
0
```

#### coset\_reps ( )

Return coset representatives.

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2)(3,4)",S3="(1,2,3)")
sage: c = G.coset_reps()
sage: len(c)
4
sage: [g in G for g in c]
[True, False, False, False]
```

#### cusp\_widths (exp=False)

Return the list of cusp widths of the group.

#### **EXAMPLES:**

```
sage: G = Gamma(2).as_permutation_group()
sage: G.cusp_widths()
[2, 2, 2]
sage: G.cusp_widths(exp=True)
{2: 3}
sage: S2 = "(1,2)(3,4)(5,6)"
sage: S3 = "(1,2,3)(4,5,6)"
sage: G = ArithmeticSubgroup_Permutation(S2=S2,S3=S3)
sage: G.cusp_widths()
[1, 1, 4]
sage: G.cusp_widths(exp=True)
{1: 2, 4: 1}
sage: S2 = "(1,2)(3,4)(5,6)"
sage: S3 = "(1,3,5)(2,4,6)"
sage: G = ArithmeticSubgroup_Permutation(S2=S2,S3=S3)
sage: G.cusp_widths()
[6]
sage: G.cusp_widths(exp=True)
{6: 1}
```

# is even ()

Returns True if this subgroup contains the matrix -Id.

```
sage: G = Gamma(2).as_permutation_group()
sage: G.is_even()
True
```

#### is odd ()

Returns True if this subgroup does not contain the matrix -Id.

#### **EXAMPLES:**

```
sage: G = Gamma(2).as_permutation_group()
sage: G.is_odd()
False
```

#### ncusps ()

Return the number of cusps of this arithmetic subgroup.

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2)(3,4)(5,6)",S3=
\rightarrow"(1,2,3)(4,5,6)")
sage: G.ncusps()
```

# nu2 ()

Returns the number of orbits of elliptic points of order 2 for this arithmetic subgroup.

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,4)(2)(3)",S3="(1,2,3)(4)")
sage: G.nu2()
2
```

#### nu3 ()

Returns the number of orbits of elliptic points of order 3 for this arithmetic subgroup.

#### **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,4)(2)(3)",S3="(1,2,3)(4)")
sage: G.nu3()
1
```

# odd\_subgroups ( )

Return a list of the odd subgroups of index 2 in  $\Gamma$ , where  $\Gamma$  is this subgroup. (Equivalently, return the liftings of  $\bar{\Gamma} \leq \mathrm{PSL}(2,\mathbf{Z})$  to  $\mathrm{SL}(2,\mathbf{Z})$ .) This can take rather a long time if the index of this subgroup is large.

#### See also:

one\_odd\_subgroup(), which returns just one of the odd subgroups (which is much quicker than enumerating them all).

# ALGORITHM:

- $\bullet$ If  $\Gamma$  has an element of order 4, then there are no index 2 odd subgroups, so return the empty set.
- •If  $\Gamma$  has no elements of order 4, then the permutation  $S_2$  is a combination of 2-cycles with no fixed points on  $\{1,\ldots,N\}$ . We construct the permutation  $\tilde{S}_2$  of  $\{1,\ldots,2N\}$  which has a 4-cycle (a,b,a+N,b+N) for each 2-cycle (a,b) in S2 . Similarly, we construct a permutation  $\tilde{S}_3$  which has a 6-cycle (a,b,c,a+N,b+N,c+N) for each 3-cycle (a,b,c) in  $S_3$ , and a 2-cycle (a,a+N) for each fixed point a of  $S_3$ .

Then the permutations  $\tilde{S}_2$  and  $\tilde{S}_3$  satisfy  $\tilde{S}_2^2 = \tilde{S}_3^3 = \iota$  where  $\iota$  is the order 2 permutation interchanging a and a+N for each a. So the subgroup corresponding to these permutations is an index 2 odd subgroup of  $\Gamma$ .

•The other index 2 odd subgroups of  $\Gamma$  are obtained from the pairs  $\tilde{S}_2$ ,  $\tilde{S}_3^{\sigma}$  where  $\sigma$  is an element of the group generated by the 2-cycles (a, a+N).

Studying the permutations in the first example below gives a good illustration of the algorithm.

#### **EXAMPLES:**

A projective congruence subgroup may have noncongruence liftings, as the example of  $\bar{\Gamma}_0(6)$  illustrates (see [KSV2011]):

```
sage: X = Gamma0(6).as_permutation_group().odd_subgroups(); Sequence([[u.
\rightarrowS2(), u.S3()] for u in X], cr=True)
[(1,3,13,15)(2,4,14,16)(5,7,17,19)(6,10,18,22)(8,12,20,24)(9,11,21,23),
\rightarrow (1,2,3,13,14,15) (4,5,6,16,17,18) (7,8,9,19,20,21) (10,11,12,22,23,24)],
[(1,3,13,15)(2,4,14,16)(5,7,17,19)(6,10,18,22)(8,12,20,24)(9,11,21,23),
\rightarrow (1,14,15,13,2,3) (4,5,6,16,17,18) (7,8,9,19,20,21) (10,11,12,22,23,24)],
[(1,3,13,15)(2,4,14,16)(5,7,17,19)(6,10,18,22)(8,12,20,24)(9,11,21,23),
\rightarrow (1,2,3,13,14,15) (4,17,6,16,5,18) (7,8,9,19,20,21) (10,11,12,22,23,24)],
[(1,3,13,15)(2,4,14,16)(5,7,17,19)(6,10,18,22)(8,12,20,24)(9,11,21,23),
\rightarrow (1,14,15,13,2,3) (4,17,6,16,5,18) (7,8,9,19,20,21) (10,11,12,22,23,24)],
[(1,3,13,15)(2,4,14,16)(5,7,17,19)(6,10,18,22)(8,12,20,24)(9,11,21,23),
\rightarrow (1,2,3,13,14,15) (4,5,6,16,17,18) (7,20,9,19,8,21) (10,11,12,22,23,24)],
[(1,3,13,15)(2,4,14,16)(5,7,17,19)(6,10,18,22)(8,12,20,24)(9,11,21,23),...
\rightarrow (1,14,15,13,2,3) (4,5,6,16,17,18) (7,20,9,19,8,21) (10,11,12,22,23,24)],
[(1,3,13,15)(2,4,14,16)(5,7,17,19)(6,10,18,22)(8,12,20,24)(9,11,21,23),
\rightarrow (1,2,3,13,14,15) (4,17,6,16,5,18) (7,20,9,19,8,21) (10,11,12,22,23,24)],
[(1,3,13,15)(2,4,14,16)(5,7,17,19)(6,10,18,22)(8,12,20,24)(9,11,21,23),
\rightarrow (1,14,15,13,2,3) (4,17,6,16,5,18) (7,20,9,19,8,21) (10,11,12,22,23,24)]
sage: [u.is_congruence() for u in X]
[True, False, False, True, True, False, False, True]
```

# one\_odd\_subgroup ( random=False)

Return an odd subgroup of index 2 in  $\Gamma$ , where  $\Gamma$  is this subgroup. If the optional argument random is False (the default), this returns an arbitrary but consistent choice from the set of index 2 odd subgroups. If random is True, then it will choose one of these at random.

For details of the algorithm used, see the docstring for the related function odd\_subgroups(), which returns a list of all the index 2 odd subgroups.

# **EXAMPLES:**

Starting from  $\Gamma(4)$  we get back  $\Gamma(4)$ :

```
sage: G = Gamma(4).as_permutation_group()
sage: G.is_odd(), G.index()
(True, 48)
sage: Ge = G.to_even_subgroup()
sage: Go = Ge.one_odd_subgroup()
sage: Go.is_odd(), Go.index()
(True, 48)
sage: Go == G
True
```

# Strating from $\Gamma(6)$ we get a different group:

```
sage: G = Gamma(6).as_permutation_group()
sage: G.is_odd(), G.index()
(True, 144)
sage: Ge = G.to_even_subgroup()
sage: Go = Ge.one_odd_subgroup()
sage: Go.is_odd(), Go.index()
(True, 144)
sage: Go == G
False
```

An error will be raised if there are no such subgroups, which occurs if and only if the group contains an element of order 4:

# Testing randomness:

```
sage: G = Gamma(6).as_permutation_group().to_even_subgroup()
sage: G1 = G.one_odd_subgroup(random=True) # random
sage: G1.is_subgroup(G)
True
```

# to\_even\_subgroup ( relabel=True)

Return the subgroup generated by self and -Id. Since self is even, this is just self. Provided for compatibility.

#### **EXAMPLE**:

```
sage: G = Gamma0(4).as_permutation_group()
sage: H = G.to_even_subgroup()
sage: H == G
True
```

#### todd coxeter ( )

Returns a 4-tuple (coset\_reps, gens, 1, s2) where coset\_reps is a list of coset representatives of the subgroup, gens a list of generators, 1 and s2 are list that corresponds to the action of the matrix S2 and L on the cosets.

```
sage: G = ArithmeticSubgroup_Permutation(S2='(1,2)(3,4)',S3='(1,2,3)')
sage: reps,gens,l,s=G.todd_coxeter_l_s2()
```

```
sage: reps
[1 0] [ 0 -1] [1 2] [1 1]
[0 1], [ 1 0], [0 1], [0 1]
sage: gens
[1 3] [1 0] [2 -3]
[0\ 1], [-1\ 1], [\ 1\ -1]
sage: 1
[3, 1, 0, 2]
sage: s
[1, 0, 3, 2]
sage: S2 = SL2Z([0,-1,1,0])
sage: L = SL2Z([1,1,0,1])
sage: reps[0] == SL2Z([1,0,0,1])
sage: all(reps[i]*S2*~reps[s[i]] in G for i in range(4))
sage: all(reps[i]*L*~reps[l[i]] in G for i in range(4))
True
```

#### todd\_coxeter\_1\_s2 ()

Returns a 4-tuple (coset\_reps, gens, 1, s2) where coset\_reps is a list of coset representatives of the subgroup, gens a list of generators, 1 and s2 are list that corresponds to the action of the matrix S2 and L on the cosets.

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2='(1,2)(3,4)',S3='(1,2,3)')
sage: reps, gens, 1, s=G.todd_coxeter_l_s2()
sage: reps
[1 \ 0] \quad [0 \ -1] \quad [1 \ 2] \quad [1 \ 1]
[0 1], [ 1 0], [0 1], [0 1]
sage: gens
[1 3] [1 0] [2 -3]
[0\ 1], [-1\ 1], [\ 1\ -1]
sage: 1
[3, 1, 0, 2]
sage: s
[1, 0, 3, 2]
sage: S2 = SL2Z([0,-1,1,0])
sage: L = SL2Z([1,1,0,1])
sage: reps[0] == SL2Z([1,0,0,1])
True
sage: all(reps[i]*S2*~reps[s[i]] in G for i in range(4))
sage: all(reps[i]*L*~reps[l[i]] in G for i in range(4))
True
```

# todd\_coxeter\_s2\_s3 ( )

Returns a 4-tuple (coset\_reps, gens, s2, s3) where coset\_reps are coset representatives of the subgroup, gens is a list of generators, s2 and s3 are the action of the matrices S2 and S3 on the

list of cosets.

The so called *Todd-Coxeter algorithm* is a general method for coset enumeration for a subgroup of a group given by generators and relations.

#### **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2='(1,2)(3,4)',S3='(1,2,3)')
sage: G.genus()
sage: reps, gens, s2, s3=G.todd_coxeter_s2_s3()
sage: g1,g2 = gens
sage: g1 in G and g2 in G
True
sage: g1
[-1 \ 0]
[ 1 -1]
sage: q2
[-1 \ 3]
[-1 2]
sage: S2 = SL2Z([0,-1,1,0])
sage: S3 = SL2Z([0,1,-1,1])
sage: reps[0] == SL2Z([1,0,0,1])
True
sage: all(reps[i]*S2*~reps[s2[i]] in G for i in range(4))
sage: all(reps[i]*S3*~reps[s3[i]] in G for i in range(4))
True
```

sage.modular.arithgroup\_arithgroup\_perm. **HsuExample10** () An example of an index 10 arithmetic subgroup studied by Tim Hsu.

# **EXAMPLE:**

```
sage: import sage.modular.arithgroup.arithgroup_perm as ap
sage: ap.HsuExample10()
Arithmetic subgroup with permutations of right cosets
S2=(1,2)(3,4)(5,6)(7,8)(9,10)
S3=(1,8,3)(2,4,6)(5,7,10)
L=(1,4)(2,5,9,10,8)(3,7,6)
R=(1,7,9,10,6)(2,3)(4,5,8)
```

sage.modular.arithgroup.arithgroup\_perm. **HsuExample18** () An example of an index 18 arithmetic subgroup studied by Tim Hsu.

```
sage: import sage.modular.arithgroup.arithgroup_perm as ap
sage: ap.HsuExample18()
Arithmetic subgroup with permutations of right cosets
S2=(1,5)(2,11)(3,10)(4,15)(6,18)(7,12)(8,14)(9,16)(13,17)
S3=(1,7,11)(2,18,5)(3,9,15)(4,14,10)(6,17,12)(8,13,16)
L=(1,2)(3,4)(5,6,7)(8,9,10)(11,12,13,14,15,16,17,18)
R=(1,12,18)(2,6,13,9,4,8,17,7)(3,16,14)(5,11)(10,15)
```

```
 \begin{array}{c} \textbf{class} \text{ sage.modular.arithgroup.arithgroup\_perm. OddArithmeticSubgroup\_Permutation ( S2, \\ S3, \\ L, \\ R, \\ canon-i-\\ cal \ labels=False \end{array}
```

Bases: sage.modular.arithgroup\_arithgroup\_perm.ArithmeticSubgroup\_Permutation\_class

An arithmetic subgroup of  $SL(2, \mathbf{Z})$  not containing -1, represented in terms of the right action of  $SL(2, \mathbf{Z})$  on its cosets.

#### **EXAMPLES:**

# cusp\_widths ( exp=False)

Return the list of cusp widths.

#### INPUT:

 $\exp$  - boolean (default: False) - if True, return a dictionary with keys the possible widths and with values the number of cusp with that width.

# **EXAMPLES:**

```
sage: G = Gamma1(5).as_permutation_group()
sage: G.cusp_widths()
[1, 1, 5, 5]
sage: G.cusp_widths(exp=True)
{1: 2, 5: 2}
```

# is\_even ()

Test whether the group is even.

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,6,4,3)(2,7,5,8)",S3=
\hookrightarrow"(1,2,3,4,5,6)(7,8)")
sage: G.is_even()
False
```

# is\_odd ()

Test whether the group is odd.

```
True
```

# ncusps ()

Returns the number of cusps.

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2,3,4)",S3="(1,3)(2,4)")
sage: G.ncusps()

sage: G = Gamma1(3).as_permutation_group()
sage: G.ncusps()
2
```

## nirregcusps ()

Return the number of irregular cusps.

The cusps are associated to cycles of the permutations L or R. The irregular cusps are the one which are stabilised by -Id.

# **EXAMPLES:**

```
sage: S2 = "(1,3,2,4)(5,7,6,8)(9,11,10,12)"
sage: S3 = "(1,3,5,2,4,6)(7,9,11,8,10,12)"
sage: G = ArithmeticSubgroup_Permutation(S2=S2,S3=S3)
sage: G.nirregcusps()
3
```

## nregcusps ()

Return the number of regular cusps of the group.

The cusps are associated to cycles of L or R. The irregular cusps correspond to the ones which are not stabilised by -Id.

# EXAMPLES:

```
sage: G = Gamma1(3).as_permutation_group()
sage: G.nregcusps()
2
```

# nu2 ()

Return the number of elliptic points of order 2.

# **EXAMPLES:**

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2,3,4)",S3="(1,3)(2,4)")
sage: G.nu2()
0
sage: G = Gamma1(2).as_permutation_group()
sage: G.nu2()
1
```

#### nu3 ()

Return the number of elliptic points of order 3.

```
sage: G = ArithmeticSubgroup_Permutation(S2="(1,2,3,4)",S3="(1,3)(2,4)")
sage: G.nu3()
2
sage: G = Gamma1(3).as_permutation_group()
sage: G.nu3()
1
```

#### to\_even\_subgroup ( relabel=True)

Returns the group with -Id added in it.

#### **EXAMPLES:**

```
sage: G = Gamma1(3).as_permutation_group()
sage: G.to_even_subgroup()
Arithmetic subgroup with permutations of right cosets
S2=(1,3)(2,4)
S3 = (1, 2, 3)
L=(2,3,4)
R = (1, 4, 2)
sage: H = ArithmeticSubgroup_Permutation(S2 =
\rightarrow' (1,4,11,14) (2,7,12,17) (3,5,13,15) (6,9,16,19) (8,10,18,20)', S3 =
→' (1, 2, 3, 11, 12, 13) (4, 5, 6, 14, 15, 16) (7, 8, 9, 17, 18, 19) (10, 20) ')
sage: G = H.to_even_subgroup(relabel=False); G
Arithmetic subgroup with permutations of right cosets
S2=(1,4)(2,7)(3,5)(6,9)(8,10)
S3 = (1, 2, 3) (4, 5, 6) (7, 8, 9)
L=(1,5)(2,4,9,10,8)(3,7,6)
R=(1,7,10,8,6)(2,5,9)(3,4)
sage: H.is_subgroup(G)
True
```

# sage.modular.arithgroup.arithgroup\_perm.eval\_sl2z\_word ( w)

Given a word in the format output by s12z word problem(), convert it back into an element of  $SL_2(\mathbf{Z})$ .

# **EXAMPLES:**

```
sage: from sage.modular.arithgroup.arithgroup_perm import eval_sl2z_word
sage: eval_sl2z_word([(0, 1), (1, -1), (0, 0), (1, 3), (0, 2), (1, 9), (0, -1)])
[ 66 -59]
[ 47 -42]
```

```
sage.modular.arithgroup.arithgroup_perm. sl2z_word_problem (A)
```

Given an element of  $SL_2(\mathbf{Z})$ , express it as a word in the generators L = [1,1,0,1] and R = [1,0,1,1].

The return format is a list of pairs (a,b), where a=0 or 1 denoting L or R respectively, and b is an integer exponent.

See also the function eval sl2z word().

```
sage: eval_sl2z_word(sl2z_word_problem(m)) == m
True
sage: m = SL2Z([7,8,-50,-57])
sage: eval_sl2z_word(sl2z_word_problem(m)) == m
True
```

sage.modular.arithgroup.arithgroup\_perm.word\_of\_perms (w, p1, p2)

Given a word w as a list of 2-tuples (index, power) and permutations p1 and p2 return the product of p1 and p2 that corresponds to w.

```
sage: import sage.modular.arithgroup.arithgroup_perm as ap
sage: S2 = SymmetricGroup(4)
sage: p1 = S2('(1,2)(3,4)')
sage: p2 = S2('(1,2,3,4)')
sage: ap.word_of_perms([(1,1),(0,1)], p1, p2) == p2 * p1
True
sage: ap.word_of_perms([(0,1),(1,1)], p1, p2) == p1 * p2
True
```



# **ELEMENTS OF ARITHMETIC SUBGROUPS**

class sage.modular.arithgroup.arithgroup\_element. ArithmeticSubgroupElement
 Bases: sage.structure.element.MultiplicativeGroupElement

An element of the group  $SL_2(\mathbf{Z})$ , i.e. a 2x2 integer matrix of determinant 1.

**a**()

Return the upper left entry of self.

**EXAMPLES**:

```
sage: Gamma0(13)([7,1,13,2]).a()
7
```

acton(z)

Return the result of the action of self on z as a fractional linear transformation.

**EXAMPLES:** 

```
sage: G = Gamma0(15)
sage: g = G([1, 2, 15, 31])
```

An example of g acting on a symbolic variable:

```
sage: z = var('z')
sage: g.acton(z)
(z + 2)/(15*z + 31)
```

An example involving the Gaussian numbers:

```
sage: K.<i> = NumberField(x^2 + 1)
sage: g.acton(i)
1/1186*i + 77/1186
```

An example with complex numbers:

```
sage: C.<i> = ComplexField()
sage: g.acton(i)
0.0649241146711636 + 0.000843170320404721*I
```

An example with the cusp infinity:

```
sage: g.acton(infinity)
1/15
```

An example which maps a finite cusp to infinity:

```
sage: g.acton(-31/15)
+Infinity
```

Note that when acting on instances of cusps the return value is still a rational number or infinity (Note the presence of '+', which does not show up for cusp instances):

```
sage: g.acton(Cusp(-31/15))
+Infinity
```

# TESTS:

We cover the remaining case, i.e., infinity mapped to infinity:

```
sage: G([1, 4, 0, 1]).acton(infinity)
+Infinity
```

# **b**()

Return the upper right entry of self.

# EXAMPLES:

```
sage: Gamma0(13)([7,1,13,2]).b()
1
```

## **c**()

Return the lower left entry of self.

# **EXAMPLES:**

```
sage: Gamma0(13)([7,1,13,2]).c()
13
```

# **d**()

Return the lower right entry of self.

#### **EXAMPLES:**

```
sage: Gamma0(13)([7,1,13,2]).d()
2
```

#### det ()

Return the determinant of self, which is always 1.

# **EXAMPLES:**

```
sage: Gamma1(11)([12,11,-11,-10]).det()
1
```

# determinant ( )

Return the determinant of self, which is always 1.

#### **EXAMPLES:**

```
sage: Gamma0(691)([1,0,691,1]).determinant()
1
```

#### matrix()

Return the matrix corresponding to self.

```
sage: x = Gamma1(3)([4,5,3,4]); x
[4 5]
[3 4]
sage: x.matrix()
[4 5]
[3 4]
sage: type(x.matrix())
<type 'sage.matrix.matrix_integer_dense.Matrix_integer_dense'>
```

# multiplicative\_order ()

Return the multiplicative order of this element.

```
sage: SL2Z.one().multiplicative_order()
1
sage: SL2Z([-1,0,0,-1]).multiplicative_order()
2
sage: s,t = SL2Z.gens()
sage: ((t^3*s*t^2) * s * ~ (t^3*s*t^2)).multiplicative_order()
4
sage: (t^3 * s * t * t^-3).multiplicative_order()
6
sage: (t^3 * s * t * s * t^-2).multiplicative_order()
3
sage: SL2Z([2,1,1,1]).multiplicative_order()
+Infinity
sage: SL2Z([-2,1,1,-1]).multiplicative_order()
+Infinity
```



# CONGRUENCE ARITHMETIC SUBGROUPS OF $\mathrm{SL}_2(\mathbf{Z})$

Sage can compute extensively with the standard congruence subgroups  $\Gamma_0(N)$ ,  $\Gamma_1(N)$ , and  $\Gamma_H(N)$ .

#### **AUTHORS:**

- · William Stein
- David Loeffler (2009, 10) modifications to work with more general arithmetic subgroups

Bases: sage.modular.arithgroup.congroup\_generic.CongruenceSubgroupFromGroup

One of the "standard" congruence subgroups  $\Gamma_0(N)$ ,  $\Gamma_1(N)$ ,  $\Gamma(N)$ , or  $\Gamma_H(N)$  (for some H).

This class is not intended to be instantiated directly. Derived subclasses must override \_contains\_sl2 , \_repr\_, and image\_mod\_n .

## image mod n ()

Raise an error: all derived subclasses should override this function.

## **EXAMPLE:**

```
sage: sage.modular.arithgroup.congroup_generic.CongruenceSubgroup(5).image_
    →mod_n()
Traceback (most recent call last):
...
NotImplementedError
```

# modular\_abelian\_variety()

Return the modular abelian variety corresponding to the congruence subgroup self.

## **EXAMPLES:**

```
sage: Gamma0(11).modular_abelian_variety()
Abelian variety J0(11) of dimension 1
sage: Gamma1(11).modular_abelian_variety()
Abelian variety J1(11) of dimension 1
sage: GammaH(11,[3]).modular_abelian_variety()
Abelian variety JH(11,[3]) of dimension 1
```

# modular\_symbols ( sign=0, weight=2, base\_ring=Rational Field)

Return the space of modular symbols of the specified weight and sign on the congruence subgroup self.

```
sage: G.modular_symbols(weight=4)
Modular Symbols space of dimension 12 for Gamma_0(23) of weight 4 with sign 0_
    →over Rational Field
sage: G.modular_symbols(base_ring=GF(7))
Modular Symbols space of dimension 5 for Gamma_0(23) of weight 2 with sign 0_
    →over Finite Field of size 7
sage: G.modular_symbols(sign=1)
Modular Symbols space of dimension 3 for Gamma_0(23) of weight 2 with sign 1_
    →over Rational Field
```

 ${\bf class} \; {\tt sage.modular.arithgroup.congroup\_generic.} \; {\tt CongruenceSubgroupBase} \; (\; {\it level})$ 

Bases: sage.modular.arithgroup.arithgroup\_generic.ArithmeticSubgroup

Create a congruence subgroup with given level.

#### **EXAMPLES:**

```
sage: Gamma0(500)
Congruence Subgroup Gamma0(500)
```

## is\_congruence ()

Return True, since this is a congruence subgroup.

#### **EXAMPLE:**

```
sage: Gamma0(7).is_congruence()
True
```

#### level ()

Return the level of this congruence subgroup.

## **EXAMPLES:**

```
sage: SL2Z.level()
1
sage: Gamma0(20).level()
20
sage: Gamma1(11).level()
11
sage: GammaH(14, [5]).level()
14
```

class sage.modular.arithgroup.congroup\_generic. CongruenceSubgroupFromGroup (G) Bases: sage.modular.arithgroup.congroup\_generic.CongruenceSubgroupBase

A congruence subgroup, defined by the data of an integer N and a subgroup G of the finite group  $SL(2, \mathbf{Z}/N\mathbf{Z})$ ; the congruence subgroup consists of all the matrices in  $SL(2, \mathbf{Z})$  whose reduction modulo N lies in G.

This class should not be instantiated directly, but created using the factory function <code>CongruenceSubgroup\_constructor()</code> , which accepts much more flexible input, and checks the input to make sure it is valid.

# TESTS:

```
sage: G = CongruenceSubgroup(5, [[0,-1,1,0]]); G
Congruence subgroup of SL(2,Z) of level 5, preimage of:
Matrix group over Ring of integers modulo 5 with 1 generators (
[0 4]
[1 0]
```

```
sage: TestSuite(G).run()
```

#### image\_mod\_n ( )

Return the subgroup of  $SL(2, \mathbf{Z}/N\mathbf{Z})$  of which this is the preimage, where N is the level of self.

# **EXAMPLE:**

#### index ()

Return the index of self in the full modular group. This is equal to the index in  $SL(2, \mathbf{Z}/N\mathbf{Z})$  of the image of this group modulo  $\Gamma(N)$ .

#### **EXAMPLE:**

```
sage: sage.modular.arithgroup.congroup_generic.

→CongruenceSubgroupFromGroup(MatrixGroup([matrix(Zmod(2), 2, [1,1,1,0])])).

→index()
2
```

# to\_even\_subgroup ( )

Return the smallest even subgroup of  $SL(2, \mathbf{Z})$  containing self.

#### **EXAMPLE:**

```
sage: G = Gamma(3)
sage: G.to_even_subgroup()
Congruence subgroup of SL(2,Z) of level 3, preimage of:
  Matrix group over Ring of integers modulo 3 with 1 generators (
[2 0]
[0 2]
)
```

sage.modular.arithgroup.congroup\_generic. CongruenceSubgroup\_constructor (\*args)
Attempt to create a congruence subgroup from the given data.

The allowed inputs are as follows:

- •A MatrixGroup object. This must be a group of matrices over  $\mathbb{Z}/N\mathbb{Z}$  for some N, with determinant 1, in which case the function will return the group of matrices in  $SL(2,\mathbb{Z})$  whose reduction mod N is in the given group.
- •A list of matrices over  $\mathbb{Z}/N\mathbb{Z}$  for some N. The function will then compute the subgroup of  $SL(2,\mathbb{Z})$  generated by these matrices, and proceed as above.
- •An integer N and a list of matrices (over any ring coercible to  $\mathbf{Z}/N\mathbf{Z}$ , e.g. over  $\mathbf{Z}$ ). The matrices will then be coerced to  $\mathbf{Z}/N\mathbf{Z}$ .

The function checks that the input G is valid. It then tests to see if G is the preimage mod N of some group of matrices modulo a proper divisor M of N, in which case it replaces G with this group before continuing.

#### **EXAMPLES:**

```
sage: from sage.modular.arithgroup.congroup_generic import CongruenceSubgroup_
⇔constructor as CS
sage: CS(2, [[1,1,0,1]])
Congruence subgroup of SL(2,Z) of level 2, preimage of:
Matrix group over Ring of integers modulo 2 with 1 generators (
[1 1]
[0 1]
sage: CS([matrix(Zmod(2), 2, [1,1,0,1])])
Congruence subgroup of SL(2, \mathbb{Z}) of level 2, preimage of:
Matrix group over Ring of integers modulo 2 with 1 generators (
[1 1]
[0 1]
sage: CS(MatrixGroup([matrix(Zmod(2), 2, [1,1,0,1])]))
Congruence subgroup of SL(2, Z) of level 2, preimage of:
Matrix group over Ring of integers modulo 2 with 1 generators (
[1 1]
[0 1]
sage: CS(SL(2, 2))
Modular Group SL(2,Z)
```

# Some invalid inputs:

```
sage: CS(SU(2, 7))
Traceback (most recent call last):
...
TypeError: Ring of definition must be Z / NZ for some N
```

sage.modular.arithgroup.congroup\_generic. is\_CongruenceSubgroup (x) Return True if x is of type CongruenceSubgroup.

Note that this may be False even if x really is a congruence subgroup – it tests whether x is "obviously" congruence, i.e.~whether it has a congruence subgroup datatype. To test whether or not an arithmetic subgroup of  $SL(2, \mathbf{Z})$  is congruence, use the <code>is\_congruence()</code> method instead.

**CHAPTER** 

**FIVE** 

# CONGRUENCE SUBGROUP $\Gamma_H(N)$

#### **AUTHORS:**

- · Jordi Quer
- · David Loeffler

The congruence subgroup  $\Gamma_H(N)$  for some subgroup  $H \leq (\mathbf{Z}/N\mathbf{Z})^{\times}$ , which is the subgroup of  $\mathrm{SL}_2(\mathbf{Z})$  consisting of matrices of the form  $\begin{pmatrix} a & b \\ c & d \end{pmatrix}$  with  $N \mid c$  and  $a,b \in H$ .

# TESTS:

We test calculation of various invariants of the group:

```
sage: GammaH(33,[2]).projective_index()
96
sage: GammaH(33,[2]).genus()
5
sage: GammaH(7,[2]).genus()
0
sage: GammaH(23, [1..22]).genus()
2
sage: GammaO(23).genus()
2
sage: GammaH(23, [1]).genus()
12
sage: GammaH(23, [1]).genus()
12
```

We calculate the dimensions of some modular forms spaces:

```
sage: GammaH(33,[2]).dimension_cusp_forms(2)
5
sage: GammaH(33,[2]).dimension_cusp_forms(3)
0
sage: GammaH(33,[2,5]).dimension_cusp_forms(2)
3
sage: GammaH(32079, [21676]).dimension_cusp_forms(20)
180266112
```

We can sometimes show that there are no weight 1 cusp forms:

```
sage: GammaH(20, [9]).dimension_cusp_forms(1)
0
```

# coset\_reps ( )

Return a set of coset representatives for self \ SL2Z.

#### **EXAMPLES:**

```
sage: list(Gamma1(3).coset_reps())
[
[1 0] [-1 -2] [ 0 -1] [-2 1] [1 0] [-3 -2] [ 0 -1] [-2 -3]
[0 1], [ 3 5], [ 1 0], [ 5 -3], [1 1], [ 8 5], [ 1 2], [ 5 7]
]
sage: len(list(Gamma1(31).coset_reps())) == 31**2 - 1
True
```

## dimension\_new\_cusp\_forms ( k=2, p=0)

Return the dimension of the space of new (or p-new) weight k cusp forms for this congruence subgroup.

#### INPUT:

- •k an integer (default: 2), the weight. Not fully implemented for k = 1.
- •p integer (default: 0); if nonzero, compute the p-new subspace.

# **OUTPUT:** Integer

#### **EXAMPLES:**

```
sage: GammaH(33,[2]).dimension_new_cusp_forms()
3
sage: Gamma1(4*25).dimension_new_cusp_forms(2, p=5)
225
sage: Gamma1(33).dimension_new_cusp_forms(2)
19
sage: Gamma1(33).dimension_new_cusp_forms(2,p=11)
21
```

#### divisor subgroups ()

Given this congruence subgroup  $\Gamma_H(N)$ , return all subgroups  $\Gamma_G(M)$  for M a divisor of N and such that G is equal to the image of H modulo M.

## **EXAMPLES:**

```
sage: G = GammaH(33,[2]); G
Congruence Subgroup Gamma_H(33) with H generated by [2]
sage: G._list_of_elements_in_H()
[1, 2, 4, 8, 16, 17, 25, 29, 31, 32]
sage: G.divisor_subgroups()
[Modular Group SL(2,Z),
    Congruence Subgroup GammaO(3),
    Congruence Subgroup GammaO(11),
    Congruence Subgroup Gamma_H(33) with H generated by [2]]
```

#### extend(M)

Return the subgroup of  $\Gamma_0(M)$ , for M a multiple of N, obtained by taking the preimage of this group under the reduction map; in other words, the intersection of this group with  $\Gamma_0(M)$ .

```
sage: G = GammaH(33, [2])
sage: G.extend(99)
Congruence Subgroup Gamma_H(99) with H generated by [2, 35, 68]
sage: G.extend(11)
Traceback (most recent call last):
...
ValueError: M (=11) must be a multiple of the level (33) of self
```

# gamma0\_coset\_reps ( )

Return a set of coset representatives for self \ Gamma0(N), where N is the level of self.

#### **EXAMPLE:**

```
sage: GammaH(108, [1,-1]).gamma0_coset_reps()
[
[1 0] [-43 -45] [ 31 33] [-49 -54] [ 25 28] [-19 -22]
[0 1], [108 113], [108 115], [108 119], [108 121], [108 125],

[-17 -20] [ 47 57] [ 13 16] [ 41 52] [ 7 9] [-37 -49]
[108 127], [108 131], [108 133], [108 137], [108 139], [108 143],

[-35 -47] [ 29 40] [ -5 -7] [ 23 33] [-11 -16] [ 53 79]
[108 145], [108 149], [108 151], [108 155], [108 157], [108 161]
]
```

# generators ( algorithm='farey')

Return generators for this congruence subgroup. The result is cached.

#### INPUT:

•algorithm (string): either farey (default) or todd-coxeter.

If algorithm is set to "farey", then the generators will be calculated using Farey symbols, which will always return a *minimal* generating set. See <code>farey\_symbol</code> for more information.

If algorithm is set to "todd-coxeter", a simpler algorithm based on Todd-Coxeter enumeration will be used. This tends to return far larger sets of generators.

```
sage: GammaH(7, [2]).generators()
[
[1 1] [ 2 -1] [ 4 -3]
[0 1], [ 7 -3], [ 7 -5]
]
sage: GammaH(7, [2]).generators(algorithm="todd-coxeter")
[
[1 1] [ -90 29] [ 15 4] [ -10 -3] [ 1 -1] [ 1 0] [ 1 1] [ -3 -1]
[0 1], [301 -97], [ -49 -13], [ 7 2], [ 0 1], [ 7 1], [ 0 1], [ 7 2],
[-13 4] [ -5 -1] [ -5 -2] [ -10 3] [ 1 0] [ 9 -1] [ -20 7]
[ 42 -13], [ 21 4], [ 28 11], [ 63 -19], [ -7 1], [ 28 -3], [ -63 22],
[1 0] [ -3 -1] [ 15 -4] [ 2 -1] [ 22 -7] [ -5 1] [ 8 -3]
[7 1], [ 7 2], [ 49 -13], [ 7 -3], [ 63 -20], [ 14 -3], [ -21 8],
[11 5] [ -13 -4]
[ 35 16], [ -42 -13]
]
```

#### image mod n ()

Return the image of this group in  $SL(2, \mathbf{Z}/N\mathbf{Z})$ .

#### **EXAMPLE:**

```
sage: Gamma0(3).image_mod_n()
Matrix group over Ring of integers modulo 3 with 2 generators (
[2 0] [1 1]
[0 2], [0 1]
)
```

#### TEST:

```
sage: for n in [2..20]:
...    for g in Gamma0(n).gamma_h_subgroups():
...         G = g.image_mod_n()
...         assert G.order() == Gamma(n).index() / g.index()
```

#### index ()

Return the index of self in SL2Z.

#### EXAMPLE:

```
sage: [G.index() for G in Gamma0(40).gamma_h_subgroups()]
[72, 144, 144, 144, 144, 288, 288, 288, 288, 144, 288, 288, 576, 576, 144,

→288, 288, 576, 576, 144, 288, 288, 576, 576, 288, 576, 1152]
```

#### is\_even()

Return True precisely if this subgroup contains the matrix -1.

# **EXAMPLES:**

```
sage: GammaH(10, [3]).is_even()
True
sage: GammaH(14, [1]).is_even()
False
```

# is\_subgroup ( other)

Return True if self is a subgroup of right, and False otherwise.

#### **EXAMPLES:**

```
sage: GammaH(24,[7]).is_subgroup(SL2Z)
True
sage: GammaH(24,[7]).is_subgroup(Gamma0(8))
True
sage: GammaH(24, []).is_subgroup(GammaH(24, [7]))
True
sage: GammaH(24, []).is_subgroup(Gamma1(24))
True
sage: GammaH(24, [17]).is_subgroup(GammaH(24, [7]))
False
sage: GammaH(1371, [169]).is_subgroup(GammaH(457, [169]))
True
```

#### ncusps ( )

Return the number of orbits of cusps (regular or otherwise) for this subgroup.

```
sage: GammaH(33,[2]).ncusps()
8
sage: GammaH(32079, [21676]).ncusps()
28800
```

# **AUTHORS:**

•Jordi Quer

#### nirregcusps ()

Return the number of irregular cusps for this subgroup.

# **EXAMPLES:**

```
sage: GammaH(3212, [2045, 2773]).nirregcusps()
720
```

# nregcusps ()

Return the number of orbits of regular cusps for this subgroup. A cusp is regular if we may find a parabolic element generating the stabiliser of that cusp whose eigenvalues are both +1 rather than -1. If G contains -1, all cusps are regular.

# **EXAMPLES:**

```
sage: GammaH(20, [17]).nregcusps()
4
sage: GammaH(20, [17]).nirregcusps()
2
sage: GammaH(3212, [2045, 2773]).nregcusps()
1440
sage: GammaH(3212, [2045, 2773]).nirregcusps()
720
```

# **AUTHOR:**

•Jordi Quer

# nu2 ()

Return the number of orbits of elliptic points of order 2 for this group.

#### **EXAMPLE:**

# **AUTHORS:**

•Jordi Quer

## nu3 ()

Return the number of orbits of elliptic points of order 3 for this group.

```
sage: GammaH(33,[2]).nu3()
0
sage: GammaH(7,[2]).nu3()
2
```

# **AUTHORS:**

•Jordi Quer

#### reduce\_cusp ( c)

Compute a minimal representative for the given cusp c. Returns a cusp c' which is equivalent to the given cusp, and is in lowest terms with minimal positive denominator, and minimal positive numerator for that denominator.

Two cusps  $u_1/v_1$  and  $u_2/v_2$  are equivalent modulo  $\Gamma_H(N)$  if and only if

$$v_1 = hv_2 \mod N$$
 and  $u_1 = h^{-1}u_2 \mod \gcd(v_1, N)$ 

or

$$v_1 = -hv_2 \mod N$$
 and  $u_1 = -h^{-1}u_2 \mod \gcd(v_1, N)$ 

for some  $h \in H$ .

#### **EXAMPLES:**

```
sage: GammaH(6,[5]).reduce_cusp(5/3)
1/3
sage: GammaH(12,[5]).reduce_cusp(Cusp(8,9))
1/3
sage: GammaH(12,[5]).reduce_cusp(5/12)
Infinity
sage: GammaH(12,[]).reduce_cusp(Cusp(5,12))
5/12
sage: GammaH(21,[5]).reduce_cusp(Cusp(-9/14))
1/7
sage: Gamma1(5).reduce_cusp(oo)
Infinity
sage: Gamma1(5).reduce_cusp(0)
```

#### restrict (M)

Return the subgroup of  $\Gamma_0(M)$ , for M a divisor of N, obtained by taking the image of this group under reduction modulo N.

# **EXAMPLES:**

```
sage: G = GammaH(33,[2])
sage: G.restrict(11)
Congruence Subgroup Gamma0(11)
sage: G.restrict(1)
Modular Group SL(2,Z)
sage: G.restrict(15)
Traceback (most recent call last):
...
ValueError: M (=15) must be a divisor of the level (33) of self
```

# to\_even\_subgroup ( )

Return the smallest even subgroup of  $SL(2, \mathbf{Z})$  containing self.

# **EXAMPLE:**

```
sage: GammaH(11, [4]).to_even_subgroup()
Congruence Subgroup GammaO(11)
sage: Gamma1(11).to_even_subgroup()
Congruence Subgroup Gamma_H(11) with H generated by [10]
```

sage.modular.arithgroup.congroup\_gammaH.GammaH\_constructor (level, H)

Return the congruence subgroup  $\Gamma_H(N)$ , which is the subgroup of  $SL_2(\mathbf{Z})$  consisting of matrices of the form  $\begin{pmatrix} a & b \\ c & d \end{pmatrix}$  with N|c and  $a,b \in H$ , for H a specified subgroup of  $(\mathbf{Z}/N\mathbf{Z})^{\times}$ .

# INPUT:

•level – an integer

#### •H – either 0, 1, or a list

- If H is a list, return  $\Gamma_H(N)$ , where H is the subgroup of  $(\mathbf{Z}/N\mathbf{Z})^*$  generated by the elements of the list.
- If H = 0, returns  $\Gamma_0(N)$ .
- If H = 1, returns  $\Gamma_1(N)$ .

# **EXAMPLES:**

```
sage: GammaH(11,0) # indirect doctest
Congruence Subgroup Gamma0(11)
sage: GammaH(11,1)
Congruence Subgroup Gamma1(11)
sage: GammaH(11,[10])
Congruence Subgroup Gamma_H(11) with H generated by [10]
sage: GammaH(11,[10,1])
Congruence Subgroup Gamma_H(11) with H generated by [10]
sage: GammaH(14,[10])
Traceback (most recent call last):
...
ArithmeticError: The generators [10] must be units modulo 14
```

sage.modular.arithgroup.congroup\_gammaH.is\_GammaH (x)

Return True if x is a congruence subgroup of type GammaH.

#### **EXAMPLES:**

```
sage: from sage.modular.arithgroup.all import is_GammaH
sage: is_GammaH(GammaH(13, [2]))
True
sage: is_GammaH(GammaO(6))
True
sage: is_GammaH(Gamma1(6))
True
sage: is_GammaH(Sage.modular.arithgroup.congroup_generic.CongruenceSubgroup(5))
False
```

sage.modular.arithgroup.congroup\_gammaH.mumu (N)

Return 0 if any cube divides N. Otherwise return  $(-2)^v$  where v is the number of primes that exactly divide N.

This is similar to the Möbius function.

INPUT:

•N - an integer at least 1

OUTPUT: Integer

```
sage: from sage.modular.arithgroup.congroup_gammaH import mumu
sage: mumu(27)
0
sage: mumu(6*25)
4
sage: mumu(7*9*25)
-2
sage: mumu(9*25)
1
```

# **CONGRUENCE SUBGROUP** $\Gamma_1(N)$

 ${\bf class} \; {\tt sage.modular.arithgroup.congroup\_gamma1.} \; {\bf Gamma1\_class} \; (\; {\it level})$ 

Bases: sage.modular.arithgroup.congroup\_gammaH.GammaH\_class

The congruence subgroup  $\Gamma_1(N)$ .

#### TESTS:

# dimension\_cusp\_forms ( k=2, eps=None, algorithm='CohenOesterle')

Return the dimension of the space of cusp forms for self, or the dimension of the subspace corresponding to the given character if one is supplied.

#### INPUT:

- •k an integer (default: 2), the weight.
- •eps either None or a Dirichlet character modulo N, where N is the level of this group. If this is None, then the dimension of the whole space is returned; otherwise, the dimension of the subspace of forms of character eps.
- •algorithm either "CohenOesterle" (the default) or "Quer". This specifies the method to use in the case of nontrivial character: either the Cohen—Oesterle formula as described in Stein's book, or by Möbius inversion using the subgroups GammaH (a method due to Jordi Quer).

## **EXAMPLES**:

We compute the same dimension in two different ways

```
sage: K = CyclotomicField(3)
sage: eps = DirichletGroup(7*43,K).0^2
sage: G = Gamma1(7*43)
```

#### Via Cohen-Oesterle:

```
sage: Gamma1(7*43).dimension_cusp_forms(2, eps)
28
```

# Via Quer's method:

```
sage: Gamma1(7*43).dimension_cusp_forms(2, eps, algorithm="Quer")
28
```

# Some more examples:

```
sage: G.<eps> = DirichletGroup(9)
sage: [Gamma1(9).dimension_cusp_forms(k, eps) for k in [1..10]]
[0, 0, 1, 0, 3, 0, 5, 0, 7, 0]
sage: [Gamma1(9).dimension_cusp_forms(k, eps^2) for k in [1..10]]
[0, 0, 0, 2, 0, 4, 0, 6, 0, 8]
```

# dimension\_eis ( k=2, eps=None, algorithm='CohenOesterle')

Return the dimension of the space of Eisenstein series forms for self, or the dimension of the subspace corresponding to the given character if one is supplied.

#### INPUT:

- •k an integer (default: 2), the weight.
- •eps either None or a Dirichlet character modulo N, where N is the level of this group. If this is None, then the dimension of the whole space is returned; otherwise, the dimension of the subspace of Eisenstein series of character eps.
- •algorithm either "CohenOesterle" (the default) or "Quer". This specifies the method to use in the case of nontrivial character: either the Cohen—Oesterle formula as described in Stein's book, or by Möbius inversion using the subgroups GammaH (a method due to Jordi Quer).

# **AUTHORS:**

- •William Stein Cohen-Oesterle algorithm
- •Jordi Quer algorithm based on GammaH subgroups
- •David Loeffler (2009) code refactoring

## **EXAMPLES:**

The following two computations use different algorithms:

```
sage: [Gamma1(36).dimension_eis(1,eps) for eps in DirichletGroup(36)]
[0, 4, 3, 0, 0, 2, 6, 0, 0, 2, 3, 0]
sage: [Gamma1(36).dimension_eis(1,eps,algorithm="Quer") for eps in_
→DirichletGroup(36)]
[0, 4, 3, 0, 0, 2, 6, 0, 0, 2, 3, 0]
```

#### So do these:

```
sage: [Gamma1(48).dimension_eis(3,eps) for eps in DirichletGroup(48)]
[0, 12, 0, 4, 0, 8, 0, 4, 12, 0, 4, 0, 8, 0, 4, 0]
```

# dimension\_modular\_forms (k=2, eps=None, algorithm='CohenOesterle')

Return the dimension of the space of modular forms for self, or the dimension of the subspace corresponding to the given character if one is supplied.

#### INPUT:

- •k an integer (default: 2), the weight.
- •eps either None or a Dirichlet character modulo N, where N is the level of this group. If this is None, then the dimension of the whole space is returned; otherwise, the dimension of the subspace of forms of character eps.
- •algorithm either "CohenOesterle" (the default) or "Quer". This specifies the method to use in the case of nontrivial character: either the Cohen—Oesterle formula as described in Stein's book, or by Möbius inversion using the subgroups GammaH (a method due to Jordi Quer).

# **EXAMPLES:**

```
sage: K = CyclotomicField(3)
sage: eps = DirichletGroup(7*43,K).0^2
sage: G = Gamma1(7*43)

sage: G.dimension_modular_forms(2, eps)
32
sage: G.dimension_modular_forms(2, eps, algorithm="Quer")
32
```

#### TESTS:

Check that trac ticket #18436 is fixed:

```
sage: K.<a> = NumberField(x^2 + x + 1)
sage: G = DirichletGroup(13, base_ring=K)
sage: Gamma1(13).dimension_modular_forms(2, G[1])
3
sage: Gamma1(13).dimension_modular_forms(2, G[1], algorithm="Quer")
3
sage: Gamma1(39).dimension_modular_forms(2, G[1])
7
sage: Gamma1(39).dimension_modular_forms(2, G[1], algorithm="Quer")
7
```

# $dimension_new_cusp_forms$ ( k=2, eps=None, p=0, algorithm='CohenOesterle')

Dimension of the new subspace (or p-new subspace) of cusp forms of weight k and character  $\varepsilon$ .

#### INPUT:

- •k an integer (default: 2)
- •eps a Dirichlet character
- •p a prime (default: 0); just the p-new subspace if given
- •algorithm either "CohenOesterle" (the default) or "Quer". This specifies the method to use in the case of nontrivial character: either the Cohen-Oesterle formula as described in Stein's book, or by Möbius inversion using the subgroups GammaH (a method due to Jordi Quer).

#### **EXAMPLES:**

```
sage: G = DirichletGroup(9)
sage: eps = G.0^3
sage: eps.conductor()
3
sage: [Gamma1(9).dimension_new_cusp_forms(k, eps) for k in [2..10]]
[0, 0, 0, 2, 0, 2, 0, 2, 0]
sage: [Gamma1(9).dimension_cusp_forms(k, eps) for k in [2..10]]
[0, 0, 0, 2, 0, 4, 0, 6, 0]
sage: [Gamma1(9).dimension_new_cusp_forms(k, eps, 3) for k in [2..10]]
[0, 0, 0, 2, 0, 2, 0, 2, 0]
```

Double check using modular symbols (independent calculation):

#### Another example at level 33:

## generators ( algorithm='farey')

Return generators for this congruence subgroup. The result is cached.

## INPUT:

•algorithm (string): either farey (default) or todd-coxeter.

If algorithm is set to "farey", then the generators will be calculated using Farey symbols, which will always return a *minimal* generating set. See <code>farey\_symbol</code> for more information.

If algorithm is set to "todd-coxeter", a simpler algorithm based on Todd-Coxeter enumeration will be used. This tends to return far larger sets of generators.

```
sage: Gamma1(3).generators()
[
[1 1] [ 1 -1]
[0 1], [ 3 -2]
]
sage: Gamma1(3).generators(algorithm="todd-coxeter")
[
```

```
[1 1] [-20 9] [4 1] [-5 -2] [1 -1] [1 0] [1 1] [-5 2] [0 1], [51 -23], [-9 -2], [3 1], [0 1], [3 1], [0 1], [12 -5], [1 0] [4 -1] [-5 3] [1 -1] [7 -3] [4 -1] [-5 3] [-3 1], [9 -2], [-12 7], [3 -2], [12 -5], [9 -2], [-12 7] ]
```

# index ()

Return the index of self in the full modular group. This is given by the formula

$$N^2 \prod_{\substack{p \mid N \\ p \text{ prime}}} \left(1 - \frac{1}{p^2}\right).$$

# **EXAMPLE:**

```
sage: Gamma1(180).index()
20736
sage: [Gamma1(n).projective_index() for n in [1..16]]
[1, 3, 4, 6, 12, 12, 24, 24, 36, 36, 60, 48, 84, 72, 96, 96]
```

# is\_even ()

Return True precisely if this subgroup contains the matrix -1.

#### **EXAMPLES:**

```
sage: Gamma1(1).is_even()
True
sage: Gamma1(2).is_even()
True
sage: Gamma1(15).is_even()
False
```

# $is\_subgroup (right)$

Return True if self is a subgroup of right.

# **EXAMPLES:**

```
sage: Gamma1(3).is_subgroup(SL2Z)
True
sage: Gamma1(3).is_subgroup(Gamma1(5))
False
sage: Gamma1(3).is_subgroup(Gamma1(6))
False
sage: Gamma1(6).is_subgroup(Gamma1(3))
True
sage: Gamma1(6).is_subgroup(Gamma0(2))
True
sage: Gamma1(80).is_subgroup(GammaH(40, []))
True
sage: Gamma1(80).is_subgroup(GammaH(40, [21]))
True
```

## ncusps ()

Return the number of cusps of this subgroup  $\Gamma_1(N)$ .

#### nu2 ()

Calculate the number of orbits of elliptic points of order 2 for this subgroup  $\Gamma_1(N)$ . This is known to be 0 if N > 2.

#### **EXAMPLE:**

```
sage: Gamma1(2).nu2()
1
sage: Gamma1(457).nu2()
0
sage: [Gamma1(n).nu2() for n in [1..16]]
[1, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0]
```

## nu3 ()

Calculate the number of orbits of elliptic points of order 3 for this subgroup  $\Gamma_1(N)$ . This is known to be 0 if N > 3.

#### **EXAMPLE:**

```
sage: Gamma1(2).nu3()
0
sage: Gamma1(3).nu3()
1
sage: Gamma1(457).nu3()
0
sage: [Gamma1(n).nu3() for n in [1..10]]
[1, 0, 1, 0, 0, 0, 0, 0, 0, 0]
```

sage.modular.arithgroup.congroup\_gamma1. Gamma1\_constructor ( N ) Return the congruence subgroup  $\Gamma_1(N)$ .

# **EXAMPLES:**

```
sage: Gamma1(5) # indirect doctest
Congruence Subgroup Gamma1(5)
sage: G = Gamma1(23)
sage: G is Gamma1(23)
True
sage: G is GammaH(23, [1])
True
sage: TestSuite(G).run()
sage: G is loads(dumps(G))
True
```

sage.modular.arithgroup.congroup\_gamma1.is\_Gamma1 (x)

Return True if x is a congruence subgroup of type Gamma1.

```
sage: from sage.modular.arithgroup.all import is_Gamma1
sage: is_Gamma1(SL2Z)
False
sage: is_Gamma1(Gamma1(13))
```

```
True
sage: is_Gamma1(Gamma0(6))
False
sage: is_Gamma1(GammaH(12, [])) # trick question!
True
sage: is_Gamma1(GammaH(12, [5]))
False
```

# CONGRUENCE SUBGROUP $\Gamma_0(N)$

```
class sage.modular.arithgroup.congroup_gamma0. Gamma0_class ( level)

Bases: sage.modular.arithgroup.congroup_gammaH.GammaH_class
```

The congruence subgroup  $\Gamma_0(N)$ .

#### TESTS:

```
sage: Gamma0(11).dimension_cusp_forms(2)
1
sage: a = Gamma0(1).dimension_cusp_forms(2); a
0
sage: type(a)
<type 'sage.rings.integer.Integer'>
sage: Gamma0(5).dimension_cusp_forms(0)
0
sage: Gamma0(20).dimension_cusp_forms(1)
0
sage: Gamma0(20).dimension_cusp_forms(4)
6

sage: Gamma0(23).dimension_cusp_forms(2)
2
sage: Gamma0(1).dimension_cusp_forms(24)
2
sage: Gamma0(3).dimension_cusp_forms(3)
0
sage: Gamma0(1).dimension_cusp_forms(-1)
0

sage: Gamma0(22).dimension_new_cusp_forms()
0
sage: Gamma0(10).dimension_new_cusp_forms(2, 5)
5
```

# Independently compute the dimension 5 above:

```
sage: m = ModularSymbols(100, 2,sign=1).cuspidal_subspace()
sage: m.new_subspace(5)
Modular Symbols subspace of dimension 5 of Modular Symbols space of dimension 18_
→for Gamma_0(100) of weight 2 with sign 1 over Rational Field
```

#### coset\_reps ( )

Return representatives for the right cosets of this congruence subgroup in  $SL_2(\mathbf{Z})$  as a generator object. Use list (self.coset\_reps()) to obtain coset reps as a list.

#### **EXAMPLES:**

```
sage: list(Gamma0(5).coset_reps())
[
[1 0] [ 0 -1] [ 1 0] [ 0 -1] [ 0 -1] [ 0 -1]
[0 1], [ 1 0], [ 1 1], [ 1 2], [ 1 3], [ 1 4]
]
sage: list(Gamma0(4).coset_reps())
[
[1 0] [ 0 -1] [ 1 0] [ 0 -1] [ 0 -1] [ 1 0]
[0 1], [ 1 0], [ 1 1], [ 1 2], [ 1 3], [ 2 1]
]
sage: list(Gamma0(1).coset_reps())
[
[1 0]
[0 1]
]
```

## divisor\_subgroups ()

Return the subgroups of SL2Z of the form Gamma0(M) that contain this subgroup, i.e. those for M a divisor of N.

# **EXAMPLES:**

```
sage: Gamma0(24).divisor_subgroups()
[Modular Group SL(2,Z),
Congruence Subgroup Gamma0(2),
Congruence Subgroup Gamma0(3),
Congruence Subgroup Gamma0(4),
Congruence Subgroup Gamma0(6),
Congruence Subgroup Gamma0(8),
Congruence Subgroup Gamma0(12),
Congruence Subgroup Gamma0(12),
Congruence Subgroup Gamma0(24)]
```

# gamma\_h\_subgroups ( )

Return the subgroups of the form  $\Gamma_H(N)$  contained in self, where N is the level of self.

#### **EXAMPLES:**

# generators ( algorithm='farey')

Return generators for this congruence subgroup.

# INPUT:

•algorithm (string): either farey (default) or todd-coxeter.

If algorithm is set to "farey", then the generators will be calculated using Farey symbols, which will always return a *minimal* generating set. See <code>farey\_symbol</code> for more information.

If algorithm is set to "todd-coxeter", a simpler algorithm based on Todd-Coxeter enumeration will be used. This tends to return far larger sets of generators.

#### **EXAMPLE:**

```
sage: Gamma0(3).generators()
[
[1 1] [-1 1]
[0 1], [-3 2]
]
sage: Gamma0(3).generators(algorithm="todd-coxeter")
[
[1 1] [-1 0] [1 -1] [1 0] [1 1] [-1 0] [1 0]
[0 1], [0 -1], [0 1], [3 1], [0 1], [3 -1], [-3 1]
]
sage: SL2Z.gens()
(
[ 0 -1] [1 1]
[ 1 0], [0 1]
)
```

#### index ()

Return the index of self in the full modular group.

This is given by

$$N \prod_{\substack{p \mid N \\ p \text{ prime}}} \left(1 + \frac{1}{p}\right).$$

# **EXAMPLES:**

```
sage: [Gamma0(n).index() for n in [1..19]]
[1, 3, 4, 6, 6, 12, 8, 12, 12, 18, 12, 24, 14, 24, 24, 24, 18, 36, 20]
sage: Gamma0(32041).index()
32220
```

#### is even ()

Return True precisely if this subgroup contains the matrix -1.

Since  $\Gamma 0(N)$  always contains the matrix -1, this always returns True.

# EXAMPLES:

```
sage: Gamma0(12).is_even()
True
sage: SL2Z.is_even()
True
```

# is\_subgroup ( right)

Return True if self is a subgroup of right.

```
sage: G = Gamma0(20)
sage: G.is_subgroup(SL2Z)
True
sage: G.is_subgroup(Gamma0(4))
True
sage: G.is_subgroup(Gamma0(20))
```

```
True
sage: G.is_subgroup(Gamma0(7))
False
sage: G.is_subgroup(Gamma1(20))
False
sage: G.is_subgroup(GammaH(40, []))
False
sage: Gamma0(80).is_subgroup(GammaH(40, [31, 21, 17]))
True
sage: Gamma0(2).is_subgroup(Gamma1(2))
True
```

#### ncusps ()

Return the number of cusps of this subgroup  $\Gamma_0(N)$ .

#### **EXAMPLES:**

#### nu2 ()

Return the number of elliptic points of order 2 for this congruence subgroup  $\Gamma_0(N)$ . The number of these is given by a standard formula: 0 if N is divisible by 4 or any prime congruent to -1 mod 4, and otherwise  $2^d$  where d is the number of odd primes dividing N.

#### **EXAMPLE:**

```
sage: Gamma0(2).nu2()
1
sage: Gamma0(4).nu2()
0
sage: Gamma0(21).nu2()
0
sage: Gamma0(1105).nu2()
8
sage: [Gamma0(n).nu2() for n in [1..19]]
[1, 1, 0, 0, 2, 0, 0, 0, 0, 2, 0, 0, 2, 0, 0, 2, 0, 0]
```

## nu3 ()

Return the number of elliptic points of order 3 for this congruence subgroup  $\Gamma_0(N)$ . The number of these is given by a standard formula: 0 if N is divisible by 9 or any prime congruent to -1 mod 3, and otherwise  $2^d$  where d is the number of primes other than 3 dividing N.

```
sage: Gamma0(2).nu3()
0
sage: Gamma0(3).nu3()
1
sage: Gamma0(9).nu3()
0
sage: Gamma0(7).nu3()
2
sage: Gamma0(21).nu3()
2
sage: Gamma0(1729).nu3()
```

```
8
```

sage.modular.arithgroup.congroup\_gamma0.  ${\tt Gamma0\_constructor}$  ( N) Return the congruence subgroup  ${\tt Gamma0}(N)$ .

# **EXAMPLES**:

```
sage: G = Gamma0(51); G # indirect doctest
Congruence Subgroup Gamma0(51)
sage: G == Gamma0(51)
True
sage: G is Gamma0(51)
True
```

sage.modular.arithgroup.congroup\_gamma0.is\_Gamma0 (x)

Return True if x is a congruence subgroup of type Gamma0.

```
sage: from sage.modular.arithgroup.all import is_Gamma0
sage: is_Gamma0(SL2Z)
True
sage: is_Gamma0(Gamma0(13))
True
sage: is_Gamma0(Gamma1(6))
False
```

# **CONGRUENCE SUBGROUP** $\Gamma(N)$

```
class sage.modular.arithgroup.congroup_gamma. Gamma_class ( *args, **kwds)
```

Bases: sage.modular.arithgroup.congroup\_generic.CongruenceSubgroup

The principal congruence subgroup  $\Gamma(N)$ .

# are\_equivalent (x, y, trans=False)

Check if the cusps x and y are equivalent under the action of this group.

ALGORITHM: The cusps  $u_1/v_1$  and  $u_2/v_2$  are equivalent modulo  $\Gamma(N)$  if and only if  $(u_1, v_1) = \pm (u_2, v_2) \bmod N$ .

#### **EXAMPLE:**

```
sage: Gamma(7).are_equivalent(Cusp(2/3), Cusp(5/4))
True
```

# image\_mod\_n ( )

Return the image of this group modulo N, as a subgroup of  $SL(2, \mathbb{Z}/N\mathbb{Z})$ . This is just the trivial subgroup.

## EXAMPLE:

```
sage: Gamma(3).image_mod_n()
Matrix group over Ring of integers modulo 3 with 1 generators (
[1 0]
[0 1]
)
```

#### index ()

Return the index of self in the full modular group. This is given by

$$\prod_{\substack{p\mid N\\ p \text{ prime}}} \left(p^{3e}-p^{3e-2}\right).$$

# **EXAMPLES:**

# ncusps ()

Return the number of cusps of this subgroup  $\Gamma(N)$ .

```
sage: [Gamma(n).ncusps() for n in [1..19]]
[1, 3, 4, 6, 12, 12, 24, 24, 36, 36, 60, 48, 84, 72, 96, 96, 144, 108, 180]
sage: Gamma(30030).ncusps()
278691840
sage: Gamma(2^30).ncusps()
432345564227567616
```

#### nirregcusps ()

Return the number of irregular cusps of self. For principal congruence subgroups this is always 0.

#### **EXAMPLE:**

```
sage: Gamma(17).nirregcusps()
0
```

## nu3 ()

Return the number of elliptic points of order 3 for this arithmetic subgroup. Since this subgroup is  $\Gamma(N)$  for  $N \geq 2$ , there are no such points, so we return 0.

#### **EXAMPLE:**

```
sage: Gamma(89).nu3()
0
```

# $reduce\_cusp (c)$

Calculate the unique reduced representative of the equivalence of the cusp c modulo this group. The reduced representative of an equivalence class is the unique cusp in the class of the form u/v with  $u,v \ge 0$  coprime, v minimal, and u minimal for that v.

#### **EXAMPLES:**

```
sage: Gamma(5).reduce_cusp(1/5)
Infinity
sage: Gamma(5).reduce_cusp(7/8)
3/2
sage: Gamma(6).reduce_cusp(4/3)
2/3
```

#### TESTS:

```
sage: G = Gamma(50); all([c == G.reduce_cusp(c) for c in G.cusps()])
True
```

sage.modular.arithgroup.congroup\_gamma. Gamma\_constructor ( N ) Return the congruence subgroup  $\Gamma(N)$ .

# **EXAMPLES:**

```
sage: Gamma(5) # indirect doctest
Congruence Subgroup Gamma(5)
sage: G = Gamma(23)
sage: G is Gamma(23)
True
sage: TestSuite(G).run()
```

Test global uniqueness:

```
sage: G = Gamma(17)
sage: G is loads(dumps(G))
True
sage: G2 = sage.modular.arithgroup.congroup_gamma.Gamma_class(17)
sage: G == G2
True
sage: G is G2
False
```

sage.modular.arithgroup.congroup\_gamma.is\_Gamma (x)

Return True if x is a congruence subgroup of type Gamma.

#### **EXAMPLES:**

```
sage: from sage.modular.arithgroup.all import is_Gamma
sage: is_Gamma(Gamma0(13))
False
sage: is_Gamma(Gamma(4))
True
```



# THE MODULAR GROUP $\mathrm{SL}_2(\mathbf{Z})$

#### **AUTHORS:**

• Niles Johnson (2010-08): trac ticket #3893: random\_element() should pass on \*args and \*\*kwds.

```
class sage.modular.arithgroup.congroup_s12z. SL2Z_class
    Bases: sage.modular.arithgroup.congroup_gamma0.Gamma0_class
```

The full modular group  $SL_2(\mathbf{Z})$ , regarded as a congruence subgroup of itself.

### is subgroup ( right)

Return True if self is a subgroup of right.

#### **EXAMPLES:**

```
sage: SL2Z.is_subgroup(SL2Z)
True
sage: SL2Z.is_subgroup(Gamma1(1))
True
sage: SL2Z.is_subgroup(Gamma0(6))
False
```

#### random\_element ( bound=100, \*args, \*\*kwds)

Return a random element of  $SL_2(\mathbf{Z})$  with entries whose absolute value is strictly less than bound (default 100). Additional arguments and keywords are passed to the random\_element method of ZZ.

(Algorithm: Generate a random pair of integers at most bound. If they are not coprime, throw them away and start again. If they are, find an element of  $SL_2(\mathbf{Z})$  whose bottom row is that, and left-multiply it by  $\begin{pmatrix} 1 & w \\ 0 & 1 \end{pmatrix}$  for an integer w randomly chosen from a small enough range that the answer still has entries at most bound.)

It is, unfortunately, not true that all elements of SL2Z with entries < bound appear with equal probability; those with larger bottom rows are favoured, because there are fewer valid possibilities for w.

#### **EXAMPLES:**

```
sage: SL2Z.random_element()
[60 13]
[83 18]
sage: SL2Z.random_element(5)
[-1 3]
[ 1 -4]
```

Passes extra positional or keyword arguments through:

```
sage: SL2Z.random_element(5, distribution='1/n')
[ 1 -4]
[ 0 1]
```

## $reduce\_cusp (c)$

Return the unique reduced cusp equivalent to c under the action of self. Always returns Infinity, since there is only one equivalence class of cusps for  $SL_2(Z)$ .

#### **EXAMPLES:**

```
sage: SL2Z.reduce_cusp(Cusps(-1/4))
Infinity
```

sage.modular.arithgroup.congroup\_sl2z.is\_SL2Z (x)

Return True if x is the modular group  $SL_2(\mathbf{Z})$ .

#### **EXAMPLES**:

```
sage: from sage.modular.arithgroup.all import is_SL2Z
sage: is_SL2Z(SL2Z)
True
sage: is_SL2Z(Gamma0(6))
False
```

# FAREY SYMBOL FOR ARITHMETIC SUBGROUPS OF $PSL_2(\mathbf{Z})$

#### **AUTHORS:**

• Hartmut Monien (08 - 2011)

based on the KFarey package by Chris Kurth. Implemented as C++ module for speed.

```
class sage.modular.arithgroup.farey_symbol. Farey
     Bases: object
```

A class for calculating Farey symbols of arithmetics subgroups of  $PSL_2(\mathbf{Z})$ .

The arithmetic subgroup can be either any of the congruence subgroups implemented in Sage, i.e. Gamma, Gamma0, Gamma1 and GammaH or a subgroup of  $PSL_2(\mathbf{Z})$  which is given by a user written helper class defining membership in that group.

#### **REFERENCES:**

•Ravi S. Kulkarni, "An arithmetic-geometric method in the study of the subgroups of the modular group", Amer. J. Math., 113(6):1053–1133, 1991.

## INPUT:

ullet G - an arithmetic subgroup of  $\operatorname{PSL}_2(\mathbf{Z})$ 

#### **EXAMPLES:**

Create a Farey symbol for the group  $\Gamma_0(11)$ :

```
sage: f = FareySymbol(Gamma0(11)); f
FareySymbol(Congruence Subgroup Gamma0(11))
```

# Calculate the generators:

```
sage: f.generators()
[
[1 1] [ 7 -2] [ 8 -3] [-1 0]
[0 1], [11 -3], [11 -4], [ 0 -1]
]
```

Pickling the FareySymbol and recovering it:

```
sage: f == loads(dumps(f))
True
```

Calculate the index of  $\Gamma_H(33, [2, 5])$  in  $PSL_2(\mathbf{Z})$  via FareySymbol:

```
sage: FareySymbol(GammaH(33, [2, 5])).index()
48
```

Calculate the generators of  $\Gamma_1(4)$ :

```
sage: FareySymbol(Gamma1(4)).generators()
[
[1 1] [-3 1]
[0 1], [-4 1]
]
```

Calculate the generators of the example of an index 10 arithmetic subgroup given by Tim Hsu:

```
sage: from sage.modular.arithgroup.arithgroup_perm import HsuExample10
sage: FareySymbol(HsuExample10()).generators()
[
[1 2] [-2 1] [ 4 -3]
[0 1], [-7 3], [ 3 -2]
]
```

Calculate the generators of the group  $\Gamma' = \Gamma_0(8) \cap \Gamma_1(4)$  using a helper class to define group membership:

```
sage: class GPrime:
....:     def __contains__(self, M):
....:         return M in Gamma0(8) and M in Gamma1(4)
....:
sage: FareySymbol(GPrime()).generators()
[
[1 1] [ 5 -1] [ 5 -2]
[0 1], [16 -3], [ 8 -3]
]
```

Calculate cusps of arithmetic subgroup defined via permutation group:

```
sage: L = SymmetricGroup(4)('(1, 2, 3)')
sage: R = SymmetricGroup(4)('(1, 2, 4)')
sage: FareySymbol(ArithmeticSubgroup_Permutation(L, R)).cusps()
[-1, Infinity]
```

Calculate the left coset representation of  $\Gamma_H(8, [3])$ :

```
sage: FareySymbol(GammaH(8, [3])).coset_reps()
[
[1 0] [ 4 -1] [ 3 -1] [ 2 -1] [ 1 -1] [ 3 -1] [ 2 -1] [-1 0]
[0 1], [ 1 0], [ 1 0], [ 1 0], [ 1 0], [ 4 -1], [ 3 -1], [ 3 -1],
[ 1 -1] [-1 0] [ 0 -1] [-1 0]
[ 2 -1], [ 2 -1], [ 1 -1], [ 1 -1]
]
```

```
coset_reps ()
```

Left coset of the arithmetic group of the FareySymbol.

**EXAMPLES:** 

Calculate the left coset of  $\Gamma_0(6)$ :

```
sage: FareySymbol(Gamma0(6)).coset_reps()
[
[1 0] [ 3 -1] [ 2 -1] [ 1 -1] [ 2 -1] [ 3 -2] [ 1 -1] [-1 0]
```

```
[0 1], [1 0], [1 0], [1 0], [3 -1], [2 -1], [2 -1], [2 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1 -1], [1
```

#### cusp\_class ( c)

Cusp class of a cusp in the FareySymbol.

#### INPUT:

c - a cusp

#### **EXAMPLES:**

```
sage: FareySymbol(Gamma0(12)).cusp_class(Cusp(1, 12))
5
```

## cusp\_widths ()

Cusps widths of the FareySymbol.

#### **EXAMPLES**:

```
sage: FareySymbol(Gamma0(6)).cusp_widths()
[6, 2, 3, 1]
```

#### cusps ()

Cusps of the FareySymbol.

#### **EXAMPLES:**

```
sage: FareySymbol(Gamma0(6)).cusps()
[0, 1/3, 1/2, Infinity]
```

#### fractions ()

Fractions of the FareySymbol.

### **EXAMPLES:**

```
sage: FareySymbol(Gamma(4)).fractions()
[0, 1/2, 1, 3/2, 2, 5/2, 3, 7/2, 4]
```

Plot a fundamental domain of an arithmetic subgroup of  $PSL_2(\mathbf{Z})$  corresponding to the Farey symbol.

#### **OPTIONS:**

- $\bullet \texttt{fill}$  boolean (default True ) fill the fundamental domain
- •linestyle string (default: 'solid') The style of the line, which is one of 'dashed', 'dotted', 'solid', 'dashdot', or '-', ':', '-', '-.', respectively
- •color (default: 'lightgray') fill color; fill color for odd part of Dedekind tesselation.
- •show\_pairing boolean (default: True ) flag for pairing
- $\bullet$ tesselation (default: 'Dedekind') The type of hyperbolic tesselation which is one of 'coset', 'Dedekind' or None respectively
- •color\_even fill color for even parts of Dedekind tesselation (default 'white'); ignored for other tesselations

```
•thickness - float (default: 1) the thickness of the line
```

```
•ymax - float (default: 1) maximal height
```

### **EXAMPLES**:

For example, to plot the fundamental domain of  $\Gamma_0(11)$  with pairings use the following command:

```
sage: FareySymbol(Gamma0(11)).fundamental_domain()
Graphics object consisting of 54 graphics primitives
```

indicating that side 1 is paired with side 3 and side 2 is paired with side 4, see also paired\_sides().

To plot the fundamental domain of  $\Gamma(3)$  without pairings use the following command:

```
sage: FareySymbol(Gamma(3)).fundamental_domain(show_pairing=False)
Graphics object consisting of 48 graphics primitives
```

Plot the fundamental domain of  $\Gamma_0(23)$  showing the left coset representatives:

```
sage: FareySymbol(Gamma0(23)).fundamental_domain(tesselation='coset')
Graphics object consisting of 58 graphics primitives
```

The same as above but with a custom linestyle:

#### generators ( )

Minimal set of generators of the group of the FareySymbol.

#### **EXAMPLES:**

Calculate the generators of  $\Gamma_0(6)$ :

```
sage: FareySymbol(Gamma0(6)).generators()
[
[1 1] [ 5 -1] [ 7 -3] [-1 0]
[0 1], [ 6 -1], [12 -5], [ 0 -1]
]
```

Calculate the generators of  $SL_2(\mathbf{Z})$ :

```
sage: FareySymbol(SL2Z).generators()
[
[ 0 -1] [ 0 -1]
[ 1 0], [ 1 -1]
]
```

The unique index 2 even subgroup and index 4 odd subgroup each get handled correctly:

```
[ 0 1] [-1 1]
[-1 -1], [-1 0]
]
```

## genus ()

Return the genus of the arithmetic group of the FareySymbol.

#### **EXAMPLES**:

```
sage: [FareySymbol(Gamma0(n)).genus() for n in range(16, 32)]
[0, 1, 0, 1, 1, 1, 2, 2, 1, 0, 2, 1, 2, 2, 3, 2]
```

#### index ()

Return the index of the arithmetic group of the FareySymbol in  $PSL_2(\mathbf{Z})$ .

#### **EXAMPLES:**

```
sage: [FareySymbol(Gamma0(n)).index() for n in range(1, 16)]
[1, 3, 4, 6, 6, 12, 8, 12, 12, 18, 12, 24, 14, 24, 24]
```

#### level ()

Return the level of the arithmetic group of the FareySymbol.

#### **EXAMPLES:**

```
sage: [FareySymbol(Gamma0(n)).level() for n in range(1, 16)]
[1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15]
```

#### nu2 ()

Return the number of elliptic points of order two.

## **EXAMPLES**:

```
sage: [FareySymbol(Gamma0(n)).nu2() for n in range(1, 16)]
[1, 1, 0, 0, 2, 0, 0, 0, 2, 0, 0, 2, 0, 0]
```

### **nu3** ()


Return the number of elliptic points of order three.

#### **EXAMPLES:**

```
sage: [FareySymbol(Gamma0(n)).nu3() for n in range(1, 16)]
[1, 0, 1, 0, 0, 0, 2, 0, 0, 0, 0, 2, 0, 0]
```

#### paired\_sides()

Pairs of index of the sides of the fundamental domain of the Farey symbol of the arithmetic group. The sides of the hyperbolic polygon are numbered 0, 1, ... from left to right.

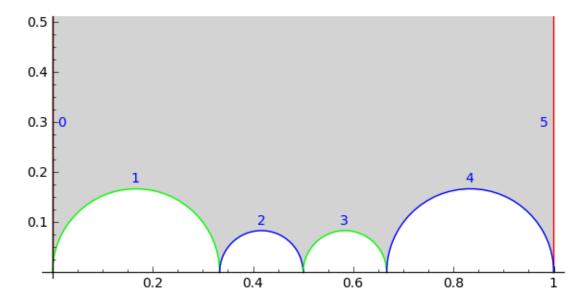

#### **EXAMPLES:**

```
sage: FareySymbol(Gamma0(11)).paired_sides()
[(0, 5), (1, 3), (2, 4)]
```

indicating that the side 0 is paired with 5, 1 with 3 and 2 with 4.

#### pairing\_matrices()

Pairing matrices of the sides of the fundamental domain. The sides of the hyperbolic polygon are numbered  $0, 1, \dots$  from left to right.

#### **EXAMPLES:**

```
sage: FareySymbol(Gamma0(6)).pairing_matrices()
[
[1 1] [ 5 -1] [ 7 -3] [ 5 -3] [ 1 -1] [-1 1]
[0 1], [ 6 -1], [12 -5], [12 -7], [ 6 -5], [ 0 -1]
]
```

#### pairing\_matrices\_to\_tietze\_index ( )

Obtain the translation table from pairing matrices to generators.

The result is cached.

#### **OUTPUT**:

a list where the i-th entry is a nonzero integer k, such that if k > 0 then the i-th pairing matrix is (up to sign) the (k-1)-th generator and, if k < 0, then the i-th pairing matrix is (up to sign) the inverse of the (-k-1)-th generator.

#### **EXAMPLES:**

```
sage: F = Gamma0(40).farey_symbol()
sage: table = F.pairing_matrices_to_tietze_index()
sage: table[12]
(-2, -1)
sage: F.pairing_matrices()[12]
[ 3 -1]
[ 40 -13]
sage: F.generators()[1]**-1
```

```
[ -3 1]
[-40 13]
```

#### pairings ()

Pairings of the sides of the fundamental domain of the Farey symbol of the arithmetic group.

The sides of the hyperbolic polygon are numbered 0, 1, ... from left to right. Conventions: even pairings are denoted by -2, odd pairings by -3 while free pairings are denoted by an integer number greater than zero.

#### **EXAMPLES:**

Odd pairings:

```
sage: FareySymbol(Gamma0(7)).pairings()
[1, -3, -3, 1]
```

#### Even and odd pairings:

```
FareySymbol(Gamma0(13)).pairings()
[1, -3, -2, -2, -3, 1]
```

#### Only free pairings:

```
sage: FareySymbol(Gamma0(23)).pairings()
[1, 2, 3, 5, 3, 4, 2, 4, 5, 1]
```

#### reduce\_to\_cusp ( r)

Transformation of a rational number to cusp representative.

#### INPUT:

r - a rational number

#### **EXAMPLES:**

```
sage: FareySymbol(Gamma0(12)).reduce_to_cusp(5/8)
[ 5 -3]
[12 -7]
```

#### Reduce 11/17 to a cusp of for HsuExample10():

```
sage: from sage.modular.arithgroup.arithgroup_perm import HsuExample10
sage: f = FareySymbol(HsuExample10())
sage: f.reduce_to_cusp(11/17)
[14 -9]
[-3 2]
sage: _.acton(11/17)
1
sage: f.cusps()[f.cusp_class(11/17)]
```

#### word\_problem ( M, output='standard', check=True)

Solve the word problem (up to sign) using this Farey symbol.

# INPUT:

```
•M – An element M of SL_2(\mathbf{Z}).
```

```
•output -(default: 'standard') Should be one of 'standard', 'syllables', 'gens'.
```

•check - (default: True ) Whether to check for correct input and output.

#### **OUTPUT**:

A solution to the word problem for the matrix M. The format depends on the output parameter, as follows.

- •standard returns the so called the Tietze representation, consists of a tuple of nonzero integers i, where if i > 0 then it indicates the i'thgenerator(thatis, "self.generators()[0]' would correspond to i = 1), and if i < 0 then it indicates the inverse of the i-th generator.
- •syllables returns a tuple of tuples of the form (i,n), where (i,n) represents self.generators()[i] ^ n, whose product equals M up to sign.
- •gens returns tuple of tuples of the form (g, n), (g, n) such that the product of the matrices  $g^n$  equals M up to sign.

#### **EXAMPLES:**

```
sage: F = Gamma0(30).farey_symbol()
sage: gens = F.generators()
sage: g = gens[3] * gens[10] * gens[8]^-1 * gens[5]
sage: q
[-628597]
           730081
[-692130 803871
sage: F.word_problem(q)
(4, 11, -9, 6)
sage: q = gens[3] * gens[10]^2 * gens[8]^-1 * gens[5]
sage: q
           5863031
[-5048053
[-5558280 645563]
sage: F.word_problem(g, output = 'gens')
( (
[109 - 10]
[120 -11], 1
),
 (
[ 19 -7]
[ 30 -11], 2
),
 (
[ 49 -9]
[60 -11], -1
),
(
[17 -2]
[60 - 7], 1
sage: F.word_problem(g, output = 'syllables')
((3, 1), (10, 2), (8, -1), (5, 1))
```

#### TESTS:

Check that problem with forgotten generator is fixed:

```
sage: g == g1
True
```

Check that it works for GammaH as well (trac ticket #19660):

```
sage: G = GammaH(147, [8])
sage: G.farey_symbol().word_problem(G([1,1,0,1]))
(1,)
```

Check that trac ticket #20347 is solved:



# CYTHON HELPER FUNCTIONS FOR CONGRUENCE SUBGROUPS

This file contains optimized Cython implementations of a few functions related to the standard congruence subgroups  $\Gamma_0, \Gamma_1, \Gamma_H$ . These functions are for internal use by routines elsewhere in the Sage library.

```
sage.modular.arithgroup.congroup. degeneracy\_coset\_representatives\_gamma0 ( N, M, t)
```

Let N be a positive integer and M a divisor of N. Let t be a divisor of N/M, and let T be the  $2 \times 2$  matrix (1,0;0,t). This function returns representatives for the orbit set  $\Gamma_0(N)\backslash T\Gamma_0(M)$ , where  $\Gamma_0(N)$  acts on the left on  $T\Gamma_0(M)$ .

#### INPUT:

- $\bullet N int$
- •M int (divisor of N)
- •t int (divisor of N/M)

#### **OUTPUT:**

list – list of lists [a,b,c,d], where [a,b,c,d] should be viewed as a 2x2 matrix.

This function is used for computation of degeneracy maps between spaces of modular symbols, hence its name.

We use that  $T^{-1} \cdot (a, b; c, d) \cdot T = (a, bt; c/t, d)$ , that the group  $T^{-1}\Gamma_0(N)T$  is contained in  $\Gamma_0(M)$ , and that  $\Gamma_0(N)T$  is contained in  $T\Gamma_0(M)$ .

#### ALGORITHM:

- 1.Compute representatives for  $\Gamma_0(N/t,t)$  inside of  $\Gamma_0(M)$ :
- •COSET EQUIVALENCE: Two right cosets represented by [a,b;c,d] and [a',b';c',d'] of  $\Gamma_0(N/t,t)$  in  $\mathrm{SL}_2(\mathbf{Z})$  are equivalent if and only if (a,b)=(a',b') as points of  $\mathbf{P}^1(\mathbf{Z}/t\mathbf{Z})$ , i.e.,  $ab'\cong ba'\pmod{t}$ , and (c,d)=(c',d') as points of  $\mathbf{P}^1(\mathbf{Z}/(N/t)\mathbf{Z})$ .
- •ALGORITHM to list all cosets:
  - 1.Compute the number of cosets.
  - 2. Compute a random element x of  $\Gamma_0(M)$ .
  - 3. Check if x is equivalent to anything generated so far; if not, add x to the list.
  - 4. Continue until the list is as long as the bound computed in step (a).
- 2. There is a bijection between  $\Gamma_0(N)\backslash T\Gamma_0(M)$  and  $\Gamma_0(N/t,t)\backslash \Gamma_0(M)$  given by  $Tr\leftrightarrow r$ . Consequently we obtain coset representatives for  $\Gamma_0(N)\backslash T\Gamma_0(M)$  by left multiplying by T each coset representative of  $\Gamma_0(N/t,t)\backslash \Gamma_0(M)$  found in step 1.

#### **EXAMPLES:**

```
sage.modular.arithgroup.congroup. degeneracy\_coset\_representatives\_gamma1 (N, M, t)
```

Let N be a positive integer and M a divisor of N. Let t be a divisor of N/M, and let T be the  $2 \times 2$  matrix (1,0;0,t). This function returns representatives for the orbit set  $\Gamma_1(N) \backslash T\Gamma_1(M)$ , where  $\Gamma_1(N)$  acts on the left on  $T\Gamma_1(M)$ .

### INPUT:

- •N -int
- •M int (divisor of N)
- •t int (divisor of N/M)

#### **OUTPUT:**

list – list of lists [a,b,c,d], where [a,b,c,d] should be viewed as a 2x2 matrix.

This function is used for computation of degeneracy maps between spaces of modular symbols, hence its name.

#### ALGORITHM:

Everything is the same as for  $degeneracy\_coset\_representatives\_gamma0()$ , except for coset equivalence. Here  $\Gamma_1(N/t,t)$  consists of matrices that are of the form  $(1,*;0,1) \mod N/t$  and  $(1,0;*,1) \mod t$ .

COSET EQUIVALENCE: Two right cosets represented by [a, b; c, d] and [a', b'; c', d'] of  $\Gamma_1(N/t, t)$  in  $SL_2(\mathbf{Z})$  are equivalent if and only if

```
a \cong a' \pmod{t}, b \cong b' \pmod{t}, c \cong c' \pmod{N/t}, d \cong d' \pmod{N/t}.
```

#### **EXAMPLES:**

```
sage.modular.arithgroup.congroup. generators_helper ( coset_reps, level) Helper function for generators of Gamma0, Gamma1 and GammaH.
```

These are computed using coset representatives, via an "inverse Todd-Coxeter" algorithm, and generators for  $SL_2(\mathbf{Z})$ .

ALGORITHM: Given coset representatives for a finite index subgroup G of  $SL_2(\mathbf{Z})$  we compute generators for G as follows. Let R be a set of coset representatives for G. Let  $S, T \in SL_2(\mathbf{Z})$  be defined by (0, -1; 1, 0) and

(1,1,0,1), respectively. Define maps  $s,t:R\to G$  as follows. If  $r\in R$ , then there exists a unique  $r'\in R$  such that GrS=Gr'. Let  $s(r)=rSr'^{-1}$ . Likewise, there is a unique r' such that GrT=Gr' and we let  $t(r)=rTr'^{-1}$ . Note that s(r) and t(r) are in G for all r. Then G is generated by  $s(R)\cup t(R)$ .

There are more sophisticated algorithms using group actions on trees (and Farey symbols) that give smaller generating sets – this code is now deprecated in favour of the newer implementation based on Farey symbols.

#### **EXAMPLES:**

```
sage: Gamma0(7).generators(algorithm="todd-coxeter") # indirect doctest
[
[1 1] [-1 0] [ 1 -1] [1 0] [1 1] [-3 -1] [-2 -1] [-5 -1]
[0 1], [ 0 -1], [ 0 1], [ 7 1], [ 0 1], [ 7 2], [ 7 3], [21 4],
[-4 -1] [-1 0] [ 1 0]
[21 5], [ 7 -1], [-7 1]
]
```



# **CHAPTER**

# **TWELVE**

# **INDICES AND TABLES**

- Index
- Module Index
- Search Page

#### PYTHON MODULE INDEX

# m

```
sage.modular.arithgroup.arithgroup_element, 37 sage.modular.arithgroup.arithgroup_generic, 3 sage.modular.arithgroup.arithgroup_perm, 15 sage.modular.arithgroup.congroup, 83 sage.modular.arithgroup.congroup_gamma, 67 sage.modular.arithgroup.congroup_gamma0, 61 sage.modular.arithgroup.congroup_gamma1, 53 sage.modular.arithgroup.congroup_gammaH, 45 sage.modular.arithgroup.congroup_generic, 41 sage.modular.arithgroup.congroup_s12z, 71 sage.modular.arithgroup.farey_symbol, 73
```

90 Python Module Index

# Α a() (sage.modular.arithgroup.arithgroup element.ArithmeticSubgroupElement method), 37 acton() (sage.modular.arithgroup\_arithgroup\_element.ArithmeticSubgroupElement method), 37 are\_equivalent() (sage.modular.arithgroup\_arithgroup\_generic.ArithmeticSubgroup method), 3 are equivalent() (sage.modular.arithgroup.congroup gamma.Gamma class method), 67 ArithmeticSubgroup (class in sage.modular.arithgroup.arithgroup\_generic), 3 ArithmeticSubgroup\_Permutation() (in module sage.modular.arithgroup\_arithgroup\_perm), 16 ArithmeticSubgroup Permutation class (class in sage.modular.arithgroup.arithgroup perm), 17 ArithmeticSubgroupElement (class in sage.modular.arithgroup.arithgroup element), 37 as\_permutation\_group() (sage.modular.arithgroup.arithgroup\_generic.ArithmeticSubgroup method), 3 В b() (sage.modular.arithgroup.arithgroup element.ArithmeticSubgroupElement method), 38 C c() (sage.modular.arithgroup.arithgroup element.ArithmeticSubgroupElement method), 38 congruence closure() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), CongruenceSubgroup (class in sage.modular.arithgroup.congroup generic), 41 CongruenceSubgroup\_constructor() (in module sage.modular.arithgroup.congroup\_generic), 43 CongruenceSubgroupBase (class in sage.modular.arithgroup.congroup generic), 42 CongruenceSubgroupFromGroup (class in sage.modular.arithgroup.congroup generic), 42 coset\_graph() (sage.modular.arithgroup\_arithgroup\_perm.ArithmeticSubgroup\_Permutation\_class method), 19 coset reps() (sage.modular.arithgroup\_arithgroup\_generic.ArithmeticSubgroup method), 4 coset reps() (sage.modular.arithgroup.arithgroup perm.EvenArithmeticSubgroup Permutation method), 26 coset reps() (sage.modular.arithgroup.congroup gamma0.Gamma0 class method), 61 coset reps() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 46 coset\_reps() (sage.modular.arithgroup.farey\_symbol.Farey method), 74 cusp class() (sage.modular.arithgroup.farey symbol.Farey method), 75 cusp data() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 4 cusp\_width() (sage.modular.arithgroup.arithgroup\_generic.ArithmeticSubgroup method), 4 cusp\_widths() (sage.modular.arithgroup\_arithgroup\_perm.EvenArithmeticSubgroup\_Permutation method), 26 cusp\_widths() (sage.modular.arithgroup\_arithgroup\_perm.OddArithmeticSubgroup\_Permutation method), 32 cusp\_widths() (sage.modular.arithgroup.farey\_symbol.Farey method), 75 cusps() (sage.modular.arithgroup\_arithgroup\_generic.ArithmeticSubgroup method), 4 cusps() (sage.modular.arithgroup.farey symbol.Farey method), 75

# D d() (sage.modular.arithgroup.arithgroup\_element.ArithmeticSubgroupElement method), 38 degeneracy coset representatives gamma0() (in module sage.modular.arithgroup.congroup), 83 degeneracy\_coset\_representatives\_gamma1() (in module sage.modular.arithgroup.congroup), 84 det() (sage.modular.arithgroup.arithgroup element.ArithmeticSubgroupElement method), 38 determinant() (sage.modular.arithgroup.arithgroup element.ArithmeticSubgroupElement method), 38 dimension\_cusp\_forms() (sage.modular.arithgroup\_arithgroup\_generic.ArithmeticSubgroup method), 5 dimension\_cusp\_forms() (sage.modular.arithgroup.congroup\_gamma1.Gamma1\_class method), 53 dimension\_eis() (sage.modular.arithgroup\_arithgroup\_generic.ArithmeticSubgroup method), 5 dimension eis() (sage.modular.arithgroup.congroup gamma1.Gamma1 class method), 54 dimension modular forms() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 5 dimension modular forms() (sage.modular.arithgroup.congroup gamma1.Gamma1 class method), 55 dimension\_new\_cusp\_forms() (sage.modular.arithgroup.congroup\_gamma1.Gamma1\_class method), 55 dimension new cusp forms() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 46 divisor\_subgroups() (sage.modular.arithgroup.congroup\_gamma0.Gamma0\_class method), 62 divisor\_subgroups() (sage.modular.arithgroup.congroup\_gammaH.GammaH\_class method), 46 E Element (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup attribute), 3 eval\_sl2z\_word() (in module sage.modular.arithgroup.arithgroup\_perm), 34 EvenArithmeticSubgroup Permutation (class in sage.modular.arithgroup.arithgroup perm), 25 extend() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 46 Farey (class in sage.modular.arithgroup.farey symbol), 73 farey symbol() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 6 fractions() (sage.modular.arithgroup.farey\_symbol.Farey method), 75 fundamental\_domain() (sage.modular.arithgroup.farey\_symbol.Farey method), 75 G Gamma0 class (class in sage.modular.arithgroup.congroup gamma0), 61 Gamma0 constructor() (in module sage.modular.arithgroup.congroup gamma0), 65 gamma0 coset reps() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 47 Gamma1\_class (class in sage.modular.arithgroup.congroup\_gamma1), 53 Gamma1 constructor() (in module sage.modular.arithgroup.congroup gamma1), 58 Gamma class (class in sage.modular.arithgroup.congroup gamma), 67 Gamma\_constructor() (in module sage.modular.arithgroup.congroup\_gamma), 68 gamma h subgroups() (sage.modular.arithgroup.congroup gamma0.Gamma0 class method), 62 GammaH class (class in sage.modular.arithgroup.congroup\_gammaH), 45 GammaH\_constructor() (in module sage.modular.arithgroup.congroup\_gammaH), 51 gen() (sage.modular.arithgroup.arithgroup\_generic.ArithmeticSubgroup method), 6 generalised level() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 6 generalised level() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 20 generators() (sage.modular.arithgroup\_arithgroup\_generic.ArithmeticSubgroup method), 7 generators() (sage.modular.arithgroup.congroup\_gamma0.Gamma0\_class method), 62 generators() (sage.modular.arithgroup.congroup gamma1.Gamma1 class method), 56 generators() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 47 generators() (sage.modular.arithgroup.farey\_symbol.Farey method), 76 generators\_helper() (in module sage.modular.arithgroup.congroup), 84 gens() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 7

```
genus() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 7
genus() (sage.modular.arithgroup.farey_symbol.Farey method), 77
Н
HsuExample10() (in module sage.modular.arithgroup.arithgroup perm), 31
HsuExample 18() (in module sage.modular.arithgroup.arithgroup perm), 31
image mod n() (sage.modular.arithgroup.congroup gamma.Gamma class method), 67
image mod n() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 47
image mod n() (sage,modular,arithgroup,congroup generic,CongruenceSubgroup method), 41
image mod n() (sage.modular.arithgroup.congroup_generic.CongruenceSubgroupFromGroup method), 43
index() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 7
index() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 20
index() (sage.modular.arithgroup.congroup_gamma.Gamma_class method), 67
index() (sage.modular.arithgroup.congroup_gamma0.Gamma0_class method), 63
index() (sage.modular.arithgroup.congroup gamma1.Gamma1 class method), 57
index() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 48
index() (sage.modular.arithgroup.congroup_generic.CongruenceSubgroupFromGroup method), 43
index() (sage.modular.arithgroup.farev_symbol.Farev_method), 77
is abelian() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 8
is ArithmeticSubgroup() (in module sage.modular.arithgroup.arithgroup generic), 14
is_congruence() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 8
is congruence() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 20
is congruence() (sage.modular.arithgroup.congroup generic.CongruenceSubgroupBase method), 42
is_CongruenceSubgroup() (in module sage.modular.arithgroup.congroup_generic), 44
is_even() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 8
is even() (sage.modular.arithgroup.arithgroup perm.EvenArithmeticSubgroup Permutation method), 26
is even() (sage.modular.arithgroup.arithgroup perm.OddArithmeticSubgroup Permutation method), 32
is_even() (sage.modular.arithgroup.congroup_gamma0.Gamma0_class method), 63
is_even() (sage.modular.arithgroup.congroup_gamma1.Gamma1_class method), 57
is even() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 48
is_finite() (sage.modular.arithgroup_generic.ArithmeticSubgroup method), 8
is Gamma() (in module sage.modular.arithgroup.congroup_gamma), 69
is Gamma0() (in module sage.modular.arithgroup.congroup_gamma0), 65
is Gamma1() (in module sage.modular.arithgroup.congroup_gamma1), 58
is GammaH() (in module sage.modular.arithgroup.congroup_gammaH), 51
is_normal() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 9
is normal() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 22
is odd() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 9
is_odd() (sage.modular.arithgroup_arithgroup_perm.EvenArithmeticSubgroup_Permutation method), 26
is odd() (sage.modular.arithgroup.arithgroup perm.OddArithmeticSubgroup Permutation method), 32
is parent of() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 9
is_regular_cusp() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 9
is SL2Z() (in module sage.modular.arithgroup.congroup sl2z), 72
is_subgroup() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 9
is_subgroup() (sage.modular.arithgroup.congroup_gamma0.Gamma0_class method), 63
is_subgroup() (sage.modular.arithgroup.congroup_gamma1.Gamma1_class method), 57
is_subgroup() (sage.modular.arithgroup.congroup_gammaH.GammaH_class method), 48
is subgroup() (sage.modular.arithgroup.congroup sl2z.SL2Z class method), 71
```

# L

L() (sage.modular.arithgroup\_arithgroup\_perm.ArithmeticSubgroup\_Permutation\_class method), 18 level() (sage.modular.arithgroup.congroup\_generic.CongruenceSubgroupBase method), 42 level() (sage.modular.arithgroup.farey\_symbol.Farey method), 77

# M

matrix() (sage.modular.arithgroup.arithgroup\_element.ArithmeticSubgroupElement method), 38 modular\_abelian\_variety() (sage.modular.arithgroup.congroup\_generic.CongruenceSubgroup method), 41 modular\_symbols() (sage.modular.arithgroup.congroup\_generic.CongruenceSubgroup method), 41 multiplicative\_order() (sage.modular.arithgroup.arithgroup\_element.ArithmeticSubgroupElement method), 39 mumu() (in module sage.modular.arithgroup.congroup\_gammaH), 51

# Ν

```
ncusps() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 10
ncusps() (sage.modular.arithgroup_arithgroup_perm.EvenArithmeticSubgroup_Permutation method), 27
ncusps() (sage.modular.arithgroup.arithgroup perm.OddArithmeticSubgroup Permutation method), 33
ncusps() (sage.modular.arithgroup.congroup_gamma.Gamma_class method), 67
ncusps() (sage.modular.arithgroup.congroup_gamma0.Gamma0_class method), 64
ncusps() (sage.modular.arithgroup.congroup_gamma1.Gamma1_class method), 57
ncusps() (sage.modular.arithgroup.congroup_gammaH.GammaH_class method), 48
ngens() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 10
nirregcusps() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 10
nirregcusps() (sage.modular.arithgroup_arithgroup_perm.OddArithmeticSubgroup_Permutation method), 33
nirregcusps() (sage.modular.arithgroup.congroup gamma.Gamma class method), 68
nirregcusps() (sage.modular.arithgroup.congroup_gammaH.GammaH_class method), 49
nregcusps() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 10
nregcusps() (sage.modular.arithgroup.arithgroup perm.OddArithmeticSubgroup Permutation method), 33
nregcusps() (sage.modular.arithgroup.congroup_gammaH.GammaH_class method), 49
nu2() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 10
nu2() (sage.modular.arithgroup_arithgroup_perm.EvenArithmeticSubgroup_Permutation method), 27
nu2() (sage.modular.arithgroup_arithgroup_perm.OddArithmeticSubgroup_Permutation method), 33
nu2() (sage.modular.arithgroup.congroup gamma0.Gamma0 class method), 64
nu2() (sage.modular.arithgroup.congroup_gamma1.Gamma1_class method), 58
nu2() (sage.modular.arithgroup.congroup_gammaH.GammaH_class method), 49
nu2() (sage.modular.arithgroup.farey symbol.Farey method), 77
nu3() (sage.modular.arithgroup_arithgroup_generic.ArithmeticSubgroup method), 11
nu3() (sage.modular.arithgroup_arithgroup_perm.EvenArithmeticSubgroup_Permutation method), 27
nu3() (sage.modular.arithgroup_arithgroup_perm.OddArithmeticSubgroup_Permutation method), 33
nu3() (sage.modular.arithgroup.congroup_gamma.Gamma_class method), 68
nu3() (sage.modular.arithgroup.congroup_gamma0.Gamma0_class method), 64
nu3() (sage.modular.arithgroup.congroup_gamma1.Gamma1_class method), 58
nu3() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 49
nu3() (sage.modular.arithgroup.farey symbol.Farey method), 77
```

# 0

odd\_subgroups() (sage.modular.arithgroup\_perm.EvenArithmeticSubgroup\_Permutation method), 27 OddArithmeticSubgroup\_Permutation (class in sage.modular.arithgroup.arithgroup\_perm), 31 one\_odd\_subgroup() (sage.modular.arithgroup.arithgroup\_perm.EvenArithmeticSubgroup\_Permutation method), 28 order() (sage.modular.arithgroup.arithgroup\_generic.ArithmeticSubgroup\_method), 11

# Р paired\_sides() (sage.modular.arithgroup.farey\_symbol.Farey method), 77 pairing matrices() (sage.modular.arithgroup.farey symbol.Farey method), 78 pairing\_matrices\_to\_tietze\_index() (sage.modular.arithgroup.farey\_symbol.Farey method), 78 pairings() (sage.modular.arithgroup.farey symbol.Farey method), 79 perm group() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 22 permutation\_action() (sage.modular.arithgroup\_arithgroup\_perm.ArithmeticSubgroup\_Permutation\_class method), 22 projective\_index() (sage.modular.arithgroup\_arithgroup\_generic.ArithmeticSubgroup method), 11 R R() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 18 random element() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 22 random\_element() (sage.modular.arithgroup.congroup\_sl2z.SL2Z\_class method), 71 reduce cusp() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 12 reduce\_cusp() (sage.modular.arithgroup.congroup\_gamma.Gamma\_class method), 68 reduce\_cusp() (sage.modular.arithgroup.congroup\_gammaH.GammaH\_class method), 50 reduce\_cusp() (sage.modular.arithgroup.congroup\_sl2z.SL2Z\_class method), 72 reduce\_to\_cusp() (sage.modular.arithgroup.farey\_symbol.Farey method), 79 relabel() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 23 restrict() (sage.modular.arithgroup.congroup\_gammaH.GammaH\_class method), 50 S S2() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 18 S3() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 19 sage.modular.arithgroup.arithgroup element (module), 37 sage.modular.arithgroup\_arithgroup\_generic (module), 3 sage.modular.arithgroup.arithgroup perm (module), 15 sage.modular.arithgroup.congroup (module), 83 sage.modular.arithgroup.congroup\_gamma (module), 67 sage.modular.arithgroup.congroup\_gamma0 (module), 61 sage.modular.arithgroup.congroup gamma1 (module), 53 sage.modular.arithgroup.congroup gammaH (module), 45 sage.modular.arithgroup.congroup generic (module), 41 sage.modular.arithgroup.congroup\_sl2z (module), 71 sage.modular.arithgroup.farey symbol (module), 73 SL2Z class (class in sage.modular.arithgroup.congroup sl2z), 71 sl2z\_word\_problem() (in module sage.modular.arithgroup.arithgroup\_perm), 34 sturm\_bound() (sage.modular.arithgroup\_arithgroup\_generic.ArithmeticSubgroup method), 12 surgroups() (sage.modular.arithgroup.arithgroup perm.ArithmeticSubgroup Permutation class method), 24 Т to even subgroup() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 13 to even subgroup() (sage.modular.arithgroup.arithgroup perm.EvenArithmeticSubgroup Permutation method), 29 to\_even\_subgroup() (sage.modular.arithgroup\_arithgroup\_perm.OddArithmeticSubgroup\_Permutation method), 34 to even subgroup() (sage.modular.arithgroup.congroup gammaH.GammaH class method), 50 to even subgroup() (sage.modular.arithgroup.congroup generic.CongruenceSubgroupFromGroup method), 43

Index 95

todd\_coxeter() (sage.modular.arithgroup\_arithgroup\_perm.EvenArithmeticSubgroup\_Permutation method), 29 todd\_coxeter\_l\_s2() (sage.modular.arithgroup\_arithgroup\_perm.EvenArithmeticSubgroup\_Permutation method), 30 todd coxeter s2 s3() (sage.modular.arithgroup.arithgroup\_perm.EvenArithmeticSubgroup\_Permutation method), 30

todd coxeter() (sage.modular.arithgroup.arithgroup generic.ArithmeticSubgroup method), 13

# W

word\_of\_perms() (in module sage.modular.arithgroup.arithgroup\_perm), 35 word\_problem() (sage.modular.arithgroup.farey\_symbol.Farey method), 79