

Using SQLyog



What is SQLyog?

- SQLyog is a GUI tool for the RDBMS MySQL. It is developed by Webyog, Inc., based in Bangalore, India, and Santa Clara, California.
- SQLyog is a powerful, graphical user interface (GUI) tool designed for managing MySQL and MariaDB databases, offering features like schema comparison and synchronization, data import/export, scheduled backups, and query profiling, making it a valuable tool for database developers, administrators, and architects.

Key Features/Functionality

GUI Tool for MySQL/MariaDB:

- SQLyog provides a user-friendly interface for managing MySQL and MariaDB databases, simplifying tasks that would otherwise require command-line interaction.

Key Features/Functionality

- Query Validation, Scheduling, and Reporting:
- It supports validating SQL queries, scheduling their execution, and generating reports on query results.

What SQLyog needs:

SQLyog is a **MySQL/MariaDB client**.


It connects to a **MySQL or MariaDB server** — it doesn't come with one.

So, you need to have a MySQL/MariaDB server running **somewhere**:

- **Locally** on your computer (XAMPP is one way to get that).
- On a **remote server** (like a live hosting service or cloud database).
- Installed **separately** (you can install just MySQL/MariaDB without XAMPP).


Using SQLyog:

- 1. Run XAMPP and click the START button to run the MySQL server.

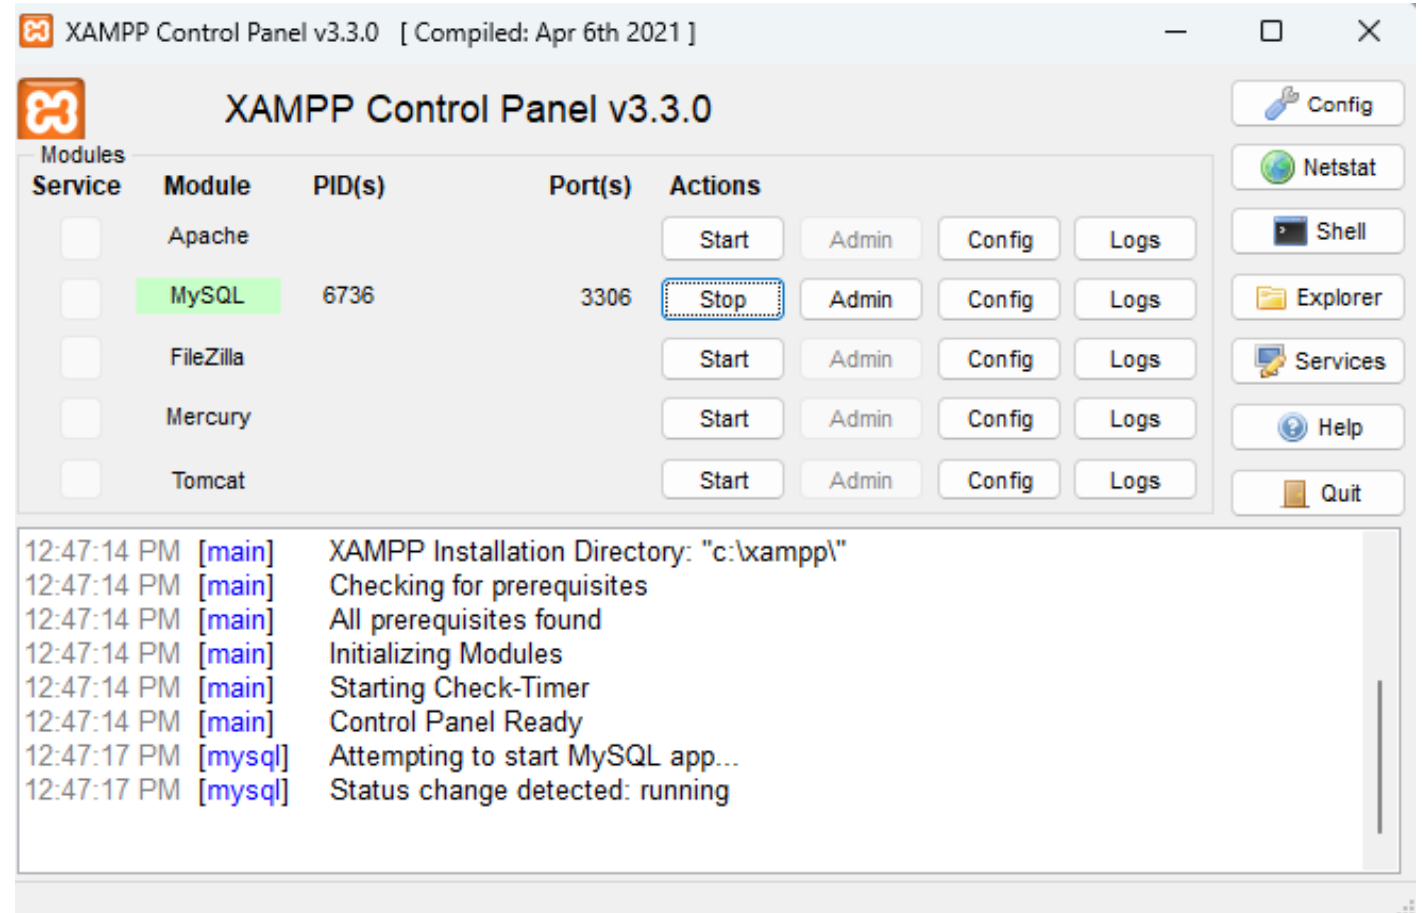


Using SQLyog:

- 2. Open SQLyog Community>Click File>Click New Connection

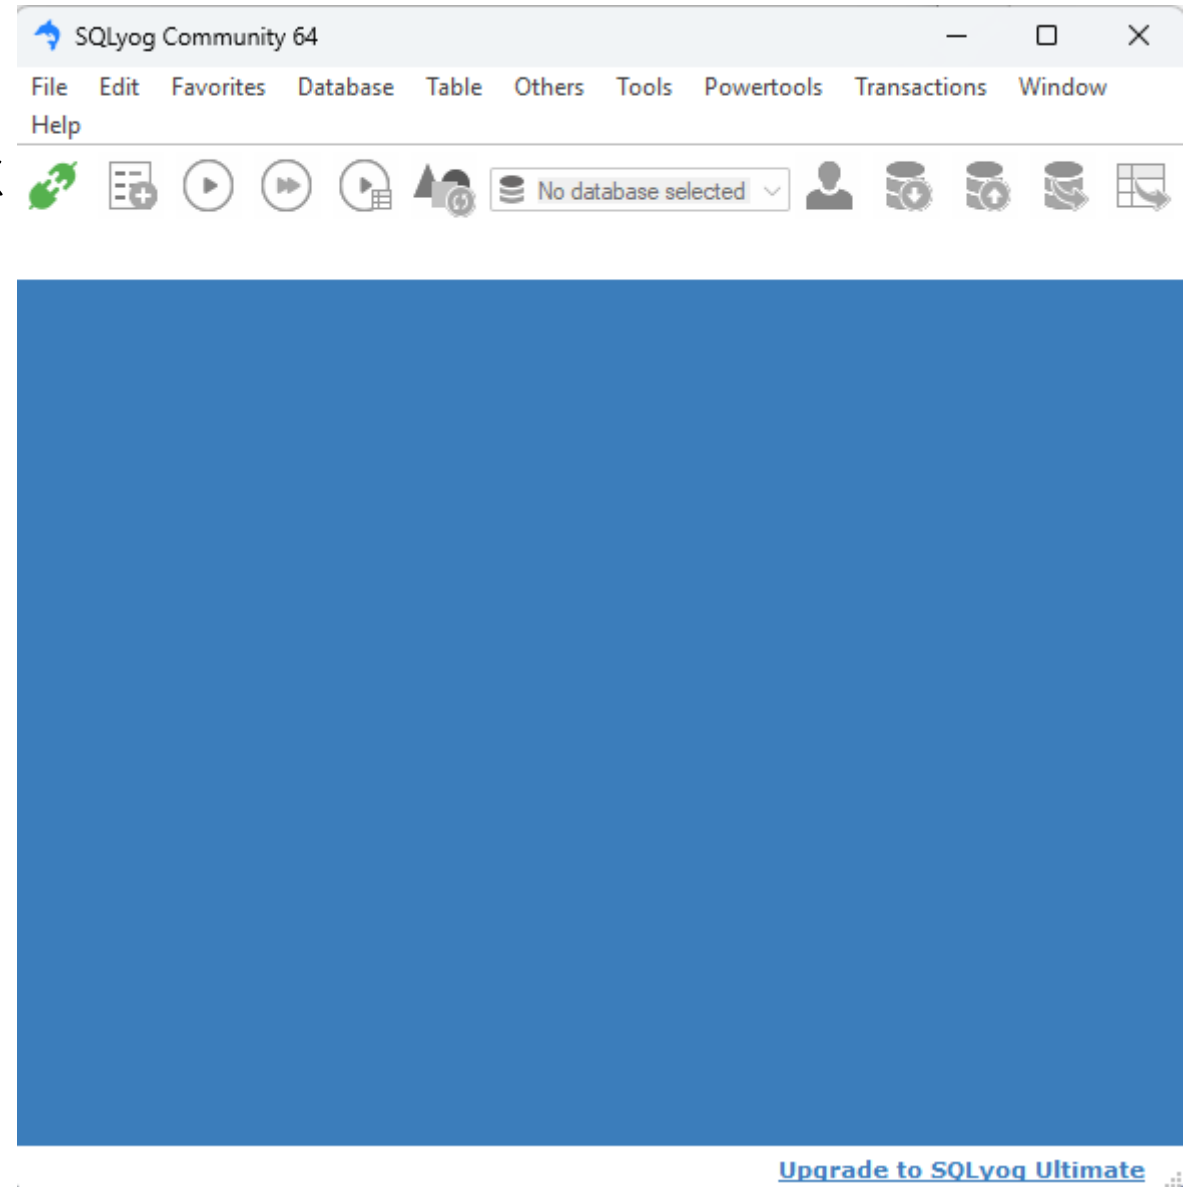

Using SQLyog:

- 2. Open SQLyog Community>Click File>Click New Connection
- 3. Click New or Select from Saved Connections
- 4. Click Connect
(no need to input password)

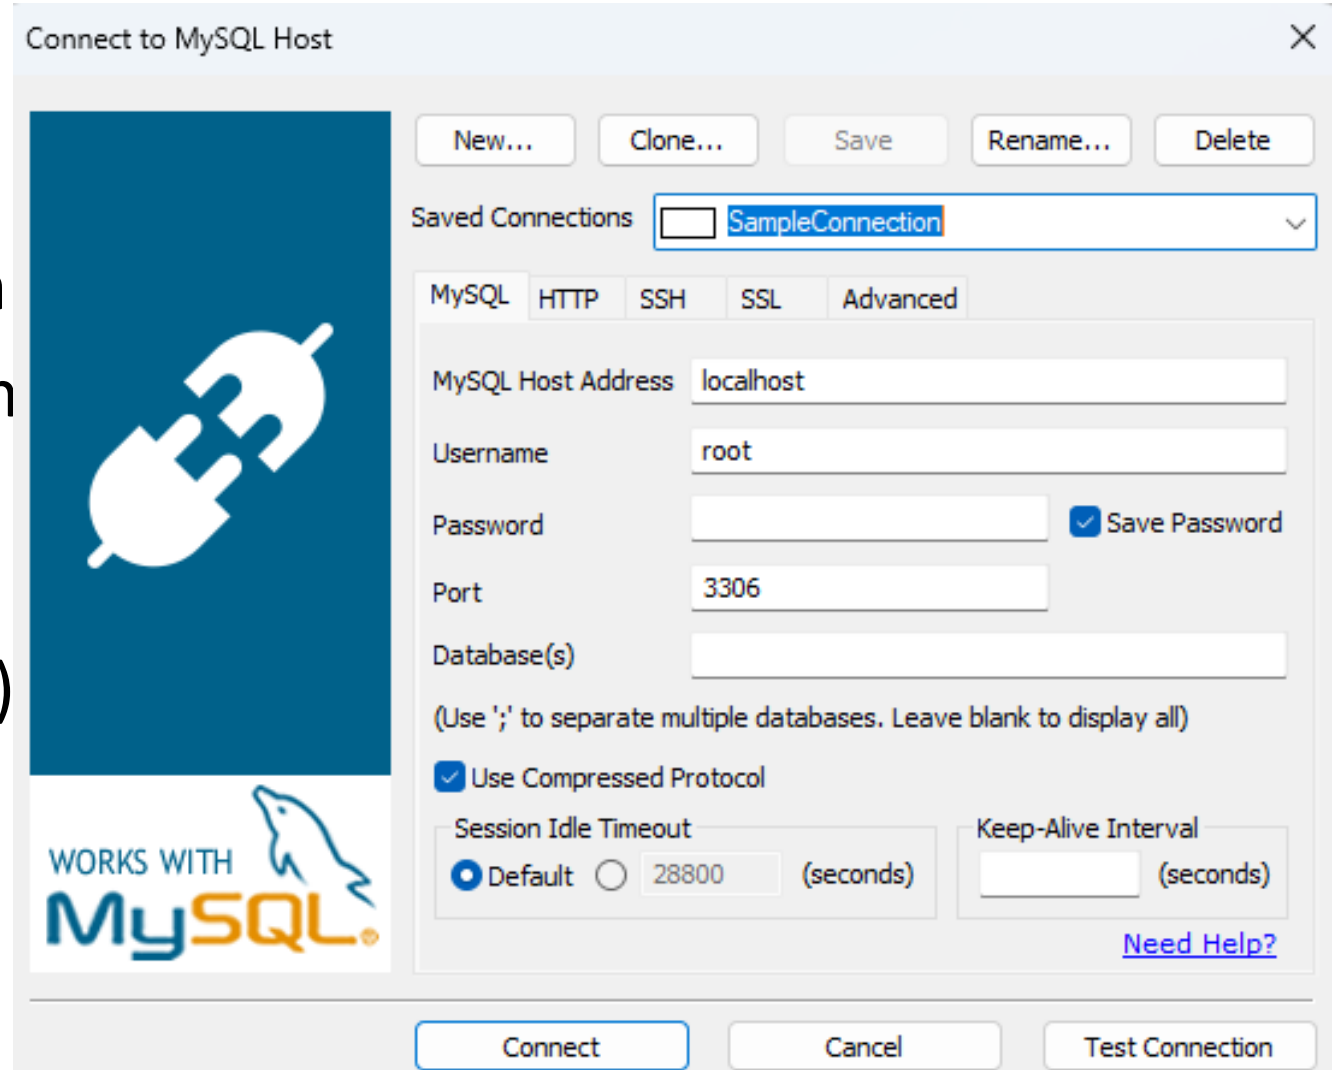

Connect to MySQL Host

New... Clone... Save Rename... Delete

Saved Connections

MySQL HTTP SSH SSL Advanced

MySQL Host Address localhost

Username root

Password ☒ Save Password

Port 3306

Database(s)

(Use ';' to separate multiple databases. Leave blank to display all)

☒ Use Compressed Protocol

Session Idle Timeout ☒ Default ☐ 28800 (seconds)


Keep-Alive Interval (seconds)

[Need Help?](#)

Connect Cancel Test Connection

Using SQLyog:

- 5. You will now be taken to the “Home Screen”

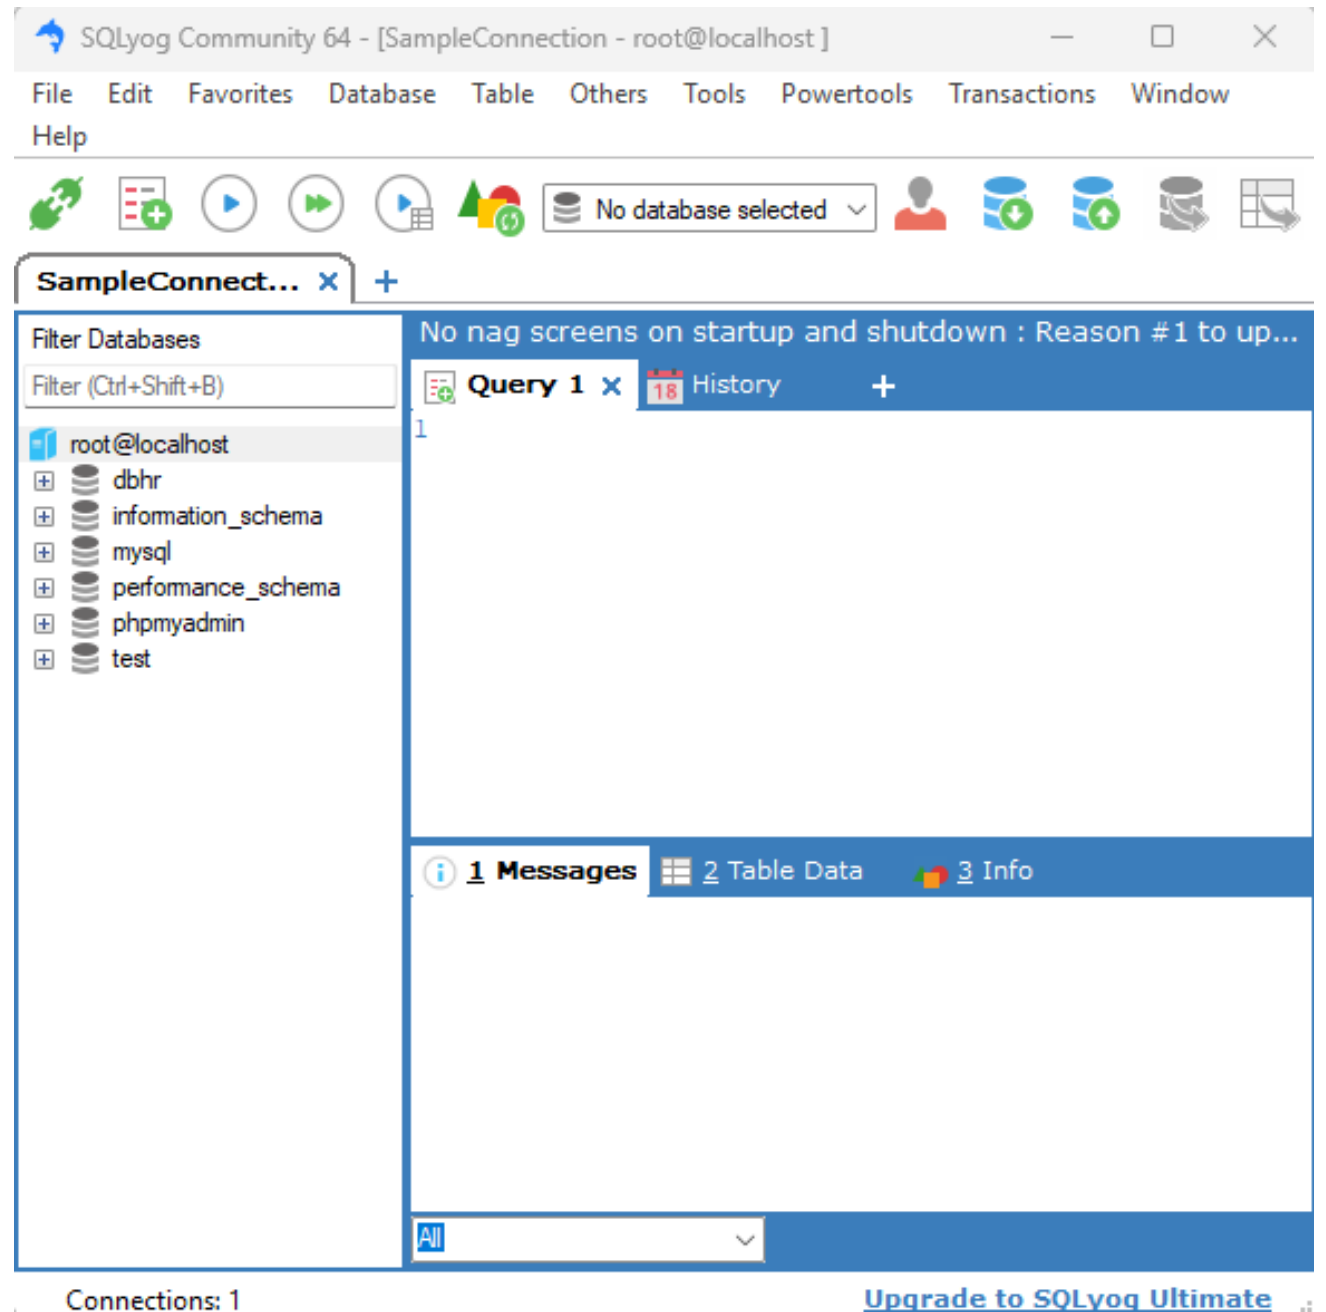

SQLyog Interface

The screenshot displays the SQLyog Community 64 interface. The title bar indicates the connection is to 'SampleConnection/dbhr - root@localhost*'. The menu bar includes File, Edit, Favorites, Database, Table, Others, Tools, Powertools, Transactions, Window, and Help. The toolbar contains various icons for database operations.

The left sidebar shows the database structure. Under 'root@localhost', the 'dbhr' database is expanded, showing 'Tables' and 'Columns'. The 'tblEmployee' table is selected, and its columns are listed: employeeID, empName, empPosition, Department, empSalary, and performanceRating. The 'Indexes' section is also visible.

The main window displays the 'Query 1' editor. The query is as follows:

```
1 CREATE TABLE tblEmployee
2 (
3     employeeID INT PRIMARY KEY,
4     empName VARCHAR(50),
5     empPosition VARCHAR(50),
6     Department VARCHAR(50),
7     empSalary INT,
8     performanceRating VARCHAR(50)
9 );
10
11 INSERT INTO tblEmployee(
12     employeeID,
13     empName,
14     empPosition,
15     Department,
16     empSalary,
17     performanceRating)
18
19 VALUES
20 (001, 'Juan dela Cruz', 'Software Engineer', 'IT', 85000, 'Excellent');
21
22
23
```

The bottom status bar shows the execution results:

1 Messages 2 Table Data 3 Info

1 queries executed, 1 success, 0 errors, 0 warnings

Query: INSERT INTO tblEmployee(employeeID, empName, empPosition, Department, empSalary, performanceRating) VALUES (001, 'Juan dela Cru...

1 row(s) affected

Execution Time : 0.005 sec
Transfer Time : 0 sec
Total Time : 0.005 sec

SQLyog Interface

1 Messages

2 Table Data

3 Info

SQLyog Interface

1 Messages

2 Table Data

3 Info

Format: ☒ HTML ☐ Text/Detailed Refresh

Table: tblemployee


Columns (6)

Calculate Optimal Datatypes

Find the optimal datatypes for this table by reading existing data.

	Field	Type	Comment
	employeeID	int(11) NOT NULL	
	empName	varchar(50) NULL	
	empPosition	varchar(50) NULL	
	Department	varchar(50) NULL	
	empSalary	int(11) NULL	
	performanceRating	varchar(50) NULL	

SQLyog Interface

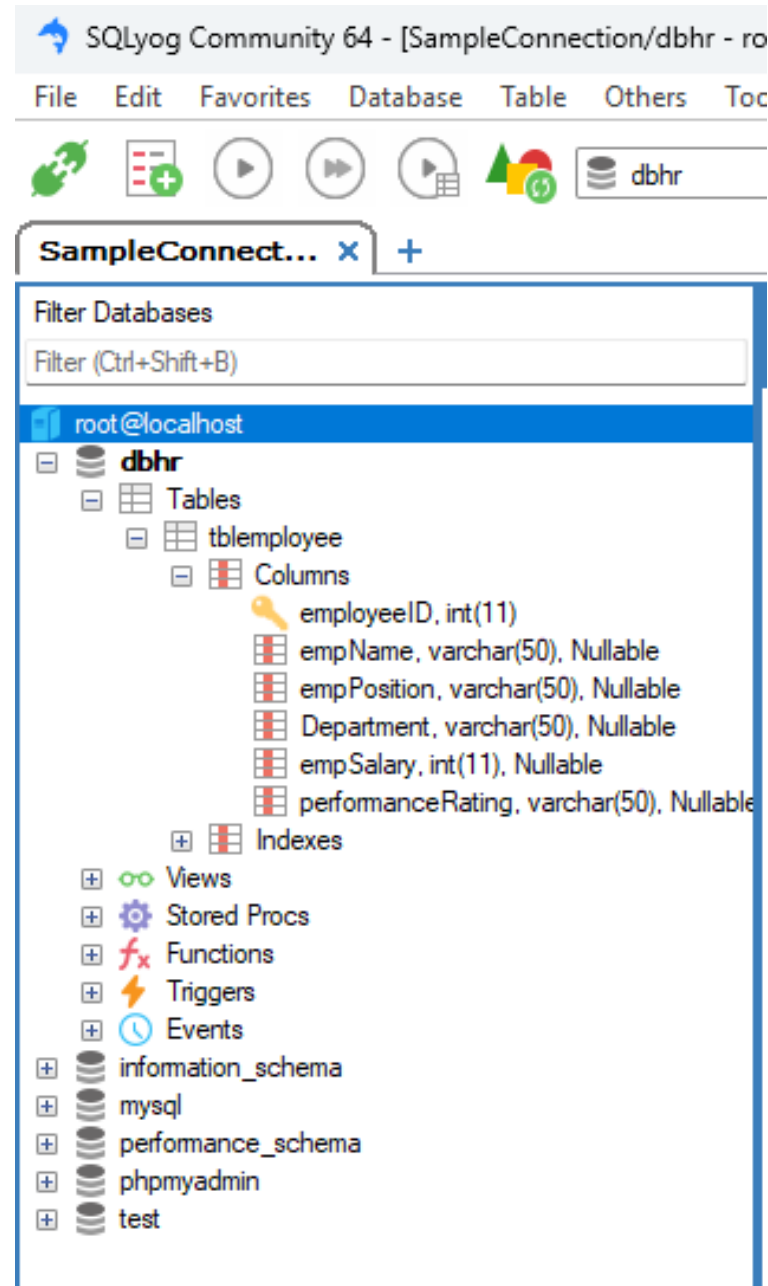

SQLyog Interface

Data Sync tool helps restore missing or damaged data at table, row or column level : Reason #34 to upgrade

```
Query 1  History x +
/*[3-Apr 12:58:26 PM][8 ms]*/ SHOW DATABASES;
/*[3-Apr 12:59:35 PM][0 ms]*/ SHOW CHARSET;
/*[3-Apr 12:59:35 PM][1 ms]*/ SELECT DISTINCT COLLATION_NAME, CHARACTER_SET_NAME FROM information_sch
/*[3-Apr 12:59:44 PM][2 ms]*/ CREATE DATABASE `DBHR`;
/*[3-Apr 12:59:44 PM][0 ms]*/ SHOW DATABASES;
/*[3-Apr 12:59:44 PM][0 ms]*/ USE `dbhr`;
/*[3-Apr 1:06:44 PM][16 ms]*/ CREATE TABLE tblEmployee ( employeeID INT PRIMARY KEY, empName VARCHAR(
/*[3-Apr 1:06:54 PM][6 ms]*/ SHOW FULL TABLES FROM `dbhr` WHERE table_type = 'BASE TABLE';
/*[3-Apr 1:07:20 PM][14 ms]*/ DESCRIBE `dbhr`.`tblemployee`;
/*[3-Apr 1:07:20 PM][21 ms]*/ SHOW INDEX FROM `dbhr`.`tblemployee`;
/*[3-Apr 1:12:26 PM][0 ms]*/ INSERT INTO tblEmployee( employeeID, empName, empPosition, Department, e
/*[3-Apr 1:13:52 PM][0 ms]*/ INSERT INTO tblEmployee( employeeID, empName, empPosition, Department, e
/*[3-Apr 1:14:45 PM][0 ms]*/ INSERT INTO tblEmployee( employeeID, empName, empPosition, Department, e
/*[3-Apr 1:14:47 PM][0 ms]*/ INSERT INTO tblEmployee( employeeID, empName, empPosition, Department, e
/*[3-Apr 1:15:08 PM][5 ms]*/ INSERT INTO tblEmployee( employeeID, empName, empPosition, Department, e
/*[3-Apr 1:38:12 PM][1 ms]*/ SELECT * FROM `dbhr`.`tblemployee` LIMIT 0, 1000;
/*[3-Apr 1:38:12 PM][0 ms]*/ SHOW CREATE TABLE `dbhr`.`tblemployee`;
/*[3-Apr 1:38:12 PM][7 ms]*/ SHOW FULL FIELDS FROM `dbhr`.`tblemployee`;
/*[3-Apr 1:38:12 PM][0 ms]*/ SHOW KEYS FROM `dbhr`.`tblemployee`;
/*[3-Apr 1:38:15 PM][11 ms]*/ SHOW FULL FIELDS FROM `dbhr`.`tblemployee`;
/*[3-Apr 1:38:15 PM][0 ms]*/ SHOW KEYS FROM `dbhr`.`tblemployee`;
/*[3-Apr 1:38:15 PM][0 ms]*/ SHOW CREATE TABLE `dbhr`.`tblemployee`;
```