

Task 11.1:

Link to proj: tyang-library-week2345.pages.dev

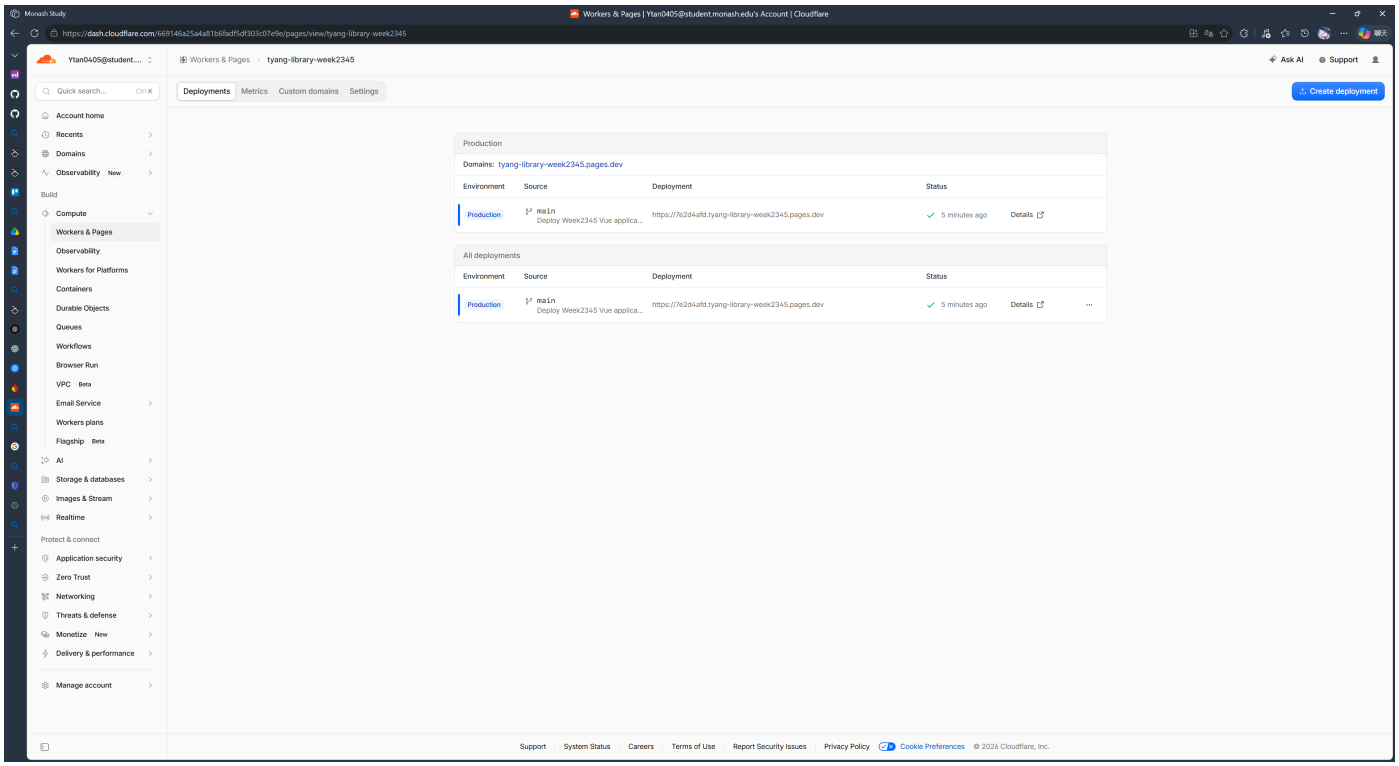

Task: 12.1:

Link to proj: tyang-library-week2345.pages.dev

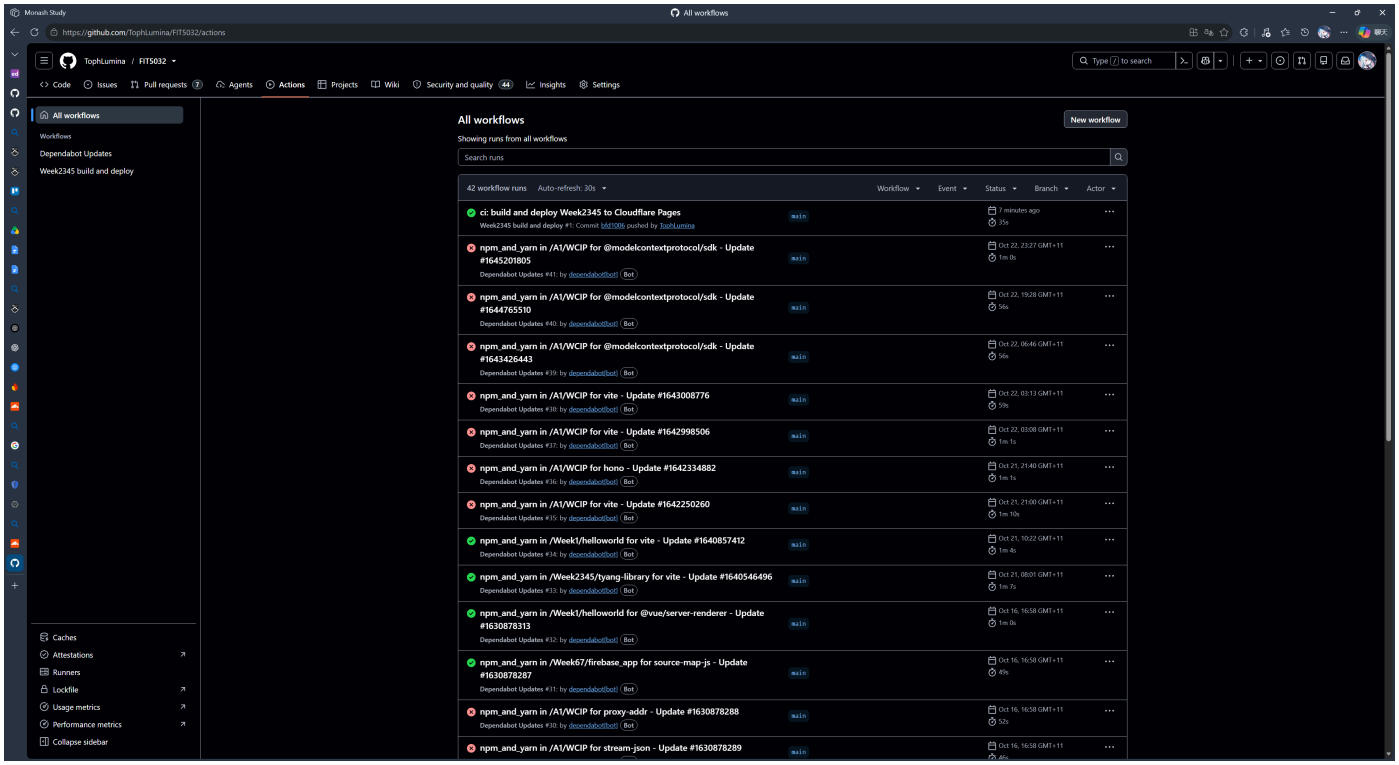

Task12.2:

TTFB reduction:

- **Use a CDN and caching.** Serving content from a server closer to the visitor can reduce waiting time. Our site already uses Cloudflare Pages, which provides built-in caching. Cloudflare: Caching and performance
- **Avoid unnecessary redirects.** Each redirect adds another request before the browser reaches the page. Linking directly to the final HTTPS address keeps things quicker. web.dev: Optimize TTFB
- **Keep backend processing fast.** If the site later uses a backend, we can improve database queries, cache reusable results, and reduce external API calls that delay the response. web.dev: Optimize TTFB

Hotlink avoid：

- **Enable Cloudflare Hotlink Protection.** For a custom domain managed through Cloudflare, this is a straightforward option. It checks the referring website and protects common image formats, including JPG, PNG, GIF and ICO. Requests without a `Referer` are still allowed. Cloudflare: Hotlink Protection
- **Add a CORP response header.** Setting `Cross-Origin-Resource-Policy: same-origin` tells browsers to restrict cross-origin embedding. On Pages, we can configure this in `_headers` and remove permissive CORS headers from protected resources. This is browser-side protection, so it does not stop people downloading the files. MDN: CORP, Cloudflare: Custom headers
- **Check requests with a Function or Worker.** We can check the `Referer` and return **403 Forbidden** for requests from other websites. This gives us more control, but it is not foolproof because the header can be missing or forged. Cloudflare: Hotlink protection example