



iCrash :
A Crisis Management Case Study
MESSIR Analysis Document
- v 1.4 -

(Report type: Definition)

Wednesday 17th May, 2017 - 14:50

Contents

1	Introduction	17
1.1	Overview	17
1.2	Purpose and recipients of the document	17
1.3	Application Domain	17
1.4	Definitions, acronyms and abbreviations	17
1.5	Document structure	18
2	General Description	19
2.1	Domain Stakeholders	19
2.1.1	Communication Company	19
2.1.2	Humans	20
2.1.3	Coordinators	20
2.1.4	Administrator	20
2.1.5	Creator	21
2.1.6	Activator	21
2.2	System's Actors	22
2.3	Use Cases Model	22
2.3.1	Use Cases	22
2.3.2	Use Case Instance(s)	36
3	Environment Model	47
3.1	Local view 01	47
3.2	Local view 02	47
3.3	Local view 03	47
3.4	Local view 04	47
3.5	Local view 05	47
3.6	Global view 01	47
3.7	Actors and Interfaces Descriptions	51
3.7.1	actActivator Actor	51
3.7.2	actAdministrator Actor	52
3.7.3	actAuthenticated Actor	52
3.7.4	actComCompany Actor	53
3.7.5	actCoordinator Actor	53
3.7.6	actMsrCreator Actor	54
4	Concept Model	55
4.1	PrimaryTypes-Classes	55
4.1.1	Local view 01	55
4.1.2	Local view 02	55
4.1.3	Local view 03	55

4.1.4	Local view 04	55
4.1.5	Local view 08	55
4.1.6	Global view 01	55
4.2	PrimaryTypes-Datatypes	55
4.2.1	Local view 06	55
4.2.2	Global view 01	59
4.3	SecondaryTypes-Datatypes	59
4.3.1	Local view 01	59
4.4	Concept Model Types Descriptions	59
4.4.1	Primary types - Class types descriptions	59
4.4.2	Primary types - Datatypes types descriptions	62
4.4.3	Primary types - Association types descriptions	64
4.4.4	Primary types - Aggregation types descriptions	66
4.4.5	Secondary types - Class types descriptions	66
4.4.6	Secondary types - Datatypes types descriptions	66
4.4.7	Secondary types - Association types descriptions	66
4.4.8	Secondary types - Aggregation types descriptions	67
4.4.9	Secondary types - Composition types descriptions	67
5	Operation Model	69
5.1	Environment - Out Interface Operation Scheme for actActivator	69
5.1.1	Operation Model for oeSetClock	69
5.1.2	Operation Model for oeSollicitateCrisisHandling	69
5.2	Environment - Out Interface Operation Scheme for actAdministrator	70
5.2.1	Operation Model for oeAddCoordinator	70
5.2.2	Operation Model for oeAddPointOfInterest	71
5.2.3	Operation Model for oeClosestToALocation	71
5.2.4	Operation Model for oeDeleteCoordinator	73
5.2.5	Operation Model for oeDeletePointOfInterest	73
5.2.6	Operation Model for oeEditPointOfInterest	74
5.2.7	Operation Model for oeRankDownCoordinator	75
5.2.8	Operation Model for oeSelectCategories	75
5.3	Environment - Out Interface Operation Scheme for actAuthenticated	76
5.3.1	Operation Model for oeFillCaptcha	76
5.3.2	Operation Model for oeResetPassword	77
5.3.3	Operation Model for oeLogin	77
5.3.4	Operation Model for oeLogout	78
5.4	Environment - Out Interface Operation Scheme for actComCompany	78
5.4.1	Operation Model for oeAlert	78
5.5	Environment - Out Interface Operation Scheme for actCoordinator	82
5.5.1	Operation Model for oeCloseCrisis	82
5.5.2	Operation Model for oeGetAlertsSet	82
5.5.3	Operation Model for oeGetCrisisSet	83
5.5.4	Operation Model for oeInvalidateAlert	83
5.5.5	Operation Model for oeReportOnCrisis	84
5.5.6	Operation Model for oeSetCrisisHandler	84
5.5.7	Operation Model for oeSetCrisisStatus	85
5.5.8	Operation Model for oeSetCrisisType	86
5.5.9	Operation Model for oeValidateAlert	86

5.6	Environment - Out Interface Operation Scheme for actMsrCreator	87
5.6.1	Operation Model for oeCreateSystemAndEnvironment	87
5.7	Environment - Actor Operation Scheme for actMsrCreator	88
5.7.1	Operation Model for init	88
5.8	Primary Types - Operation Schemes for Class ctAdministrator	89
5.8.1	Operation Model for init	89
5.9	Primary Types - Operation Schemes for Class ctAlert	89
5.9.1	Operation Model for init	89
5.9.2	Operation Model for isSentToCoordinator	90
5.10	Primary Types - Operation Schemes for Class ctAuthenticated	90
5.10.1	Operation Model for init	90
5.11	Primary Types - Operation Schemes for Class ctCoordinator	90
5.11.1	Operation Model for init	90
5.12	Primary Types - Operation Schemes for Class ctCrisis	91
5.12.1	Operation Model for init	91
5.12.2	Operation Model for handlingDelayPassed	91
5.12.3	Operation Model for maxHandlingDelayPassed	92
5.12.4	Operation Model for isSentToCoordinator	92
5.12.5	Operation Model for isAllocatedIfPossible	92
5.13	Primary Types - Operation Schemes for Class ctHuman	93
5.13.1	Operation Model for init	93
5.13.2	Operation Model for isAcknowledged	93
5.14	Primary Types - Operation Schemes for Class ctPointOfInterest	94
5.14.1	Operation Model for init	94
5.15	Primary Types - Operation Schemes for Class ctState	94
5.15.1	Operation Model for init	94
5.16	Primary Types - Operation Schemes for Datatype dtAlertID	95
5.16.1	Operation Model for is	95
5.17	Primary Types - Operation Schemes for Datatype dtComment	95
5.17.1	Operation Model for is	95
5.18	Primary Types - Operation Schemes for Datatype dtCoordinatorID	95
5.18.1	Operation Model for is	95
5.19	Primary Types - Operation Schemes for Datatype dtCrisisID	96
5.19.1	Operation Model for is	96
5.20	Primary Types - Operation Schemes for Datatype dtDescription	96
5.20.1	Operation Model for is	96
5.21	Primary Types - Operation Schemes for Datatype dtExpPoints	96
5.21.1	Operation Model for is	96
5.22	Primary Types - Operation Schemes for Datatype dtGPSLocation	97
5.22.1	Operation Model for DistanceTo	97
5.22.2	Operation Model for is	97
5.22.3	Operation Model for isNearTo	97
5.23	Primary Types - Operation Schemes for Datatype dtLatitude	98
5.23.1	Operation Model for is	98
5.24	Primary Types - Operation Schemes for Datatype dtLogin	98
5.24.1	Operation Model for is	98
5.25	Primary Types - Operation Schemes for Datatype dtLongitude	98
5.25.1	Operation Model for is	98
5.26	Primary Types - Operation Schemes for Datatype dtPassword	99

5.26.1	Operation Model for is	99
5.27	Primary Types - Operation Schemes for Datatype dtPhoneNumber	99
5.27.1	Operation Model for is	99
5.28	Primary Types - Operation Schemes for Datatype dtPointOfInterestID	99
5.28.1	Operation Model for is	99
5.29	Primary Types - Operation Schemes for Enumeration etAlertStatus	100
5.29.1	Operation Model for is	100
5.30	Primary Types - Operation Schemes for Enumeration etCategory	100
5.30.1	Operation Model for is	100
5.31	Primary Types - Operation Schemes for Enumeration etCrisisStatus	100
5.31.1	Operation Model for is	100
5.32	Primary Types - Operation Schemes for Enumeration etCrisisType	101
5.32.1	Operation Model for is	101
5.33	Primary Types - Operation Schemes for Enumeration etExperienceRank	101
5.33.1	Operation Model for is	101
5.34	Primary Types - Operation Schemes for Enumeration etHumanKind	101
5.34.1	Operation Model for is	101
5.35	Secondary Types - Operation Schemes for Classes	102
5.36	Secondary Types - Operation Schemes for Datatype dtSMS	102
5.36.1	Operation Model for is	102
5.37	Secondary Types - Operation Schemes for Enumerations	102
6	Test Model(s)	103
6.1	Test Model for testcase01	103
6.1.1	Test Steps Specification	103
6.1.2	Test Case Instance - instance01	115
6.1.3	Test Case Instance - instance01Part01	115
6.1.4	Test Case Instance - instance01Part02	117
7	Additional Constraints	119
7.1	Quality Constraints	119
7.1.1	Functional suitability	119
7.1.2	Performance efficiency	119
7.1.3	Compatibility	120
7.1.4	Usability	120
7.1.5	Reliability	121
7.1.6	Security	122
7.1.7	Maintainability	122
7.1.8	Portability	123
7.2	Other Constraints	124
A	Undocumented Messir Specification Elements	125
A.1	Undocumented Use Cases	125
A.1.1	Undocumented Use Cases - Subfunction Level	125
A.2	Undocumented Use Case Instances	125
A.2.1	Undocumented Use Case Instance Views	125
A.3	Undocumented Operation Specifications	125
A.4	Undocumented Test-Case Instance Specifications	125
B	Specification project lu.uni.lassy.excalibur.examples.icrash	127

B.1	Use Cases Model	128
B.1.1	Use Cases	128
C	Messir Specification Files Listing	129
C.1	File /src-gen/messir-spec/.views.msr	129
C.2	File /src-gen/messir-spec/operations/concepts/secondarytypes-datatypes/dtSMS.msr	129
C.3	File /src-gen/messir-spec/operations.../environment-actActivator-oeSetClock.msr	130
C.4	File /src-gen.../environment-actActivator-oeSollicitateCrisisHandling.msr	130
C.5	File /src-gen/messir-spec.../environment-actAdministrator-oeAddCoordinator.msr	131
C.6	File /src-gen.../environment-actAdministrator-oeAddPointOfInterest.msr	132
C.7	File /src-gen.../environment-actAdministrator-oeClosestToALocation.msr	133
C.8	File /src-gen.../environment-actAdministrator-oeDeleteCoordinator.msr	134
C.9	File /src-gen.../environment-actAdministrator-oeDeletePointOfInterest.msr	135
C.10	File /src-gen.../environment-actAdministrator-oeEditPointOfInterest.msr	136
C.11	File /src-gen.../environment-actAdministrator-oeRankDownCoordinator.msr	137
C.12	File /src-gen.../environment-actAdministrator-oeSelectCategories.msr	138
C.13	File /src-gen/messir-spec.../environment-actAuthenticated-oeFillCaptcha.msr	139
C.14	File /src-gen/messir-spec.../environment-actAuthenticated-oeResetPassword.msr	141
C.15	File /src-gen/messir-spec/operations.../environment-actAuthenticated.msr	142
C.16	File /src-gen/messir-spec/operations/environment/environment-actComCompany.msr	144
C.17	File /src-gen/messir-spec.../environment-actCoordinator-oeCloseCrisis.msr	146
C.18	File /src-gen/messir-spec.../environment-actCoordinator-oeGetAlertsSet.msr	146
C.19	File /src-gen/messir-spec.../environment-actCoordinator-oeGetCrisisSet.msr	146
C.20	File /src-gen/messir-spec.../environment-actCoordinator-oeInvalidateAlert.msr	147
C.21	File /src-gen/messir-spec.../environment-actCoordinator-oeReportOnCrisis.msr	147
C.22	File /src-gen/messir-spec.../environment-actCoordinator-oeSetCrisisHandler.msr	148
C.23	File /src-gen/messir-spec.../environment-actCoordinator-oeSetCrisisStatus.msr	148
C.24	File /src-gen/messir-spec.../environment-actCoordinator-oeSetCrisisType.msr	148
C.25	File /src-gen/messir-spec.../environment-actCoordinator-oeValidateAlert.msr	149
C.26	File /src-gen/messir-spec/operations.../environment-actMsrCreator-init.msr	149
C.27	File /src-gen.../environment-actMsrCreator-oeCreateSystemAndEnvironment.msr	149
C.28	File /src-gen/messir-spec/environment/environment.msr	151
C.29	File /src-gen/messir-spec/concepts/primarytypes-associations.msr	153
C.30	File /src-gen/messir-spec.../primarytypes-classes-ctAdministrator.msr	154
C.31	File /src-gen/messir-spec/operations.../primarytypes-classes-ctAlert.msr	154
C.32	File /src-gen/messir-spec.../primarytypes-classes-ctAuthenticated.msr	155
C.33	File /src-gen/messir-spec/operations.../primarytypes-classes-ctCoordinator.msr	155
C.34	File /src-gen/messir-spec/operations.../primarytypes-classes-ctCrisis.msr	156
C.35	File /src-gen/messir-spec/operations.../primarytypes-classes-ctHuman.msr	158
C.36	File /src-gen/messir-spec.../primarytypes-classes-ctPointOfInterest-init.msr	159
C.37	File /src-gen/messir-spec/operations.../primarytypes-classes-ctState.msr	159
C.38	File /src-gen/messir-spec/concepts/primarytypes-classes.msr	160
C.39	File /src-gen/messir-spec/operations.../primarytypes-datatypes-dtAlertID.msr	162
C.40	File /src-gen/messir-spec/operations.../primarytypes-datatypes-dtComment.msr	162
C.41	File /src-gen/messir-spec.../primarytypes-datatypes-dtCoordinatorID.msr	163
C.42	File /src-gen/messir-spec/operations.../primarytypes-datatypes-dtCrisisID.msr	163
C.43	File /src-gen/messir-spec.../primarytypes-datatypes-dtDescription-is.msr	164
C.44	File /src-gen/messir-spec.../primarytypes-datatypes-dtExpPoints-is.msr	164
C.45	File /src-gen.../primarytypes-datatypes-dtGPSLocation-DistanceTo.msr	165

C.46	File /src-gen/messir-spec.../primarytypes-datatatypes-dtGPSLocation.msr	166
C.47	File /src-gen/messir-spec/operations.../primarytypes-datatatypes-dtLogin.msr	167
C.48	File /src-gen/messir-spec/operations.../primarytypes-datatatypes-dtPassword.msr	168
C.49	File /src-gen/messir-spec.../primarytypes-datatatypes-dtPhoneNumber.msr	168
C.50	File /src-gen/messir-spec.../primarytypes-datatypes-dtPointOfInterestID-is.msr	168
C.51	File /src-gen/messir-spec.../primarytypes-datatypes-etAlertStatus.msr	169
C.52	File /src-gen/messir-spec.../primarytypes-datatypes-etCategory-is.msr	169
C.53	File /src-gen/messir-spec.../primarytypes-datatypes-etCrisisStatus.msr	170
C.54	File /src-gen/messir-spec/operations.../primarytypes-datatypes-etCrisisType.msr	170
C.55	File /src-gen/messir-spec.../primarytypes-datatypes-etExperienceRank-is.msr	171
C.56	File /src-gen/messir-spec/operations.../primarytypes-datatypes-etHumanKind.msr	171
C.57	File /src-gen/messir-spec/concepts/primarytypes-datatypes.msr	172
C.58	File /src-gen/messir-spec/concepts/secondarytypes-associations.msr	173
C.59	File /src-gen/messir-spec/concepts/secondarytypes-classes.msr	173
C.60	File /src-gen/messir-spec/concepts/secondarytypes-datatypes.msr	174
C.61	File /src-gen/messir-spec/usecases/subfunctions-usecases.msr	174
C.62	File /src-gen/messir-spec/test/tc-testcase01.msr	177
C.63	File /src-gen/messir-spec/test/tci-testcase01-instance01.msr	185
C.64	File /src-gen/messir-spec/usecases/usecase-suDeployAndRun.msr	195
C.65	File /src-gen/messir-spec/usecases/usecase-suGlobalCrisisHandling.msr	199
C.66	File /src-gen/messir-spec/usecases/usecase-ugAdministrateTheSystem.msr	200
C.67	File /src-gen/messir-spec/usecases/usecase-ugManageCrisis.msr	201
C.68	File /src-gen/messir-spec/usecases/usecase-ugMonitor.msr	201
C.69	File /src-gen/messir-spec/usecases/usecase-ugSecurelyUseSystem.msr	202
C.70	File /.../usecaseinstance-ugAdministrateTheSystem-uciugAdministrateTheSystem.msr	202
C.71	File /.../usecaseinstance-ugAdministrateTheSystem-uciugAdministrateTheSystemPointOfInterest.msr	203
C.72	File /src-gen.../usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystem.msr .	204
C.73	File /.../usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemFailLogin.msr	204
C.74	File /.../usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemFailLoginResetPassword.msr	205
C.75	File /.../usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemWithDirectResetPassword.msr	206

D Listing of the Prolog Files Referenced in the Operation Model Specification . 209

D.1	File /src-gen/prolog-ref-spec/Operations.../outactActivator-oeSetClock.pl	209
D.2	File /src-gen/prolog-ref-spec.../outactActivator-oeSollicitateCrisisHandling.pl	210
D.3	File /src-gen/prolog-ref-spec.../outactAdministrator-oeAddCoordinator.pl	212
D.4	File /src-gen/prolog-ref-spec.../outactAdministrator-oeDeleteCoordinator.pl	213
D.5	File /src-gen/prolog-ref-spec/Operations.../outactAuthenticated-oeLogin.pl	214
D.6	File /src-gen/prolog-ref-spec/Operations.../outactAuthenticated-oeLogout.pl	216
D.7	File /src-gen/prolog-ref-spec/Operations.../outactComCompany-oeAlert.pl	217
D.8	File /src-gen/prolog-ref-spec/Operations.../outactCoordinator-oeCloseCrisis.pl	221
D.9	File /src-gen/prolog-ref-spec/Operations.../outactCoordinator-oeGetAlertsSet.pl	222
D.10	File /src-gen/prolog-ref-spec/Operations.../outactCoordinator-oeGetCrisisSet.pl	223
D.11	File /src-gen/prolog-ref-spec.../outactCoordinator-oeInvalidateAlert.pl	224
D.12	File /src-gen/prolog-ref-spec.../outactCoordinator-oeReportOnCrisis.pl	226
D.13	File /src-gen/prolog-ref-spec.../outactCoordinator-oeSetCrisisHandler.pl	227
D.14	File /src-gen/prolog-ref-spec.../outactCoordinator-oeSetCrisisStatus.pl	229
D.15	File /src-gen/prolog-ref-spec.../outactCoordinator-oeSetCrisisType.pl	231
D.16	File /src-gen/prolog-ref-spec.../outactCoordinator-oeValidateAlert.pl	232
D.17	File /src-gen.../outactMsrCreator-oeCreateSystemAndEnvironment.pl	234

D.18	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctAdministrator-init.pl	236
D.19	File /src-gen/prolog-ref-spec/Operations.../PrimaryTypesClasses-ctAlert-init.pl	236
D.20	File /src-gen.../PrimaryTypesClasses-ctAlert-isSentToCoordinator.pl	237
D.21	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctAuthenticated-init.pl	237
D.22	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctCoordinator-init.pl	238
D.23	File /src-gen.../PrimaryTypesClasses-ctCrisis-handlingDelayPassed.pl	238
D.24	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctCrisis-init.pl	239
D.25	File /src-gen.../PrimaryTypesClasses-ctCrisis-isAllocatedIfPossible.pl	239
D.26	File /src-gen.../PrimaryTypesClasses-ctCrisis-isSentToCoordinator.pl	240
D.27	File /src-gen.../PrimaryTypesClasses-ctCrisis-maxHandlingDelayPassed.pl	241
D.28	File /src-gen/prolog-ref-spec/Operations.../PrimaryTypesClasses-ctHuman-init.pl . .	242
D.29	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctHuman-isAcknowledged.pl .	242
D.30	File /src-gen/prolog-ref-spec/Operations.../PrimaryTypesClasses-ctState-init.pl . .	242
D.31	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtAlertID-is.pl	243
D.32	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtComment-is.pl	244
D.33	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtCoordinatorID-is.pl . .	244
D.34	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtCrisisID-is.pl	245
D.35	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtGPSLocation-is.pl . . .	245
D.36	File /src-gen.../PrimaryTypesDatatypes-dtGPSLocation-isNearTo.pl	246
D.37	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtLatitude-is.pl	247
D.38	File /src-gen/prolog-ref-spec/Operations.../PrimaryTypesDatatypes-dtLogin-is.pl .	247
D.39	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtLongitude-is.pl	248
D.40	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtPassword-is.pl	248
D.41	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtPhoneNumber-is.pl . .	249
D.42	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-etAlertStatus-is.pl	249
D.43	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-etCrisisStatus-is.pl	250
D.44	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-etCrisisType-is.pl	250
D.45	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-etHumanKind-is.pl	251
D.46	File /src-gen/prolog-ref-spec/Operations.../SecondaryTypesDatatypes-dtSMS-is.pl .	251
Glossary	253

List of Figures

2.1	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-suDeployAndRun	24
2.2	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-suGlobalCrisisHandling . .	29
2.3	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugAdministrateTheSystem	29
2.4	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugManageCrisis	30
2.5	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugMonitor	30
2.6	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugSecurelyUseSystem	31
2.7	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-oeSetCrisisHandler	34
2.8	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-oeSollicitateCrisisHandling	35
2.9	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-suDeployAndRun-uciSimpleAndComplete-Part0	
2.10	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-suDeployAndRun-uciSimpleAndComplete-Part0	
2.11	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugAdministrateTheSystem	39
2.12	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugAdministrateTheSystemPointOfInterest	41
2.13	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugSecurelyUseSystem	42
2.14	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugSecurelyUseSystemFailLogin	43
2.15	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugSecurelyUseSystemFailLoginResetPassword	
2.16	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugSecurelyUseSystemWithDirectResetPassword	
3.1	Environment Model - Local View 01 - environment model local view - Part	48
3.2	Environment Model - Local View 02 - environment model local view - Part	49
3.3	Environment Model - Local View 03 - administrator actor environment mode	49
3.4	Environment Model - Local View 04 - coordinator actor environment model	50
3.5	Environment Model - Local View 05 - authenticated actor environment mode	50
3.6	Environment Model - Global View 01 - em-gv-01 environment model global v	51
4.1	Concept Model - PrimaryTypes-Classes local view 01 - Local view of all the primary types	56
4.2	Concept Model - PrimaryTypes-Classes local view 02 - local view of the ctState primary ty	57
4.3	Concept Model - PrimaryTypes-Classes local view 03 - local view of the ctAlert primary ty	57
4.4	Concept Model - PrimaryTypes-Classes local view 04 - local view of the ctCrisis primary t	57
4.5	Concept Model - PrimaryTypes-Classes local view 08 -	58
4.6	Concept Model - PrimaryTypes-Classes global view 01 - Primary types class types global vi	58
4.7	Concept Model - PrimaryTypes-Datatypes local view 06 -	59
4.8	Concept Model - PrimaryTypes-Datatypes global view 01 - global view of primary types dataty	65
4.9	Concept Model - SecondaryTypes-Datatypes local view 01 - Local view of the secondary types da	65
5.1	lu.uni.lassy.excalibur.examples.icrash Operation Scope: operation-scope-outactActivator-oeSollicitateCrisisHa	
5.2	lu.uni.lassy.excalibur.examples.icrash Operation Scope: operation-scope-outactComCompany-oeAlertv2	80
5.3	lu.uni.lassy.excalibur.examples.icrash Operation Scope: operation-scope-outactComCompany-oeAlertv3	81
5.4	lu.uni.lassy.excalibur.examples.icrash Operation Scope: operation-scope-outactMsrCreator-oeCreateSystemAn	
6.1	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: tci-testcase01-instance01-Part01	116
6.2	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: tci-testcase01-instance01-Part02	118

B.1 lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-oeCloseCrisis	128
---	-----

Listings

C.1	Messir Spec. file .views.msr.	129
C.2	Messir Spec. file dtSMS.msr.	129
C.3	Messir Spec. file environment-actActivator-oeSetClock.msr.	130
C.4	Messir Spec. file environment-actActivator-oeSollicitateCrisisHandling.msr.	130
C.5	Messir Spec. file environment-actAdministrator-oeAddCoordinator.msr.	131
C.6	Messir Spec. file environment-actAdministrator-oeAddPointOfInterest.msr.	132
C.7	Messir Spec. file environment-actAdministrator-oeClosestToALocation.msr.	133
C.8	Messir Spec. file environment-actAdministrator-oeDeleteCoordinator.msr.	134
C.9	Messir Spec. file environment-actAdministrator-oeDeletePointOfInterest.msr.	135
C.10	Messir Spec. file environment-actAdministrator-oeEditPointOfInterest.msr.	136
C.11	Messir Spec. file environment-actAdministrator-oeRankDownCoordinator.msr.	137
C.12	Messir Spec. file environment-actAdministrator-oeSelectCategories.msr.	138
C.13	Messir Spec. file environment-actAuthenticated-oeFillCaptcha.msr.	139
C.14	Messir Spec. file environment-actAuthenticated-oeResetPassword.msr.	141
C.15	Messir Spec. file environment-actAuthenticated.msr.	142
C.16	Messir Spec. file environment-actComCompany.msr.	144
C.17	Messir Spec. file environment-actCoordinator-oeCloseCrisis.msr.	146
C.18	Messir Spec. file environment-actCoordinator-oeGetAlertsSet.msr.	146
C.19	Messir Spec. file environment-actCoordinator-oeGetCrisisSet.msr.	147
C.20	Messir Spec. file environment-actCoordinator-oeInvalidateAlert.msr.	147
C.21	Messir Spec. file environment-actCoordinator-oeReportOnCrisis.msr.	147
C.22	Messir Spec. file environment-actCoordinator-oeSetCrisisHandler.msr.	148
C.23	Messir Spec. file environment-actCoordinator-oeSetCrisisStatus.msr.	148
C.24	Messir Spec. file environment-actCoordinator-oeSetCrisisType.msr.	148
C.25	Messir Spec. file environment-actCoordinator-oeValidateAlert.msr.	149
C.26	Messir Spec. file environment-actMsrCreator-init.msr.	149
C.27	Messir Spec. file environment-actMsrCreator-oeCreateSystemAndEnvironment.msr.	149
C.28	Messir Spec. file environment.msr.	151
C.29	Messir Spec. file primarytypes-associations.msr.	153
C.30	Messir Spec. file primarytypes-classes-ctAdministrator.msr.	154
C.31	Messir Spec. file primarytypes-classes-ctAlert.msr.	154
C.32	Messir Spec. file primarytypes-classes-ctAuthenticated.msr.	155
C.33	Messir Spec. file primarytypes-classes-ctCoordinator.msr.	155
C.34	Messir Spec. file primarytypes-classes-ctCrisis.msr.	156
C.35	Messir Spec. file primarytypes-classes-ctHuman.msr.	158
C.36	Messir Spec. file primarytypes-classes-ctPointOfInterest-init.msr.	159
C.37	Messir Spec. file primarytypes-classes-ctState.msr.	159
C.38	Messir Spec. file primarytypes-classes.msr.	160
C.39	Messir Spec. file primarytypes-datatypes-dtAlertID.msr.	162

C.40 Messir Spec. file primarytypes-datatatypes-dtComment.msr	163
C.41 Messir Spec. file primarytypes-datatatypes-dtCoordinatorID.msr	163
C.42 Messir Spec. file primarytypes-datatatypes-dtCrisisID.msr	163
C.43 Messir Spec. file primarytypes-datatatypes-dtDescription-is.msr	164
C.44 Messir Spec. file primarytypes-datatatypes-dtExpPoints-is.msr	164
C.45 Messir Spec. file primarytypes-datatypes-dtGPSLocation-DistanceTo.msr	165
C.46 Messir Spec. file primarytypes-datatypes-dtGPSLocation.msr	166
C.47 Messir Spec. file primarytypes-datatypes-dtLogin.msr	167
C.48 Messir Spec. file primarytypes-datatypes-dtPassword.msr	168
C.49 Messir Spec. file primarytypes-datatypes-dtPhoneNumber.msr	168
C.50 Messir Spec. file primarytypes-datatypes-dtPointOfInterestID-is.msr	168
C.51 Messir Spec. file primarytypes-datatypes-etAlertStatus.msr	169
C.52 Messir Spec. file primarytypes-datatypes-etCategory-is.msr	169
C.53 Messir Spec. file primarytypes-datatypes-etCrisisStatus.msr	170
C.54 Messir Spec. file primarytypes-datatypes-etCrisisType.msr	170
C.55 Messir Spec. file primarytypes-datatypes-etExperienceRank-is.msr	171
C.56 Messir Spec. file primarytypes-datatypes-etHumanKind.msr	171
C.57 Messir Spec. file primarytypes-datatypes.msr	172
C.58 Messir Spec. file secondarytypes-associations.msr	173
C.59 Messir Spec. file secondarytypes-classes.msr	173
C.60 Messir Spec. file secondarytypes-datatypes.msr	174
C.61 Messir Spec. file subfunctions-usecases.msr	174
C.62 Messir Spec. file tc-testcase01.msr	177
C.63 Messir Spec. file tci-testcase01-instance01.msr	185
C.64 Messir Spec. file usecase-suDeployAndRun.msr	195
C.65 Messir Spec. file usecase-suGlobalCrisisHandling.msr	199
C.66 Messir Spec. file usecase-ugAdministrateTheSystem.msr	200
C.67 Messir Spec. file usecase-ugManageCrisis.msr	201
C.68 Messir Spec. file usecase-ugMonitor.msr	201
C.69 Messir Spec. file usecase-ugSecurelyUseSystem.msr	202
C.70 Messir Spec. file usecaseinstance-ugAdministrateTheSystem-uciugAdministrateTheSystem.msr	202
C.71 Messir Spec. file usecaseinstance-ugAdministrateTheSystem-uciugAdministrateTheSystemPointOfInterest.msr	204
C.72 Messir Spec. file usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystem.msr	204
C.73 Messir Spec. file usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemFailLogin.msr	204
C.74 Messir Spec. file usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemFailLoginResetPassword.msr	204
C.75 Messir Spec. file usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemWithDirectResetPassword.msr	204
D.1 Prolog file outactActivator-oeSetClock.pl	209
D.2 Prolog file outactActivator-oeSollicitateCrisisHandling.pl	210
D.3 Prolog file outactAdministrator-oeAddCoordinator.pl	212
D.4 Prolog file outactAdministrator-oeDeleteCoordinator.pl	213
D.5 Prolog file outactAuthenticated-oeLogin.pl	214
D.6 Prolog file outactAuthenticated-oeLogout.pl	216
D.7 Prolog file outactComCompany-oeAlert.pl	217
D.8 Prolog file outactCoordinator-oeCloseCrisis.pl	221
D.9 Prolog file outactCoordinator-oeGetAlertsSet.pl	222
D.10 Prolog file outactCoordinator-oeGetCrisisSet.pl	223
D.11 Prolog file outactCoordinator-oeInvalidateAlert.pl	224
D.12 Prolog file outactCoordinator-oeReportOnCrisis.pl	226
D.13 Prolog file outactCoordinator-oeSetCrisisHandler.pl	227

D.14 Prolog file outactCoordinator-oeSetCrisisStatus.pl	229
D.15 Prolog file outactCoordinator-oeSetCrisisType.pl	231
D.16 Prolog file outactCoordinator-oeValidateAlert.pl	232
D.17 Prolog file outactMsrCreator-oeCreateSystemAndEnvironment.pl	234
D.18 Prolog file PrimaryTypesClasses-ctAdministrator-init.pl	236
D.19 Prolog file PrimaryTypesClasses-ctAlert-init.pl	236
D.20 Prolog file PrimaryTypesClasses-ctAlert-isSentToCoordinator.pl	237
D.21 Prolog file PrimaryTypesClasses-ctAuthenticated-init.pl	237
D.22 Prolog file PrimaryTypesClasses-ctCoordinator-init.pl	238
D.23 Prolog file PrimaryTypesClasses-ctCrisis-handlingDelayPassed.pl	238
D.24 Prolog file PrimaryTypesClasses-ctCrisis-init.pl	239
D.25 Prolog file PrimaryTypesClasses-ctCrisis-isAllocatedIfPossible.pl	239
D.26 Prolog file PrimaryTypesClasses-ctCrisis-isSentToCoordinator.pl	240
D.27 Prolog file PrimaryTypesClasses-ctCrisis-maxHandlingDelayPassed.pl	241
D.28 Prolog file PrimaryTypesClasses-ctHuman-init.pl	242
D.29 Prolog file PrimaryTypesClasses-ctHuman-isAcknowledged.pl	242
D.30 Prolog file PrimaryTypesClasses-ctState-init.pl	242
D.31 Prolog file PrimaryTypesDatatypes-dtAlertID-is.pl	243
D.32 Prolog file PrimaryTypesDatatypes-dtComment-is.pl	244
D.33 Prolog file PrimaryTypesDatatypes-dtCoordinatorID-is.pl	244
D.34 Prolog file PrimaryTypesDatatypes-dtCrisisID-is.pl	245
D.35 Prolog file PrimaryTypesDatatypes-dtGPSLocation-is.pl	245
D.36 Prolog file PrimaryTypesDatatypes-dtGPSLocation-isNearTo.pl	246
D.37 Prolog file PrimaryTypesDatatypes-dtLatitude-is.pl	247
D.38 Prolog file PrimaryTypesDatatypes-dtLogin-is.pl	247
D.39 Prolog file PrimaryTypesDatatypes-dtLongitude-is.pl	248
D.40 Prolog file PrimaryTypesDatatypes-dtPassword-is.pl	248
D.41 Prolog file PrimaryTypesDatatypes-dtPhoneNumber-is.pl	249
D.42 Prolog file PrimaryTypesDatatypes-etAlertStatus-is.pl	249
D.43 Prolog file PrimaryTypesDatatypes-etCrisisStatus-is.pl	250
D.44 Prolog file PrimaryTypesDatatypes-etCrisisType-is.pl	250
D.45 Prolog file PrimaryTypesDatatypes-etHumanKind-is.pl	251
D.46 Prolog file SecondaryTypesDatatypes-dtSMS-is.pl	251

Chapter 1

Introduction

1.1 Overview

iCrash is a simple system dedicated to any person who wants to inform of a car crash crisis situation in order to allow for crisis handling. At anytime and anywhere, anyone can be the witness or victim of a car crash and might be in a situation allowing for alerting this crisis. The *iCrash* system has for objectives to support crisis declaration and secure administration and crisis handling by the *iCrash* professional users.

1.2 Purpose and recipients of the document

This document is an analysis document complying with the **Messip** methodology [1]. Its intent is to provide an example of a precise specification of the functional properties of the *iCrash* system.

The recipients of this document are:

- the *iCrash* system's buyer company (ABC): this document is used as a contractual document jointly with any other document considered as useful (as requirement elicitation document, ...) in order to have a higher degree of precision in requirement description. It is also used as a basis document for the *iCrash* system validation using specification based testing.
- the *iCrash* system development company (ADC) is expected to use this document as the basis for development (mainly design, implementation, maintenance). It is also used for verification and validation using test plans defined using the analysis models described in this document and according to the **Messip** methodology.

1.3 Application Domain

The *iCrash* system belongs to the Crisis Management Systems Domain. It is a system dedicated to crisis professional and non professional end users. It has to be considered as an autonomous and external service for the society. It is not an institutional system certified and guaranteed by any governmental entity and thus, must be used with caution.

1.4 Definitions, acronyms and abbreviations

N.A.

1.5 Document structure

The document structure is designed to be coherent with the **Messip** methodology [1]. Section 2 provides a general description of the system purpose, its users, its environment and some general non functional requirements. A more detailed description of the non functional requirements, if any, are provided in section ???. The **system operation** triggered by events sent by the external **actors** belonging to the environment are described in Section 3. The *iCrash* concepts used to represent the any persistent or transient information is given in Section 4. The precise specification of the system operations in term of system's state changes, events sent together with the constraints on the allowed sequences of system operations are described in Section 5.

Chapter 2

General Description

In the context of the **Messip** method, the information provided in this section is intended to present the system for which the **Messip** analysis is provided. The content of this section is made accordingly to the requirements elicitation document that might have been done during the project but also adapted coherently in order to be an abstract introduction to the **Messip** analysis.

2.1 Domain Stakeholders

All stakeholders of the system are detailed in this section. After a brief description of a stakeholder, its objectives are first stated. Thereafter, the responsibilities of the stakeholder are detailed which help to achieve the stakeholder objectives to a certain degree. While the objectives characterize the general problems addressed by the *iCrash* system, the responsibilities describe concrete actions that are expected from a stakeholder. Some of these responsibilities can be traced looking at the use case described in Section B.1, and hence must be supported by the *iCrash* system. All stakeholders listed in this section have an interest in the system or are affected by the system in some way, but only a subset of the stakeholders are directly involved in the use cases described. Let us remind that use case diagrams or descriptions are not **Messip** analysis phase mandatory outputs. They are proposed as informal means to help understanding the semantics of the system specification made of the mandatory analysis models, which provide a complete executable specification.

2.1.1 Communication Company

A Communication Company is a company that has the capacity to ensure communication of information between its customers and the *iCrash* system. The objectives of a Communication Company are:

- to be able to deliver any SMS sent by any human to the *iCrash* 's phone number.
- to be able to transmit SMS messages from the ABC company that owns the *iCrash* system to any human having an SMS compatible device accessible using a phone number.

In order to achieve these objectives, the responsibilities of a Communication Company are:

- ensure confidentiality and integrity of the information sent by a human to the *iCrash* system or from the system to a human.
- to be always available and reliable.

2.1.2 Humans

A human is any person who considers himself related to a car crash either as a witness, a victim or an anonymous person. The objectives of a human are:

- inform the *iCrash* system about the crisis situation he detected.
- be sure that the ABC company has been informed about the situation.
- to be informed about the situation of the crisis he is related to as a victim or witness.

In order to achieve these objectives, the responsibilities of a human are:

- to provide as much details as possible concerning the crisis to the ABC company.
- to declare a crisis only if the crisis is real.
- to have access to the SMS compatible communication device he used to communicate with the *iCrash* system.

2.1.3 Coordinators

A coordinator is an employee of the ABC company being responsible of handling one or several crises. The objectives of a coordinator are:

- to securely monitor the existing alerts and crisis.
- to securely manage alerts and crisis until their termination.

In order to achieve these objectives, the responsibilities of a coordinator are:

- to be capable to determine how an alert received should be considered.
- to be available to react to requests to handle alerts and crisis.
- to be autonomous in handling crisis and to report on its handling.
- to be able to decide when a crisis or an alert can be closed.
- to know its system identification information for secure usage of the system.

2.1.4 Administrator

An administrator is an employee of the ABC company being responsible of administrating the *iCrash* system. The objectives of an administrator are:

- to add or delete coordinator actors from the system and its environment.

In order to achieve these objectives, the responsibilities of a coordinator are:

- know the company employees that can be coordinators and that have access to the system.
- to know its system identification information for secure usage of the system.
- to know the security policy of the ABC company.
- to communicate the coordinators their identification information for secure system usage.

2.1.5 Creator

Any system has a `Creator` stakeholder which is a technician who is installing the *iCrash* system on the targeted deployment infrastructure.

The objectives of a `Creator` are:

- to install the *iCrash* system
- to define the values for the initial system's state
- to define the values for the initial system's environment
- to ensure the integration of the *iCrash* system with its initial environment

In order to achieve these objectives, the responsibilities of a `Creator` are:

- provide the necessary data to the *iCrash* system for its initialization.

2.1.6 Activator

An `activator` is a logical representation of the active part the *iCrash* system. It represents an implicit stakeholder belonging to the system's environment that interacts with the *iCrash* system autonomously without the need of a external entity. It is usually used for representing time triggered functionalities.

The objectives of a `activator` are:

- to communicate the current time to the system
- to notify the administrator that some crisis are still pending for a too long time.

In order to achieve these objectives, the responsibilities of a `activator` are:

- to know the current universal time
- to send the messages to the system according to the time constraints specifically defined for it.

2.2 System's Actors

The objective of this section is not to provide the full requirement elicitation document in this section but to reuse a part of this document to provide a informal introduction to the **Messir** specification of the system under development. The use case model is made of a use case diagrams modelling abstractly and informally the actors and their use cases together with a set of use cases descriptions. In addition, those diagrams and description tables are adapted to the **Messir** specification since actor and messages names together with parameters are partly adapted to be consistent with the specification identifiers (see [1] for more details).

Among all the stakeholders presented in the previous section, we can determine five types of direct actors¹:

- `actComCompany`: for the Communication Company stakeholder.
- `actAdministrator`: for the Administrator stakeholder.
- `actCoordinator`: for the Coordinators stakeholders.
- `actActivator`: for the Activator stakeholder.
- `actMsrCreator`: for the Creator stakeholder.

In addition to those system actors, we can add five other types of actors related to the system's ones. Those five actors are grouped into two categories:

- *Indirect actors*
 - *Witness*: for any human that is a witness of a car crash
 - *Victim*: for any human that is a victim of a car crash
 - *Anonymous*: for any human that want to inform about a car crash while staying anonymous.
- *Abstract actors*
 - `actHuman`: represent abstractly any kind of human being actor wanting to communicate with the ABC system in the context of a car crash.
 - `actAuthenticated`: for the logical Activator stakeholder.

2.3 Use Cases Model

This section contains the use cases elicited during the requirements elicitation phase. The use cases are textually described as suggested by the **Messir** method and inspired by the standard Cokburn template [2].

2.3.1 Use Cases

2.3.1.1 summary-suDeployAndRun

The goal is to install the iCrash system on its infrastructure and to exploit its capacities related to the secure administration and efficient handling of car crash situations depending on alerts received.

¹The naming conventions in **Messir** propose to start each type name by lowercase letters indicating the meta model type used (i.e. act for actors, ct for class type,). In addition to ease the reading it makes the translational semantics into Prolog code more straightforward.

USE-CASE DESCRIPTION	
<i>Name</i>	suDeployAndRun
<i>Scope</i>	system
<i>Level</i>	summary
Primary actor(s)	
1	actAdministrator [active]
Secondary actor(s)	
1	actMsrCreator [active]
2	actCoordinator [active, multiple]
3	actActivator [proactive]
4	actComCompany [active]
Goal(s) description	
The goal is to install the iCrash system on its infrastructure and to exploit its capacities related to the secure administration and efficient handling of car crash situations depending on alerts received.	
Reuse	
1	<u>oeCreateSystemAndEnvironment [1..1]</u>
2	<u>ugAdministrateTheSystem [1..*]</u>
3	<u>suGlobalCrisisHandling [1..*]</u>
4	<u>oeSetClock [1..*]</u>
5	<u>oeSollicitateCrisisHandling [0..*]</u>
6	<u>oeAlert [1..*]</u>
Protocol condition(s)	
1	the iCrash system has never been deployed and used
Pre-condition(s)	
1	none
Main post-condition(s)	
1	the iCrash system has been created and has handled the crisis situations for which it received alerts through the communication company.
Main Steps	
a	the actor actMsrCreator executes the <u>oeCreateSystemAndEnvironment</u> use case
b	the actor actAdministrator executes the <u>ugAdministrateTheSystem</u> use case
c	the actor actComCompany executes the <u>oeAlert</u> use case
d	the actor actActivator executes the <u>oeSetClock</u> use case
e	the actor actActivator executes the <u>oeSollicitateCrisisHandling</u> use case
f	the actor actCoordinator executes the <u>suGlobalCrisisHandling</u> use case
Steps Ordering Constraints	
1	step (a) must be always the first step.
2	step (f) can be executed by different actCoordinator actors.
3	if (e) then previously (d).

Figure 2.1 shows the use case diagram for the suDeployAndRun summary use case

2.3.1.2 summary-suGlobalCrisisHandling

the actCoordinator's goal is to monitor the alerts received and the corresponding crisis in order to act as necessary to handle the crisis.

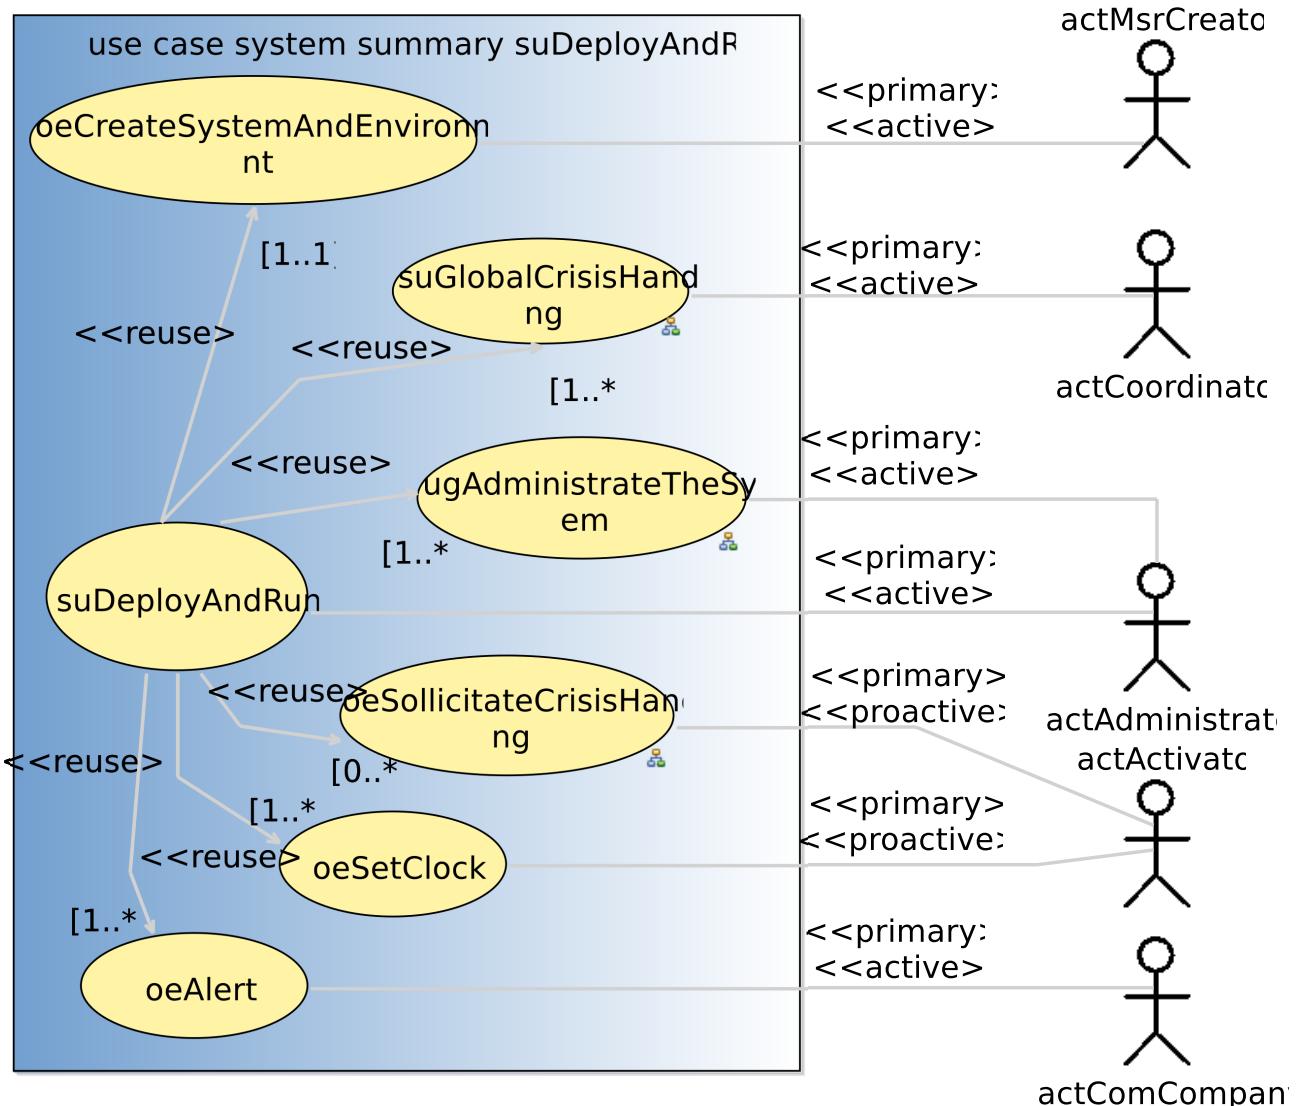


Figure 2.1: suDeployAndRun summary use case

USE-CASE DESCRIPTION	
<i>Name</i>	suGlobalCrisisHandling
<i>Scope</i>	system
<i>Level</i>	summary
Primary actor(s)	
1	actCoordinator [active]
Goal(s) description	
the actCoordinator's goal is to monitor the alerts received and the corresponding crisis in order to act as necessary to handle the crisis.	
Reuse	
1	ugSecurelyUseSystem [1..*]
2	ugMonitor [1..*]
3	ugManageCrisis [1..*]
Protocol condition(s)	
1	the iCrash system has been deployed
2	the coordinator actor involved in the use case has been declared by the actor actAdministrator
Pre-condition(s)	
1	none
Main post-condition(s)	
1	modifications have been made by the coordinator on existing alerts or crisis OR the coordinator requested an updated status on existing alerts or crisis.
Main Steps	
a	the actor actCoordinator executes the ugSecurelyUseSystem use case
b	the actor actCoordinator executes the ugMonitor use case
c	the actor actCoordinator executes the ugManageCrisis use case
Steps Ordering Constraints	
1	steps (a) (b) and (c) executions are interleaved (steps (b) and (c) have their protocol constrained by steps of (a)).
2	steps (a) (b) and (c) can be executed multiple times.

Figure 2.2 shows the use case diagram for the suGlobalCrisisHandling user goal use case

2.3.1.3 usergoal-ugAdministateTheSystem

the actAdministrator's goal is to follow an identification procedure to be allowed to add or delete the necessary crisis coordinators that will be granted the responsibility to handle alerts and crisis.

USE-CASE DESCRIPTION	
<i>Name</i>	ugAdministateTheSystem
<i>Scope</i>	system
<i>Level</i>	usergoal
Primary actor(s)	
1	actAdministrator [active]
Goal(s) description	
the actAdministrator's goal is to follow an identification procedure to be allowed to add or delete the necessary crisis coordinators that will be granted the responsibility to handle alerts and crisis.	

continues in next page ...

... Use-Case Description table continuation

<i>Reuse</i>	
1	<u>ugSecurelyUseSystem [1..*]</u>
2	<u>oeAddCoordinator [1..*]</u>
3	<u>oeDeleteCoordinator [0..*]</u>
4	<u>oeRankDownCoordinator [0..*]</u>
5	<u>oeAddPointOfInterest [1..*]</u>
6	<u>oeEditPointOfInterest [0..*]</u>
7	<u>oeDeletePointOfInterest [0..*]</u>
<i>Protocol condition(s)</i>	
1	the iCrash system has been deployed
<i>Pre-condition(s)</i>	
1	none
<i>Main post-condition(s)</i>	
1	modifications have been made to the system and its environment concerning existing or new coordinators. modifications have been made to the system concerning existing or new Points of interest.
<i>Main Steps</i>	
a	the actor actAdministrator executes the <u>ugSecurelyUseSystem</u> use case
b	the actor actAdministrator executes the <u>oeAddPointOfInterest</u> use case
c	the actor actAdministrator executes the <u>oeEditPointOfInterest</u> use case
d	the actor actAdministrator executes the <u>oeDeletePointOfInterest</u> use case
e	the actor actAdministrator executes the <u>oeAddCoordinator</u> use case
f	the actor actAdministrator executes the <u>oeDeleteCoordinator</u> use case
g	the actor actAdministrator executes the <u>oeRankDownCoordinator</u> use case
<i>Steps Ordering Constraints</i>	
1	steps (a) (b) (c) (d) (e) (f) and (g) executions are interleaved (steps (b) (c) (d) (e) (f) and (g) have their protocol constrained by steps of (a)).
2	steps (a) (b) (c) (d) (e) (f) (g) can be executed multiple times.

Figure 2.3 shows the use case diagram for the ugAdministrateTheSystem user goal use case

2.3.1.4 usergoal-ugManageCrisis

The goal is to do an action that makes the handling of a crisis or an alert progress.

USE-CASE DESCRIPTION	
<i>Name</i>	ugManageCrisis
<i>Scope</i>	system
<i>Level</i>	usergoal
<i>Primary actor(s)</i>	
1	actCoordinator[active]
<i>Goal(s) description</i>	
The goal is to do an action that makes the handling of a crisis or an alert progress.	
<i>Reuse</i>	
1	<u>oeValidateAlert [0..*]</u>
2	<u>oeSetCrisisStatus [0..*]</u>

continues in next page ...

... Use-Case Description table continuation

3	<u>oeSetCrisisHandler [0..*]</u>
4	<u>oeReportOnCrisis [0..*]</u>
5	<u>oeCloseCrisis [0..*]</u>
6	<u>oeInvalidateAlert [0..*]</u>
Protocol condition(s)	
1	the iCrash system has been deployed
Pre-condition(s)	
1	none
Main post-condition(s)	
1	there exist one alert or one crisis whose related information has been changed.
Main Steps	
a	the actor actCoordinator executes the <u>oeValidateAlert</u> use case
b	the actor actCoordinator executes the <u>oeSetCrisisStatus</u> use case
c	the actor actCoordinator executes the <u>oeSetCrisisHandler</u> use case
d	the actor actCoordinator executes the <u>oeReportOnCrisis</u> use case
e	the actor actCoordinator executes the <u>oeCloseCrisis</u> use case
f	the actor actCoordinator executes the <u>oeInvalidateAlert</u> use case
Steps Ordering Constraints	
1	managing a crisis is doing one of the indicated use cases.

Figure 2.4 shows the use case diagram for the ugManageCrisis user goal use case

2.3.1.5 usergoal-ugMonitor

the actCoordinator's goal is to get the detailed list of existing crisis or alerts to decide on next actions to undertake.

USE-CASE DESCRIPTION	
Name	ugMonitor
Scope	system
Level	usergoal
Primary actor(s)	
1	actCoordinator[active]
Goal(s) description	
the actCoordinator's goal is to get the detailed list of existing crisis or alerts to decide on next actions to undertake.	
Reuse	
1	<u>oeGetCrisisSet [0..*]</u>
2	<u>oeGetAlertsSet [0..*]</u>
Protocol condition(s)	
1	the iCrash system has been deployed
Pre-condition(s)	
1	none
Main post-condition(s)	
1	none
Main Steps	

continues in next page ...

... Use-Case Description table continuation

a	the actor actCoordinator executes the <u>oeGetAlertsSet</u> use case
b	the actor actCoordinator executes the <u>oeGetCrisisSet</u> use case



Figure 2.5 shows the use case diagram for the ugMonitor user goal use case

2.3.1.6 usergoal-ugSecurelyUseSystem

the actAuthenticated's goal is to follow an identification procedure to be allowed to act as a coordinator or as an administrator. A password reset is always possible. After the identification procedure fails 3 times in a row a captcha test need to be performed.

USE-CASE DESCRIPTION	
Name	ugSecurelyUseSystem
Scope	system
Level	usergoal
Primary actor(s)	
1	actAuthenticated [active]
Secondary actor(s)	
1	actAdministrator []
Goal(s) description	
the actAuthenticated's goal is to follow an identification procedure to be allowed to act as a coordinator or as an administrator. A password reset is always possible. After the identification procedure fails 3 times in a row a captcha test need to be performed.	
Reuse	
1	<u>oeLogin</u> [1..*]
2	<u>oeFillCaptcha</u> [0..*]
3	<u>oeResetPassword</u> [0..1]
4	<u>oeLogout</u> [1..1]
Protocol condition(s)	
1	the iCrash system has been deployed
Pre-condition(s)	
1	none
Main post-condition(s)	
1	the actAuthenticated is known by the system not to be logged.
Main Steps	
a	the actor actAuthenticated executes the <u>oeLogin</u> use case
b	the actor actAuthenticated executes the <u>oeFillCaptcha</u> use case
c	the actor actAuthenticated executes the <u>oeResetPassword</u> use case
d	the actor actAuthenticated executes the <u>oeLogout</u> use case
Steps Ordering Constraints	
1	step (a) or step (c) is always the first one. step (a) must always precede step (d). step (b) is only needed when step (a) fails 3 times in a row. step (d) is always the last step

Figure 2.6 shows the use case diagram for the ugSecurelyUseSystem user goal use case

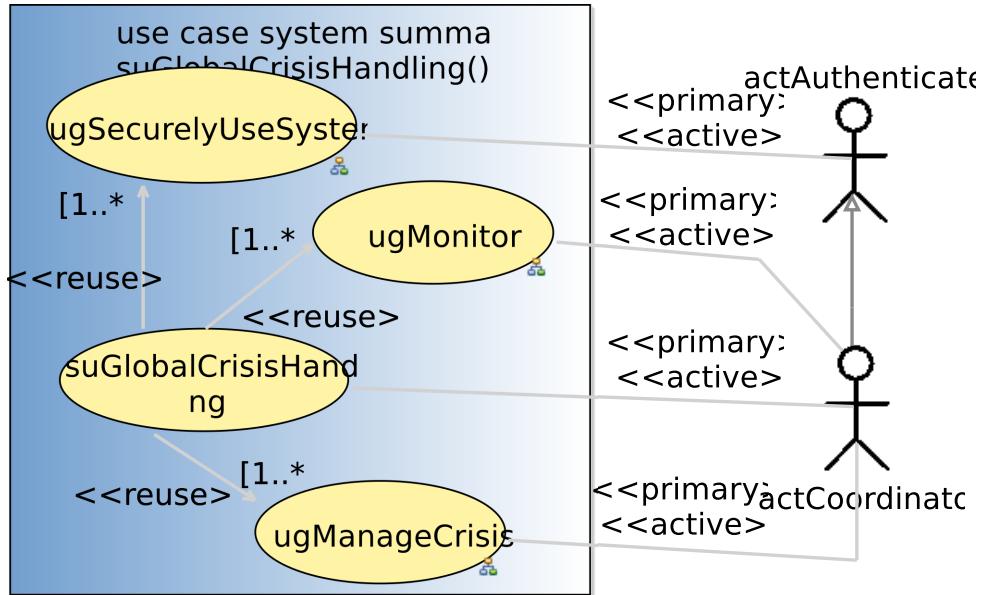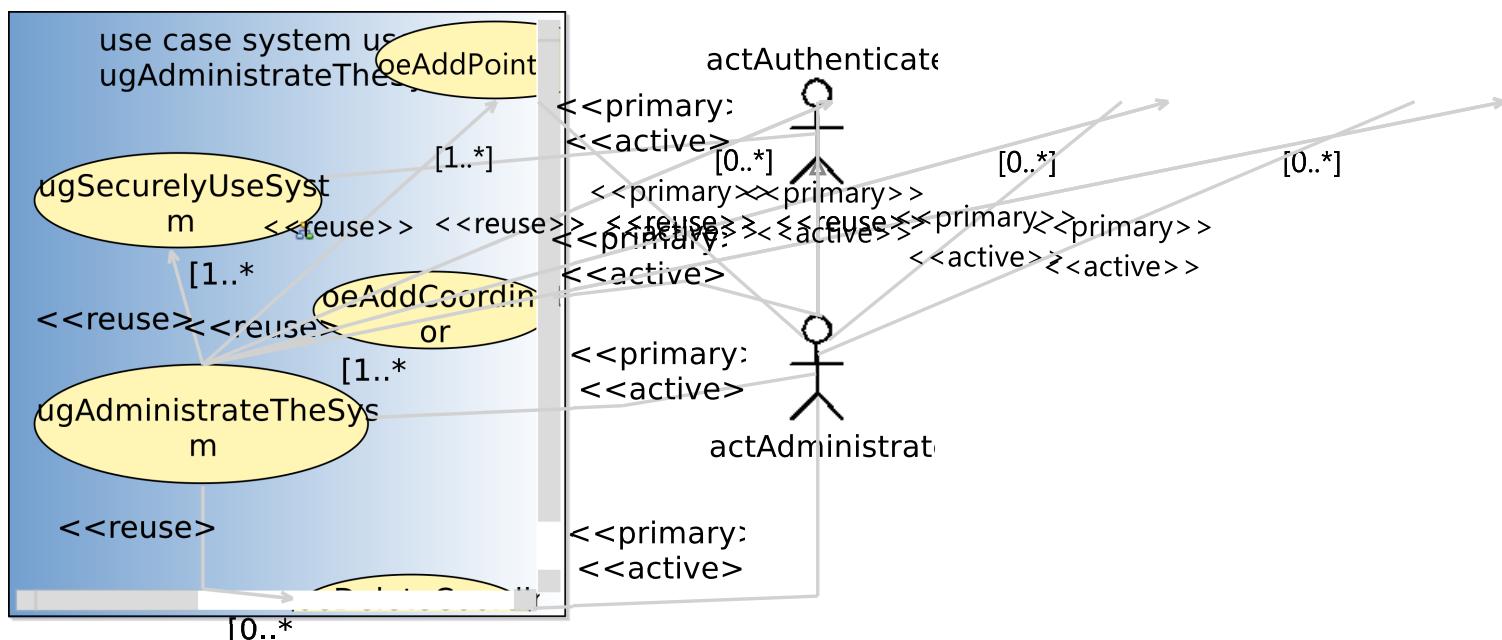Figure 2.2: **suGlobalCrisisHandling** user goal use caseFigure 2.3: **ugAdministateTheSystem** user goal use case

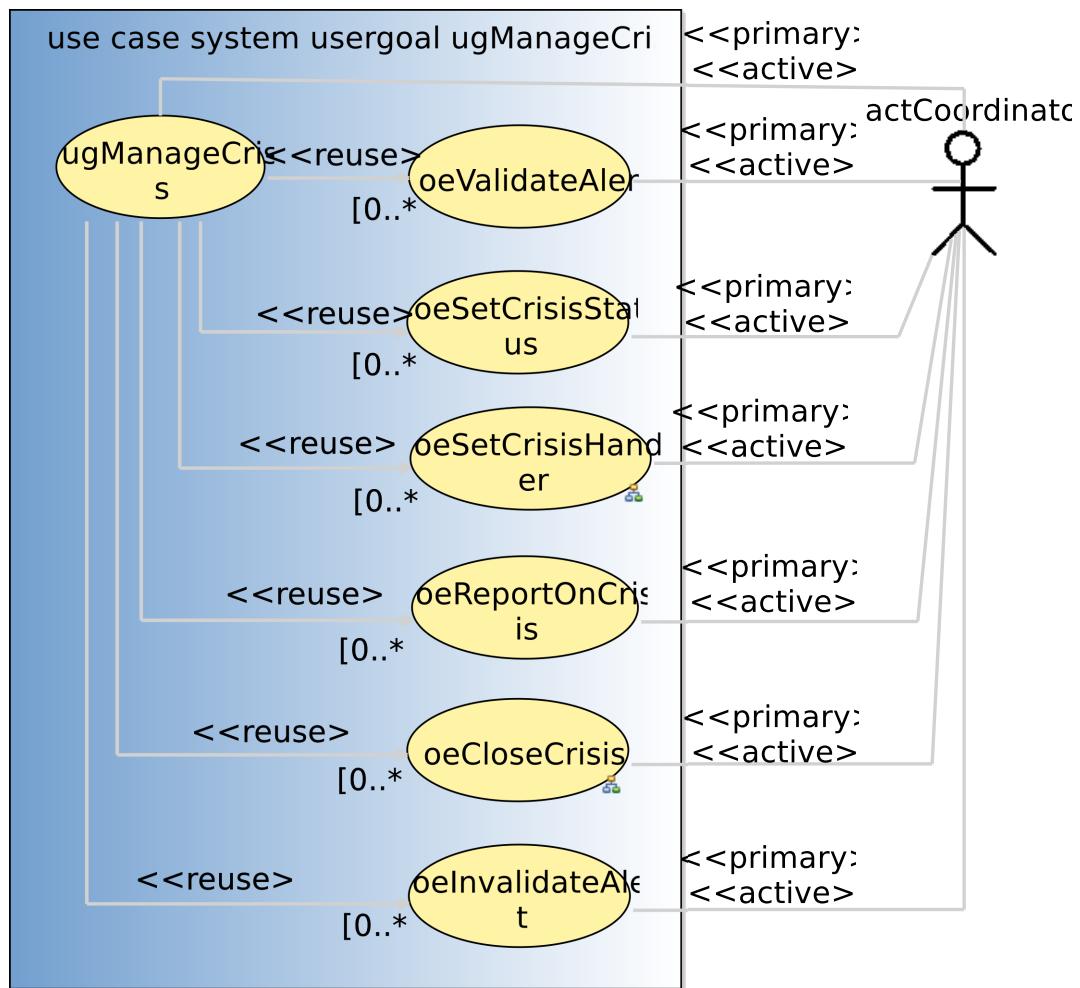


Figure 2.4: ugManageCrisis user goal use case

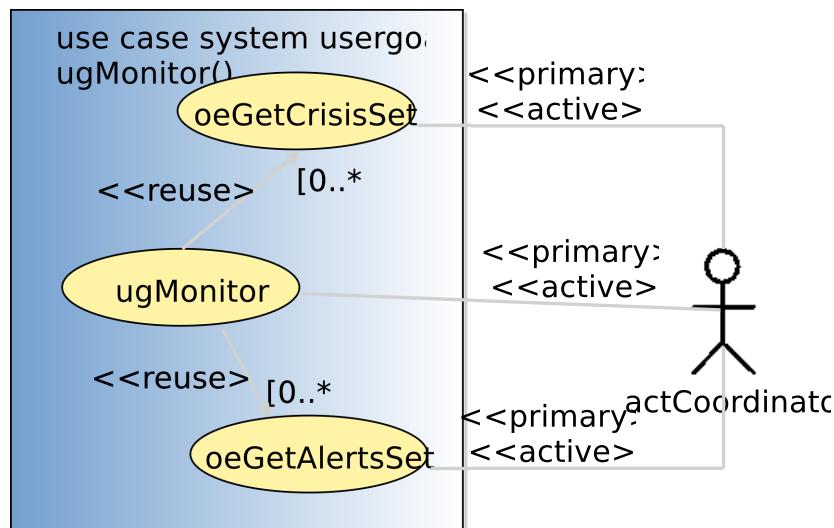


Figure 2.5: ugMonitor user goal use case

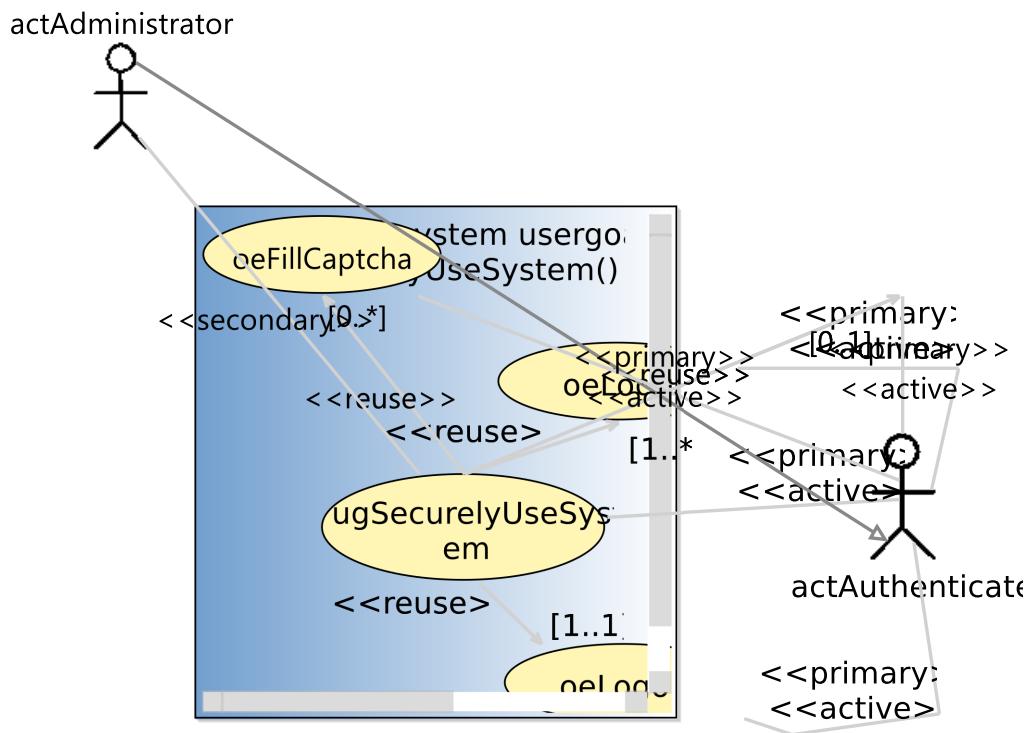


Figure 2.6: ugSecurelyUseSystem user goal use case

2.3.1.7 subfunction-oeClosestToALocation

Gives a sorted list back (From closest until furthest)

USE-CASE DESCRIPTION	
Name	oeClosestToALocation
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actAdministrator [active]
<i>Goal(s) description</i>	
Gives a sorted list back (From closest until furthest)	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.8 subfunction-oeFillCaptcha

USE-CASE DESCRIPTION	
Name	oeFillCaptcha
Scope	system
Level	subfunction
<i>Parameters</i>	
AdtString: ptString 1	

USE-CASE DESCRIPTION	
Name	oeRankDownCoordinator
Scope	system
Level	subfunction
<i>Parameters</i>	
AdtCoordinatorID: dtCoordinatorID 1	
<i>Primary actor(s)</i>	
1	actAdministrator[active]
<i>Goal(s) description</i>	
the goal is to demote a coordinator by lowering his experience rank	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.10 subfunction-oeResetPassword

goal is to request a new password in order to be able to request access secured system operations anew.

USE-CASE DESCRIPTION	
Name	oeResetPassword
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actAuthenticated[active]
<i>Secondary actor(s)</i>	
1	actAdministrator[passive]
<i>Goal(s) description</i>	
goal is to request a new password in order to be able to request access secured system operations anew.	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.11 subfunction-oeSelectCategories

goal is to display/select categories from the system's state

USE-CASE DESCRIPTION	
Name	oeSelectCategories
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actAdministrator [active]
<i>Goal(s) description</i>	
goal is to display/select categories from the system's state	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.12 subfunction-oeSetCrisisHandler

goal is to declare himself as been the handler of a crisis having the specified id.

USE-CASE DESCRIPTION	
Name	oeSetCrisisHandler
Scope	system
Level	subfunction
<i>Parameters</i>	
AdtCrisisID: dtCrisisID 1	
<i>Primary actor(s)</i>	
1	actCoordinator [active]
<i>Secondary actor(s)</i>	
1	actCoordinator [passive]
2	actComCompany [passive, multiple]
<i>Goal(s) description</i>	
goal is to declare himself as been the handler of a crisis having the specified id.	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

Figure 2.7 shows the use case diagram for the oeSetCrisisHandler subfunction use case

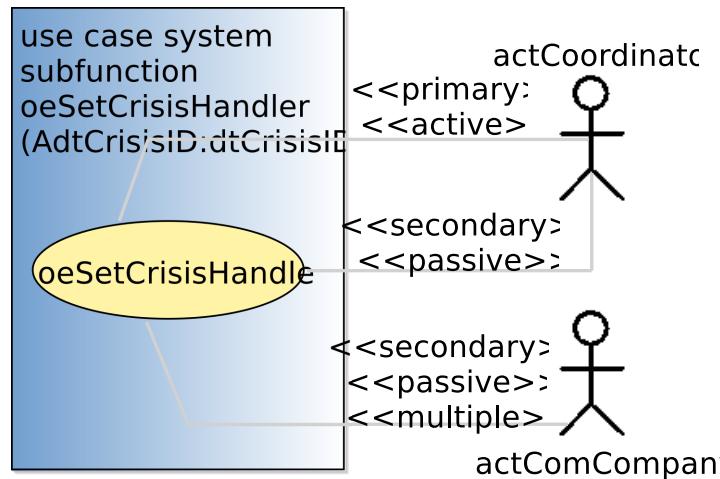


Figure 2.7: oeSetCrisisHandler subfunction use case

2.3.1.13 subfunction-oeSetCrisisType

goal is to define the difficulty level (based on the severity) of a specific crisis.

USE-CASE DESCRIPTION	
Name	oeSetCrisisType
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actCoordinator[active]
<i>Goal(s) description</i>	
goal is to define the difficulty level (based on the severity) of a specific crisis.	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.14 subfunction-oeSollicitateCrisisHandling

the actActivator's goal is to decrease the number of unhandled crisis.

USE-CASE DESCRIPTION	
Name	oeSollicitateCrisisHandling
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actActivator[proactive]
<i>Secondary actor(s)</i>	
1	actCoordinator[passive, multiple]
2	actAdministrator[passive]
<i>Goal(s) description</i>	
the actActivator's goal is to decrease the number of unhandled crisis.	
<i>Protocol condition(s)</i>	

... Use-Case Description table continuation

- | | |
|---|--|
| 2 | the reminder period for the concerned crisis is initialized. |
|---|--|

Figure 2.8 shows the use case diagram for the oeSollicitateCrisisHandling subfunction use case

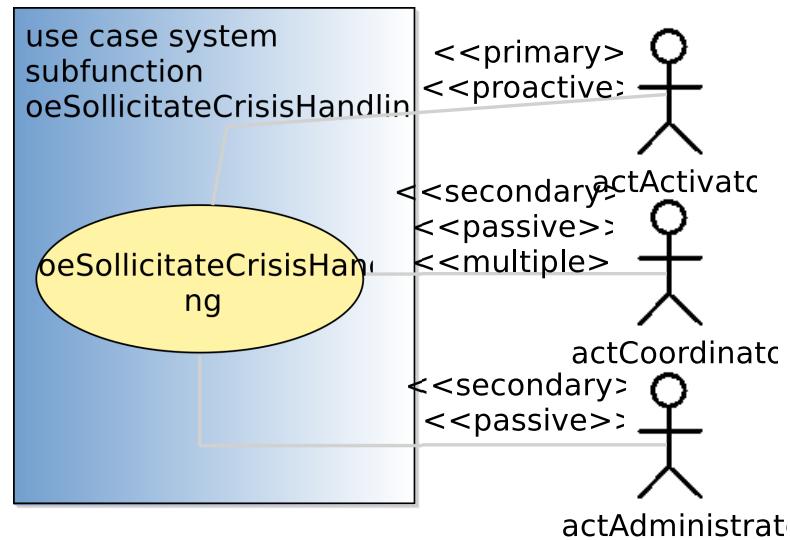


Figure 2.8: oeSollicitateCrisisHandling subfunction use case

2.3.2 Use Case Instance(s)

2.3.2.1 Use-Case Instance - uciSimpleAndCompletePart01:suDeployAndRun

First part of a use case instance for the summary use case suDeployAndRun illustrating a simple and complete interaction scenario primarily handled by an administrator in a concrete situation.

SUMMARY USE-CASE INSTANCE	
<i>Instantiated Use Case</i>	
suDeployAndRun	
<i>Instance ID</i>	
uciSimpleAndCompletePart01	
<i>Remarks</i>	
a	shows the system initialization and the first administrative tasks by the administrator.
b	The unique and always existing actMsrCreator actor instance (named here theCreator) requests the initialization of the system and its environment (made of one administrator identified here by bill), one activator actor (identified by theClock) and indicating that the number of communication company actor instances for the system's environment is 4 (one of them is identified here by tango)
c	the administrator logs in to initialize a coordinator
d	an alert is received. Time is going on without having the coordinator handling the alert which let's the proactive actor trigger the automatic solicitation of crisis handling.
e	this first part stops before the coordinator logs in the system.

Figure 2.9 shows the sequence diagram representing the first part of a simple and complete use case instance for the summary use case suDeployAndRun.

2.3.2.2 Use-Case Instance - uciSimpleAndCompletePart02:suDeployAndRun

Second part of a simple and complete use case instance for the summary use case suDeployAndRun illustrating a simple and complete interaction scenario primarily handled by an administrator in a concrete situation.

SUMMARY USE-CASE INSTANCE	
<i>Instantiated Use Case</i>	
suDeployAndRun	
<i>Instance ID</i>	
uciSimpleAndCompletePart02	
<i>Remarks</i>	
a	starts when the coordinator logs in the system until the full handling of all the existing crisis.
b	shows an instantiated case of handling of a crisis by a coordinator until its closure after reporting.

Figure 2.10 shows the sequence diagram representing the second part of a simple and complete use case instance for the summary use case suDeployAndRun.

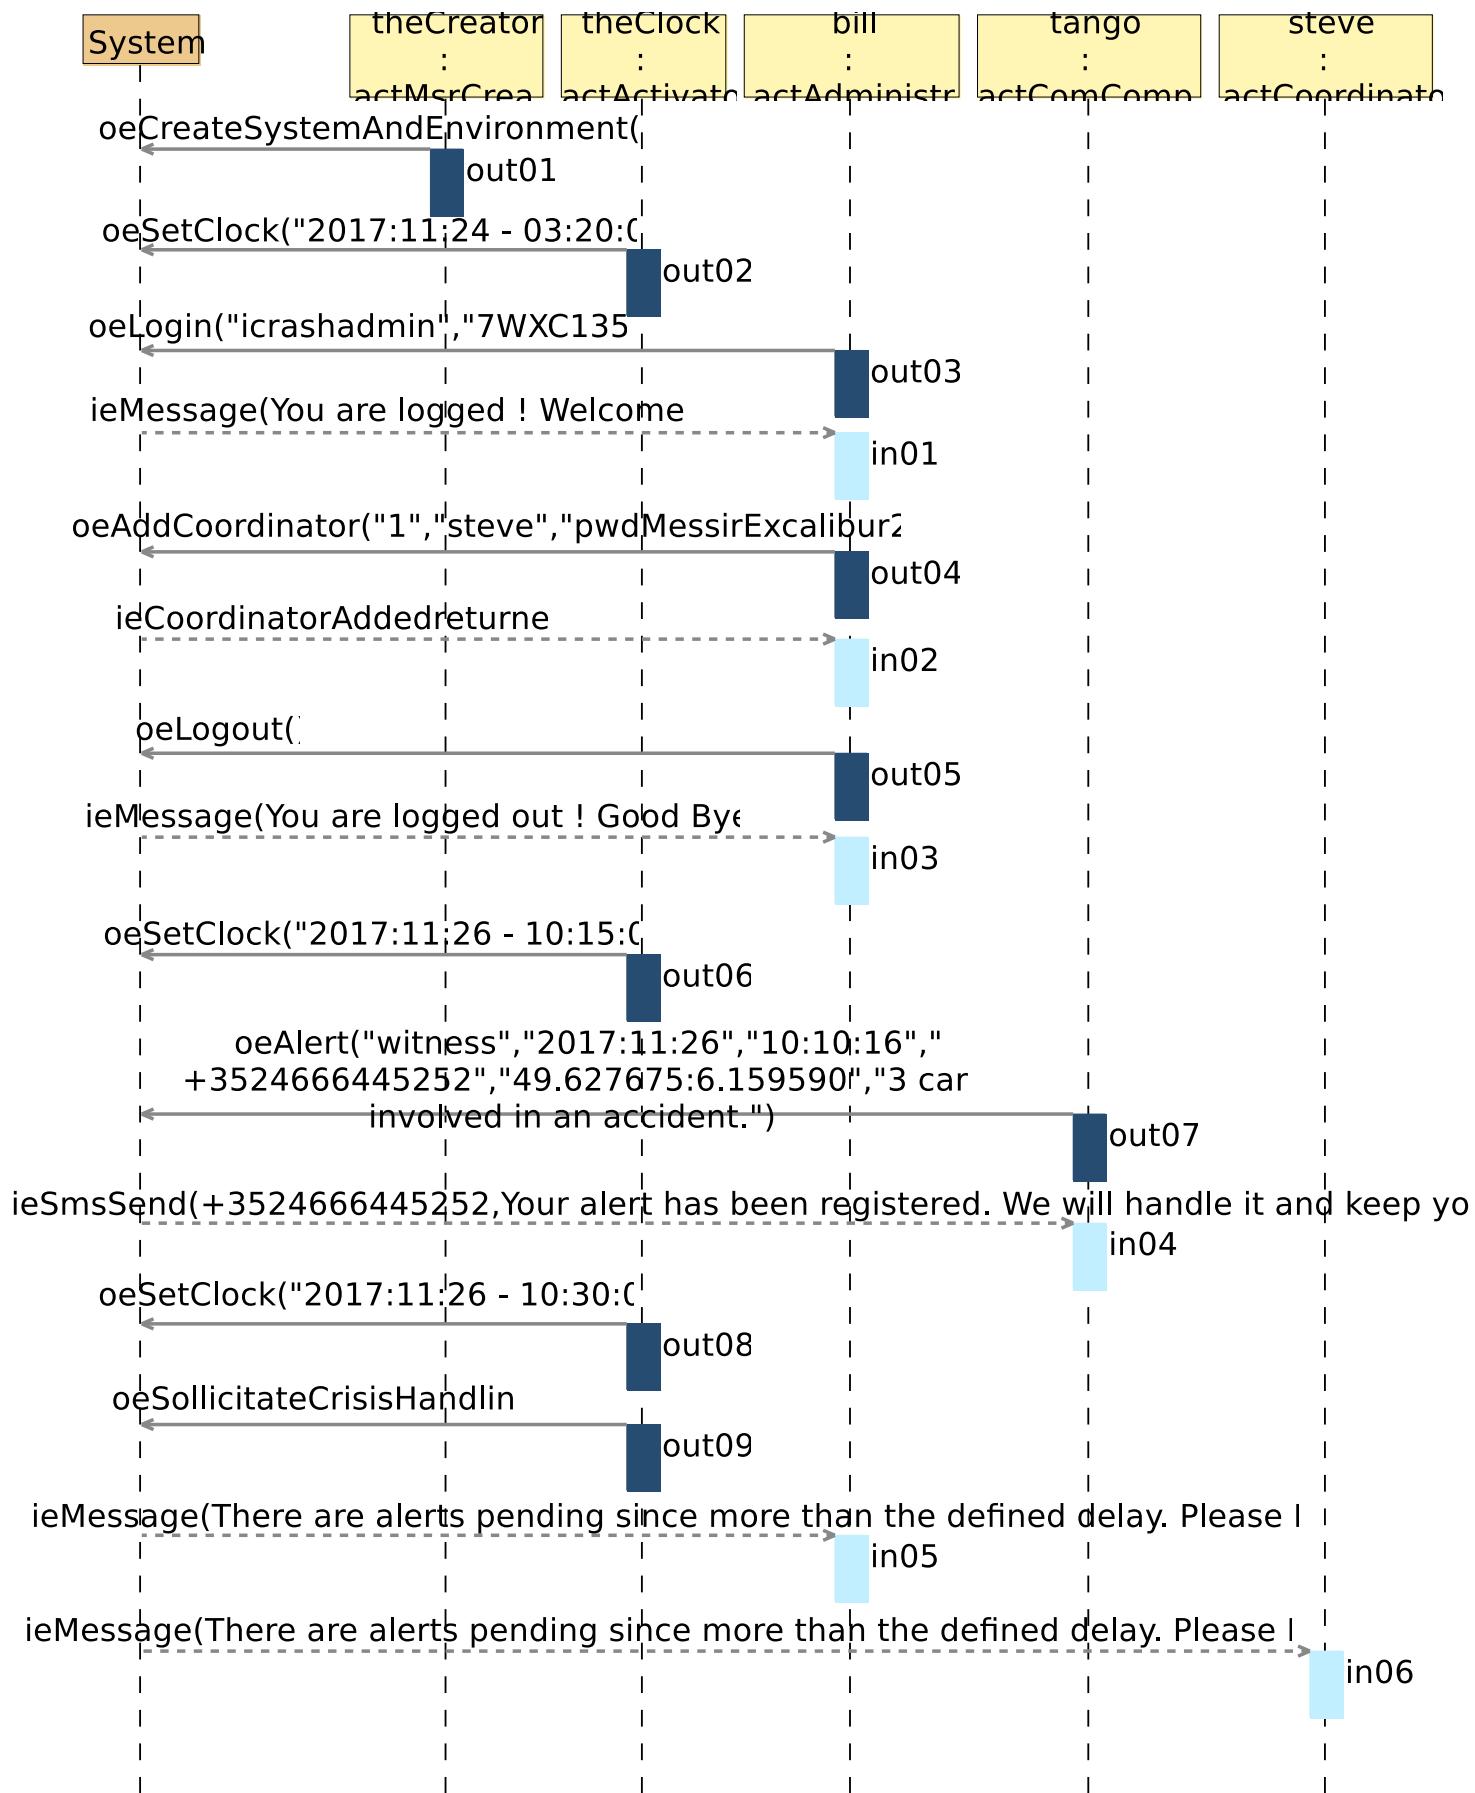


Figure 2.9: uci-suDeployAndRun-uciSimpleAndComplete-Part01

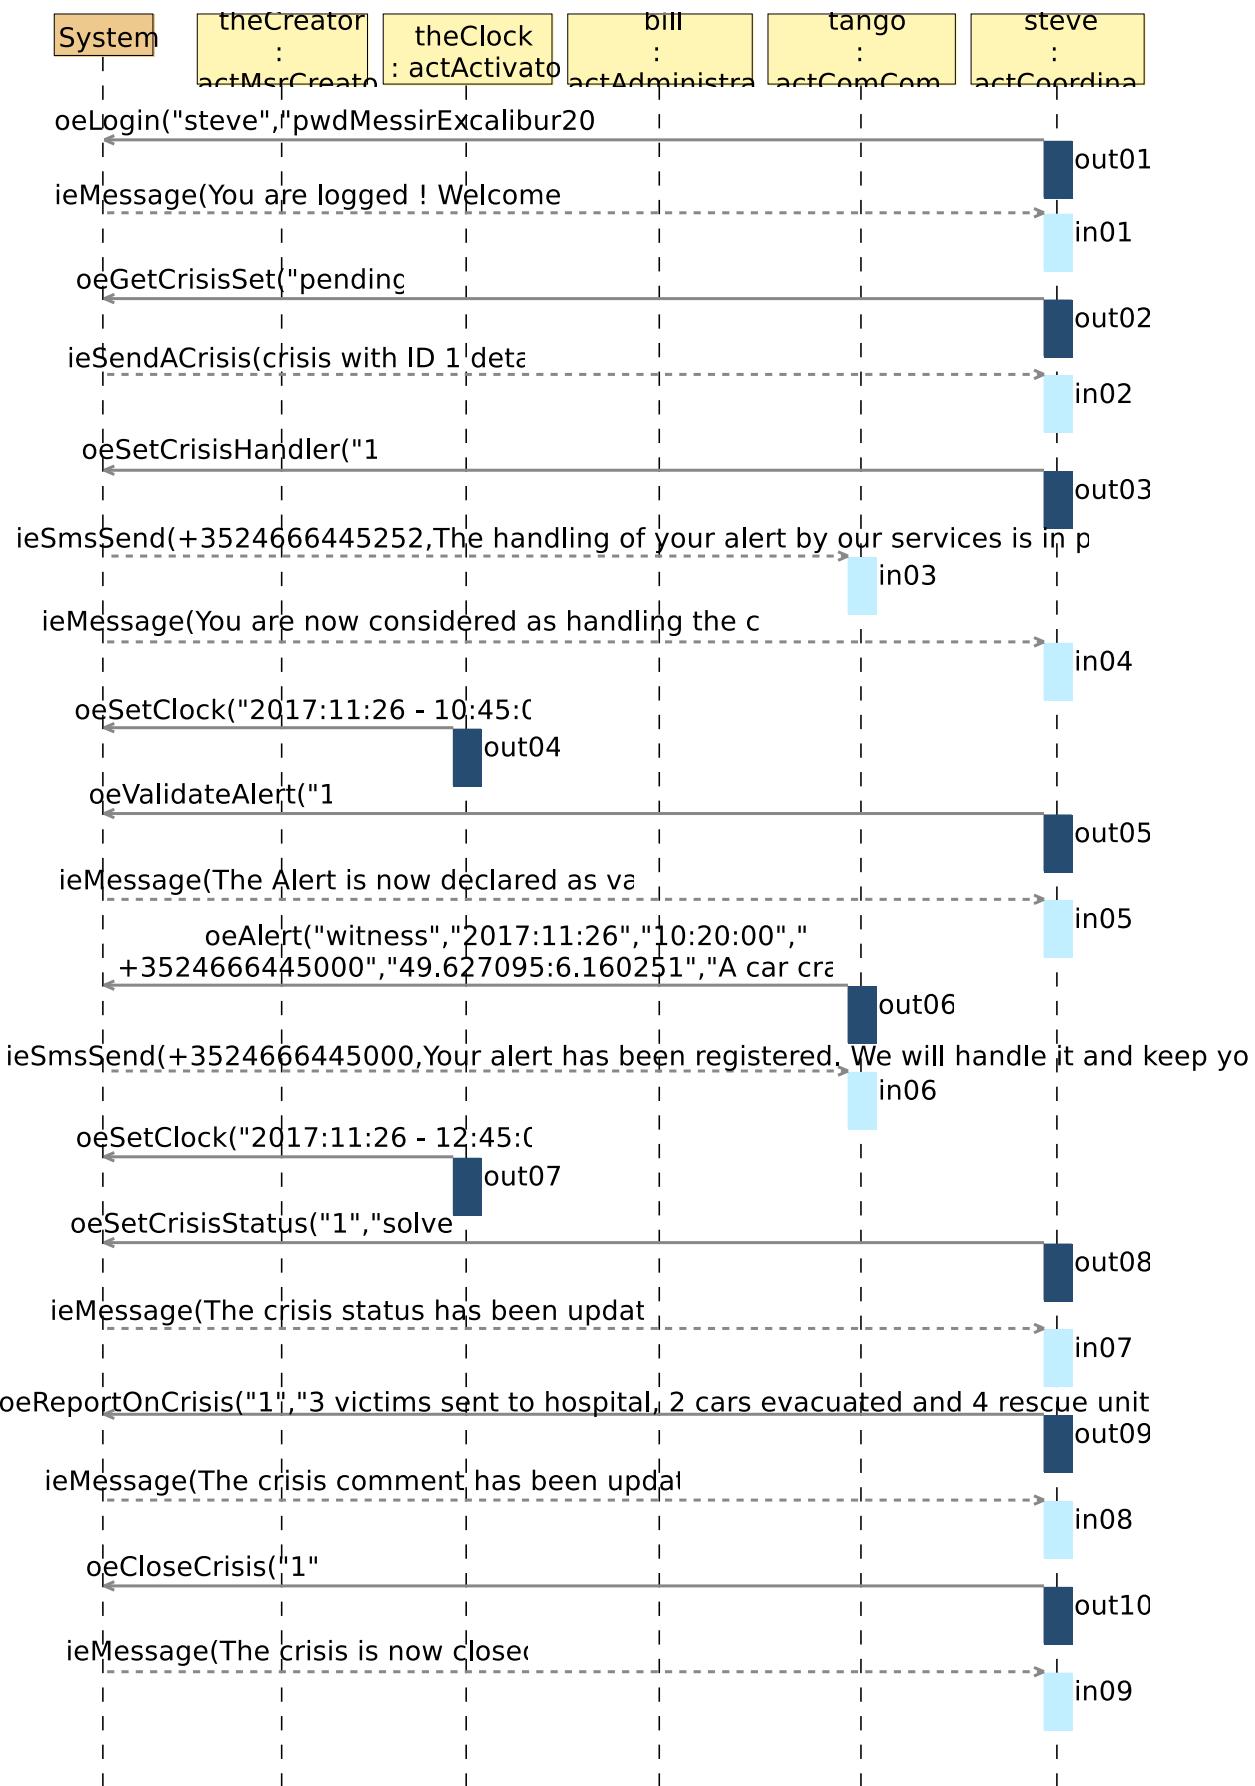


Figure 2.10: uci-suDeployAndRun-uciSimpleAndComplete-Part02 use case instance sequence diagram

2.3.2.3 Use-Case Instance - uciugAdministateTheSystem:ugAdministateTheSystem

use case instance for the use case ugAdministateTheSystem showing the addition of a coordinator and his demotion in rank by the administrator

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i> ugAdministateTheSystem
<i>Instance ID</i> uciugAdministateTheSystem

Figure 2.11 shows the sequence diagram representing a use case instance for the user goal use case ugAdministateTheSystem.

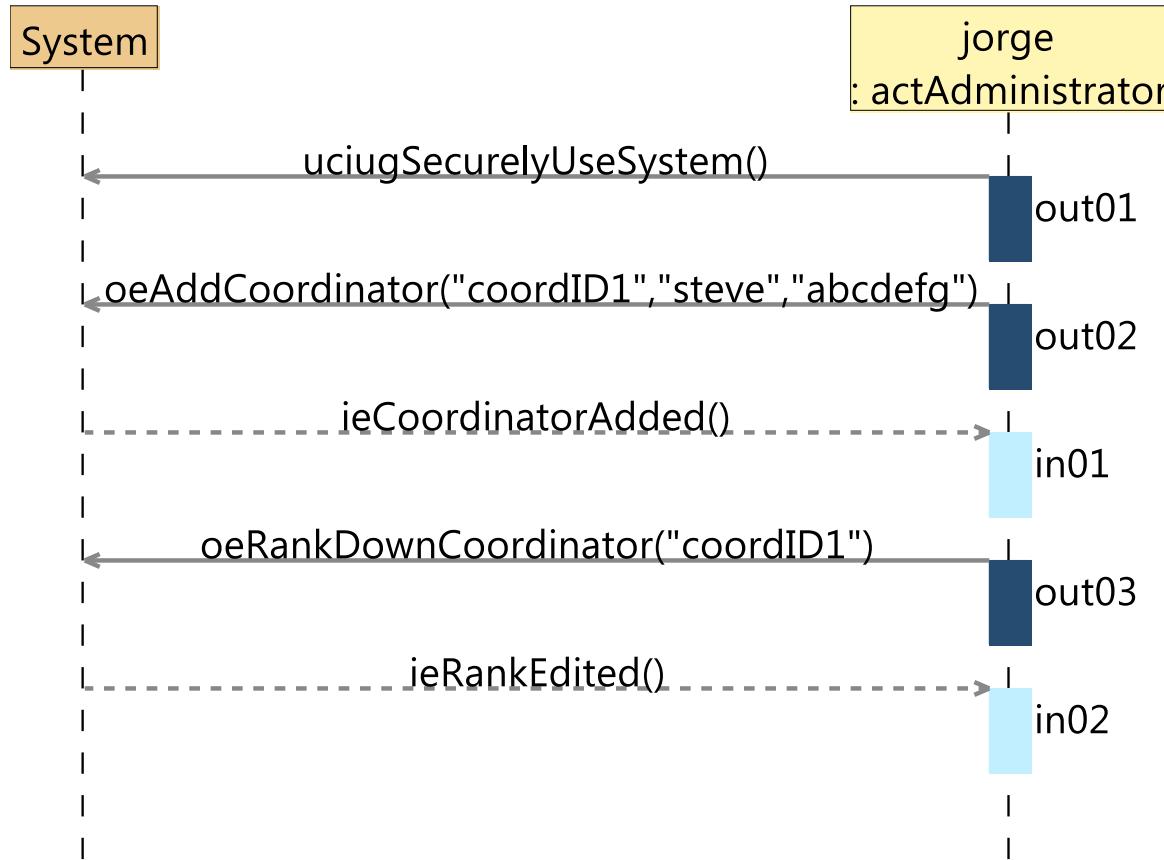


Figure 2.11: uciugAdministateTheSystem

2.3.2.4 Use-Case Instance - uciugAdministateTheSystemPointOfInterest:ugAdministateTheSystem

use case instance for the use case ugAdministateTheSystem showing the addition/deletion/editon of a point of interest.

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i> ugAdministateTheSystem
<i>Instance ID</i> uciugAdministateTheSystemPointOfInterest

Figure 2.12

2.3.2.5 Use-Case Instance - uciugSecurelyUseSystem:ugSecurelyUseSystem

use case instance for the user goal use case ugSecurelyUseSystem illustrating a simple interaction scenario primarily handled by an administrator in a concrete situation. In this instance there is no password reset asked, neither a captcha test asked.

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i> ugSecurelyUseSystem
<i>Instance ID</i> uciugSecurelyUseSystem
<i>Remarks</i>
a A captcha test is asked after three failed attempts of login. b A password reset is always possible. A mail has to be given to the system.

Figure 2.13 view

2.3.2.6 Use-Case Instance - uciugSecurelyUseSystemFailLogin:ugSecurelyUseSystem

use case instance for the user goal use case ugSecurelyUseSystem illustrating a simple interaction scenario primarily handled by an administrator in a concrete situation. In this instance a captcha test is asked after 3 failed attempts of login. Once the actAuthenticated successfully entered the right captcha, he's able to connect.

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i> ugSecurelyUseSystem
<i>Instance ID</i> uciugSecurelyUseSystemFailLogin
<i>Remarks</i>
a A captcha test is asked after three failed attempts of login. b A password reset is always possible. A mail has to be given to the system.

Figure 2.14 view



Figure 2.12:

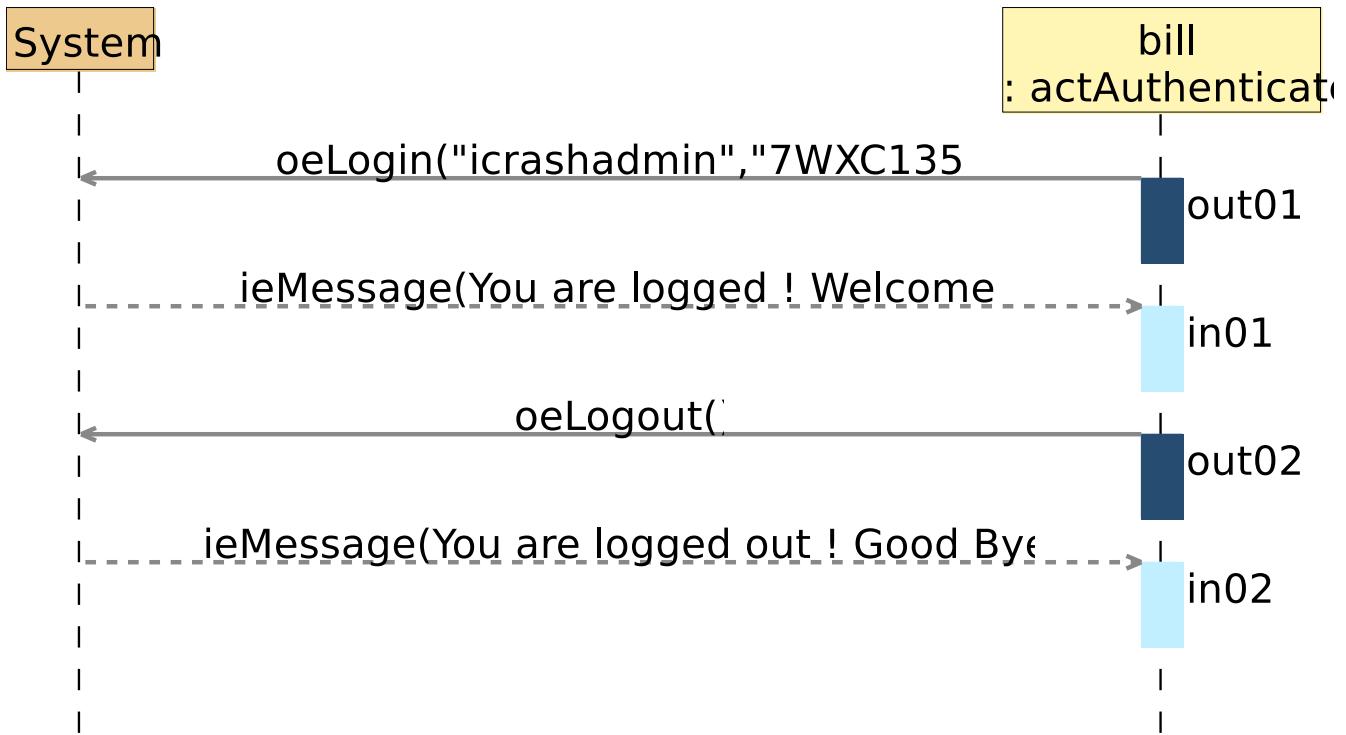


Figure 2.13:

2.3.2.7 Use-Case Instance - uciugSecurelyUseSystemFailLoginResetPassword:ugSecurelyUseSystem

use case instance for the user goal use case ugSecurelyUseSystem illustrating a simple interaction scenario primarily handled by an administrator in a concrete situation. In this instance a captcha test is asked. The actAuthenticated asks for a password reset and logs in after retrieving it from his mails.

USERGOAL USE-CASE INSTANCE	
<i>Instantiated Use Case</i>	
ugSecurelyUseSystem	
<i>Instance ID</i>	
uciugSecurelyUseSystemFailLoginResetPassword	
<i>Remarks</i>	
a	A captcha test is asked after three failed attempts of login.
b	A password reset is always possible. A mail has to be given to the system.


Figure 2.15

2.3.2.8 Use-Case Instance - uciugSecurelyUseSystemWithDirectResetPassword:ugSecurelyUseSystem

use case instance for the user goal use case ugSecurelyUseSystem illustrating a simple interaction scenario primarily handled by an administrator in a concrete situation. In this instance a password reset is directly asked. The actAuthenticated may logon after retrieving the password from his mails.

USERGOAL USE-CASE INSTANCE	
<i>Instantiated Use Case</i>	
ugSecurelyUseSystem	
<i>Instance ID</i>	
uciugSecurelyUseSystemWithDirectResetPassword	



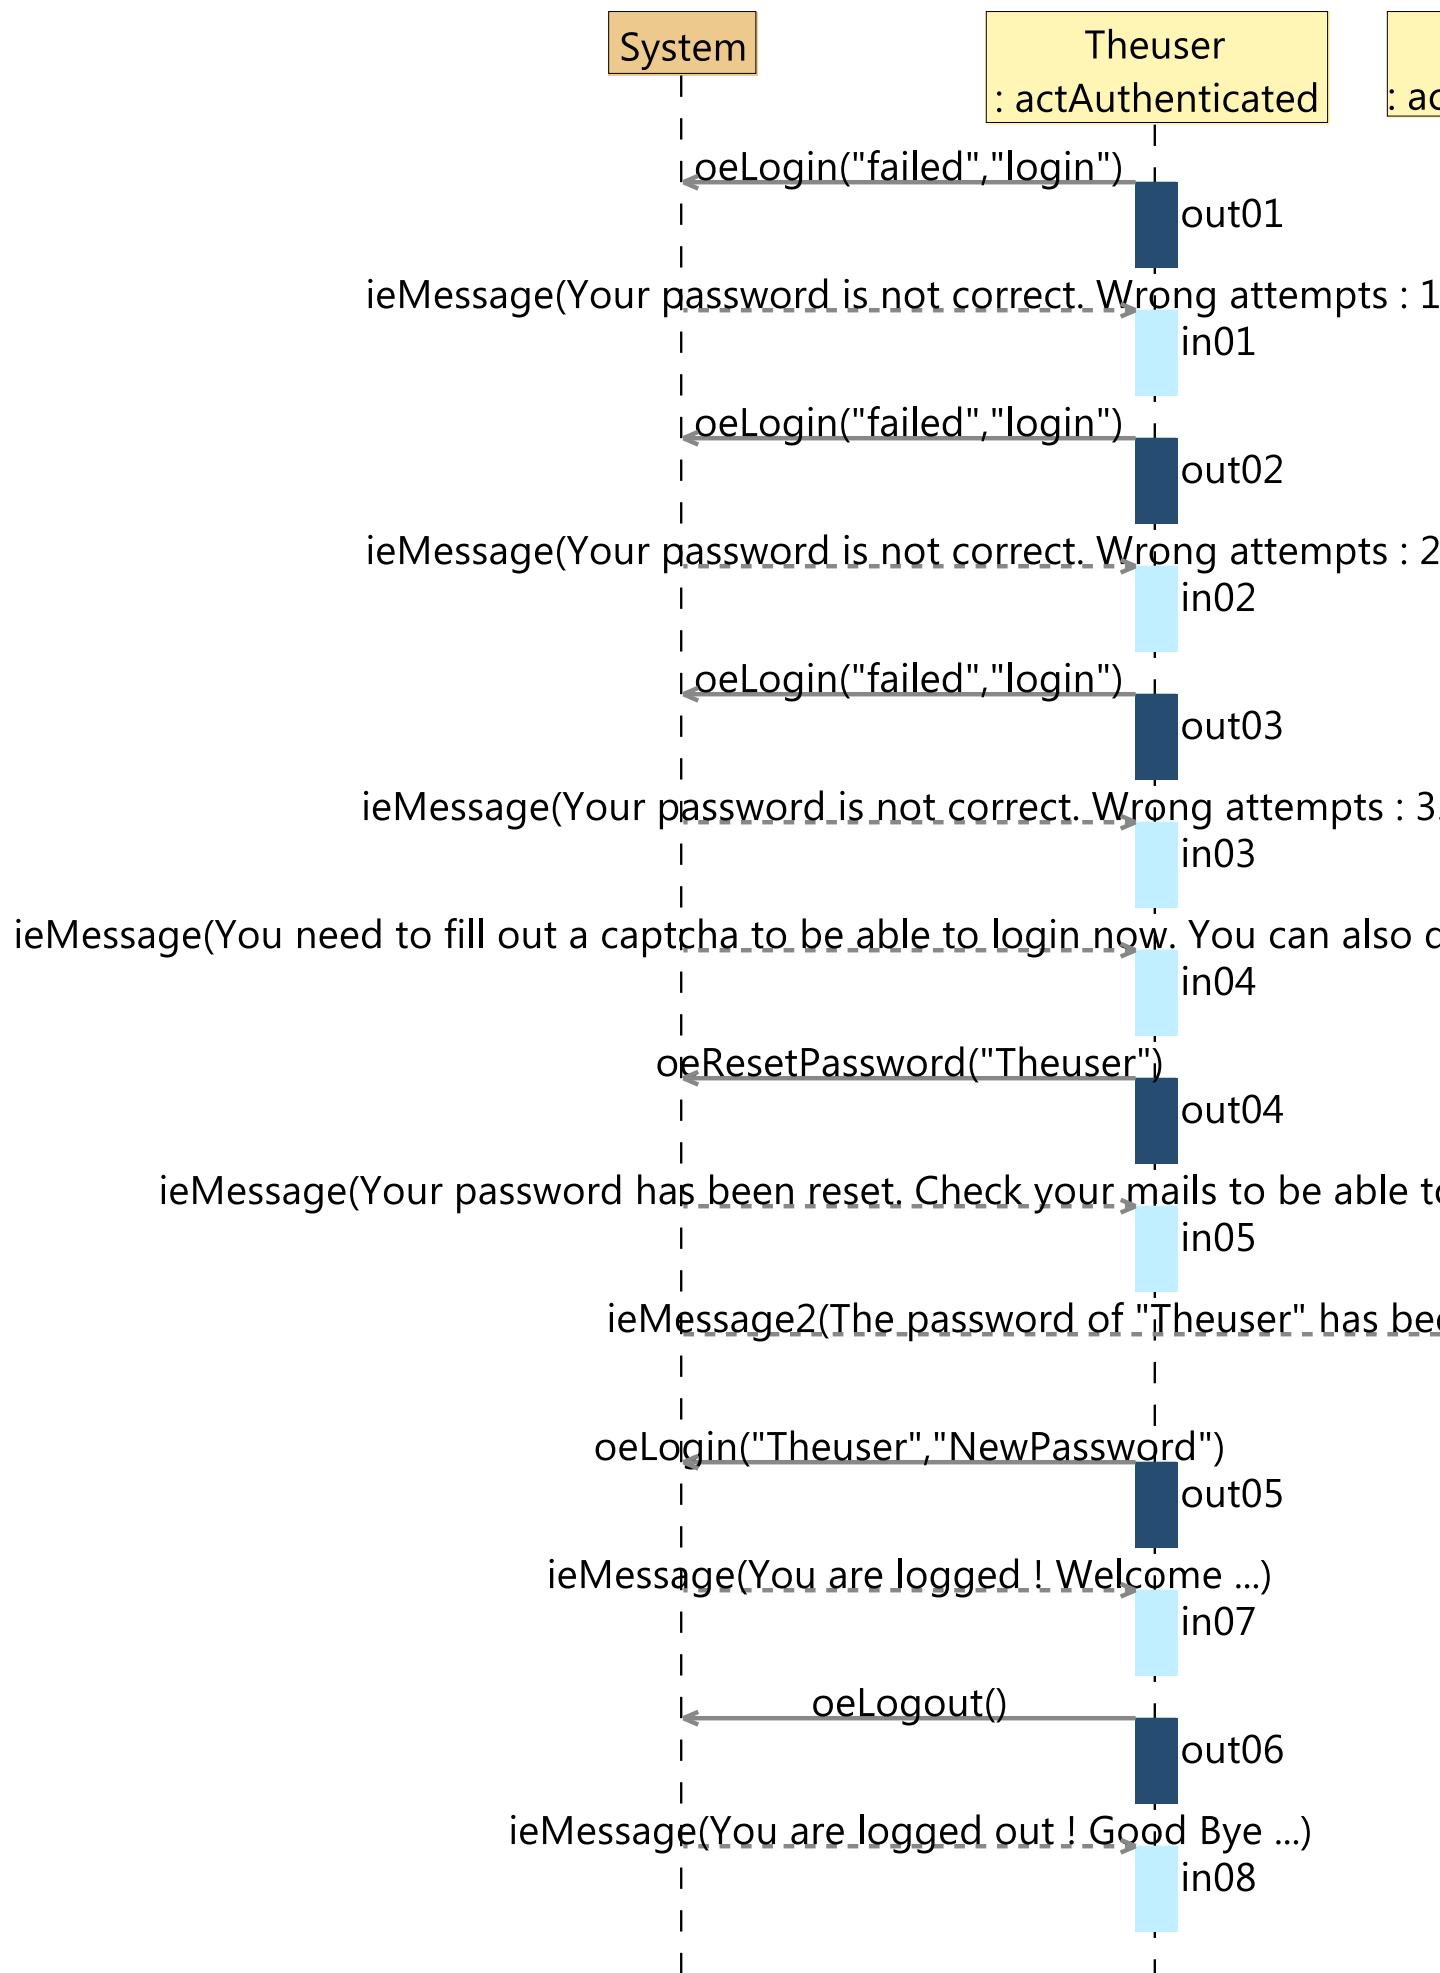

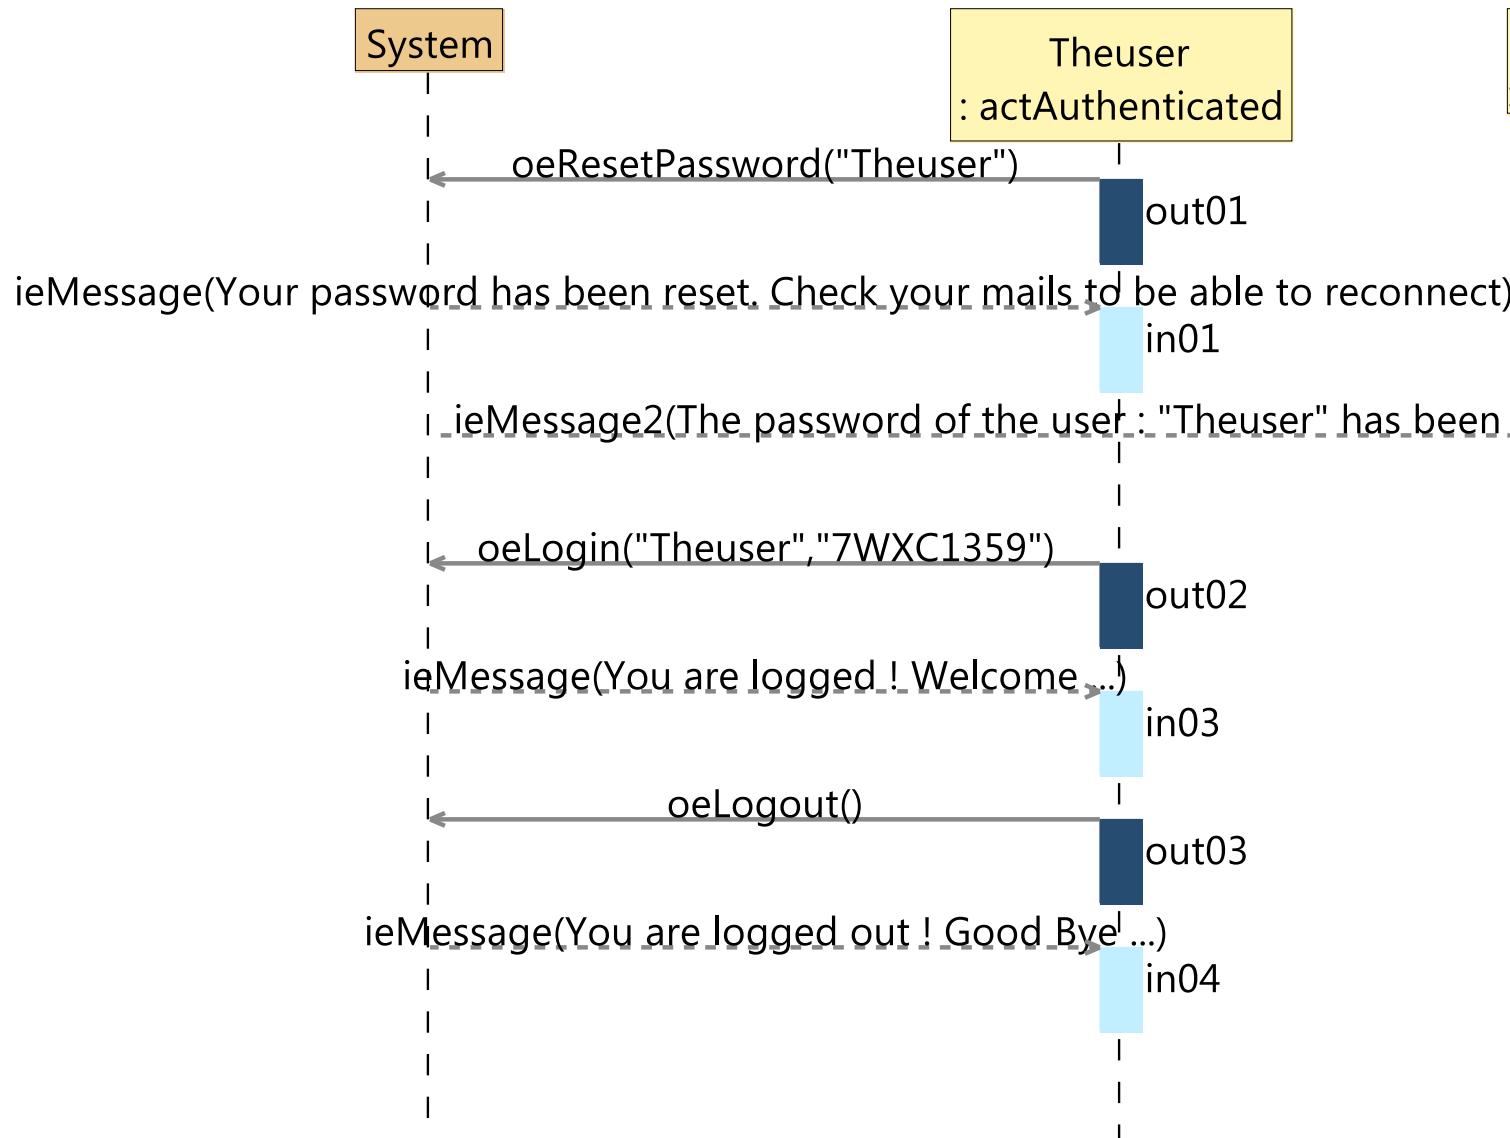


Figure 2.16:

Chapter 3

Environment Model

We provide below the view(s) defined for the **Messip** environment model (cf. [1]) of the system.

3.1 Local view 01

Figure 3.1 shows the local view giving the second part of the environment model of the system in term of its state class, actors with their input and output interfaces and all related associations.

3.2 Local view 02

Figure 3.2 shows the local view giving the second part the environment model of the system in term of its state class, actors with their input and output interfaces and all related associations.

3.3 Local view 03

Figure 3.3 shows the local view for the administrator actor and interfaces

3.4 Local view 04

Figure 3.4 shows the local view for the coordinator actor and interfaces

3.5 Local view 05

Figure 3.5 shows the local view for the authenticated actor and interfaces

3.6 Global view 01

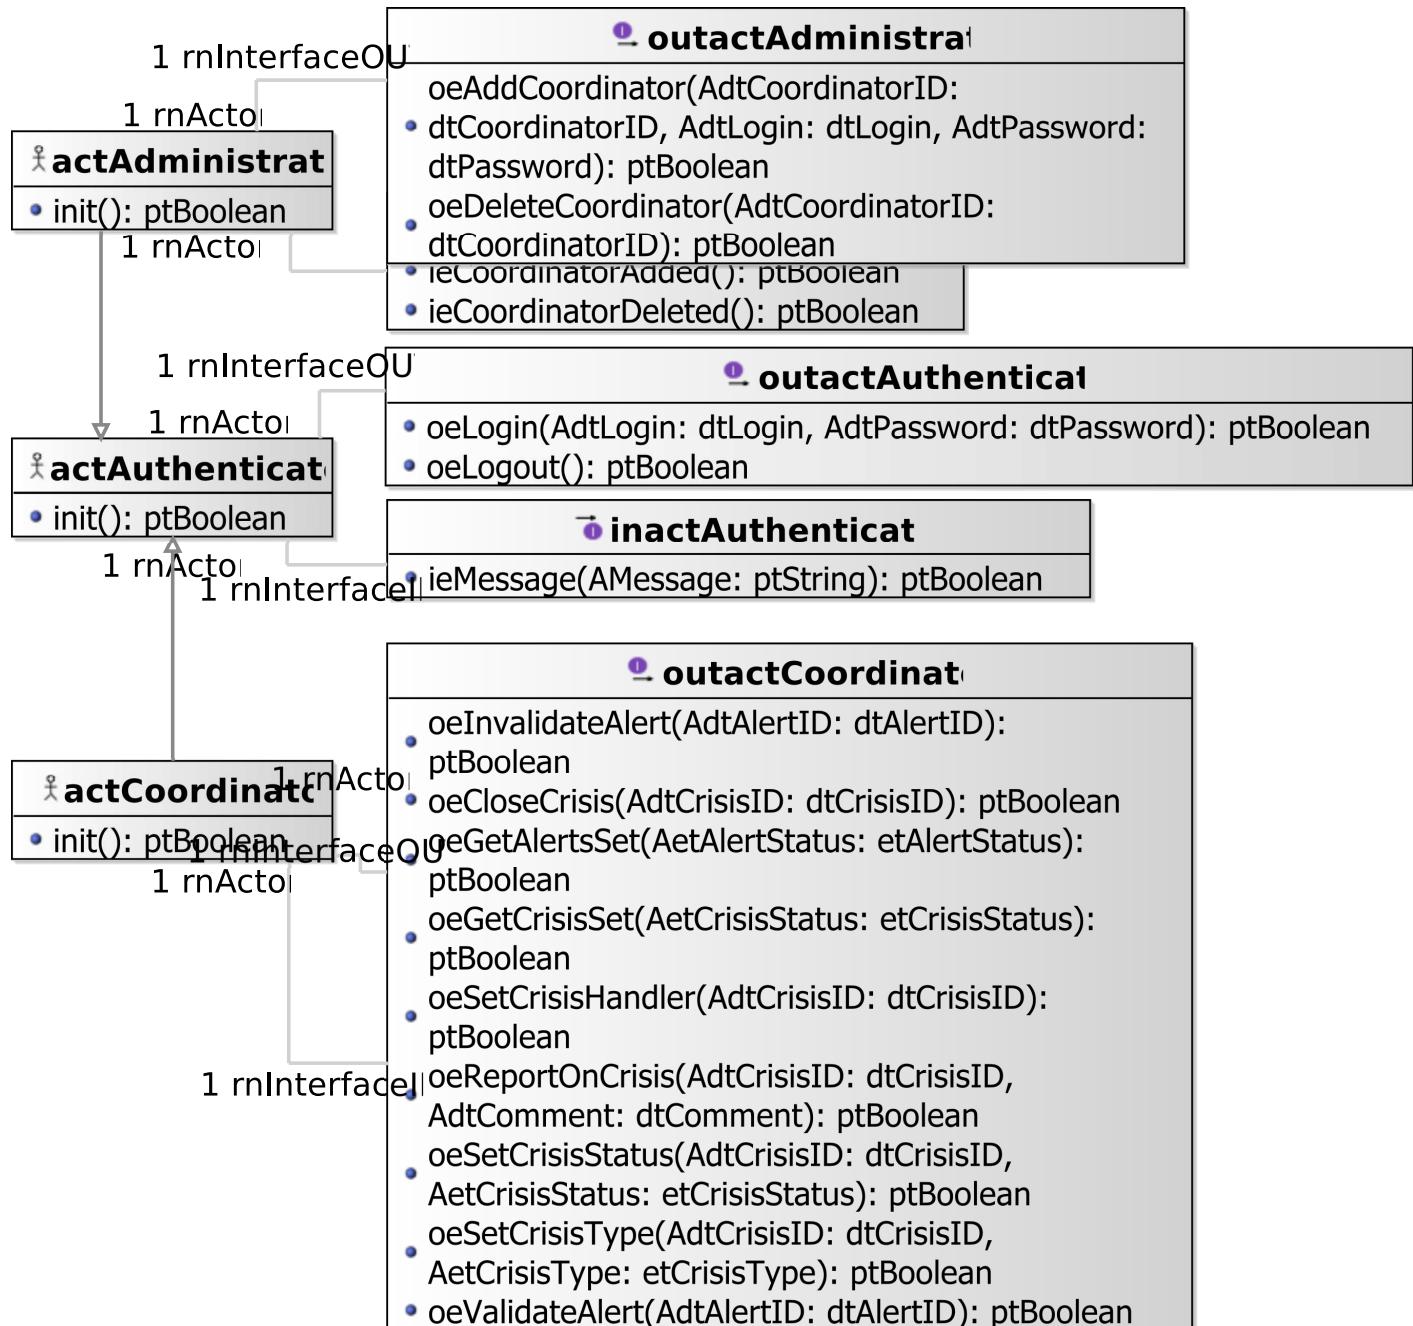


Figure 3.1: Environment Model - Local View 01. environment model local view - Part 1.

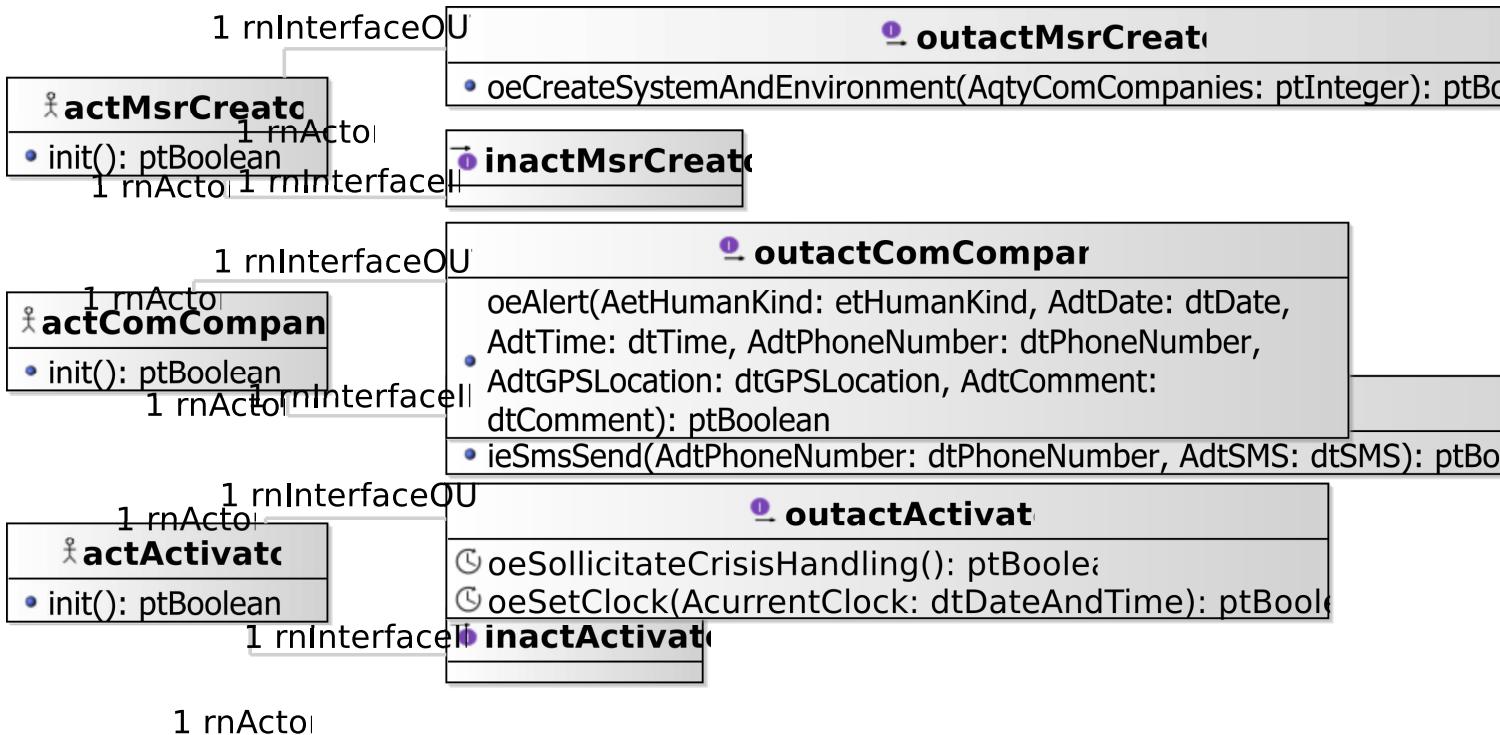


Figure 3.2: Environment Model - Local View 02. environment model local view - Part 2.

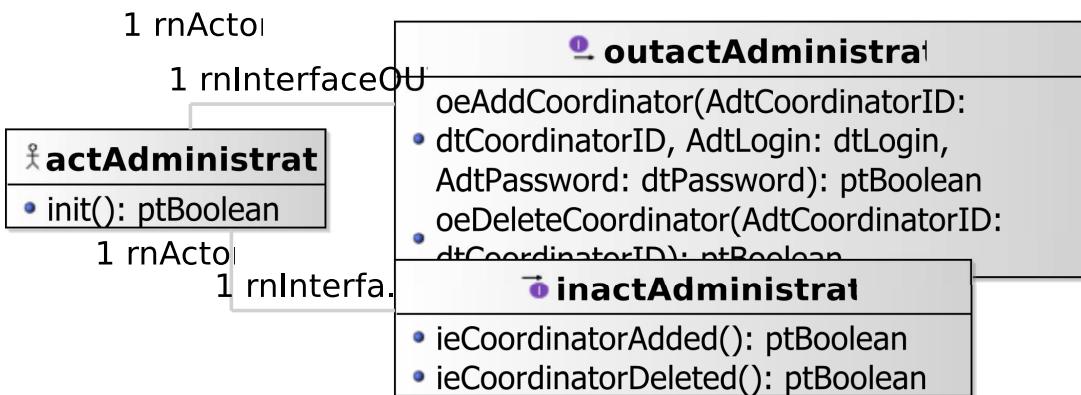


Figure 3.3: Environment Model - Local View 03. administrator actor environment model view.

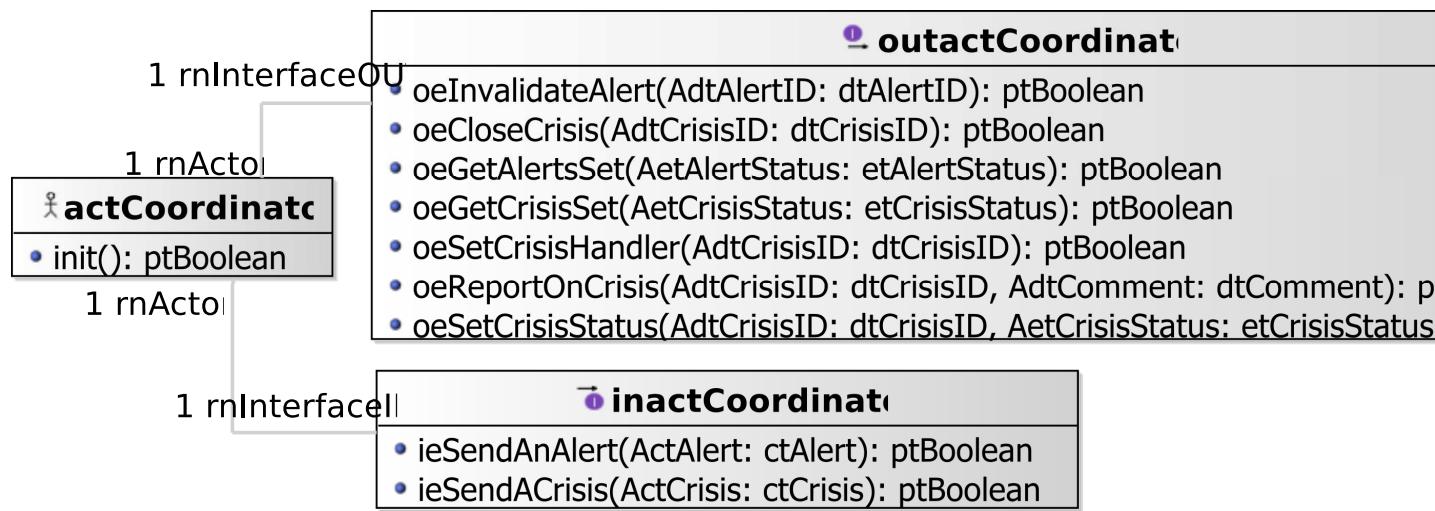


Figure 3.4: Environment Model - Local View 04. coordinator actor environment model view.

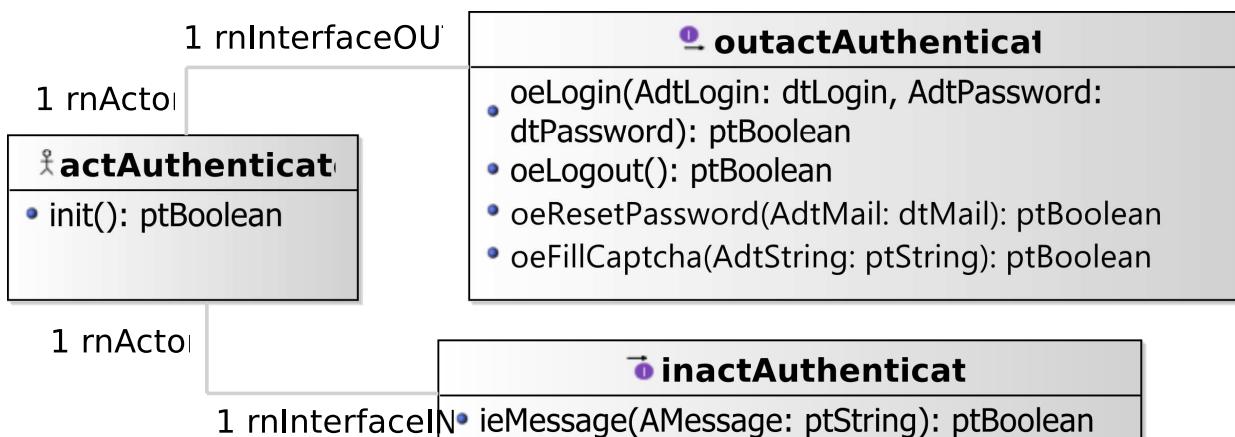


Figure 3.5: Environment Model - Local View 05. authenticated actor environment model local view.

Figure 3.6 shows a global view for all actors with their relationships with ctState

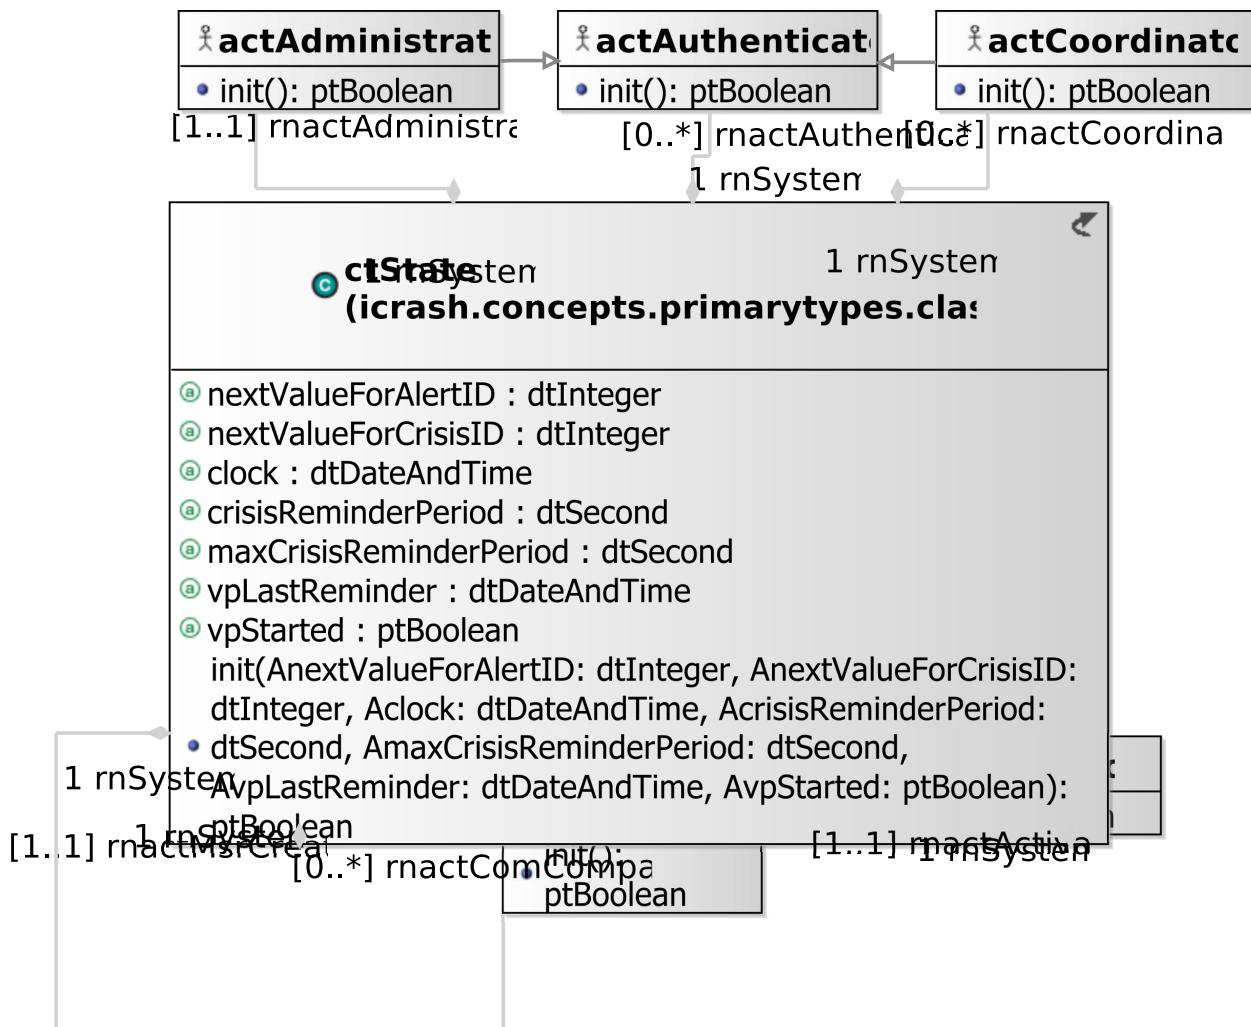


Figure 3.6: Environment Model - Global View 01. em-gv-01 environment model global view.

3.7 Actors and Interfaces Descriptions

We provide for the given views the description of the actors together with their associated input and output interface descriptions.

3.7.1 **actActivator** Actor

ACTOR
<i>actActivator</i>
represents a logical actor for time automatic message sending based on system's or environment status.
<i>OutputInterfaces</i>

continues in next page ...

...Actor table continuation

OUT 1	[proactive] oeSolicitCrisisHandling() :ptBoolean used to avoid crisis to stay too long in an not handled status.
OUT 2	[proactive] oeSetClock(AcurrentClock:dtDateAndTime) :ptBoolean used to update the system's time

3.7.2 actAdministrator Actor

ACTOR	
<i>actAdministrator</i>	
	represents an actor responsible of administration tasks for the <i>iCrash</i> system.
<i>Extends</i>	
icrash.environment.actAuthenticated	
<i>OutputInterfaces</i>	
OUT 1	oeAddCoordinator(AdtCoordinatorID:dtCoordinatorID, AdtLogin:dtLogin, AdtPassword:dtPassword) :ptBoolean sent to add a new coordinator in the system's post state and environment's post state.
OUT 2	oeDeleteCoordinator(AdtCoordinatorID:dtCoordinatorID) :ptBoolean sent to delete an existing coordinator in the system's post state and environment's post state.
OUT 3	oeAddPointOfInterest(AetCategory:etCategory, AdtGPSLocation:dtGPSLocation, AdtDescription:dtDescription) :ptBoolean sent to add a new point of interest in the system's post state.
OUT 4	oeDeletePointOfInterest(AdtPointOfInterestID:dtPointOfInterestID) :ptBoolean sent to delete a new point of interest in the system's post state.
OUT 5	oeEditPointOfInterest(AdtPointsOfInterestID:dtPointOfInterestID, AetCategory:etCategory, AdtGPSLocation:dtGPSLocation, AdtDescription:dtDescription) :ptBoolean sent to edit a new point of interest in the system's post state.
OUT 6	oeSelectCategories(AdtCategory:etCategory) :ptBoolean sent to select categories in the system's post state.
<i>InputInterfaces</i>	
IN 1	ieCoordinatorAdded() :ptBoolean its reception confirms the creation of the requested coordinator.
IN 2	ieCoordinatorDeleted() :ptBoolean its reception confirms the deletion of the requested coordinator.
IN 3	iePointOfInterestAdded() :ptBoolean its reception confirms the creation of the requested point of interest.
IN 4	iePointOfInterestDeleted() :ptBoolean its reception confirms the deletion of the requested point of interest.
IN 5	iePointOfInterestEdited() :ptBoolean its reception confirms the edition of the requested point of interest.
IN 6	oeSelectCategories(AdtCategory:etCategory) :ptBoolean its reception confirms the selection of the requested category.

3.7.3 actAuthenticated Actor

ACTOR	
<i>actAuthenticated</i>	
abstract actor providing reusable input and output interfaces for actors that need to authenticate themselves.	
<i>OutputInterfaces</i>	
OUT 1	oeLogin (AdtLogin:dtLogin, AdtPassword:dtPassword) :ptBoolean sent to request authorization to request access secured system operations.
OUT 2	oeLogout () :ptBoolean sent to end the secured access to specific system operations.
<i>InputInterfaces</i>	
IN 1	ieMessage (AMessage:ptString) :ptBoolean allows for receiving general textual messages.

3.7.4 actComCompany Actor

ACTOR	
<i>actComCompany</i>	
represents the communication company stakeholder ensuring the input/output of textual messages with humans having communication devices.	
<i>OutputInterfaces</i>	
OUT 1	oeAlert (AetHumanKind:etHumanKind, AdtDate:dtDate, AdtTime:dtTime, AdtPhoneNumber:dtPhoneNumber, AdtGPSLocation:dtGPSLocation, AdtComment:dtComment) :ptBoolean sent to alert of a potential crisis situation.
<i>InputInterfaces</i>	
IN 1	ieSmsSend (AdtPhoneNumber:dtPhoneNumber, AdtSMS:dtSMS) :ptBoolean allows for receiving textual messages to be dispatched to the communication company customers having the provided phone number.

3.7.5 actCoordinator Actor

ACTOR	
<i>actCoordinator</i>	
represents actor responsible of handling one or several crisis for the <i>iCrash</i> system.	
<i>Extends</i>	
icrash.environment.actAuthenticated	
<i>OutputInterfaces</i>	
OUT 1	oeInvalidateAlert (AdtAlertID:dtAlertID) :ptBoolean sent to indicate that an alert should be considered as closed.
OUT 2	oeCloseCrisis (AdtCrisisID:dtCrisisID) :ptBoolean sent to indicate that a crisis should be considered as closed.
OUT 3	oeGetAlertsSet (AetAlertStatus:etAlertStatus) :ptBoolean sent to request all the ctAlert instances having a specific status.
OUT 4	oeGetCrisisSet (AetCrisisStatus:etCrisisStatus) :ptBoolean sent to request all the ctCrisis instances having a specific status.
OUT 5	oeSetCrisisHandler (AdtCrisisID:dtCrisisID) :ptBoolean sent to declare himself as been the handler of a crisis having the specified id.

continues in next page ...

...Actor table continuation

OUT 6	oeReportOnCrisis (AdtCrisisID:dtCrisisID, AdtComment:dtComment) :ptBoolean sent to update the textual information available for a specific handled crisis.
OUT 7	oeSetCrisisStatus (AdtCrisisID:dtCrisisID, AetCrisisStatus:etCrisisStatus) :ptBoolean sent to define the handling status of a specific crisis.
OUT 8	oeSetCrisisType (AdtCrisisID:dtCrisisID, AetCrisisType:etCrisisType) :ptBoolean sent to define the gravity type of a specific crisis.
OUT 9	oeValidateAlert (AdtAlertID:dtAlertID) :ptBoolean sent to indicate that a specific alert is not a fake.

InputInterfaces

IN 1	ieSendAnAlert (ActAlert:ctAlert) :ptBoolean allows for receiving a requested ctAlert instance.
IN 2	ieSendACrisis (ActCrisis:ctCrisis) :ptBoolean allows for receiving a requested ctCrisis instance.

3.7.6 actMsrCreator Actor

ACTOR	
<i>actMsrCreator</i>	
Represents the creator stakeholder in charge of state and environment initialization.	
<i>OutputInterfaces</i>	
OUT 1	oeCreateSystemAndEnvironment (AqtyComCompanies:ptInteger) :ptBoolean sent to request the initialization of the system's class instances and the environment actors instances.

Chapter 4

Concept Model

4.1 PrimaryTypes-Classes

4.1.1 Local view 01

Figure 4.1 shows the local view on all the primary types class types.

4.1.2 Local view 02

Figure 4.2 shows the local view of the ctState primary type class type.

4.1.3 Local view 03

Figure 4.3 shows the local view of the ctAlert primary type class type.

4.1.4 Local view 04

Figure 4.4 shows the local view of the ctCrisis primary type class type.

4.1.5 Local view 08

Figure 4.5 views

4.1.6 Global view 01

Figure 4.6 shows the global view on primary types class types showing the association(s) types with the actor classes of the environment model.

4.2 PrimaryTypes-Datatypes

4.2.1 Local view 06

Figure 4.7 view

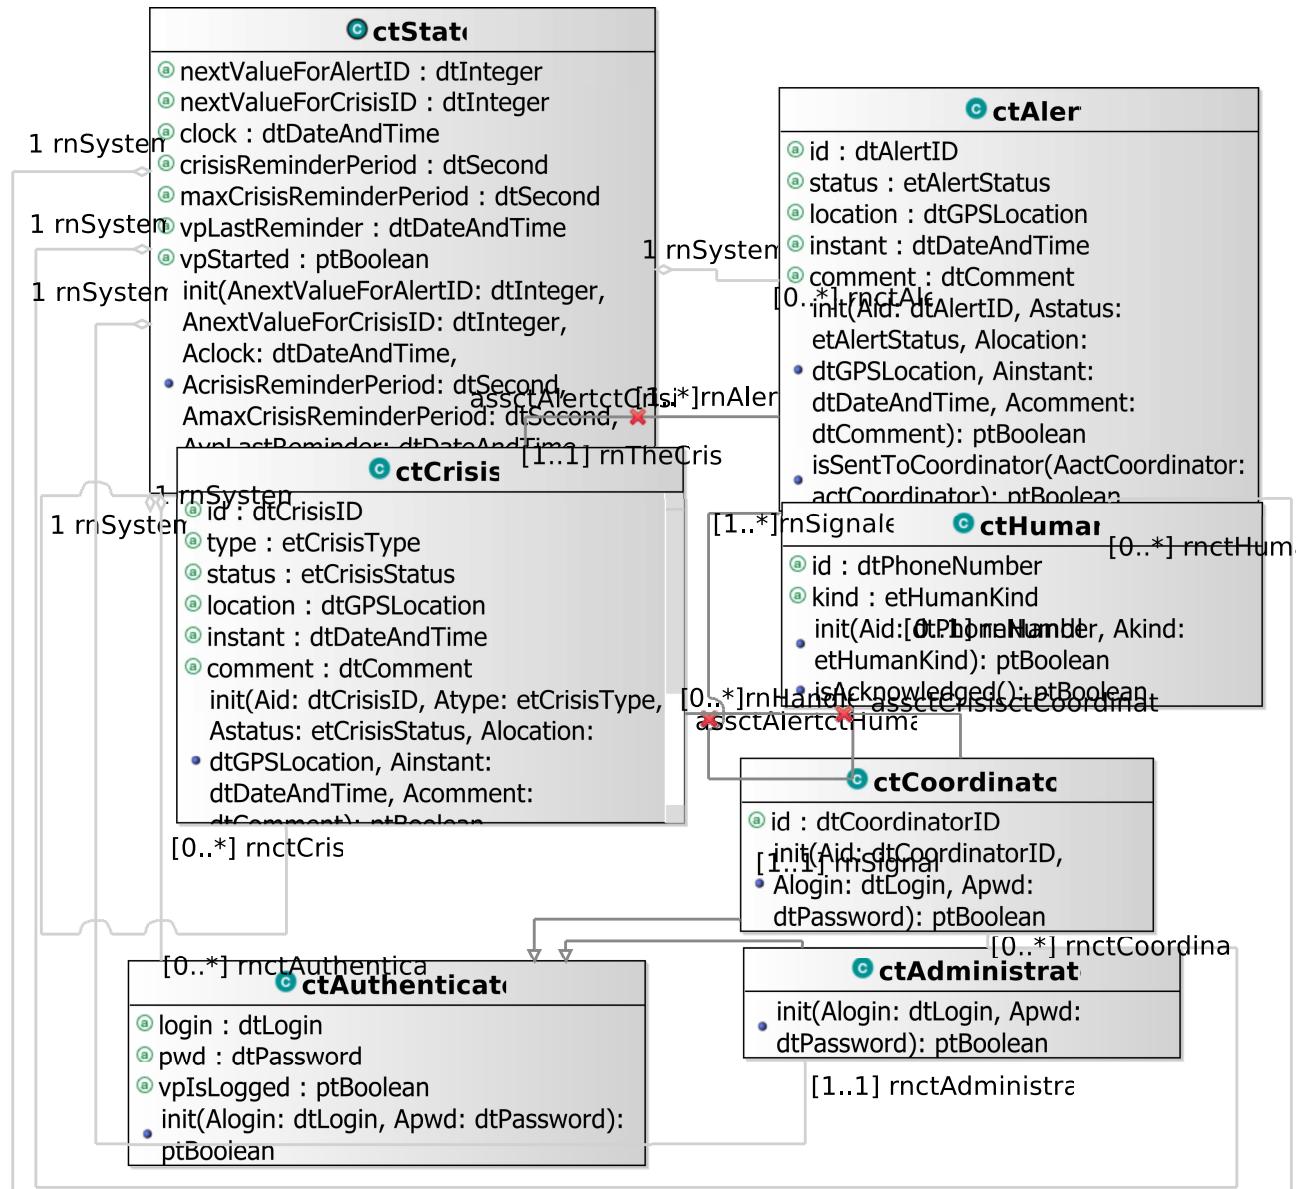


Figure 4.1: Concept Model - PrimaryTypes-Classes local view 01. Local view of all the primary types class types .

ctState	
④	nextValueForAlertID : dtInteger
④	nextValueForCrisisID : dtInteger
④	clock : dtDateAndTime
④	crisisReminderPeriod : dtSecond
④	maxCrisisReminderPeriod : dtSecond
④	vpLastReminder : dtDateAndTime
④	vpStarted : ptBoolean
	init(AnextValueForAlertID: dtInteger, AnextValueForCrisisID: dtInteger, Aclock:

Figure 4.2: Concept Model - PrimaryTypes-Classes local view 02. local view of the ctState primary type.

ctAlert	
④	id : dtAlertID
④	status : etAlertStatus
④	location : dtGPSLocation
④	instant : dtDateAndTime
④	comment : dtComment
	init(Aid: dtAlertID, Astatus: etAlertStatus, Alocation: dtGPSLocation, Ainstant:

Figure 4.3: Concept Model - PrimaryTypes-Classes local view 03. local view of the ctAlert primary type.

ctCrisis	
④	id : dtCrisisID
④	type : etCrisisType
④	status : etCrisisStatus
④	location : dtGPSLocation
④	instant : dtDateAndTime
④	comment : dtComment
	init(Aid: dtCrisisID, Atype: etCrisisType, Astatus: • etCrisisStatus, Alocation: dtGPSLocation, Ainstant: dtDateAndTime, Acomment: dtComment): ptBoolean

Figure 4.4: Concept Model - PrimaryTypes-Classes local view 04. local view of the ctCrisis primary type.

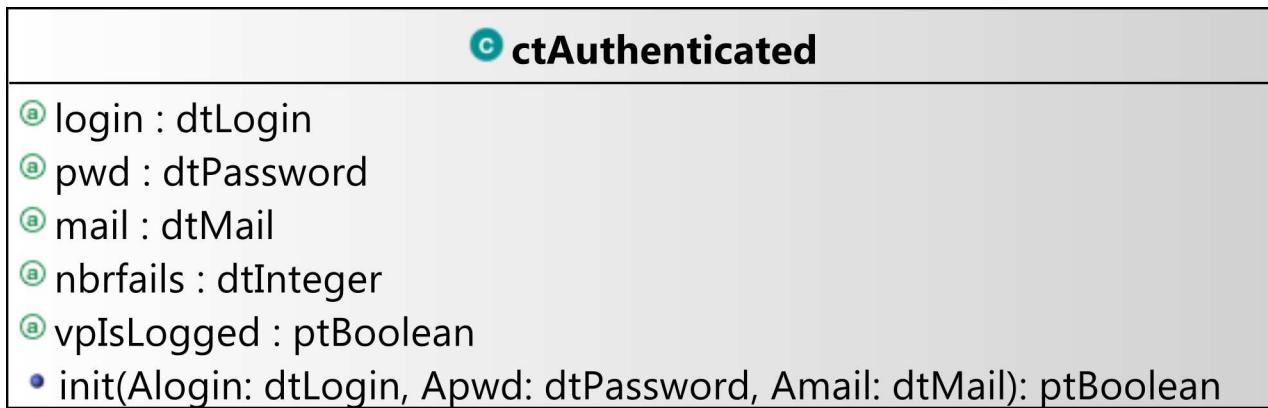


Figure 4.5: Concept Model - PrimaryTypes-Classes local view 08. .

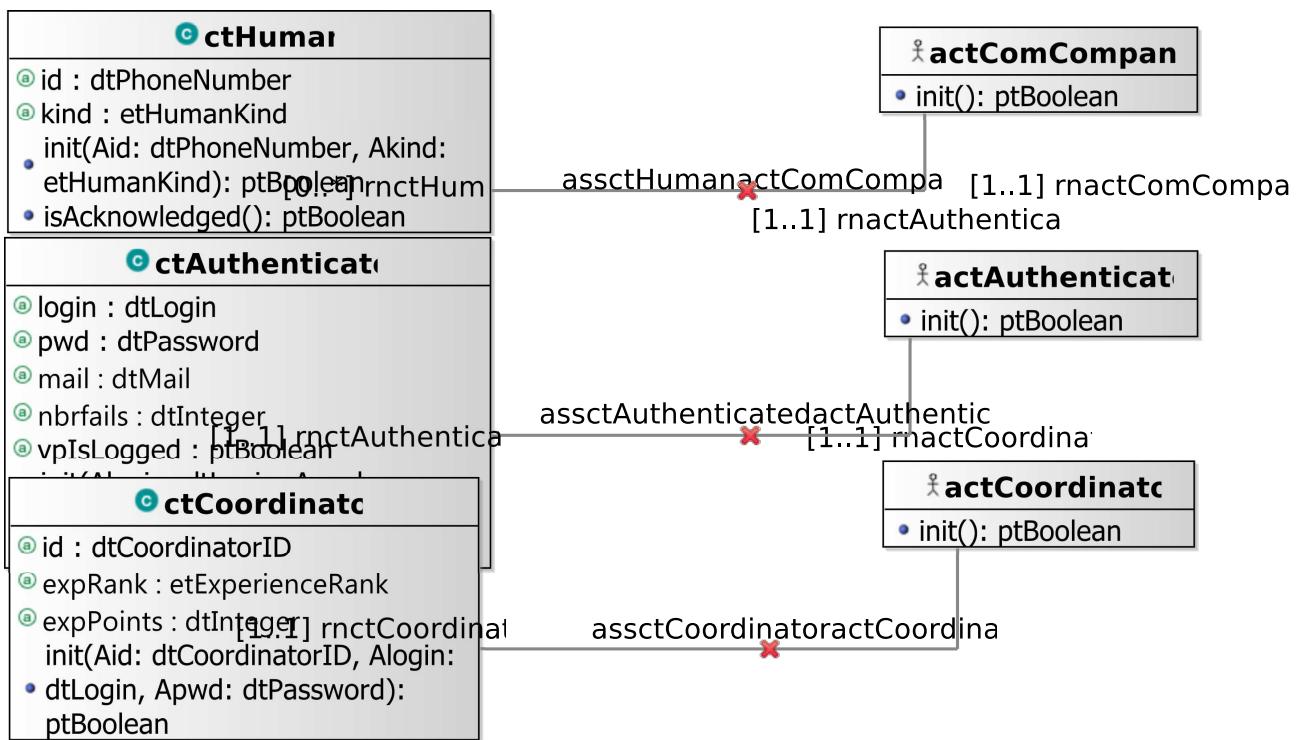


Figure 4.6: Concept Model - PrimaryTypes-Classes global view 01. Primary types class types global view - cm-pt-ct-gv-01 .

dtGPSLocation
• latitude : dtLatitude
• longitude : dtLongitude
• is() : ptBoolean
• isNearTo(AGPSLocation: dtGPSLocation): ptBoolean

Figure 4.7: Concept Model - PrimaryTypes-Datatypes local view 06. .

4.2.2 Global view 01

Figure 4.8 shows a global view on the *iCrash* primary types datatype types.

4.3 SecondaryTypes-Datatypes

4.3.1 Local view 01

Figure 4.9 shows the local view of the secondary types datatype types.

4.4 Concept Model Types Descriptions

This section provides the textual descriptions of all the types defined in the concept model and that can be part of the graphical views provided.

4.4.1 Primary types - Class types descriptions

The table below is providing comments on the graphical views given for the class types of the primary types. Type logical operations are precisely specified in the operation model.

CLASSES	
ctAdministrator	
used to characterize internally the entity that is responsible of administrating the <i>iCrash</i> system.	
operation init (Alogin:dtLogin, Apwd:dtPassword) :ptBoolean	
used to initialize the current object as a new instance of the ctAdministrator type.	
ctAlert	
Used to model crisis alerts sent by any human having communication capability using communication companies belonging to the system's environment	
attribute comment: dtComment	a textual description providing unstructured information on the alert.
attribute id: dtAlertID	the alert unique identification information.
attribute instant: dtDateAndTime	the date and time at which the alert notification has been sent.
attribute location: dtGPSLocation	

continues in next page ...

... Classes table continuation

		the position of the alert provided by the space-based satellite navigation system used by the human using the communication company to inform the <i>iCrash</i> system of a crisis.
attribute	status: etAlertStatus	the alert validation status
operation	init(Aid:dtAlertID, Astatus:etAlertStatus, Alocation:dtGPSLocation, Ainstant:dtDateAndTime, Acomment:dtComment) :ptBoolean	used to initialize the current object as a new instance of the ctAlert type.
operation	isSentToCoordinator(AactCoordinator:actCoordinator) :ptBoolean	used to provide a given coordinator with current alert information.
ctAuthenticated		
		used to model system's representation about actors that need to authenticate to access some specific functionalities.
attribute	login: dtLogin	an identifier for authentication.
attribute	pwd: dtPassword	a key for authentication.
attribute	vpIsLogged: ptBoolean	used to determine the access status.
operation	init(Alogin:dtLogin, Apwd:dtPassword, Amail:dtMail) :ptBoolean	used to initialize the current object as a new instance of the ctAuthenticated type.
ctCoordinator		
		used to model system's representation about the actors that have the responsibility to handle alerts and crisis.
attribute	id: dtCoordinatorID	a unique identification information.
operation	init(Aid:dtCoordinatorID, Alogin:dtLogin, Apwd:dtPassword) :ptBoolean	used to initialize the current object as a new instance of the ctCoordinator type.
ctCrisis		
		Used to model crisis that are inferred from the reception of at least one alert message. Crisis are entities that are handled by the <i>iCrash</i> system.
attribute	comment: dtComment	a textual description providing unstructured information on the crisis handling.
attribute	id: dtCrisisID	the crisis unique identification information.
attribute	instant: dtDateAndTime	the date and time at which the first related alert notification has been sent.
attribute	location: dtGPSLocation	the position of the crisis equal to the one of the first alert received and associated to the crisis.
attribute	status: etCrisisStatus	the crisis handling status.
attribute	type: etCrisisType	an indication of the gravity of the crisis.
operation	handlingDelayPassed() :ptBoolean	used to determine if the crisis stood too long in a pending status since last reminder.

continues in next page ...

... Classes table continuation

operation	init (Aid:dtCrisisID, Atype:etCrisisType, Astatus:etCrisisStatus, Alocation:dtGPSLocation, Ainstant:dtDateAndTime, Acomment:dtComment) :ptBoolean used to initialize the current object as a new instance of the ctAlert type.
operation	isAllocatedIfPossible () :ptBoolean used to allocate a crisis to a coordinator if any or to alert the administrator of crisis waiting to be handled.
operation	isSentToCoordinator (AactCoordinator:actCoordinator) :ptBoolean used to provide a given coordinator with current crisis information.
operation	maxHandlingDelayPassed () :ptBoolean used to determine if the crisis stood too longly in a pending status since its creation.
ctHuman	
	used to model system's representation about the indirect actors that has alerted of potential crisis.
attribute	id: dtPhoneNumber the number of the communication device used to send an alert to <i>iCrash</i> system.
attribute	kind: etHumanKind role with respect to the alert notified.
operation	init (Aid:dtPhoneNumber, Akind:etHumanKind) :ptBoolean init: used to initialize the current object as a new instance of the ctHuman type.
ctPointOfInterest	
	Used to model Points of interest added by the administrator into the system.
attribute	description: dtDescription a textual description providing unstructured information on the Points of interest.
attribute	id: dtPointOfInterestID the Point of interest unique identification information.
attribute	location: dtGPSLocation the position of the Points of interest provided by the space-based satellite navigation system used by the administrator.
attribute	type: etCategory the category type.
operation	init (Aid:dtPointOfInterestID, Atype:etCategory, Alocation:dtGPSLocation, Adescription:dtDescription) :ptBoolean used to initialize the current object as a new instance of the ctPointOfInterest type.
ctState	
	used to model the system. Each system specified using Messip must include a ctState class for which there is only one instance at any state of the abstract machine after creation.
attribute	clock: dtDateAndTime used to represent the system local time.
attribute	crisisReminderPeriod: dtSecond used to define the delay between two reminders after which a reminder must be sent to the administrator and to the known coordinators to encourage them to handle the crisis.
attribute	maxCrisisReminderPeriod: dtSecond used to define the maximum delay after which the crisis is randomly allocated to a coordinator if any or an alert message is sent to the administrator in order to encourage him to add coordinators.
attribute	nextValueForAlertID: dtInteger

continues in next page ...

... Classes table continuation

	<code>nextValueForAlertID: dtInteger</code> : used to associate each alert declared with a unique identification value.
attribute	<code>nextValueForCrisisID: dtInteger</code> used to associate each crisis declared with a unique identification value.
attribute	<code>vpLastReminder: dtDateAndTime</code> date and time of the last reminder.
attribute	<code>vpStarted: ptBoolean</code> used to avoid reacting to an actor message if the system is not started (i.e. <code>oeCreateSystemAndEnvironment</code> not executed).
operation	<code>init (AnextValueForAlertID:dtInteger, AnextValueForCrisisID:dtInteger, AnextValueForPointOfInterestID:dtInteger, AClock:dtDateAndTime, ACrisisReminderPeriod:dtSecond, AmaxCrisisReminderPeriod:dtSecond, AvpLastReminder:dtDateAndTime, AvpStarted:ptBoolean) :ptBoolean</code> used to initialize the current object as a new instance of the <code>ctState</code> type.

4.4.2 Primary types - Datatypes types descriptions

The table below is providing comments on the graphical views given for the datatype types of the primary types.

DATATYPES
<code>dtAlertID</code> A string used to identify alerts. <i>extends</i> <code>dtString</code> <i>operation</i> <code>is () :ptBoolean</code> used to determine which strings are considered as valid alert identifiers.
<code>dtCaptcha</code> a datatype made of an alphanumeric value used to test the user's human nature and slow down intrusions as also automatic responses. <i>extends</i> <code>dtString</code> <i>operation</i> <code>is () :ptBoolean</code> used to determine which strings are considered as valid captchas.
<code>dtComment</code> a datatype made of a string value used to receive, store and send textual information about crisis and alerts. <i>extends</i> <code>dtString</code> <i>operation</i> <code>is () :ptBoolean</code> used to determine which strings are considered as valid comments.
<code>dtCoordinatorID</code> A string used to identify coordinators. <i>extends</i> <code>dtString</code> <i>operation</i> <code>is () :ptBoolean</code> used to determine which strings are considered as valid coordinators identifiers.
<code>dtCrisisID</code> A string used to identify crisis. <i>extends</i> <code>dtString</code> <i>operation</i> <code>is () :ptBoolean</code> used to determine which strings are considered as valid crisis identifiers.

continues in next page ...

... Datatypes table continuation

<i>dtDescription</i>	a datatype made of a string value used to store information about Points of interest.
extends	dtString
operation	is() :ptBoolean used to determine which strings are considered as valid descriptions.
<i>dtExpPoints</i>	number of experience points accumulated by a coordinator based on the amount of crises handled
extends	dtInteger
operation	is() :ptBoolean used to determine which integers are considered to be DtExpPoints (value between 0 and 120)
<i>dtGPSLocation</i>	used to define coordinates of geographical positions on earth. It is defined a couple made of a latitude and a longitude.
attribute	latitude: dtLatitude for the latitude part of the coordinate.
attribute	longitude: dtLongitude for the longitude part of the coordinate.
operation	DistanceTo(AGPSLocation:dtGPSLocation) :ptReal used to determine how close two locations are and to give an integer value representing the distance.
operation	is() :ptBoolean used to determine which couples are considered as valid dtGPSLocation values.
operation	isNearTo(AGPSLocation:dtGPSLocation) :ptBoolean used to determine if locations are considered enough close to be treated as equivalent in the application domain context.
<i>dtLatitude</i>	used to define a latitude value of a geographical positions on earth.
extends	dtReal
operation	is() :ptBoolean used to determine which strings are considered as valid dtLatitude.
<i>dtLogin</i>	a login string used to authentify an <i>iCrash</i> user
extends	dtString
operation	is() :ptBoolean used to determine which strings are considered as valid dtLogin.
<i>dtLongitude</i>	used to define a longitude value of a geographical positions on earth.
extends	dtReal
operation	is() :ptBoolean used to determine which strings are considered as valid dtLongitude.
<i>dtMail</i>	a mail address used to reset the password of an <i>iCrash</i> user
extends	dtString
operation	is() :ptBoolean used to determine which strings are considered as valid dtMail.
<i>dtPassword</i>	

continues in next page ...

... Datatypes table continuation

a password string used to authentify an <i>iCrash</i> user	
<i>extends</i>	dtString
operation	generatePassword() : dtPassword
	used to generate a new password which is considered as secure fulfilling set requirements.
	For example at least 8 char. with at least one captial letter and at least one lower case and 2 digits.
operation	is() : ptBoolean
	used to determine which strings are considered as valid dtPassword.
dtPhoneNumber	
a string used to store the phone number from the human declaring the crisis or the alert.	
<i>extends</i>	dtString
operation	is() : ptBoolean
	used to determine which strings are considered as valid dtPhoneNumber.
dtPointOfInterestID	
A string used to identify Points of interest.	
<i>extends</i>	dtString
operation	is() : ptBoolean
	used to determine which strings are considered as valid Points of interest identifiers.

ENUMERATIONS

etAlertStatus	
this type is used to indicate the different validation status of an alert.	
operation	is() : ptBoolean
	used to determine which litteral belongs to the enumeration.
etCategory	
this type is used to indicate the different types of categories available for Points of interest.	
operation	is() : ptBoolean
	used to determine which litteral belongs to the enumeration.
etCrisisStatus	
this type is used to indicate the different handling status of a crisis.	
operation	is() : ptBoolean
	used to determine which litteral belongs to the enumeration.
etCrisisType	
this type is used to indicate the different types of a crisis.	
operation	is() : ptBoolean
	used to determine which litteral belongs to the enumeration.
etExperienceRank	
the experience rank indicates the crisis level the coordinator is allowed to handle	
etHumanKind	
this type is used to indicate the kind of human that informs about a car crash crisis.	
operation	is() : ptBoolean
	used to determine which litteral belongs to the enumeration.

4.4.3 Primary types - Association types descriptions

The table below is providing comments on the association types of the primary types.

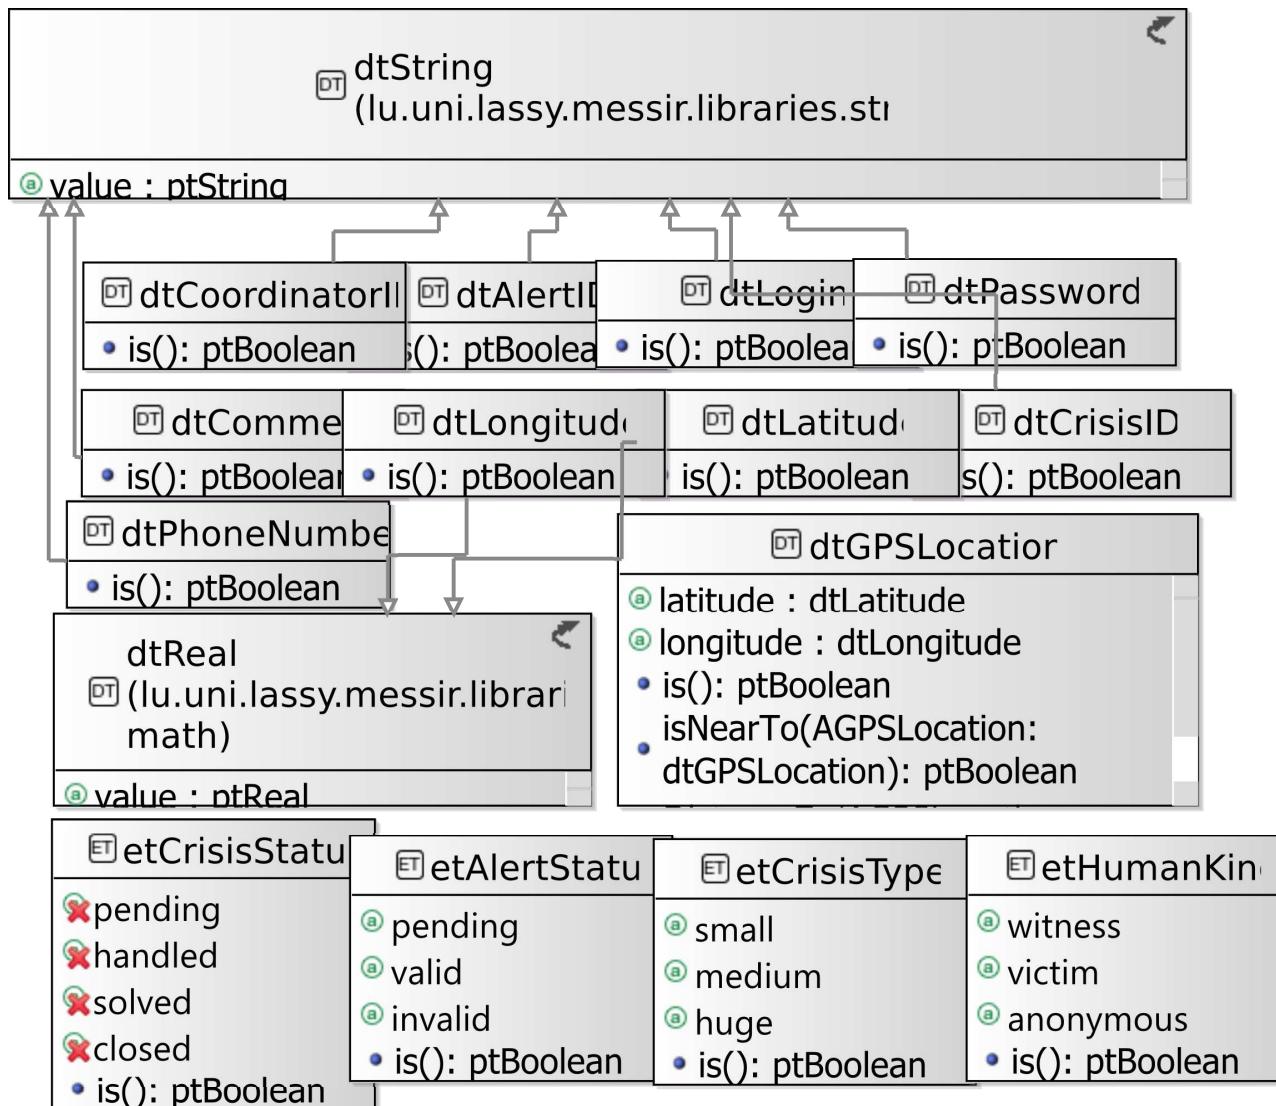


Figure 4.8: Concept Model - PrimaryTypes-Datatypes global view 01. global view of primary types datatypes - cm-pt-dt-gv-01 .

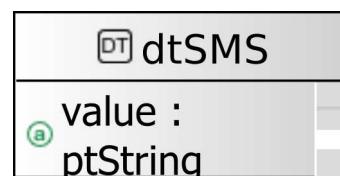


Figure 4.9: Concept Model - SecondaryTypes-Datatypes local view 01. Local view of the secondary types datatype types.

ASSOCIATIONS	
<i>assctAlertctCrisis</i>	a crisis is related to one or more alerts as the alerts judged to concern all the same crisis due to their location. An alert alerts exactly one crisis.
<i>assctAlertctHuman</i>	alerts are notified by human through the communication company. We need to keep an internal representation of those human to allow for communication of alert handling.
<i>assctAuthenticatedactAuthenticated</i>	mainly used to determine if the login request of an authenticated actor can be granted based on the given credentials and the registered ones.
<i>assctCoordinatoractCoordinator</i>	frequent messages must be sent to coordinator especially in relation to crisis they handle.
<i>assctCrisisctCoordinator</i>	at any point in time we need to know if a coordinator is handling existing crisis or not.
<i>assctHumanactComCompany</i>	in order to communicate with humans who informed about potential crisis, we need to record the communication company to use to send them messages.
<i>assctPointOfInterestactAdministrator</i>	The administrator is the only one who can handle Points of interest and there is only one administrator.

4.4.4 Primary types - Aggregation types descriptions

There are no aggregation types for the primary types.

4.4.4.1 Primary types - Composition types descriptions

There are no composition types for the primary types.

4.4.5 Secondary types - Class types descriptions

There are no elements in this category in the system analysed.

4.4.6 Secondary types - Datatypes types descriptions

The table below is providing comments on the graphical views given for the datatype types of the secondary types.

DATATYPES	
<i>dtSMS</i>	a datatype made of a string value used to send textual information to human mobile devices.
attribute	<i>value: ptString</i> the textual information.
operation	<i>is() :ptBoolean</i> used to determine which strings are considered as valid comments.

4.4.7 Secondary types - Association types descriptions

There are no association types for the secondary types.

4.4.8 Secondary types - Aggregation types descriptions

There are no aggregation types for the secondary types.

4.4.9 Secondary types - Composition types descriptions

There are no composition types for the secondary types.

Chapter 5

Operation Model

This section contains the operation schemes of each operation defined in either an actor, its output interface, in a primary or secondary type (class, datatype or enumeration types). The **Messir** OCL code listing is joined to the comment table.

5.1 Environment - Out Interface Operation Scheme for actActivator

5.1.1 Operation Model for oeSetClock

The oeSetClock operation has the following properties:

OPERATION	
<i>oeSetClock[proactive]</i>	
An active message used to statically set the date and time information in the system's state.	
Parameters	
1	AcurentClock: dtDateAndTime the date and time to be considered as the actual one.
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is supposed to be created and initialized and the provided date and time value is greater than the one known by the system.
Pre-Condition (functional)	
PreF 1	none
Post-Condition (functional)	
PostF 1	the ctState instance post-state is updated to have its clock attribute equal to the given date and time.
Post-Condition (protocol)	
PostP 1	none

5.1.2 Operation Model for oeSollicitateCrisisHandling

The oeSollicitateCrisisHandling operation has the following properties:

OPERATION	
<i>oeSollicitateCrisisHandling[proactive]</i>	
<i>continues in next page ...</i>	

... Operation table continuation

A proactive message (message of a pro-active actor with no parameter triggered automatically if the pre protocol condition is true) used to avoid crisis to stay too long in an not handled status.	
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is started
PreP 2	there exist some crisis that are in pending status and for which the duration between the current ctState clock information and the last reminder is greater than the crisis reminder period duration.
Pre-Condition (functional)	
PreF 1	none
Post-Condition (functional)	
PostF 1	if there exist coordinators and crisis who stood in a not handled status more than the maximum allowed time then those crisis are randomly allocated to the existing coordinators.
PostF 2	for all other crisis who stood too longly in a not handled status but not more than the maximum delay allowed then a reminder message is sent to the administrator and all coordinator actors of the environment to sollicitate handling of those crisis.
Post-Condition (protocol)	
PostP 1	the value of the last reminder known by the system at post state is the system's clock value.

Figure 5.1 shows concept model elements in the scope of the oeSollicitateCrisisHandling operation

5.2 Environment - Out Interface Operation Scheme for actAdministrator

5.2.1 Operation Model for oeAddCoordinator

The oeAddCoordinator operation has the following properties:

OPERATION	
<i>oeAddCoordinator</i>	
sent to add a new coordinator in the system's post state and environment's post state.	
Parameters	
1	AdtCoordinatorID: dtCoordinatorID used to initialize the id field
2	AdtLogin: dtLogin used to initialize the login field
3	AdtPassword: dtPassword used to initialize the password field
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged)

continues in next page ...

...Operation table continuation

Pre-Condition (functional)	
PreF 1	it is supposed that there cannot exist a ctCoordinator instance with the same id attribute as the one the administrator wants to delete.
Post-Condition (functional)	
PostF 1	the environment has a new instance of coordinator actor allowing for input/output message communication with the system.
PostF 2	the system's state has a new instance of ctCoordinator initialized with the given values.
PostF 3	the new actor instance and ctCoordinator instance are related.
PostF 4	the new actor instance and ctCoordinator instance are related according to the authenticated association.
PostF 5	the administrator actor is informed about the satisfaction of its request.
Post-Condition (protocol)	
PostP 1	none

5.2.2 Operation Model for oeAddPointOfInterest

The oeAddPointOfInterest operation has the following properties:

OPERATION	
oeAddPointOfInterest	
sent to add a new Point of interest in the system's post state .	
Parameters	
1	AetCategory: etCategory used to initialize the category field
2	AdtGPSLocation: dtGPSLocation used to initialize the location field
3	AdtDescription: dtDescription used to initialize the description field
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged)
Pre-Condition (functional)	
PreF 1	it is supposed that there cannot exist a ctPointOfInterest instance with the same id attribute.
Post-Condition (functional)	
PostF 1	the ctState attribute for the next value for alert IDs is incremented by one at post.
PostF 2	the system's state has a new instance of ctPointOfInterest initialized with the given values.
PostF 3	the administrator actor is informed about the satisfaction of its request.
Post-Condition (protocol)	
PostP 1	

5.2.3 Operation Model for oeClosestToALocation

The oeClosestToALocation operation has the following properties:

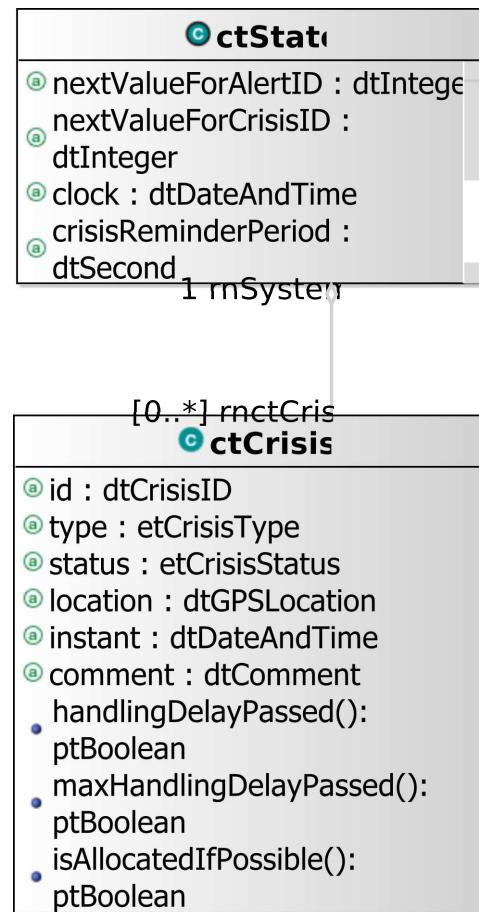


Figure 5.1: oeSollicitateCrisisHandling operation scope

OPERATION
<i>oeClosestToALocation</i>
Parameters
1 AdtGPSLocation: dtGPSLocation
Return type
ptBoolean
Pre-Condition (protocol)
PreP 1
Pre-Condition (functional)
PreF 1
Post-Condition (functional)
PostF 1
Post-Condition (protocol)
PostP 1

5.2.4 Operation Model for oeDeleteCoordinator

The *oeDeleteCoordinator* operation has the following properties:

OPERATION
<i>oeDeleteCoordinator</i>
sent to delete an existing coordinator in the system's post state and environment's post state.
Parameters
1 AdtCoordinatorID: dtCoordinatorID used for ctCoordinator instance retrieval
Return type
ptBoolean
Pre-Condition (protocol)
PreP 1 the system is started PreP 2 the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged)
Pre-Condition (functional)
PreF 1 it is supposed that there exist one ctCoordinator instance with the same id attribute than the one the administrator wants to create.
Post-Condition (functional)
PostF 1 the ctCoordinator class instance having the required id do not belong anymore to the post state as well as is related actCoordinator actor instance. PostF 2 the administrator actor is informed about the satisfaction of its request.
Post-Condition (protocol)
PostP 1 none

5.2.5 Operation Model for oeDeletePointOfInterest

The *oeDeletePointOfInterest* operation has the following properties:

OPERATION	
<i>oeDeletePointOfInterest</i>	
sent to delete an existing Point of interest in the system's post state.	
<i>Parameters</i>	
1	AdtPointOfInterestID: dtPointOfInterestID used for ctPointOfInterest instance retrieval
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	it is supposed that there exist one ctCoordinator instance with the same id attribute than the one the administrator wants to delete.
<i>Post-Condition (functional)</i>	
PostF 1	the ctPointOfInterest class instance having the required id does not belong anymore to the post state.
PostF 2	the administrator actor is informed about the satisfaction of its request.
<i>Post-Condition (protocol)</i>	
PostP 1	none

5.2.6 Operation Model for oeEditPointOfInterest

The oeEditPointOfInterest operation has the following properties:

OPERATION	
<i>oeEditPointOfInterest</i>	
sent to modify an existing Point of interest in the system's post state .	
<i>Parameters</i>	
1	AdtPointsOfInterestID: dtPointOfInterestID used to initialize the id field
2	AetCategory: etCategory used to initialize the category field
3	AdtGPSLocation: dtGPSLocation used to initialize the location field
4	AdtDescription: dtDescription used to initialize the description field
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	it is supposed that there exists a ctPointOfInterest instance with the same id attribute.
<i>Post-Condition (functional)</i>	

continues in next page ...

...Operation table continuation

PostF 1	The values for the attributes selected by the system's actor actAdministrator are modified to the ones the administrator's given values.
PostF 2	the administrator actor is informed about the satisfaction of its request.
Post-Condition (protocol)	
PostP 1	none

5.2.7 Operation Model for oeRankDownCoordinator

The oeRankDownCoordinator operation has the following properties:

OPERATION	
<i>oeRankDownCoordinator</i>	
sent to demote a coordinator to the rank below his current rank	
Parameters	
1	AdtCoordinatorID: dtCoordinatorID
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged).
Pre-Condition (functional)	
PreF 1	there exists one coordinator having the given id in the pre-state.
PreF 2	the coordinator specified by the id has a higher rank than Novice (i.e. either Intermediate or Expert).
Post-Condition (functional)	
PostF 1	a message is sent to the ctAdministrator, confirming the operation has been successful, else the administrator is notified that the operation was unsuccessful.
PostF 2	the ctCoordinator attribute expRank is decremented by one (i.e. expert to intermediate, intermediate to novice) and his expPoints are adjusted accordingly at post (i.e. expert to intermediate -> 20 ExpPoints, intermediate to novice -> 0 ExpPoints).
Post-Condition (protocol)	
PostP 1	

5.2.8 Operation Model for oeSelectCategories

The oeSelectCategories operation has the following properties:

OPERATION	
<i>oeSelectCategories</i>	
Used to select all the rows that contain the category selected by the Administrator.	
Parameters	
1	AdtCategory: etCategory used to initialize the category field
Return type	

continues in next page ...

... Operation table continuation

ptBoolean
Pre-Condition (protocol)
PreP 1 the system is started
PreP 2 the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged).
Pre-Condition (functional)
PreF 1 It is supposed there exists at least one point of interest with the same category as the one chosen.
Post-Condition (functional)
PostF 1 all the points of interest with the given category as shown in a list
PostF 2 the administrator actor is informed about the satisfaction of its request.
Post-Condition (protocol)
PostP 1

5.3 Environment - Out Interface Operation Scheme for actAuthenticated

5.3.1 Operation Model for oeFillCaptcha

The oeFillCaptcha operation has the following properties:

OPERATION
<i>oeFillCaptcha</i>
sent to verify correctness of the captcha test to be able to continue the login procedure.
Parameters
1 AdtCaptcha: dtCaptcha first information used to determine the result of the captcha test, it should correspond to the given captcha
Return type
ptBoolean
Pre-Condition (protocol)
PreP 1 the system is started
PreP 2 the actor is not already logged in ! (i.e. the associated ctAuthenticated instance is not considered logged)
PreP 3 the nbrfails attribute of the ctAuthenticated instance should be higher or equal 3 for a captcha test to be asked (therefore also to be filled).
Pre-Condition (functional)
PreF 1 none
Post-Condition (functional)
PostF 1 if the captcha provided by the actor corresponds to the one he should provide then a success message (captcha was filled correctly) is sent to the actor; else the actor is notified that he gave incorrect data and needs to give the test another try.
Post-Condition (protocol)
PostP 1 if the captcha test is successful the nbrfails attribute goes down to zero again.

5.3.2 Operation Model for oeResetPassword

The oeResetPassword operation has the following properties:

OPERATION	
<i>oeResetPassword</i>	
sent to request a password reset to be able to request access secured system operations again.	
Parameters	
1	AdtLogin: dtLogin This information is used to reset a specific password which will be sent on the user's e-mail
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is started
PreP 2	the actor is not already logged in ! (i.e. the associated ctAuthenticated instance is not considered logged)
Pre-Condition (functional)	
PreF 1	none
Post-Condition (functional)	
PostF 1	if the login provided by the actor corresponds to the one that belongs to the ctAuthenticated instance he is related to then a successful password reset message is sent to the actor and a message is sent to the actor Administrator that tells which user resets his password; else the actor is notified that he gave incorrect data and all the administrator actors existing in the environment are notified of an intrusion attempt.
Post-Condition (protocol)	
PostP 1	if the reset information is correct then the actor is known to have a new password ! (i.e. the associated ctAuthenticated instance with given login will get a new password.)

5.3.3 Operation Model for oeLogin

The oeLogin operation has the following properties:

OPERATION	
<i>oeLogin</i>	
sent to request authorization to request access secured system operations.	
Parameters	
1	AdtLogin: dtLogin first information used to determine accessibility rights for the actual actor.
2	AdtPassword: dtPassword second information used to determine accessibility rights for the actual actor.
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is started
PreP 2	the actor is not already logged in ! (i.e. the associated ctAuthenticated instance is not considered logged)
PreP 3	the nbrfails attribute is less than 3 (which means the actor attempted less than three times in a row a login without captcha test)

continues in next page ...

... Operation table continuation

<i>Pre-Condition (functional)</i>	
PreF 1	none
<i>Post-Condition (functional)</i>	
PostF 1	if the login and password provided by the actor correspond to the ones that belong to the ctAuthenticated instance he is related to then a welcome message is sent to the actor (n.b. the logged status is changed as a post-protocol condition); else the actor is notified that he gave incorrect data and all the administrator actors existing in the environment are notified of an intrusion attempt.
<i>Post-Condition (protocol)</i>	
PostP 1	if the authentication information is correct then the actor is known to be logged in ! (i.e. the associated ctAuthenticated instance with given login and password is considered logged)
PostP 2	if the authentication information is correct then the actor number of failed attempts(nbrfails) goes down to zero to ensure a correct initialization.

5.3.4 Operation Model for oeLogout

The oeLogout operation has the following properties:

OPERATION	
<i>oeLogout</i>	
	sent to end the secured access to specific system operations.
<i>Return type</i>	
	ptBoolean
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor is currently logged in ! (i.e. the associated ctAuthenticated instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	
<i>Post-Condition (functional)</i>	
PostF 1	a logout confirmation message is sent to the actor (n.b. the logged status is changed as a post-protocol condition)
<i>Post-Condition (protocol)</i>	
PostP 1	the actor is known to be logged out ! (i.e. the associated ctAuthenticated instance with given login and password is considered logged out)

5.4 Environment - Out Interface Operation Scheme for actComCompany**5.4.1 Operation Model for oeAlert**

The oeAlert operation has the following properties:

OPERATION	
<i>oeAlert</i>	
<i>continues in next page ...</i>	

...Operation table continuation

Any human having a phone able to connect to the communication companies using the *iCrash* system can send his company an sms message with structured information in order to declare an alert.

Parameters	
1	AetHumanKind: etHumanKind the kind of human informing of an alert.
2	AdtDate: dtDate the date of the alert
3	AdtTime: dtTime the time of the alert
4	AdtPhoneNumber: dtPhoneNumber the phone number of the human sending the alert SMS message
5	AdtGPSLocation: dtGPSLocation the GPS position of the phone at the date and time the message was sent.
6	AdtComment: dtComment a free text message sent by the human providing information on the alert that he wants to declare
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is supposed to be created and initialized.
Pre-Condition (functional)	
PreF 1	the date and time the alert is declared is supposed to be in the past with respect to the current time known by the system.
Post-Condition (functional)	
PostF 1	the ctState attribute for the next value for alert IDs is incremented by one at post.
PostF 2	a new alert instance exists in the post state with status pending, instant information (resp. GPS location and comment) based on date and time provided (resp. position and comment); and with alert ID being a string conversion of the dtInteger value available in the pre state in the ctState instance.
PostF 3	if there exist no already registered alert near to the alert currently declared then a new crisis is added in the post state and initialized with: its ID being the one provided by the ctState instance (which is incremented by one in the post state), its type considered as small, its status being pending, its declared time being the same than the alert and a default comment indicating that a report will come later on. else the crisis to which the new alert must be related to is the one related to any alert nearby in the pre-state.
PostF 4	the post state relates the new alert to the previously characterized crisis.
PostF 5	if there is no ctHuman instance having same phone number and same kind in the pre-state then a new one is added in the post-state with given phone number and kind and is associated to the communication company actor used to declare the alert. else the pre-state one is chosen
PostF 6	and this specified ctHuman is related to the new alert thus indicating he has signed the alert.
Post-Condition (protocol)	
PostP 1	none

Figure 5.2 shows concept model elements in the scope of the oeAlert operation

Figure 5.3 shows concept model elements in the scope of the oeAlert operation

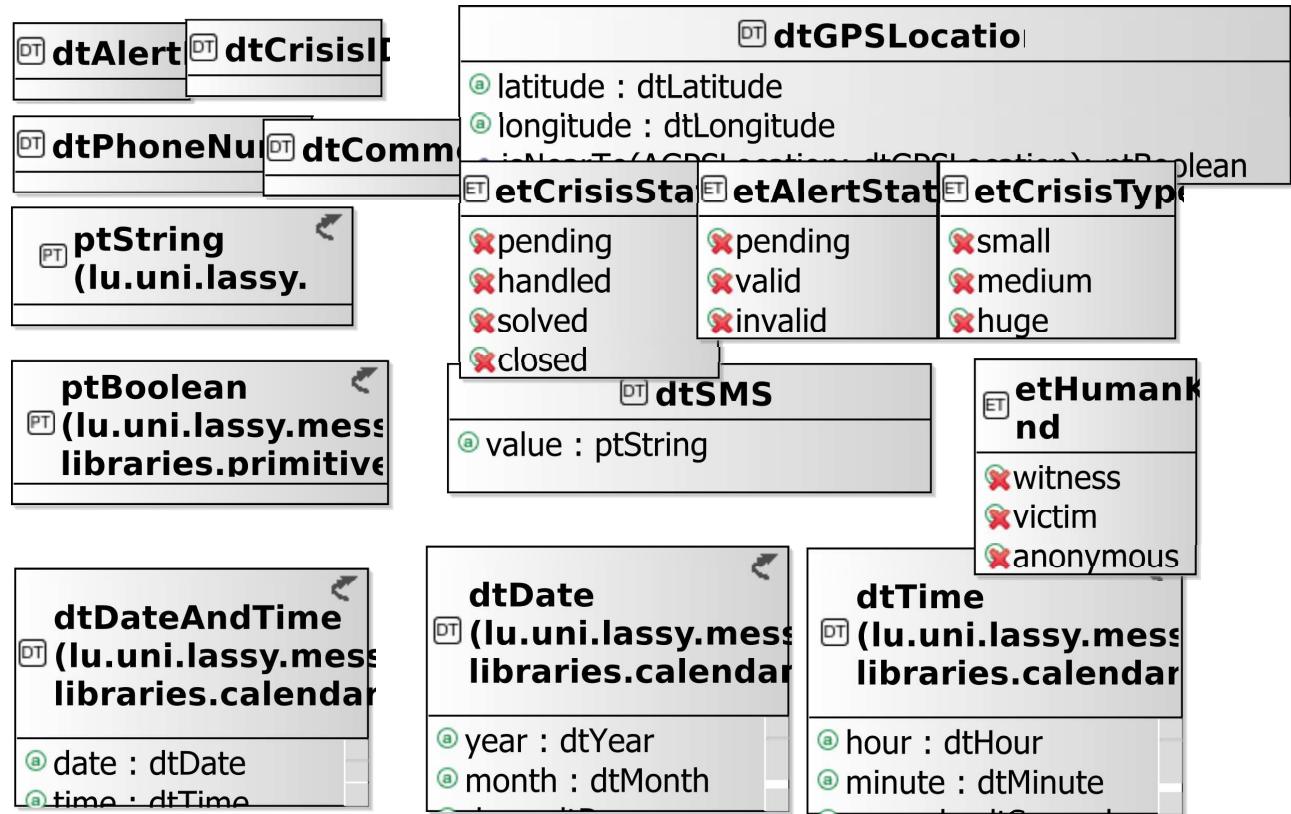


Figure 5.2: oeAlert operation scope

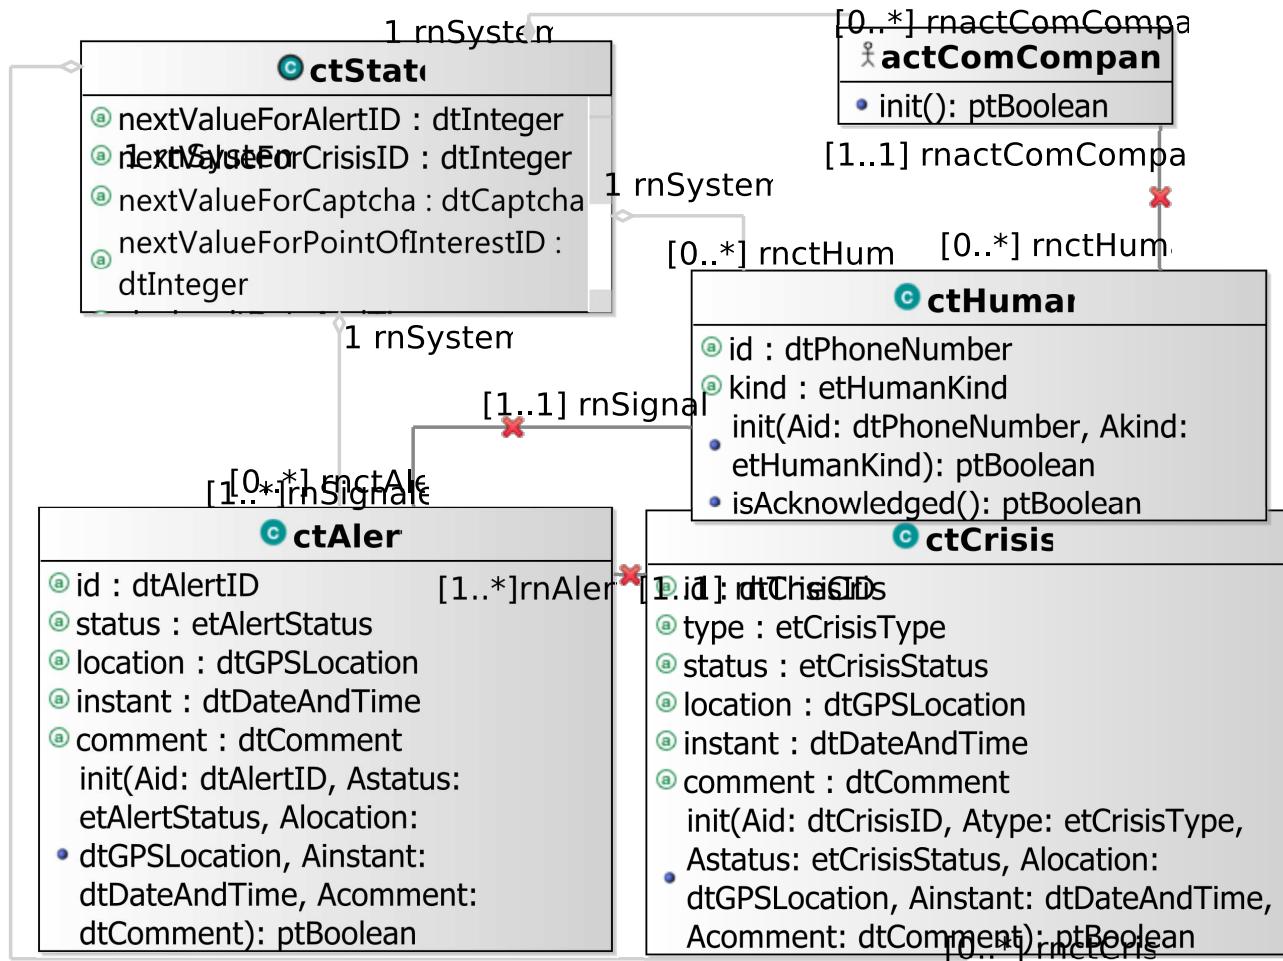


Figure 5.3: oeAlert operation scope

5.5 Environment - Out Interface Operation Scheme for actCoordinator

5.5.1 Operation Model for oeCloseCrisis

The `oeCloseCrisis` operation has the following properties:

OPERATION	
<i>oeCloseCrisis</i>	
sent to indicate that a crisis should be considered as closed.	
<i>Parameters</i>	
1	AdtCrisisID: dtCrisisID the identification information used to determine the crisis to close
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	it is supposed that there exist one ctCrisis instance with the same <code>id</code> attribute value as the one provided by the coordinator actor who wants to close.
<i>Post-Condition (functional)</i>	
PostF 1	the ctCrisis class instance having the provided id is considered closed in the post state.
PostF 2	There is no handler declared in the system as associated to the crisis.
PostF 3	all the alert instances associated to this crisis do not belong any more to the system's post state.
PostF 4	the coordinator actor is informed about the satisfaction of its request.
<i>Post-Condition (protocol)</i>	
PostP 1	none

5.5.2 Operation Model for oeGetAlertsSet

The `oeGetAlertsSet` operation has the following properties:

OPERATION	
<i>oeGetAlertsSet</i>	
sent to request all the ctAlert instances having a specific status.	
<i>Parameters</i>	
1	AetAlertStatus: etAlertStatus the criteria used to select the alerts to send back to the actor
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<i>Pre-Condition (functional)</i>	

continues in next page ...

...Operation table continuation

PreF 1	none
Post-Condition (functional)	
PostF 1	the post state is the one obtained by satisfying the <code>isSentToCoordinator</code> predicate for each alert having the provided status and for the actor sending the message. (cf. specification of <code>isSentToCoordinator</code> predicate given for the <code>ctAlert</code> type.
Post-Condition (protocol)	
PostP 1	none

5.5.3 Operation Model for oeGetCrisisSet

The `oeGetCrisisSet` operation has the following properties:

OPERATION
<i>oeGetCrisisSet</i>
sent to request all the <code>ctCrisis</code> instances having a specific status.
Parameters
1 AetCrisisStatus: etCrisisStatus the status information used to determine the crisis to send back to the actor
Return type
<code>ptBoolean</code>
Pre-Condition (protocol)
PreP 1 the system is started PreP 2 the actor logged previously and did not log out ! (i.e. the associated <code>ctCoordinator</code> instance is considered logged)
Pre-Condition (functional)
PreF 1 none
Post-Condition (functional)
PostF 1 the post state is the one obtained by satisfying the <code>isSentToCoordinator</code> predicate for each crisis having the provided status and for the actor sending the message <code>ieSendACrisis</code> . (cf. specification of <code>isSentToCoordinator</code> predicate given for the <code>ctCrisis</code> type.
Post-Condition (protocol)
PostP 1 none

5.5.4 Operation Model for oeInvalidateAlert

The `oeInvalidateAlert` operation has the following properties:

OPERATION
<i>oeInvalidateAlert</i>
sent to indicate that an alert should be considered as closed.
Parameters
1 AdtAlertID: dtAlertID the identification information used to determine the alert to close
Return type
<code>ptBoolean</code>

continues in next page ...

... Operation table continuation

<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	it is supposed that there exist one ctAlert instance with the same id attribute value as the one provided by the coordinator actor who wants to close.
<i>Post-Condition (functional)</i>	
PostF 1	the ctAlert class instance having the provided id is considered closed in the post state.
PostF 2	the coordinator actor is informed about the satisfaction of its request.
<i>Post-Condition (protocol)</i>	
PostP 1	none

5.5.5 Operation Model for oeReportOnCrisis

The oeReportOnCrisis operation has the following properties:

OPERATION	
<i>oeReportOnCrisis</i>	
sent to update the textual information available for a specific handled crisis.	
Parameters	
1	AdtCrisisID: dtCrisisID the identification information used to determine the crisis to report on
2	AdtComment: dtComment the textual information commenting the crisis
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
Pre-Condition (functional)	
PreF 1	it is supposed that there exist one crisis in the pre state having the given id.
Post-Condition (functional)	
PostF 1	the comment attribute of the crisis instance having the given id is replaced by the given one and the requesting actor is notified of this update.
Post-Condition (protocol)	
PostP 1	none

5.5.6 Operation Model for oeSetCrisisHandler

The oeSetCrisisHandler operation has the following properties:

OPERATION	
<i>oeSetCrisisHandler</i>	
sent to declare himself as been the handler of a crisis having the specified id.	

continues in next page ...

... Operation table continuation

<i>Parameters</i>	
1	AdtCrisisID: dtCrisisID the identification information used to determine the crisis
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	there exist one crisis having the given id in the pre-state.
<i>Post-Condition (functional)</i>	
PostF 1	the ctCrisis instance having the provided id is in handled status at poststate and is associated to the actor that sends the message (which himself is notified with a textual message as confirmation).
PostF 2	All the alerts related to this crisis are sent to the actor such that he can decide how to handle them.
PostF 3	if the crisis was already handled at pre-state then the associated handler actor is notified about the change of handler for one of his crisis (n.b. it might be the same even if not relevant).
PostF 4	a message is sent to the communication company for any human related to an alert associated to the crisis. A human will receive as many messages as alerts he sent despite the fact that they might relate to the same crisis (i.e. one alert, one acknowledgement).
<i>Post-Condition (protocol)</i>	
PostP 1	none

5.5.7 Operation Model for oeSetCrisisStatus

The *oeSetCrisisStatus* operation has the following properties:

OPERATION	
<i>oeSetCrisisStatus</i>	
	sent to define the handling status of a specific crisis.
<i>Parameters</i>	
1	AdtCrisisID: dtCrisisID the identification information used to determine the crisis
2	AetCrisisStatus: etCrisisStatus the new status value
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	it is supposed that there exist one crisis in the pre state having the given id.

continues in next page ...

... Operation table continuation

<i>Post-Condition (functional)</i>	
PostF 1	the crisis status attribute of the crisis instance having the given id is replaced by the given one and the requesting actor is notified of this update.
<i>Post-Condition (protocol)</i>	
PostP 1	none

5.5.8 Operation Model for oeSetCrisisType

The `oeSetCrisisType` operation has the following properties:

OPERATION	
<i>oeSetCrisisType</i>	
sent to define the gravity type of a specific crisis.	
<i>Parameters</i>	
1	AdtCrisisID: dtCrisisID the identification information used to determine the crisis
2	AetCrisisType: etCrisisType the new type value
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	it is supposed that there exist one crisis in the pre state having the given id.
<i>Post-Condition (functional)</i>	
PostF 1	the crisis type attribute of the crisis instance having the given id is replaced by the given one and the requesting actor is notified of this update.
<i>Post-Condition (protocol)</i>	
PostP 1	none

5.5.9 Operation Model for oeValidateAlert

The `oeValidateAlert` operation has the following properties:

OPERATION	
<i>oeValidateAlert</i>	
sent to indicate that a specific alert is not a fake.	
<i>Parameters</i>	
1	AdtAlertID: dtAlertID the identification information used to determine the alert instance
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started

continues in next page ...

...Operation table continuation

PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
Pre-Condition (functional)	
PreF 1	it is supposed that there exist one ctAlert instance with the same id attribute value as the one provided by the coordinator actor who wants to validate.
Post-Condition (functional)	
PostF 1	the ctAlert class instance having the provided id is considered as valid in the post state and the coordinator actor is informed about the satisfaction of its request.
Post-Condition (protocol)	
PostP 1	none

5.6 Environment - Out Interface Operation Scheme for actMsrCreator

5.6.1 Operation Model for oeCreateSystemAndEnvironment

The oeCreateSystemAndEnvironment operation has the following properties:

OPERATION	
<i>oeCreateSystemAndEnvironment</i>	
sent to request the initialization of the system's class instances and the environment actors instances.	
Parameters	
1	AqtyComCompanies: ptInteger the quantity of communication companies to create in the environment
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	none
Pre-Condition (functional)	
PreF 1	none
Post-Condition (functional)	
PostF 1	the ctState instance is initialized with the integer 1 for the crisis and alert counters used for their identifications, a value for the clock corresponding to a default initial time (i.e. January 1st, 1970) the crisis reminder period is set to 300 seconds, the maximum crisis reminder period is fixed to 1200 seconds (i.e. 20 minutes), an initial value for the automatic reminder period equal to the current date and time and the system is considered in a started state. Those predicates must be satisfied first since all the other depend on the existence of a ctState instance !
PostF 2	the actMsrCreator actor instance is initiated (remember that since the oeCreateSystemAndEnvironment is a special event its role is to make consistent the post state thus creating the actor and its interfaces is required even though the sending of this message logically would need the actor and its interfaces to already exist ...).
PostF 3	the environment for communication company actors, in the post state, is made of AqtyComCompanies instances allowing for receiving and sending messages to humans.
PostF 4	the environment for administrator actors, in the post state, is made of one instance.
PostF 5	the environment for activator actors, in the post state, is made of one instance allowing for automatic message sending based on current system's and environment state'.

continues in next page ...

... Operation table continuation

PostF 6	the set of ctAdministrator instances at post is made of one instance initialized with 'icrashadmin' (resp. '7WXC1359') for login (resp. password) values.
PostF 7	the association between ctAdministrator and actAdministrator is made of one couple made of the conjointly specified instances.

Post-Condition (protocol)

PostP 1	none is given since the only protocol variable to be modified in the post state is the one initialized with the ctState instance (i.e. vpStarted).
---------	--

Figure 5.4 shows all the concept model elements in the scope of the oeCreateSystemAndEnvironment operation

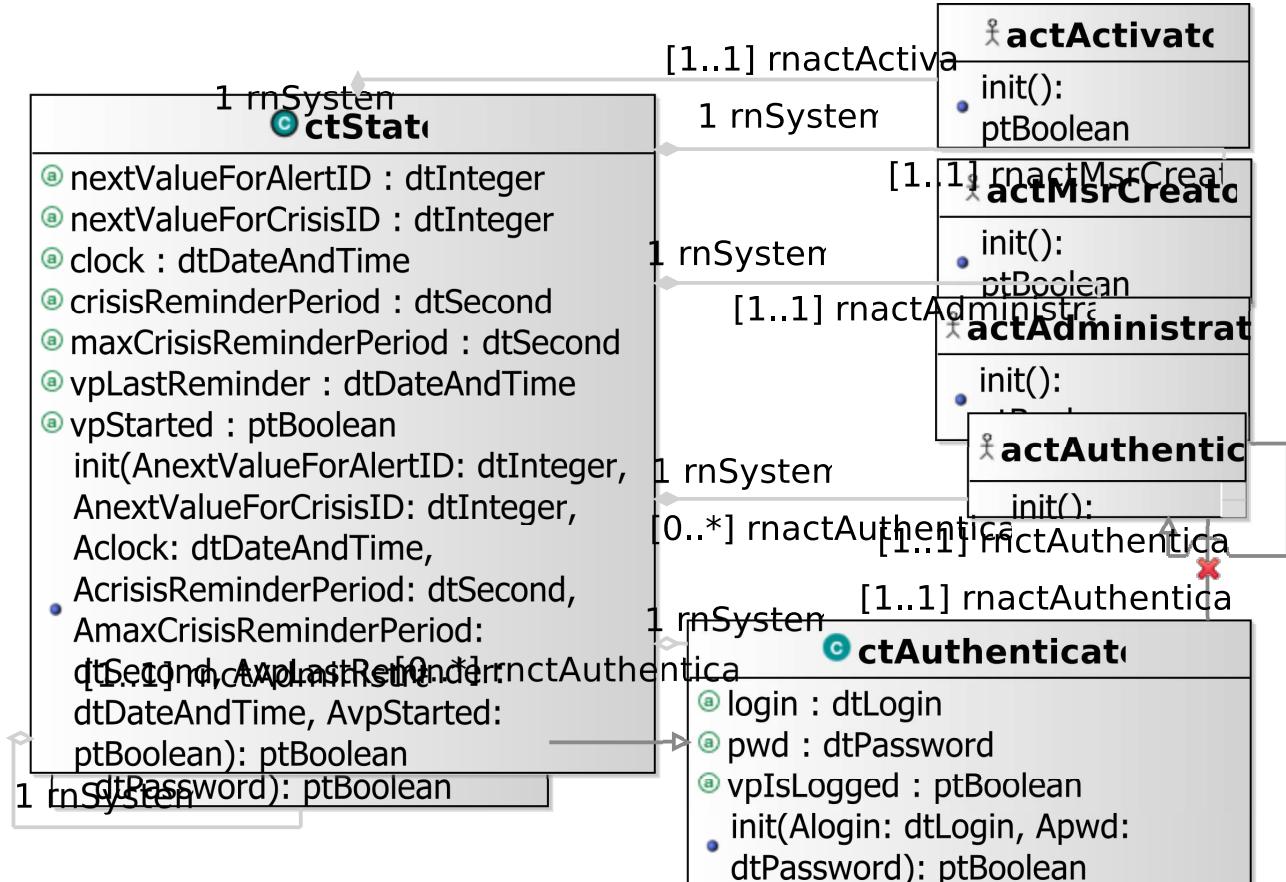


Figure 5.4: oeCreateSystemAndEnvironment operation scope

5.7 Environment - Actor Operation Scheme for actMsrCreator

5.7.1 Operation Model for init

The init operation has the following properties:

OPERATION
<i>init</i>
used to create an instance of the actor together with its interface instances and update the associations with the <code>ctState</code> instance.
<i>Return type</i>
<code>ptBoolean</code>

5.8 Primary Types - Operation Schemes for Class ctAdministrator

5.8.1 Operation Model for init

The `init` operation has the following properties:

OPERATION
<i>init</i>
used to initialize the current object as a new instance of the <code>ctAdministrator</code> type.
<i>Parameters</i>
1 Alogin: dtLogin used to initialize the login field
2 Apwd: dtPassword used to initialize the password field
<i>Return type</i>
<code>ptBoolean</code>
<i>Post-Condition (functional)</i>
PostF 1 true iff the system poststate includes the current object as a new <code>ctAdministrator</code> instance having its login and password attributes equal to the one provided as parameters and its <code>vpIsLogged</code> attribute equal to false.

5.9 Primary Types - Operation Schemes for Class ctAlert

5.9.1 Operation Model for init

The `init` operation has the following properties:

OPERATION
<i>init</i>
used to initialize the current object as a new instance of the <code>ctAlert</code> type.
<i>Parameters</i>
1 Aid: dtAlertID used to initialize the id field
2 Astatus: etAlertStatus used to initialize the status field
3 Alocation: dtGPSLocation used to initialize the location field
4 Ainstant: dtDateAndTime used to initialize the instant field
5 Acomment: dtComment used to initialize the comment field

continues in next page ...

... Operation table continuation

<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the system poststate includes the current object as a new ctAlert instance having its attributes equal to the ones provided as parameters.

5.9.2 Operation Model for isSentToCoordinator

The `isSentToCoordinator` operation has the following properties:

OPERATION
<i>isSentToCoordinator</i>
used to provide a given coordinator with current alert information.
<i>Parameters</i>
1 AactCoordinator: actCoordinator the message destination
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the message ieSendAnAlert is sent to the input interface of the given coordinator actor with the current alert as parameter value.

5.10 Primary Types - Operation Schemes for Class ctAuthenticated**5.10.1 Operation Model for init**

The `init` operation has the following properties:

OPERATION
<i>init</i>
used to initialize the current object as a new instance of the ctAuthenticated type.
<i>Parameters</i>
1 Alogin: dtLogin used to initialize the login field
2 Apwd: dtPassword used to initialize the password field
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the system poststate includes the current object as a new ctAuthenticated instance having its attributes equal to the ones provided as parameters.

5.11 Primary Types - Operation Schemes for Class ctCoordinator**5.11.1 Operation Model for init**

The `init` operation has the following properties:

OPERATION	
init	
used to initialize the current object as a new instance of the ctCoordinator type.	
Parameters	
1	Aid: dtCoordinatorID used to initialize the id field
2	Alogin: dtLogin used to initialize the login field
3	Apwd: dtPassword used to initialize the password field
Return type	
ptBoolean	
Post-Condition (functional)	
PostF 1	true iff the system poststate includes the current object as a new ctCoordinator instance having its attributes equal to the ones provided as parameters.

5.12 Primary Types - Operation Schemes for Class ctCrisis

5.12.1 Operation Model for init

The `init` operation has the following properties:

OPERATION	
init	
used to initialize the current object as a new instance of the ctCrisis type.	
Parameters	
1	Aid: dtCrisisID used to initialize the id field
2	Atype: etCrisisType used to initialize the type field
3	Astatus: etCrisisStatus used to initialize the status field
4	Alocation: dtGPSLocation used to initialize the location field
5	Ainstant: dtDateAndTime used to initialize the instant field
6	Acomment: dtComment used to initialize the comment field
Return type	
ptBoolean	
Post-Condition (functional)	
PostF 1	true iff the system poststate includes the current object as a new ctCrisis instance having its attributes equal to the ones provided as parameters.

5.12.2 Operation Model for handlingDelayPassed

The `handlingDelayPassed` operation has the following properties:

OPERATION	
<i>handlingDelayPassed</i>	
used to determine if the crisis stood too longly in a pending status since last reminder.	
<i>Return type</i>	
ptBoolean	
<i>Post-Condition (functional)</i>	
PostF 1	true iff the crisis is in pending status and if the duration between the current ctState clock information and the last reminder is greater than the crisis reminder period duration.

5.12.3 Operation Model for maxHandlingDelayPassed

The `maxHandlingDelayPassed` operation has the following properties:

OPERATION	
<i>maxHandlingDelayPassed</i>	
used to determine if the crisis stood too longly in a pending status since its creation.	
<i>Return type</i>	
ptBoolean	
<i>Post-Condition (functional)</i>	
PostF 1	true iff the crisis is in pending status and if the duration between the current ctState clock information and the crisis instant is greater than the maximum reminder period duration.

5.12.4 Operation Model for isSentToCoordinator

The `isSentToCoordinator` operation has the following properties:

OPERATION	
<i>isSentToCoordinator</i>	
used to provide a given coordinator with current crisis information.	
<i>Parameters</i>	
1	AactCoordinator: actCoordinator the message destination actor
<i>Return type</i>	
ptBoolean	
<i>Post-Condition (functional)</i>	
PostF 1	true iff the message ieSendACrisis is sent by the simulator to the input interface of the given coordinator actor with the current crisis as parameter value.

5.12.5 Operation Model for isAllocatedIfPossible

The `isAllocatedIfPossible` operation has the following properties:

OPERATION	
<i>isAllocatedIfPossible</i>	
used to allocate a crisis to a coordinator if any or to alert the administrator of crisis waiting to be handled.	
<i>Return type</i>	
ptBoolean	

continues in next page ...

...Operation table continuation

<i>Post-Condition (functional)</i>	
PostF 1	true iff the duration between the crisis creation and the system's clock is greater than the maximum delay defined and
PostF 2	if there exist at least one coordinator then (a) the post state associates to the crisis any of the existing coordinators and (b) the coordinator is informed that he is now the handlers of the crisis whose ID is communicated
PostF 3	else a message is sent to all known administrators to request creation of new coordinators.

5.13 Primary Types - Operation Schemes for Class ctHuman

5.13.1 Operation Model for init

The `init` operation has the following properties:

OPERATION	
<i>init</i>	used to initialize the current object as a new instance of the <code>ctHuman</code> type.
Parameters	
1	Aid: dtPhoneNumber used to initialize the id field
2	Akind: etHumanKind used to initialize the kind field
Return type	
ptBoolean	
<i>Post-Condition (functional)</i>	
PostF 1	true iff the system poststate includes the current object as a new <code>ctHuman</code> instance having its attributes equal to the ones provided as parameters.

5.13.2 Operation Model for isAcknowledged

The `isAcknowledged` operation has the following properties:

OPERATION	
<i>isAcknowledged</i>	used to specify the property of having sent an alert acknowledge message to the human having declared the alert through its own communication company.
Return type	
ptBoolean	
<i>Post-Condition (functional)</i>	
PostF 1	true iff the message <code>ieSmsSend</code> is sent to the related input interface of the related communication company actor with the human phone number and the generic message 'The handling of your alert by our services is in progress !'

5.14 Primary Types - Operation Schemes for Class ctPointOfInterest

5.14.1 Operation Model for init

The `init` operation has the following properties:

OPERATION	
<i>init</i>	
used to initialize the current object as a new instance of the <code>ctPointOfInterest</code> type.	
<i>Parameters</i>	
1	Aid: <code>dtPointOfInterestID</code> used to initialize the <code>id</code> field
2	Atype: <code>etCategory</code> used to initialize the <code>type</code> field
3	Alocation: <code>dtGPSLocation</code> used to initialize the <code>location</code> field
4	Adescription: <code>dtDescription</code> used to initialize the <code>description</code> field
<i>Return type</i>	
<code>ptBoolean</code>	
<i>Post-Condition (functional)</i>	
PostF 1	true iff the system poststate includes the current object as a new <code>ctPointOfInterest</code> instance having its attributes equal to the ones provided as parameters.

5.15 Primary Types - Operation Schemes for Class ctState

5.15.1 Operation Model for init

The `init` operation has the following properties:

OPERATION	
<i>init</i>	
used to initialize the current object as a new instance of the <code>ctState</code> type.	
<i>Parameters</i>	
1	AnextValueForAlertID: <code>dtInteger</code> used to initialize the <code>nextValueForAlertID</code> field
2	AnextValueForCrisisID: <code>dtInteger</code> used to initialize the <code>nextValueForCrisisID</code> field
3	Aclock: <code>dtDateAndTime</code> used to initialize the <code>clock</code> field
4	AcrisisReminderPeriod: <code>dtSecond</code> used to initialize the <code>crisisReminderPeriod</code> field
5	AmaxCrisisReminderPeriod: <code>dtSecond</code> used to initialize the <code>maxCrisisReminderPeriod</code> field
6	AvpLastReminder: <code>dtDateAndTime</code> used to initialize the <code>vpLastReminder</code> field
7	AvpStarted: <code>ptBoolean</code> used to initialize the <code>vpStarted</code> field

continues in next page ...

...Operation table continuation

Return type
ptBoolean
Post-Condition (functional)
PostF 1 true iff the system poststate includes the current object as a new ctState instance having its attributes equal to the ones provided as parameters.

5.16 Primary Types - Operation Schemes for Datatype dtAlertID**5.16.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
is
used to determine which strings are considered as valid alert identifiers.
Return type
ptBoolean
Post-Condition (functional)
PostF 1 if the length of the value attribute of a dtAlertID is a ptInteger greater than zero and lower or equal to 20 then the operation returns the ptBoolean true, else the ptBoolean false.

5.17 Primary Types - Operation Schemes for Datatype dtComment**5.17.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
is
used to determine which strings are considered as valid comments.
Return type
ptBoolean
Post-Condition (functional)
PostF 1 true iff the length of the string value is not more than 160 characters.

5.18 Primary Types - Operation Schemes for Datatype dtCoordinatorID**5.18.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
is
used to determine which string are considered as valid alert identifiers.
Return type

continues in next page ...

... Operation table continuation

ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 if the length of the value attribute of a dtCoordinatorID is a ptInteger greater than zero and lower or equal to 5 than the operation returns the ptBoolean true, else the ptBoolean false.

5.19 Primary Types - Operation Schemes for Datatype dtCrisisID**5.19.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid crisis identifiers.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 if the length of the value attribute of a dtCrisisID is a ptInteger greater than zero and lower or equal to 10 than the operation returns the ptBoolean true, else the ptBoolean false.

5.20 Primary Types - Operation Schemes for Datatype dtDescription**5.20.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid description.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the length of the string value is not more than 280 characters.

5.21 Primary Types - Operation Schemes for Datatype dtExpPoints**5.21.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which integers are considered as valid dtExpPoints
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>

continues in next page ...

...Operation table continuation

PostF 1	returns true if the integer has a value between 0 and 120 (inclusive)
---------	---

5.22 Primary Types - Operation Schemes for Datatype dtGPSLocation

5.22.1 Operation Model for DistanceTo

The DistanceTo operation has the following properties:

OPERATION
<i>DistanceTo</i>
used to determine how close two locations are. In the context of the iCrash system, we compute the distance between two GPS locations using the following Haversine formula. (more details can be found at: http://www.movable-type.co.uk/scripts/latlong.html and http://www.gpsvisualizer.com/calculators#distance)
<i>Return type</i>
ptReal
<i>Post-Condition (functional)</i>
PostF 1 The Haversine formula $(ACOS(SIN(lat1)*SIN(lat2)+COS(lat1)*COS(lat2)*COS(lon2-lon1))*6371$, in which latitudes and longitudes are in radiant applied to the two dtGPS coordinates has to be greater than zero.

5.22.2 Operation Model for is

The is operation has the following properties:

OPERATION
<i>is</i>
used to determine which couples are considered as valid dtGPSLocation values.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true if both latitude and longitude are valid values according to their is operation.

5.22.3 Operation Model for isNearTo

The isNearTo operation has the following properties:

OPERATION
<i>isNearTo</i>
used to determine if locations are considered enough close to be treated as equivalent in the application domain context. In the context of the iCrash system, we compute the distance between two GPS locations using the following Haversine formula. (more details can be found at: http://www.movable-type.co.uk/scripts/latlong.html and http://www.gpsvisualizer.com/calculators#distance)
<i>Parameters</i>
1 AGPSLocation: dtGPSLocation the GPS location to be compared to.

continues in next page ...

... Operation table continuation

Return type
ptBoolean
Post-Condition (functional)
PostF 1 if the Haversine formula ($\text{ACOS}(\text{SIN}(\text{lat1}) * \text{SIN}(\text{lat2}) + \text{COS}(\text{lat1}) * \text{COS}(\text{lat2}) * \text{COS}(\text{lon2} - \text{lon1})) * 6371$, in which latitudes and longitudes are in radians applied to the two dtGPS coordinates is lower to 100 meters) then the predicate is true and false otherwise.

5.23 Primary Types - Operation Schemes for Datatype dtLatitude**5.23.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtLatitude.
Return type
ptBoolean
Post-Condition (functional)
PostF 1 is true if the value is a real in the interval [-90.0 , +90.0].

5.24 Primary Types - Operation Schemes for Datatype dtLogin**5.24.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtLogin.
Return type
ptBoolean
Post-Condition (functional)
PostF 1 is true if the length of the string value is not more than 20 characters.

5.25 Primary Types - Operation Schemes for Datatype dtLongitude**5.25.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtLongitude.
Return type
ptBoolean

continues in next page ...

... Operation table continuation

<i>Post-Condition (functional)</i>	
PostF 1	is true if the value is a real in the interval [-180.0 , +180.0].

5.26 Primary Types - Operation Schemes for Datatype dtPassword

5.26.1 Operation Model for is

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtPassword.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 is true of the length of the string value is at least 6 characters long.

5.27 Primary Types - Operation Schemes for Datatype dtPhoneNumber

5.27.1 Operation Model for is

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtPhoneNumber.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 is true of the length of the string value is from 4 to 30 characters. No standard is applied !

5.28 Primary Types - Operation Schemes for Datatype dtPointOfInterestID

5.28.1 Operation Model for is

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid alert identifiers.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>

continues in next page ...

... Operation table continuation

PostF 1	if the length of the value attribute of a dtAlertID is a ptInteger greater than zero and lower or equal to 30 then the operation returns the ptBoolean true, else the ptBoolean false.
---------	--

5.29 Primary Types - Operation Schemes for Enumeration etAlertStatus

5.29.1 Operation Model for is

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which litteral belongs to the enumeration.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the value is equal to one of the following values: pending, valid, invalid

5.30 Primary Types - Operation Schemes for Enumeration etCategory

5.30.1 Operation Model for is

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which litteral belongs to the enumeration.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the value is equal to one of the following values: Hospital, Police station, Garage, Parking, Insurance Office, Fire station

5.31 Primary Types - Operation Schemes for Enumeration etCrisisStatus

5.31.1 Operation Model for is

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which litteral belongs to the enumeration.
<i>Return type</i>

continues in next page ...

...Operation table continuation

ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the value is equal to one of the following values: pending, handled, solved, closed.

5.32 Primary Types - Operation Schemes for Enumeration etCrisisType

5.32.1 Operation Model for is

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which litteral belongs to the enumeration.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the value is equal to one of the following values: small, medium, huge

5.33 Primary Types - Operation Schemes for Enumeration etExperienceRank

5.33.1 Operation Model for is

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid etExperienceRank
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 returns true if the string is either 'Novice', 'Intermediate' or 'Expert'.

5.34 Primary Types - Operation Schemes for Enumeration etHumanKind

5.34.1 Operation Model for is

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which litteral belongs to the enumeration.

continues in next page ...

... Operation table continuation

<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the value is equal to one of the following values: witness, victim, anonym

5.35 Secondary Types - Operation Schemes for Classes

There are no elements in this category in the system analysed.

5.36 Secondary Types - Operation Schemes for Datatype dtSMS**5.36.1 Operation Model for is**

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid comments
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the length of the string value is not more than 160 characters.

5.37 Secondary Types - Operation Schemes for Enumerations

There are no elements in this category in the system analysed.

Chapter 6

Test Model(s)

6.1 Test Model for testcase01

this positive test case intends to verify the correctness of the execution of a simple instance of the suDeployAndRun use case.

6.1.1 Test Steps Specification

6.1.1.1 testcase01-ts01oeCreateSystemAndEnvironment-actMsrCreator.outactMsrCreator.oeCreateSy

The testcase01-ts01oeCreateSystemAndEnvironment-actMsrCreator.outactMsrCreator.oeCreateSy has the following properties:

TEST STEP	
<i>ts01oeCreateSystemAndEnvironment</i>	
This test step initializes the system state and environment.	
<i>Test Sent Message</i>	
TSM 1	<p>out:Creator</p> <p>sends to system</p> <p>actMsrCreator.outactMsrCreator.oeCreateSystemAndEnvironment (AqtyComCompanies)</p>
<i>Variables</i>	
V 1	Creator:icrash.environment.actMsrCreator only actMsrtCreator actors can trigger the system and environment creation and initialization.
<i>Constraints</i>	
C 1	the number of communication company actor instances present in the environment is equal to four to represent all the communication companies available in Luxembourg.
<i>Oracle Constraints</i>	
OC 1	true for testing only the executability (is available and can be triggered) of the operation.

6.1.1.2 testcase01-ts02oeSetClock-actActivator.outactActivator.oeSetClock

The testcase01-ts02oeSetClock-actActivator.outactActivator.oeSetClock has the following properties:

TEST STEP	
<i>ts02oeSetClock</i>	
test the update of the current time.	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actActivator.outactActivator.oeSetClock (ACurrentClock)</p>
<i>Variables</i>	
V 1	<p>TheActor:actActivator</p> <p>proactive actor responsible of requesting the update of the system's clock.</p>
<i>Constraints</i>	
C 1	TheActor is any instance existing in the current environment status.
C 2	ACurrentClock is a fixed date equal to the 24th November 2017 at 15:20:00 using a 24-hours notation ¹ .
<i>Oracle Constraints</i>	
OC 1	true for testing only the executability (is available and can be triggered) of the operation.

6.1.1.3 testcase01-ts03oeLogin-actAdministrator.outactAdministrator.oeLogin

The testcase01-ts03oeLogin-actAdministrator.outactAdministrator.oeLogin has the following properties:

TEST STEP	
<i>ts03oeLogin</i>	
test the authentified access of the administrator	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actAdministrator.outactAdministrator.oeLogin (AdtLogin, AdtPassword)</p>
<i>Variables</i>	
V 1	<p>TheActor:actAdministrator</p> <p>an actAdministrator actor as subtype of actAuthenticated can send oeLogin messages to the system.</p>
<i>Constraints</i>	

continues in next page ...

¹for more details see the ISO 8601 Data elements and interchange formats - Information interchange - Representation of dates and times - <http://www.iso.org/iso/home/standards/iso8601.htm>

... Test Step table continuation

C 1	TheActor is any <code>actAdministrator</code> instance existing in the environment. It is thus expected that there exist at least one.
C 2	<code>AdtLogin</code> has its value attribute equal to the primitive string 'icrashadmin' (which is the correct administrator login known by the system after the step one.)
C 3	<code>AdtPassword</code> has its value attribute equal to the primitive string '7WXC1359' (which is the correct administrator password known by the system after the step one.)
Oracle Constraints	
OC 1	the <code>AMessage</code> value is expected to be equal to the primitive string 'You are logged ! Welcome ...'
OC 2	TheActor receives from system <code>ieMessage(AMessage)</code>

6.1.1.4 testcase01-ts04oeAddCoordinator-actAdministrator.outactAdministrator.oeAddCoordinator

The `testcase01-ts04oeAddCoordinator-actAdministrator.outactAdministrator.oeAddCoordinator` has the following properties:

TEST STEP	
<i>ts04oeAddCoordinator</i>	
to test the add of a new coordinator by an administrator.	
<i>Test Sent Message</i>	
TSM 1	out:TheActor sends to system actAdministrator.outactAdministrator.oeAddCoordinator (<code>AdtCoordinatorID</code> , <code>AdtLogin</code> , <code>AdtPassword</code>)
<i>Variables</i>	
V 1	TheActor:actAdministrator actAdministrator actors as being the only one allowed to add coordinators.
<i>Constraints</i>	
C 1	TheActor is any <code>actAdministrator</code> instance existing in the environment. It is expected that there exists at least one which is the same during all the test case.
C 2	<code>AdtCoordinatorID</code> is equal to 1 to set the new coordinator ID
C 3	<code>AdtLogin</code> has its value attribute equal to the primitive string 'steve' which is the ID defined for the new coordinator.
C 4	<code>AdtPassword</code> has its value attribute equal to the primitive string 'pwdMessirExcalibur2017' which is the password to be set for steve.
<i>Oracle Constraints</i>	
OC 1	the administrator should have been acknowledged for the adding of the new coordinator.

6.1.1.5 testcase01-ts05oeLogout-actAdministrator.outactAdministrator.oeLogout

The `testcase01-ts05oeLogout-actAdministrator.outactAdministrator.oeLogout` has the following properties:

TEST STEP	
<i>continues in next page ...</i>	

... Test Step table continuation

<i>ts05oeLogout</i> to test the logout of a connected administrator.	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actAdministrator.outactAdministrator.oeLogout ()</p>
<i>Variables</i>	
V 1	TheActor:actAdministrator an actAdministrator actor as subtype of actAuthenticated can send oeLogout messages to the system.
<i>Constraints</i>	
C 1	TheActor is any actAdministrator instance existing in the environment. It is expected that there exists at least one which is the same during all the test case.
<i>Oracle Constraints</i>	
OC 1	the AMessage value is expected to be equal to the primitive string 'You are logged out ! Good Bye ...'
OC 2	the administrator should have received the message AMessage.

6.1.1.6 testcase01-ts06oeSetClock02-actActivator.outactActivator.oeSetClock

The testcase01-ts06oeSetClock02-actActivator.outactActivator.oeSetClock has the following properties:

TEST STEP	
<i>ts06oeSetClock02</i> test the update of the current time.	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actActivator.outactActivator.oeSetClock (ACurrentClock)</p>
<i>Variables</i>	
V 1	TheActor:icrash.environment.actActivator proactive actors responsible of requesting the update of the system's clock.
<i>Constraints</i>	
C 1	TheActor is any instance existing in the current environment status.
C 2	ACurrentClock is a fixed date equal to the 26th November 2017 at 10:15:00 using a 24-hours notation.
<i>Oracle Constraints</i>	
OC 1	true for testing only the executability (is available and can be triggered) of the operation.

6.1.1.7 testcase01-ts07oeAlert1-actComCompany.outactComCompany.oeAlert

The testcase01-ts07oeAlert1-actComCompany.outactComCompany.oeAlert has the following properties:

TEST STEP	
<i>ts07oeAlert1</i>	
tests the declaration of a new alert functionality.	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actComCompany.outactComCompany.oeAlert (AetHumanKind, AdtDate, AdtTime, AdtPhoneNumber, AdtGPSLocation, AdtComment)</p>
<i>Variables</i>	
V 1	<p>TheActor:actComCompany</p> <p>actComCompany actors transfer alert declaration messages.</p>
<i>Constraints</i>	
C 1	TheActor is any instance existing in the current environment status. It is expected to exist at least one.
C 2	AetHumanKind is equal to witness
C 3	AdtDate is equal to the 26th of November 2017
C 4	AdtTime is equal to 10:10:16 using a 24-hours.
C 5	AdtPhoneNumber is equal to the ptString value '+3524666445252'.
C 6	AdtGPSLocation is equal to (49.627675 , 6.159590).
C 7	AdtComment is equal to '3 cars involved in an accident.'
<i>Oracle Constraints</i>	
OC 1	AdtSMS is equal to the ptString 'Your alert has been registered. We will handle it and keep you informed'.
OC 2	AdtSMS is sent to the phone number AdtPhoneNumber using the communication company having sent the alert using its ieSmsSend input message.

6.1.1.8 testcase01-ts08oeSetClock03-actActivator.outactActivator.oeSetClock

The testcase01-ts08oeSetClock03-actActivator.outactActivator.oeSetClock has the following properties:

TEST STEP	
<i>ts08oeSetClock03</i>	
test the update of the current time.	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actActivator.outactActivator.oeSetClock (ACurrentClock)</p>

continues in next page ...

... Test Step table continuation

<i>Variables</i>	
V 1	TheActor:actActivator proactive actor responsible of requesting the update of the system's clock.
<i>Constraints</i>	
C 1	TheActor is any instance existing in the current environment status.
C 2	ACurrentClock is a fixed date equal to the 26th November 2017 at 10:30:00 using a 24-hours notation.
<i>Oracle Constraints</i>	
OC 1	true for testing only the executability (is available and can be triggered) of the operation.

6.1.1.9 testcase01-ts09oeSollicitateCrisisHandling-actActivator.outactActivator.oeSollicitateCrisisHandling()

The testcase01-ts09oeSollicitateCrisisHandling-actActivator.outactActivator.oeSollicitateCrisisHandling() has the following properties:

<i>TEST STEP</i>	
<i>ts09oeSollicitateCrisisHandling</i>	
test the proactive sollication to handle an alert.	
<i>Test Sent Message</i>	
TSM 1	out:TheActor sends to system actActivator.outactActivator.oeSollicitateCrisisHandling ()
<i>Variables</i>	
V 1	TheActor:icrash.environment.actActivator proactive actor responsible of triggering sollicitation functionality.
<i>Constraints</i>	
C 1	TheActor is any instance existing in the current environment status. It is expected to exist at least one.
<i>Oracle Variables</i>	
OV 1	TheAdministrator:actAdministrator actAdministrator actors can be sollicitated to handle alerts.
OV 2	TheCoordinator:actCoordinator actCoordinator actors can be sollicitated to handle alerts.
OV 3	AMessageForCrisisHandlers:ptString messages sent to sollicitated actors are of type ptString.
<i>Oracle Constraints</i>	
OC 1	TheAdministrator is any instance existing in the current environment status. It is expected to exist at least one.
OC 2	TheCoordinator is any instance existing in the current environment status. It is expected to exist at least one.
OC 3	AMessageForCrisisHandlers is equal to the ptString 'There are alerts pending since more than the defined delay. Please REACT !'
OC 4	TheCoordinator and TheAdministrator have received the message AMessag

6.1.1.10 testcase01-ts10oeLogin02-actAuthenticated.outactAuthenticated.oeLogin

The testcase01-ts10oeLogin02-actAuthenticated.outactAuthenticated.oeLogin has the following properties:

TEST STEP	
<i>ts10oeLogin02</i>	
test the authentified access of the coordinator	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actAuthenticated.outactAuthenticated.oeLogin (AdtLogin, AdtPassword)</p>
<i>Variables</i>	
V 1	<p>TheActor:actCoordinator</p> <p>an actCoordinator actor as subtype of actAuthenticated can send oeLogin messages to the system.</p>
<i>Constraints</i>	
C 1	TheActor is any actAdministrator instance existing in the environment. It is thus expected that there exist at least one.
C 2	AdtLogin has its value attribute equal to the primitive string 'icrashadmin' (which is the correct administrator login known by the system after the step one.)
C 3	AdtPassword has its value attribute equal to the primitive string '7WXC1359' (which is the correct administrator password known by the system after the step one.)
<i>Oracle Constraints</i>	
OC 1	the AMessage value is expected to be equal to the primitive string 'You are logged ! Welcome ...'

6.1.1.11 testcase01-ts11oeGetCrisisSet-actCoordinator.outactCoordinator.oeGetCrisisSet

The testcase01-ts11oeGetCrisisSet-actCoordinator.outactCoordinator.oeGetCrisisSet has the following properties:

TEST STEP	
<i>ts11oeGetCrisisSet</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actCoordinator.outactCoordinator.oeGetCrisisSet (AetCrisisStatus)</p>
<i>Variables</i>	
V 1	<p>TheActor:icrash.environment.actCoordinator</p> <p>cf. actor documentation</p>
V 2	<p>AetCrisisStatus:icrash.concepts.primarytypes.datatypes.etCrisisStatus</p> <p><i>continues in next page ...</i></p>

... Test Step table continuation

V 3	cf. actor documentation ActCrisis:icrash.concepts.primarytypes.classes.ctCrisis cf. actor documentation
Constraints	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AetCrisisStatus value is pending
Oracle Constraints	
OC 1	ActCrisis is any ctCrisis instance that has been sent to TheActor.

6.1.1.12 testcase01-ts12oeSetCrisisHandler-actCoordinator.outactCoordinator.oeSetCrisisHandler

The `testcase01-ts12oeSetCrisisHandler-actCoordinator.outactCoordinator.oeSetCrisisHandler` has the following properties:

TEST STEP	
<i>ts12oeSetCrisisHandler</i>	
cf. actor documentation	
Test Sent Message	
TSM 1	out:TheActor sends to system actCoordinator.outactCoordinator.oeSetCrisisHandler (AdtCrisisID)
Variables	
V 1	TheActor:icrash.environment.actCoordinator cf. actor documentation
V 2	TheComCompany:icrash.environment.actComCompany cf. actor documentation
V 3	TheCoordinator:icrash.environment.actCoordinator cf. actor documentation
V 4	AdtCrisisID:icrash.concepts.primarytypes.datatypes.dtCrisisID cf. actor documentation
V 5	AMessage:lu.uni.lassy.messir.libraries.primitives.ptString cf. actor documentation
V 6	AdtPhoneNumber:icrash.concepts.primarytypes.datatypes.dtPhoneNumber cf. actor documentation
V 7	AdtSMS:icrash.concepts.secondarytypes.datatypes.dtSMS cf. actor documentation
V 8	ActAlert:icrash.concepts.primarytypes.classes.ctAlert cf. actor documentation
Constraints	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtCrisisID as a value of 1
C 3	AMessage is the string 'You are now considered as handling the crisis !'

continues in next page ...

... Test Step table continuation

C 4	AdtPhoneNumber
C 5	AdtSMS has for value the string 'The handling of your alert by our services is in progress !'
Oracle Constraints	
OC 1	there is a communication company actor that received the message ieSmsSend(AdtPhoneNumber,AdtSMS)
OC 2	there is a coordinator actor that received an alert using the message ieSendAnAlert(ActAlert)

6.1.1.13 testcase01-ts13oeSetClock04-actActivator.outactActivator.oeSetClock

The `testcase01-ts13oeSetClock04-actActivator.outactActivator.oeSetClock` has the following properties:

TEST STEP	
<i>ts13oeSetClock04</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actActivator.outactActivator.oeSetClock (ACurrentClock)</p>
<i>Variables</i>	
V 1	TheActor:icrash.environment.actActivator
	cf. actor documentation
V 2	ACurrentClock:lu.uni.lassy.messir.libraries.calendar.dtDateAndTime
	cf. actor documentation
<i>Constraints</i>	
C 1	TheActor
C 2	ACurrentClock

6.1.1.14 testcase01-ts14oeValidateAlert-actCoordinator.outactCoordinator.oeValidateAlert

The `testcase01-ts14oeValidateAlert-actCoordinator.outactCoordinator.oeValidateAlert` has the following properties:

TEST STEP	
<i>ts14oeValidateAlert</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actCoordinator.outactCoordinator.oeValidateAlert (AdtAlertID)</p>
<i>Variables</i>	

continues in next page ...

... Test Step table continuation

V 1	TheActor:icrash.environment.actCoordinator cf. actor documentation
V 2	AdtAlertID:icrash.concepts.primarytypes.datatypes.dtAlertID cf. actor documentation
V 3	AMessage:lu.uni.lassy.messir.libraries.primitives.ptString cf. actor documentation
<i>Constraints</i>	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtAlertID
C 3	AMessage
<i>Oracle Constraints</i>	
OC 1	

6.1.1.15 testcase01-ts15oeAlert2-actComCompany.outactComCompany.oeAlert

The `testcase01-ts15oeAlert2-actComCompany.outactComCompany.oeAlert` has the following properties:

TEST STEP	
<i>ts15oeAlert2</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actComCompany.outactComCompany.oeAlert (AetHumanKind, AdtDate, AdtTime, AdtPhoneNumber, AdtGPSLocation, AdtComment)</p>
<i>Variables</i>	
V 1	TheActor:icrash.environment.actComCompany cf. actor documentation
V 2	AetHumanKind:icrash.concepts.primarytypes.datatypes.etHumanKind cf. actor documentation
V 3	AdtDate:lu.uni.lassy.messir.libraries.calendar.dtDate cf. actor documentation
V 4	AdtTime:lu.uni.lassy.messir.libraries.calendar.dtTime cf. actor documentation
V 5	AdtPhoneNumber:icrash.concepts.primarytypes.datatypes.dtPhoneNumber cf. actor documentation
V 6	AdtGPSLocation:icrash.concepts.primarytypes.datatypes.dtGPSLocation cf. actor documentation
V 7	AdtComment:icrash.concepts.primarytypes.datatypes.dtComment cf. actor documentation
V 8	AdtSMS:icrash.concepts.secondarytypes.datatypes.dtSMS cf. actor documentation

continues in next page ...

... Test Step table continuation

<i>Constraints</i>	
C 1	TheActor
C 2	AetHumanKind
C 3	AdtDate
C 4	AdtTime
C 5	AdtPhoneNumber
C 6	AdtGPSLocation
C 7	AdtComment
C 8	AdtSMS
<i>Oracle Constraints</i>	
OC 1	

6.1.1.16 testcase01-ts16oeSetClock05-actActivator.outactActivator.oeSetClock

The `testcase01-ts16oeSetClock05-actActivator.outactActivator.oeSetClock` has the following properties:

TEST STEP	
<i>ts16oeSetClock05</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p>actActivator.outactActivator.oeSetClock (ACurrentClock)</p>
<i>Variables</i>	
V 1	TheActor:icrash.environment.actActivator
V 2	cf. actor documentation
	ACurrentClock:lu.uni.lassy.messir.libraries.calendar.dtDateAndTime
	cf. actor documentation
<i>Constraints</i>	
C 1	TheActor
C 2	ACurrentClock

6.1.1.17 testcase01-ts17oeSetCrisisStatus-actCoordinator.outactCoordinator.oeSetCrisisStatus

The `testcase01-ts17oeSetCrisisStatus-actCoordinator.outactCoordinator.oeSetCrisisStatus` has the following properties:

TEST STEP	
<i>ts17oeSetCrisisStatus</i>	
cf. actor documentation	
<i>Test Sent Message</i>	

continues in next page ...

... Test Step table continuation

TSM 1	<p>out:TheActor sends to system</p> <p>actCoordinator.outactCoordinator.oeSetCrisisStatus (AdtCrisisID, AetCrisisStatus)</p>
Variables	
V 1	TheActor:icrash.environment.actCoordinator cf. actor documentation
V 2	AdtCrisisID:icrash.concepts.primarytypes.datatypes.dtCrisisID cf. actor documentation
V 3	AetCrisisStatus:icrash.concepts.primarytypes.datatypes.etCrisisStatus cf. actor documentation
V 4	AMessage:lu.uni.lassy.messir.libraries.primitives.ptString cf. actor documentation
Constraints	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtCrisisID
C 3	AetCrisisStatus
C 4	AMessage
Oracle Constraints	
OC 1	

6.1.1.18 testcase01-ts18oeReportOnCrisis-actCoordinator.outactCoordinator.oeReportOnCrisis

The `testcase01-ts18oeReportOnCrisis-actCoordinator.outactCoordinator.oeReportOnCrisis` has the following properties:

TEST STEP	
<i>ts18oeReportOnCrisis</i>	
cf. actor documentation	
Test Sent Message	
TSM 1	<p>out:TheActor sends to system</p> <p>actCoordinator.outactCoordinator.oeReportOnCrisis (AdtCrisisID, AdtComment)</p>
Variables	
V 1	TheActor:icrash.environment.actCoordinator cf. actor documentation
V 2	AdtCrisisID:icrash.concepts.primarytypes.datatypes.dtCrisisID cf. actor documentation
V 3	AdtComment:icrash.concepts.primarytypes.datatypes.dtComment

continues in next page ...

... Test Step table continuation

V 4	cf. actor documentation AMessage:lu.uni.lassy.messir.libraries.primitives.ptString cf. actor documentation
Constraints	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtCrisisID
C 3	AdtComment
C 4	AMessage
Oracle Constraints	
OC 1	

6.1.1.19 testcase01-ts19oeCloseCrisis-actCoordinator.outactCoordinator.oeCloseCrisis

The `testcase01-ts19oeCloseCrisis-actCoordinator.outactCoordinator.oeCloseCrisis` has the following properties:

TEST STEP	
<i>ts19oeCloseCrisis</i> cf. actor documentation	
Test Sent Message	
TSM 1	out:TheActor sends to system actCoordinator.outactCoordinator.oeCloseCrisis (AdtCrisisID)
Variables	
V 1	TheActor:icrash.environment.actCoordinator cf. actor documentation
V 2	AdtCrisisID:icrash.concepts.primarytypes.datatypes.dtCrisisID cf. actor documentation
V 3	AMessage:lu.uni.lassy.messir.libraries.primitives.ptString cf. actor documentation
Constraints	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtCrisisID
C 3	AMessage
Oracle Constraints	
OC 1	

6.1.2 Test Case Instance - instance01**6.1.3 Test Case Instance - instance01Part01**

Figure 6.1 Sequence diagram representing the first part of a simple and complete testcase instance for *iCrash*.



Figure 6.1: tci-testcase01-instance01-Part01 testcase instance sequence diagram

6.1.4 Test Case Instance - instance01Part02

Figure 6.2 Sequence diagram representing the second part of a simple and complete testcase instance for *iCrash*.

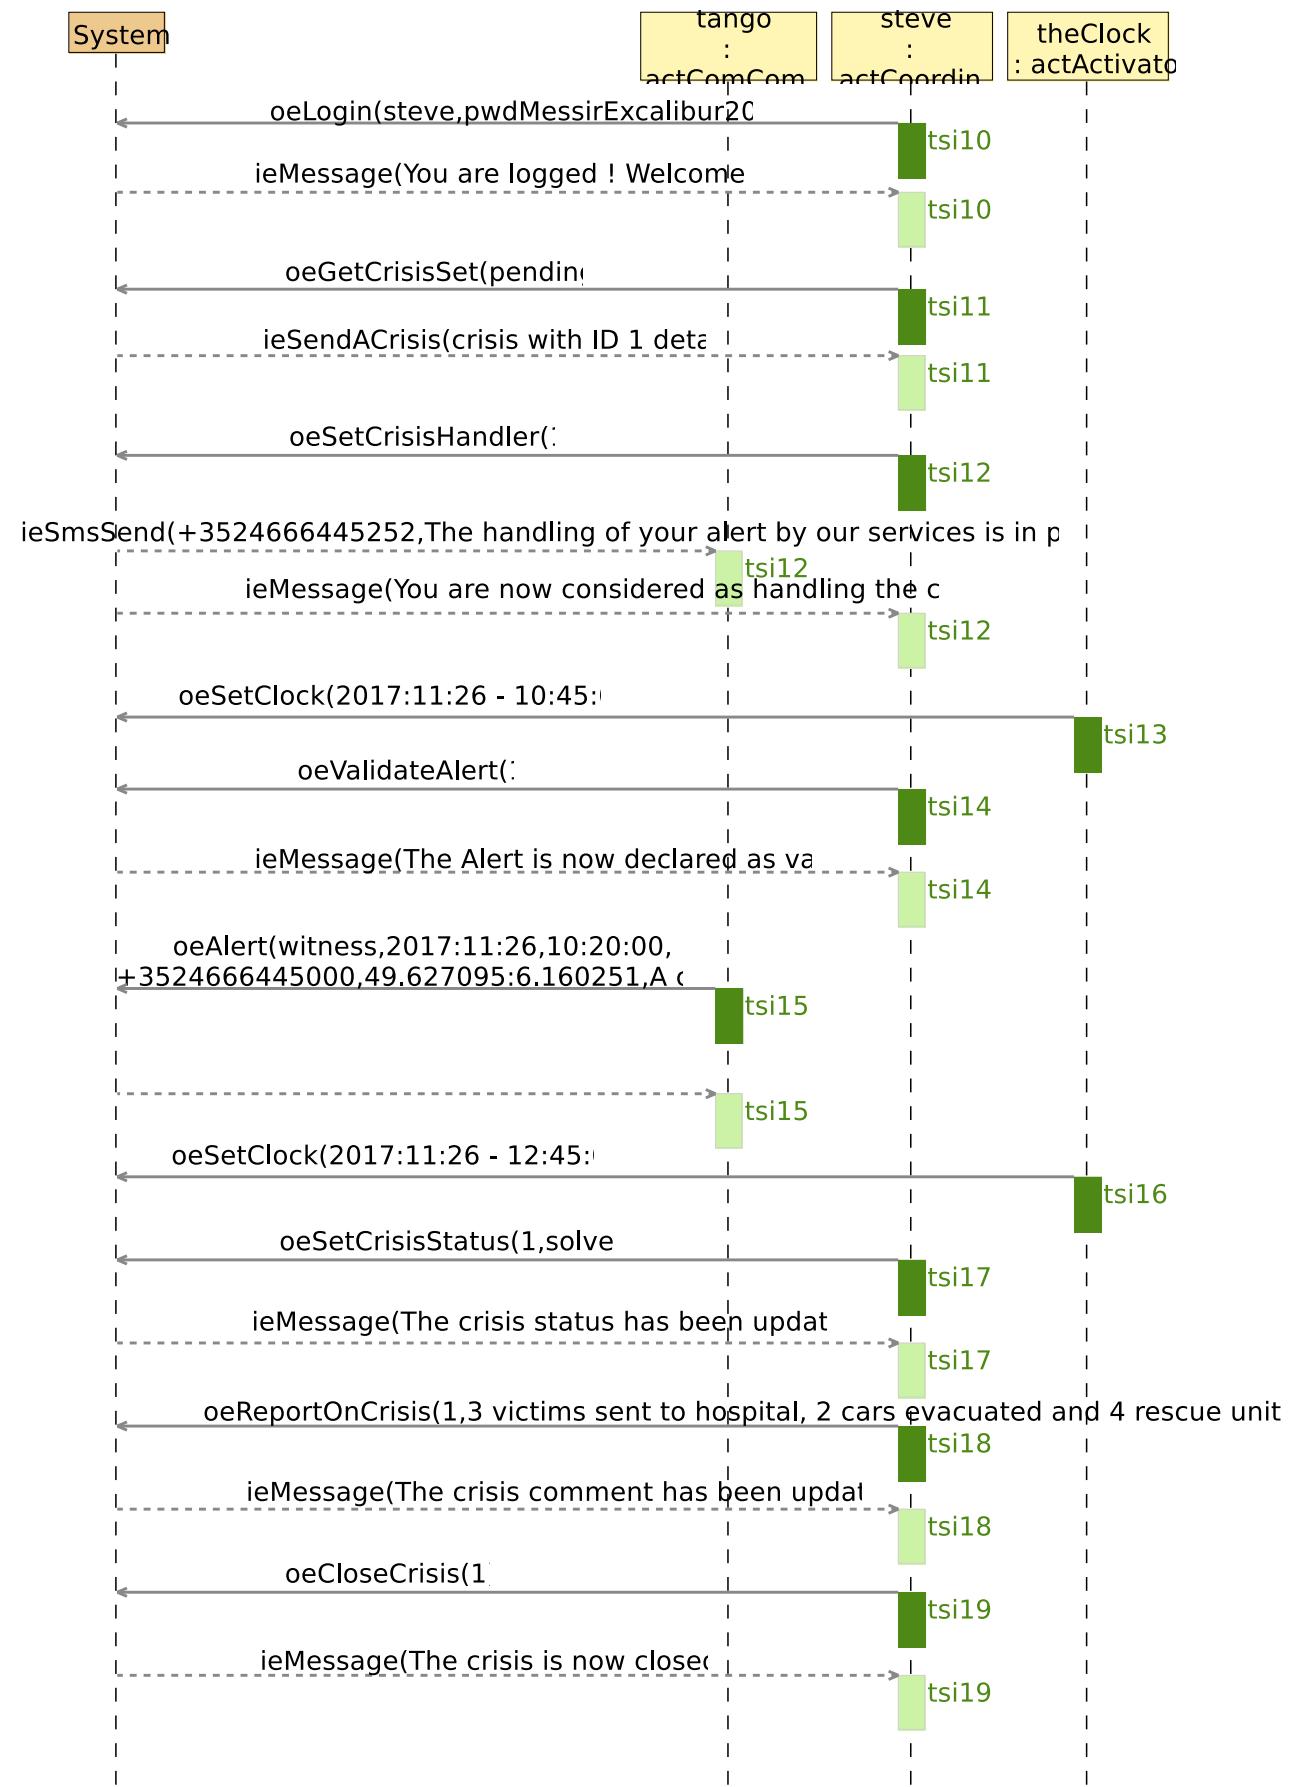


Figure 6.2: tci-testcase01-instance01-Part02 testcase instance sequence diagram

Chapter 7

Additional Constraints

7.1 Quality Constraints

Description of all the constraints that concern the required quality criteria according to their ISO definition [3].

7.1.1 Functional suitability

Constraints on the degree to which the product provides functions that meet stated and implied needs when the product is used under specified conditions.

7.1.1.1 Functional completeness

List of requirements on the degree to which the set of functions covers all the specified tasks and user objectives.

1. (to be filled)

7.1.1.2 Functional correctness

List of requirements on the degree to which the set of functions covers all the specified tasks and user objectives.

1. (to be filled)

7.1.1.3 Functional appropriateness

List of requirements on the degree to which the functions facilitate the accomplishment of specified tasks and objectives.

1. (to be filled)

7.1.2 Performance efficiency

Constraints on the performance relative to the amount of resources used under stated conditions

7.1.2.1 Time behaviour

List of requirements on the degree to which the response and processing times and throughput rates of a product or system, when performing its functions, meet requirements.

1. (to be filled)

7.1.2.2 Resource utilization

List of requirements on the degree to which the amounts and types of resources used by a product or system, when performing its functions, meet requirements.

1. (to be filled)

7.1.2.3 Capacity

List of requirements on the degree to which the maximum limits of a product or system parameter meet requirements.

1. (to be filled)

7.1.3 Compatibility

Constraints on the degree to which a product, system or component can exchange information with other products, systems or components, and/or perform its required functions, while sharing the same hardware or software environment.

7.1.3.1 Co-existence

List of requirements on the degree to which a product can perform its required functions efficiently while sharing a common environment and resources with other products, without detrimental impact on any other product.

1. (to be filled)

7.1.3.2 Interoperability

List of requirements on the degree to which two or more systems, products or components can exchange information and use the information that has been exchanged.

1. (to be filled)

7.1.4 Usability

Constraints on the usability degree to which a product or system can be used by specified users to achieve specified goals with effectiveness, efficiency and satisfaction in a specified context of use.

7.1.4.1 Appropriateness recognizability

List of requirements on the degree to which users can recognize whether a product or system is appropriate for their needs.

1. (to be filled)

7.1.4.2 Learnability

List of requirements on the degree to which a product or system can be used by specified users to achieve specified goals of learning to use the product or system with effectiveness, efficiency, freedom from risk and satisfaction in a specified context of use.

1. (to be filled)

7.1.4.3 Operability

List of requirements on the degree to which a product or system has attributes that make it easy to operate and control.

1. (to be filled)

7.1.4.4 User error protection

List of requirements on the degree to which a system protects users against making errors.

1. (to be filled)

7.1.4.5 User interface aesthetics

List of requirements on the degree to which a user interface enables pleasing and satisfying interaction for the user.

1. (to be filled)

7.1.4.6 Accessibility

List of requirements on the degree to which a product or system can be used by people with the widest range of characteristics and capabilities to achieve a specified goal in a specified context of use.

1. (to be filled)

7.1.5 Reliability

Constraints on the degree to which a system, product or component performs specified functions under specified conditions for a specified period of time.

7.1.5.1 Maturity

List of requirements on the degree to which a system, product or component meets needs for reliability under normal operation.

1. (to be filled)

7.1.5.2 Availability

List of requirements on the degree to which a system, product or component is operational and accessible when required for use.

1. (to be filled)

7.1.5.3 Fault tolerance

List of requirements on the degree to which a system, product or component operates as intended despite the presence of hardware or software faults.

1. (to be filled)

7.1.5.4 Recoverability

List of requirements on the degree to which, in the event of an interruption or a failure, a product or system can recover the data directly affected and re-establish the desired state of the system.

1. (to be filled)

7.1.6 Security

Constraints on the degree to which a product or system protects information and data so that persons or other products or systems have the degree of data access appropriate to their types and levels of authorization.

7.1.6.1 Confidentiality

List of requirements on the degree to which a product or system ensures that data are accessible only to those authorized to have access.

1. (to be filled)

7.1.6.2 Integrity

List of requirements on the degree to which a system, product or component prevents unauthorized access to, or modification of, computer programs or data.

1. (to be filled)

7.1.6.3 Non-repudiation

List of requirements on the degree to which actions or events can be proven to have taken place, so that the events or actions cannot be repudiated later.

1. (to be filled)

7.1.6.4 Accountability

List of requirements on the degree to which the actions of an entity can be traced uniquely to the entity.

1. (to be filled)

7.1.6.5 Authenticity

List of requirements on the degree to which the identity of a subject or resource can be proved to be the one claimed.

1. (to be filled)

7.1.7 Maintainability

Constraints on the degree of effectiveness and efficiency with which a product or system can be modified by the intended maintainers.

7.1.7.1 Modularity

List of requirements on the degree to which a system or computer program is composed of discrete components such that a change to one component has minimal impact on other components.

1. (to be filled)

7.1.7.2 Reusability

List of requirements on the degree to which an asset can be used in more than one system, or in building other assets.

1. (to be filled)

7.1.7.3 Analysability

List of requirements on the degree of effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more of its parts, or to diagnose a product for deficiencies or causes of failures, or to identify parts to be modified.

1. (to be filled)

7.1.7.4 Modifiability

List of requirements on the degree to which a product or system can be effectively and efficiently modified without introducing defects or degrading existing product quality.

1. (to be filled)

7.1.7.5 Testability

List of requirements on the degree of effectiveness and efficiency with which test criteria can be established for a system, product or component and tests can be performed to determine whether those criteria have been met.

1. (to be filled)

7.1.8 Portability

Constraints on the degree of effectiveness and efficiency with which a system, product or component can be transferred from one hardware, software or other operational or usage environment to another.

7.1.8.1 Adaptability

List of requirements on the degree to which a product or system can effectively and efficiently be adapted for different or evolving hardware, software or other operational or usage environments.

1. (to be filled)

7.1.8.2 Installability

List of requirements on the degree of effectiveness and efficiency with which a product or system can be successfully installed and/or uninstalled in a specified environment.

1. (to be filled)

7.1.8.3 Replaceability

List of requirements on the degree to which a product can replace another specified software product for the same purpose in the same environment.

1. (to be filled)

7.2 Other Constraints

Any other unclassified constraints judged as required for the product under development.

Appendix A

Undocumented Messir Specification Elements

A.1 Undocumented Use Cases

A.1.1 Undocumented Subfunction Level Use Cases

- icrash.usecases.subfunctions.oeFillCaptcha

A.2 Undocumented Use Case Instances

A.2.1 Undocumented Use Case Instance Views

- uci-uciugAdministrateTheSystemPointOfInterest
- uci-uciugSecurelyUseSystemFailLoginResetPassword
- uci-uciugSecurelyUseSystemWithDirectResetPassword

A.3 Undocumented Operation Specifications

- icrash.concepts.primarytypes.datatypes.dtCaptcha.is
- icrash.concepts.primarytypes.datatypes.dtMail.is
- icrash.environment.actAdministrator.outactAdministrator.oeClosestToALocation

A.4 Undocumented Test-Case Instance Specifications

- lu.uni.lassy.excalibur.examples.icrash.tests.testcase01.instance01.instance01
- lu.uni.lassy.excalibur.examples.icrash.tests.testcase01.instance01.instance01Part01
- lu.uni.lassy.excalibur.examples.icrash.tests.testcase01.instance01.instance01Part02

Appendix B

Specification project
`lu.uni.lassy.excalibur.examples.icrash`

B.1 Use Cases Model

This section contains the use cases elicited during the requirements elicitation phase. The use cases are textually described as suggested by the **Messir** method and inspired by the standard Cokburn template [2].

B.1.1 Use Cases

B.1.1.1 subfunction-oeCloseCrisis

the actCoordinator's goal is to declare a crisis as closed.

USE-CASE DESCRIPTION	
Name	oeCloseCrisis
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actCoordinator[active]
<i>Goal(s) description</i>	
the actCoordinator's goal is to declare a crisis as closed.	
<i>Protocol condition(s)</i>	
1	the iCrash system has been deployed.
<i>Pre-condition(s)</i>	
1	none
<i>Main post-condition(s)</i>	
1	the crisis is known by the system to be closed.
2	a message ieMessage(AMessage) is sent to the actCoordinator to inform him that his crisis is now considered as closed.

Figure B.1 shows the use case diagram for the oeCloseCrisis subfunction use case

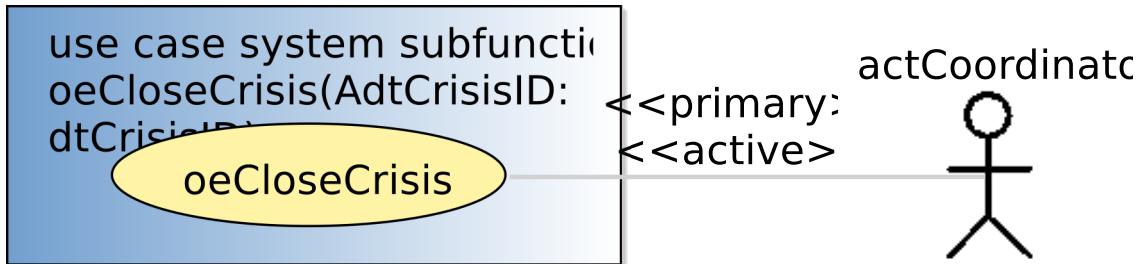


Figure B.1: oeCloseCrisis subfunction use case

Appendix C

Messir Specification Files Listing

C.1 File ./src-gen/messir-spec/.views.msr

```
1 //  
2 //DON'T TOUCH THIS FILE !!!  
3 //  
4 package uuid7e0d382938204f3c9036c123484468fb {  
5   Concept Model {}  
6 }
```

Listing C.1: Messir Spec. file .views.msr.

C.2 File ./src-gen/messir-spec/operations/concepts/secondarytypes-datatatypes/dtSMS.msr

```
1 package icrash.operations.concepts.secondarytypes.datatypes.dtSMS{  
2  
3 import lu.uni.lassy.messir.libraries.primitives  
4 import lu.uni.lassy.messir.libraries.calendar  
5 import lu.uni.lassy.messir.libraries.math  
6  
7 import icrash.concepts.primarytypes.datatypes  
8 import icrash.concepts.primarytypes.classes  
9 import icrash.concepts.secondarytypes.datatypes  
10 import icrash.concepts.secondarytypes.classes  
11  
12 Operation Model {  
13 operation: icrash.concepts.secondarytypes.datatypes.dtSMS.is():ptBoolean{  
14   postF{  
15     let TheResult: ptBoolean in  
16     let MaxLength: ptInteger in  
17     ( if  
18       ( MaxLength = 160  
19         and AdtValue.value.length().leq(MaxLength)  
20       )  
21     then (TheResult = true)  
22     else (TheResult = false)  
23     endif  
24     result = TheResult  
25   })  
26 prolog{ "src/Operations/Concepts/SecondaryTypesDatatypes/SecondaryTypesDatatypes-dtSMS-is.pl"}  
27 }  
28 }  
29 }
```

Listing C.2: Messir Spec. file dtSMS.msr.

C.3 File ./src-gen/messir-spec/operations/environment/environment-actActivator-oeSetClock.msr

```

1 package icrash.operations.environment.actActivator.oeSetClock {
2
3 import icrash.environment
4
5 import lu.uni.lassy.messir.libraries.primitives
6 import lu.uni.lassy.messir.libraries.calendar
7 import lu.uni.lassy.messir.libraries.math
8
9 import icrash.concepts.primarytypes.datatypes
10 import icrash.concepts.primarytypes.classes
11
12 Operation Model {
13
14 operation: actActivator.outactActivator.oeSetClock(AcurrentClock:dtDateAndTime) :ptBoolean
15 {
16 preP{
17 let TheSystem: ctState in
18 let AvpStarted: ptBoolean in
19
20 /* PreP01 */
21 self.rnActor.rnSystem = TheSystem
22 and self.rnActor.rnSystem.vpStarted = AvpStarted
23 and AvpStarted = true
24 and TheSystem.clock.lt(AcurrentClock)
25 }
26 preF{true}
27
28 postF{
29 let TheSystem: ctState in
30 self.rnActor.rnSystem = TheSystem
31
32 /* PostF01 */
33 and TheSystem@post.clock = AcurrentClock
34 }
35 postP{true}
36
37 prolog{"src/Operations/Environment/OUT/outactActivator-oeSetClock.pl"}
38
39 }
40 }
41 }
```

Listing C.3: Messir Spec. file environment-actActivator-oeSetClock.msr.

C.4 File ./src-gen/messir-spec/operations/environment/environment-actActivator-oeSollicitateCrisisHandling.msr

```

1 package icrash.operations.environment.actActivator.oeSollicitateCrisisHandling {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.datatypes
9 import icrash.concepts.primarytypes.classes
10 import icrash.environment
11
12 Operation Model {
13
14 operation: actActivator.outactActivator.oeSollicitateCrisisHandling():ptBoolean
15 {
16 preP{
17 let TheSystem: ctState in
```

```

18 let AvpStarted: ptBoolean in
19 let ColctCrisisToHandle:
20     Bag(ctCrisis) in
21
22 self.rnActor.rnSystem = TheSystem
23
24 /* PreP01 */
25 and TheSystem.vpStarted
26
27 /* PreP02 */
28 and TheSystem.rnctCrisis->select(handlingDelayPassed())
29     = ColctCrisisToHandle
30 and ColctCrisisToHandle->size().geq(1)
31 }
32 preF{true}
33
34 postF{
35 let TheSystem: ctState in
36 let AMessageForCrisisHandlers: dtComment in
37 let ColctCrisisToAllocateIfPossible:Bag(ctCrisis) in
38
39 self.rnActor.rnSystem = TheSystem
40 /* PostF01 */
41 and TheSystem.rnctCrisis->select(maxHandlingDelayPassed())
42     = ColctCrisisToAllocateIfPossible
43 and ColctCrisisToAllocateIfPossible->forAll(isAllocatedIfPossible())
44
45 /* PostF02 */
46 and TheSystem.rnctCrisis->select(handlingDelayPassed())
47     = ColctCrisisToHandle
48
49 and ColctCrisisToHandle->msrColSubtract(ColctCrisisToAllocateIfPossible)
50     = ColctCrisisToRemind
51
52 and if (ColctCrisisToRemind->size().geq(1))
53     then (AMessageForCrisisHandlers.value
54         ='There are alerts pending since more than the defined delay. Please REACT !'
55         and TheSystem.rnactAdministrator.
56             rnInterfaceIN^ieMessage(AMessageForCrisisHandlers)
57         and TheSystem.rnactCoordinator
58             ->forAll(rnInterfaceIN^ieMessage(AMessageForCrisisHandlers))
59     )
60 else true
61 endif
62 }
63 postP{
64 let TheSystem: ctState in
65 let TheClock: dtDateAndTime in
66
67 self.rnActor.rnSystem = TheSystem
68 and TheSystem.clock = TheClock
69 and TheSystem@post.vpLastReminder = TheClock
70 }
71
72 prolog{"src/Operations/Environment/OUT/outactActivator-oeSollicitateCrisisHandling.pl"}
73 }
74 }
75 }

```

Listing C.4: Messir Spec. file environment-actActivator-oeSollicitateCrisisHandling.msr.

C.5 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeAddCoordinator.msr

```

1 package icrash.operations.environment.actAdministrator.oeAddCoordinator {
2
3 import lu.uni.lassy.messir.libraries.primitives
4

```

```

5 import icrash.concepts.primarytypes.datatypes
6 import icrash.concepts.primarytypes.classes
7 import icrash.environment
8
9 Operation Model {
10
11 operation: actAdministrator.outactAdministrator.oeAddCoordinator(AdtCoordinatorID:dtCoordinatorID,
12 AdtLogin:dtLogin, AdtPassword:dtPassword):ptBoolean
12 {
13 preP{
14 let TheSystem: ctState in
15 let TheActor:actAdministrator in
16
17 self.rnActor.rnSystem = TheSystem
18 and self.rnActor = TheActor
19
20 /* PreP01 */
21 and TheSystem.vpStarted = true
22 /* PreP02 */
23 and TheActor.rnctAuthenticated.vpIsLogged = true
24 }
25 preF{
26 let TheSystem: ctState in
27 let TheActor:actAdministrator in
28 let ColctCoordinators:Bag(ctCoordinator) in
29
30 self.rnActor.rnSystem = TheSystem
31 and self.rnActor = TheActor
32 /* PreF01 */
33 and TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
34 = ColctCoordinators
35 and ColctCoordinators->isEmpty() = true
36 }
37 postF{
38 let TheSystem: ctState in
39 let TheactCoordinator:actCoordinator in
40 let ThectCoordinator:ctCoordinator in
41 self.rnActor.rnSystem = TheSystem
42 and self.rnActor = TheActor
43 /* PostF01 */
44 TheactCoordinator.init()
45 /* PostF02 */
46 and ThectCoordinator.init(AdtCoordinatorID,AdtLogin,AdtPassword)
47
48 /* PostF03 */
49 and TheactCoordinator@post.rnctCoordinator = ThectCoordinator
50
51 /* PostF04 */
52 and ThectCoordinator@post.rnactAuthenticated = TheactCoordinator
53
54 /* PostF05 */
55 and TheActor.rnInterfaceIN^ieCoordinatorAdded()
56 }
57 postP{true}
58
59 prolog{"src/Operations/Environment/OUT/outactAdministrator-oeAddCoordinator.pl"}
60 }
61 }
62 }

```

Listing C.5: Messir Spec. file environment-actAdministrator-oeAddCoordinator.msr.

C.6 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeAddPointOfInterest.msr

```

1 package icrash.environment.operations.actAdministrator.outactAdministrator.oeAddPointOfInterest {
2
3 import lu.uni.lassy.messir.libraries.primitives

```

```

4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 import icrash.environment
10
11 Operation Model {
12
13     operation: icrash.environment.actAdministrator.outactAdministrator.oeAddPointOfInterest(
14         AetCategory:etCategory, AdtGPSLocation:dtGPSLocation, AdtDescription:dtDescription):ptBoolean{
15         // include below the specification information (pre,post or ocl or prolog)
16         prep{
17             let TheSystem: ctState in
18             let TheActor:actAdministrator in
19
20             self.rnActor.rnSystem = TheSystem
21             and self.rnActor = TheActor
22
23             /* PreP01 */
24             and TheSystem.vpStarted = true
25             /* PreP02 */
26             and TheActor.rnctAuthenticated.vpIsLogged = true
27         }
28
29         postF{
30             let TheSystem: ctState in
31             let TheactAdministrator:actAdministrator in
32             let ActPointOfInterest:ctPointOfInterest in
33             let AetPointOfInterestCategory:etCategory in
34             let APointOfInterestDescription:dtDescription in
35             let AdtPointOfInterestID:dtPointOfInterestID in
36             let ColctPointOfInterest:Bag(ctPointOfInterest) in
37
38             self.rnActor.rnSystem = TheSystem
39             and self.rnActor = TheactComCompany
40
41             TheSystem.nextValueForPointOfInterestID=PrenextValueForPointOfInterestID
42             and PrenextValueForPointOfInterestID.add(1) = PostnextValueForPointOfInterestID
43
44             and TheSystem.rnctPointOfInterest->select(id.eq(PostnextValueForPointOfInterestID))
45                 = ColctPointOfInterest
46             and ColctPointOfInterest->isEmpty() = true
47
48             and TheSystem@post.nextValueForPointOfInterestID = PostnextValueForPointOfInterestID
49             and TheSystem.nextValueForPointOfInterestID.todtString().eq(AdtPointOfInterestID)
50
51             /* PostF03 */
52
53             and ActPointOfInterest.init(AdtPointOfInterestID,
54                 AetCategory,
55                 AdtGPSLocation,
56                 AdtDescription)
57             and TheactAdministrator.rnInterfaceIN^iePointOfInterestAdded()
58         }
59         postP{true}
60     }
61 }
62 }
```

Listing C.6: Messir Spec. file environment-actAdministrator-oeAddPointOfInterest.msr.

C.7 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeClosestToALocation.msr

```

1 package icrash.environment.operations.actAdministrator.outactAdministrator.oeClosestToALocation {
2
```

```

3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9
10 import icrash.environment
11
12 Operation Model {
13
14     operation: icrash.environment.actAdministrator.outactAdministrator.oeClosestToALocation(
15         AdtGPSLocation:dtGPSLocation):ptBoolean /* List */{
16     // include below the specification information (pre,post or ocl or prolog)
17
18     preP{
19         let TheSystem: ctState in
20         let TheActor:actAdministrator in
21
22         self.rnActor.rnSystem = TheSystem
23         and self.rnActor = TheActor
24
25         /* PreP01 */
26         and TheSystem.vpStarted = true
27         /* PreP02 */
28         and TheActor.rnctAuthenticated.vpIsLogged = true
29     }
30     postF{
31         let TheSystem: ctState in
32         let TheActor:actAdministrator in
33         let CollectPointOfInterest:ctPointOfInterest in
34         let temp:ctPointOfInterest in
35         let j:dtInteger in
36         let flag:ptBoolean in
37         self.rnActor.rnSystem = TheSystem
38         and self.rnActor = TheActor
39         /* PostF01 */
40         and j = 0
41         and flag = true
42         TheSystem.rnctPointOfInterest->select(AllctPointOfInterest)
43         = CollectPointOfInterest
44         and while (flag)
45         flag = false
46         and while (j.lt(CollectPointOfInterest.length-1))
47         if (CollectPointOfInterest.get(j).location.distanceTo(AdtGPSLocation) > CollectPointOfInterest.get(j+1).location.distanceTO(AdtGPSLocation) )
48             then (temp = CollectPointOfInterest.get(j)
49             and CollectPointOfInterest.set(j) = CollectPointOfInterest.get(j+1)
50             and CollectPointOfInterest.set(j+1) = temp
51             and j = j+1
52             and flag = true)
53             else (j= j+1)
54             endif
55     }
56     postP{true}
57 }
58 }
59 }
```

Listing C.7: Messir Spec. file environment-actAdministrator-oeClosestToALocation.msr.

C.8 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeDeleteCoordinator.msr

```

1 package icrash.operations.environment.actAdministrator.oeDeleteCoordinator {
2
3 import lu.uni.lassy.messir.libraries.primitives
```

```

4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.calendar
6
7 import icrash.environment
8
9 import icrash.concepts.primarytypes.datatypes
10 import icrash.concepts.primarytypes.classes
11
12 Operation Model {
13
14 operation: actAdministrator.outactAdministrator.oeDeleteCoordinator(AdtCoordinatorID:dtCoordinatorID
15 ) :ptBoolean
16 {
17     let TheSystem: ctState in
18     let TheActor:actAdministrator in
19
20     self.rnActor.rnSystem = TheSystem
21     and self.rnActor = TheActor
22
23 /* PreP01 */
24     and TheSystem.vpStarted = true
25 /* PreP02 */
26     and TheActor.rnctAuthenticated.vpIsLogged = true
27 }
28 preF{
29     let TheSystem: ctState in
30     let TheActor:actAdministrator in
31
32     self.rnActor.rnSystem = TheSystem
33     and self.rnActor = TheActor
34 /* PreF01 */
35     TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
36     = ColctCoordinators
37     and ColctCoordinators->size().eq(1)
38 }
39 postF{
40     let TheSystem: ctState in
41     let TheActor:actAdministrator in
42     let ThetcCoordinator:ctCoordinator in
43     self.rnActor.rnSystem = TheSystem
44     and self.rnActor = TheActor
45 /* PostF01 */
46     TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
47     = ThetcCoordinator
48     and ThetcCoordinator.rnactCoordinator->forAll(msrIsKilled)
49     and ThetcCoordinator.msrIsKilled
50
51 /* PostF02 */
52     and TheActor.rnInterfaceIN^ieCoordinatorDeleted()
53
54 /* Post Protocol:*/
55 /* PostP01 */
56     and true
57 }
58 postP{true}
59
60 prolog{"src/Operations/Environment/OUT/outactAdministrator-oeDeleteCoordinator.pl"}
61 }
62     }
63 }

```

Listing C.8: Messir Spec. file environment-actAdministrator-oeDeleteCoordinator.msr.

C.9 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeDeletePointOfInterest.msr

```
1 package icrash.environment.operations.actAdministrator.outactAdministrator.oeDeletePointOfInterest {
```

```

2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.environment
8
9 import icrash.concepts.primarytypes.datatypes
10 import icrash.concepts.primarytypes.classes
11
12 Operation Model {
13
14   operation: icrash.environment.actAdministrator.outactAdministrator.oeDeletePointOfInterest(
15     AdtPointOfInterestID:dtPointOfInterestID):ptBoolean{
16     // include below the specification information (pre,post or ocl or prolog)
17     preP{
18       let TheSystem: ctState in
19       let TheActor:actAdministrator in
20
21       self.rnActor.rnSystem = TheSystem
22       and self.rnActor = TheActor
23
24       /* PreP01 */
25       and TheSystem.vpStarted = true
26       /* PreP02 */
27       and TheActor.rnctAuthenticated.vpIsLogged = true
28     }
29     preF{
30       let TheSystem: ctState in
31       let TheActor:actAdministrator in
32
33       self.rnActor.rnSystem = TheSystem
34       and self.rnActor = TheActor
35       /* PreF01 */
36       TheSystem.rnctPointOfInterest->select(id.eq(AdtPointOfInterestID))
37       = ColctPointOfInterest
38       and ColctPointOfInterest->size().eq(1)
39     }
40     postF{
41       let TheSystem: ctState in
42       let TheActor:actAdministrator in
43       let ThectPointOfInterest:ctPointOfInterest in
44       self.rnActor.rnSystem = TheSystem
45       and self.rnActor = TheActor
46       /* PostF01 */
47       TheSystem.rnctPointOfInterest->select(id.eq(AdtPointOfInterestID))
48       = ThectPointOfInterest
49       and ThectPointOfInterest.msrIsKilled
50
51       /* PostF02 */
52       and TheActor.rnInterfaceIN^iePointOfInterestDeleted()
53
54     /* Post Protocol:*/
55     /* PostP01 */
56     and true
57   }
58   postP{true}
59 }
60 }

```

Listing C.9: Messir Spec. file environment-actAdministrator-oeDeletePointOfInterest.msr.

C.10 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeEditPointOfInterest.msr

```

1 package icrash.environment.operations.actAdministrator.outactAdministrator.oeEditPointOfInterest {
2

```

```

3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 import icrash.environment
10
11 Operation Model {
12
13   operation: icrash.environment.actAdministrator.outactAdministrator.oeEditPointOfInterest(
14     AdtPointsOfInterestID:dtPointOfInterestID, AetCategory:etCategory, AdtGPSLocation:
15     dtGPSLocation, AdtDescription:dtDescription):ptBoolean{
16
17     prep{
18       let TheSystem: ctState in
19       let TheActor:actAdministrator in
20
21       self.rnActor.rnSystem = TheSystem
22       and self.rnActor = TheActor
23
24       /* PreP01 */
25       and TheSystem.vpStarted = true
26       /* PreP02 */
27       and TheActor.rnctAuthenticated.vpIsLogged = true
28     }
29
30     preF{
31       let TheSystem: ctState in
32       let TheActor:actAdministrator in
33
34       self.rnActor.rnSystem = TheSystem
35       and self.rnActor = TheActor
36
37       TheSystem.rnctPointOfInterest->select(id.eq(AdtPointOfInterestID))
38       = ColctPointOfInterest
39       and ColctPointOfInterest->size().eq(1)
40       and ColctPointOfInterest@post.Category = AetCategory
41       and ColctPointOfInterest@post.Location = AdtGPSLocation
42       and ColctPointOfInterest@post.Description = AdtDescription
43       and ColctPointOfInterest = TheSystem.rnctPointOfInterest->select(id.eq(AdtPointOfInterestID))
44       and TheActor.rnInterfaceIN^iePointOfInterestEdited()
45       and true
46     }
47   }
48 }

```

Listing C.10: Messir Spec. file environment-actAdministrator-oeEditPointOfInterest.msr.

C.11 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeRankDownCoordinator.msr

```

1 package icrash.environment.operations.actAdministrator.outactAdministrator.oeRankDownCoordinator {
2
3   import lu.uni.lassy.messir.libraries.primitives
4   import lu.uni.lassy.messir.libraries.math
5   import lu.uni.lassy.messir.libraries.string
6   import lu.uni.lassy.messir.libraries.calendar
7   import icrash.concepts.primarytypes.datatypes
8   import icrash.concepts.primarytypes.classes
9   import icrash.environment
10
11 Operation Model {
12
13   operation: icrash.environment.actAdministrator.outactAdministrator.oeRankDownCoordinator(
14     AdtCoordinatorID:dtCoordinatorID):ptBoolean{

```

```

14 // include below the specification information (pre,post or ocl or prolog)
15
16 preP{
17
18   let TheSystem:ctState in
19   let Jack:actAdministrator in
20   self.rnActor.rnSystem = TheSystem
21   and self.rnActor = Jack
22
23 /* PreP01 */
24   and TheSystem.vpStarted = true
25 /* PreP02 */
26   and Jack.rnctAuthenticated.vpIsLogged = true
27
28 }
29
30 preF{
31
32   let TheSystem:ctState in
33   let Jack:actAdministrator in
34   self.rnActor.rnSystem = TheSystem
35   and self.rnActor = Jack
36
37 /* PreF01*/
38 TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
39   = ColctCoordinators
40   and ColctCoordinators->size() .eq(1)
41
42 /*PreF02*/
43   and (ColctCoordinators.expRank.eq("Intermediate") or ColctCoordinators.expRank.eq("Expert"))
44
45 }
46
47 postF{
48
49   let TheSystem:ctState in
50   let Jack:actAdministrator in
51   self.rnActor.rnSystem = TheSystem
52   and self.rnActor = Jack
53
54 TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
55   = ColctCoordinators
56
57 /*PostF01*/
58   and Jack.rnInterfaceIN^ieRankEdited()
59
60 /*PostF02*/
61
62   if(ColctCoordinators.expRank.eq("Expert") and ColctCoordinators.expPoints >= 60) then
63     ColctCoordinators.@post.expRank.eq("Intermediate") and ColctCoordinators.@post.expPoints = 20
64   else(ColctCoordinators.@post.expRank.eq("Novice") and ColctCoordinators.@post.expPoints = 0) endif
65
66 postP{
67   true
68 }
69
70 }
71 }
72 }
```

Listing C.11: Messir Spec. file environment-actAdministrator-oeRankDownCoordinator.msr.

C.12 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeSelectCategories.msr

```

1 package icrash.environment.operations.actAdministrator.outactAdministrator.oeSelectCategories {
2
```

```

3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.environment
9
10 import icrash.concepts.primarytypes.datatypes
11 import icrash.concepts.primarytypes.classes
12 Operation Model {
13
14   operation: icrash.environment.actAdministrator.outactAdministrator.oeSelectCategories(AdtCategory:
15     etCategory):ptBoolean{
16     // include below the specification information (pre,post or ocl or prolog)
17     preP{
18       let TheSystem: ctState in
19       let TheActor:actAdministrator in
20
21       self.rnActor.rnSystem = TheSystem
22       and self.rnActor = TheActor
23
24       /* PreP01 */
25       and TheSystem.vpStarted = true
26       /* PreP02 */
27       and TheActor.rnctAuthenticated.vpIsLogged = true
28     }
29     postF{
30       let TheSystem: ctState in
31       let TheActor:actAdministrator in
32       let CollectPointOfInterest:ctPointOfInterest in
33       self.rnActor.rnSystem = TheSystem
34       and self.rnActor = TheActor
35       /* PostF01 */
36       TheSystem.rnctPointOfInterest->select(category.eq(AetCategory))
37       = CollectPointOfInterest
38       and TheActor.rnInterfaceIN^ieCategorySelected()
39       and true
40     }
41     postP{true}
42   }
43 }

```

Listing C.12: Messir Spec. file environment-actAdministrator-oeSelectCategories.msr.

C.13 File ./src-gen/messir-spec/operations/environment/environment-actAuthenticated-oeFillCaptcha.msr

```

1 package icrash.environment.operations.actAuthenticated.outactAuthenticated.oeFillCaptcha {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 import icrash.environment
10
11 Operation Model {
12
13   operation: icrash.environment.actAuthenticated.outactAuthenticated.oeFillCaptcha(AdtCaptcha:
14     dtCaptcha):ptBoolean{
15     preP{
16       let TheSystem:ctState in
17       let Bob:actAuthenticated in
18       self.rnActor.rnSystem = TheSystem
19       and self.rnActor = Bob

```

```

20
21 /* PreP01 */
22 and TheSystem.vpStarted = true
23 /* PreP02 */
24 and TheActor.rnctAuthenticated.vpIsLogged = false
25 /* PreP03 */
26 and TheActor.rnctAuthenticated.nbrfails >= 3
27 }
28
29 preF{
30
31 true
32
33 }
34
35 postF{
36
37 let TheSystem: ctState in
38 let Bob:actAuthenticated in
39
40 let AptStringMessageForTheactAuthenticated:ptString in
41 let AdtNewCaptcha:dtCaptcha in
42
43 self.rnActor.rnSystem = TheSystem
44 and self.rnActor = TheactAuthenticated
45
46 and /* PostF01 */
47 if (TheActor.rnctAuthenticated.nextValueForCapthca
48     = AdtCaptcha)
49 then
50     (TheSystem.nextValueForCaptcha = AdtNewCaptcha.generateCaptcha()
51
52     and AptStringMessageForTheactAuthenticated.eq('The captcha test was successful, you may now try
53         to login again.')
54         and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
55     )
56 else (AptStringMessageForTheactAuthenticated
57     .eq('Wrong captcha, you need to succeed the captcha tets in order to be able to login. A new
58     captcha will be send.')
59     and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
60     )
61 endif
62
63 postP{
64
65 let TheSystem: ctState in
66 let Bob:actAuthenticated in
67
68 self.rnActor.rnSystem = TheSystem
69 and self.rnActor = TheactAuthenticated
70 /* PostP01 */
71 if (TheActor.rnctAuthenticated.nextValueForCapthca = AdtCaptcha
72 )
73 then (Bob.rnctAuthenticated@post.nbrfails = 0)
74 else true
75 endif
76
77 }
78
79 }
80 }
81 }
```

Listing C.13: Messir Spec. file environment-actAuthenticated-oeFillCaptcha.msr.

C.14 File ./src-gen/messir-spec/operations/environment/environment-actAuthenticated-oeResetPassword.msr

```

1 package icrash.environment.operations.actAuthenticated.outactAuthenticated.oeResetPassword {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 import icrash.environment
10
11 Operation Model {
12
13   operation: icrash.environment.actAuthenticated.outactAuthenticated.oeResetPassword(AdtLogin:
14     dtLogin):ptBoolean{
15     preP{
16
17       let TheSystem:ctState in
18       let Bob:actAuthenticated in
19       self.rnActor.rnSystem = TheSystem
20       and self.rnActor = Bob
21
22     /* PreP01 */
23     and TheSystem.vpStarted = true
24
25   }
26
27   preF {
28
29   true
30   }
31
32   postF{
33
34     let TheSystem: ctState in
35     let Bob:actAuthenticated in
36
37     let AptStringMessageForTheactAuthenticated: ptString in
38     let AptStringMessageForTheactAdministrator:ptString in
39     let AdtNewPassword:dtPassword in
40
41     self.rnActor.rnSystem = TheSystem
42     and self.rnActor = Bob
43
44     and /* PostF01 */
45     if (Bob.rnctAuthenticated.login
46         = AdtLogin
47         )
48     then (
49
50       Bob.rnctAuthenticated.pwd = AdtNewPassword.generatePassword()
51
52       and AptStringMessageForTheactAuthenticated.eq('Your password has been successfully reseted,
53         please check your mails.')
54       and Bob.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
55
56       and AptStringMessageForTheactAdministrator.eq(AdtLogin)
57       and AptStringMessageForTheactAdministrator.dtStringConcat('has reset his password.')
58       and TheSystem.rnactAdministrator
59         .rnInterfaceIN^ieMessage(AptStringMessageForTheactAdministrator)
60
61     )
62     else (AptStringMessageForTheactAuthenticated
63       .eq('Wrong identification information ! Please try again ...')
64       and Bob.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
65       and AptStringMessageForTheactAdministrator.eq('Intrusion tentative !')

```

```

65     and TheSystem.rnactAdministrator
66         .rnInterfaceIN^ieMessage(AptStringMessageForTheactAdministrator)
67     )
68 endif
69
70 }
71
72 postP{
73
74 if(TheactAuthenticated.rnctAuthenticated.login = AdtLogin
75 )
76 then ()
77
78 else true
79 endif
80
81 }
82
83 }
84 }
85 }
```

Listing C.14: Messir Spec. file environment-actAuthenticated-oeResetPassword.msr.

C.15 File ./src-gen/messir-spec/operations/environment/environment-actAuthenticated.msr

```

1 package icrash.operations.environment.actAuthenticated{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 import icrash.concepts.primarytypes.datatypes
6 import icrash.concepts.primarytypes.classes
7 import icrash.concepts.secondarytypes.datatypes
8 import icrash.concepts.secondarytypes.classes
9 import icrash.environment
10
11 Operation Model {
12
13 operation: actAuthenticated.outactAuthenticated.oeLogin(AdtLogin:dtLogin, AdtPassword:dtPassword) :
14     ptBoolean
15 {
16     let TheSystem: ctState in
17     let TheActor:actAuthenticated in
18     self.rnActor.rnSystem = TheSystem
19     and self.rnActor = TheActor
20
21 /* PreP01 */
22 and TheSystem.vpStarted = true
23 /* PreP02 */
24 and TheActor.rnctAuthenticated.vpIsLogged = false
25 /* PreP03 */
26 and TheActor.rnctAuthenticated.nbrfails < 3
27 }
28 preF{
29 /* PreF01 */
30 true
31 }
32 postF{
33 let TheSystem: ctState in
34 let TheactAuthenticated:actAuthenticated in
35
36 let AptStringMessageForTheactAuthenticated: ptString in
37 let AptStringMessageForTheactAdministrator:ptString in
38
39 self.rnActor.rnSystem = TheSystem
40 and self.rnActor = TheactAuthenticated
```

```

41
42 and /* PostF01 */
43   if (TheactAuthenticated.rnctAuthenticated.pwd
44     = AdtPassword
45     and TheactAuthenticated.rnctAuthenticated.login
46     = AdtLogin
47   )
48   then (AptStringMessageForTheactAuthenticated.eq('You are logged ! Welcome ...')
49     and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
50   )
51   else (AptStringMessageForTheactAuthenticated
52     .eq('Wrong identification information ! Please try again ...')
53     and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
54     and AptStringMessageForTheactAdministrator.eq('Intrusion tentative !')
55     and TheSystem.rnactAdministrator
56       .rnInterfaceIN^ieMessage(AptStringMessageForTheactAdministrator)
57   )
58   endif
59 }
60 postP{
61   let TheSystem: ctState in
62   let TheactAuthenticated:actAuthenticated in
63
64   self.rnActor.rnSystem = TheSystem
65   and self.rnActor = TheactAuthenticated
66 /* PostP01 */
67   if (TheactAuthenticated.rnctAuthenticated.pwd = AdtPassword
68     and TheactAuthenticated.rnctAuthenticated.login = AdtLogin
69   )
70   then (TheactAuthenticated.rnctAuthenticated@post.vpIsLogged = true
71     and TheactAuthenticated.rnctAuthenticated@post.nbrfails = 0
72   )
73   else (TheactAuthenticated.rnctAuthenticated@post.nbrfails = TheactAuthenticated.
74     rnctAuthenticated@post.nbrfails@pre + 1)
75   endif
76 }
77 }
78 /*-----*/
79
80 operation: actAuthenticated.outactAuthenticated.oeLogout () :ptBoolean{
81
82 preP{
83   let TheSystem: ctState in
84   let TheActor:actAdministrator in
85   self.rnActor.rnSystem = TheSystem
86   and self.rnActor = TheActor
87
88 /* PreP01 */
89   and TheSystem.vpStarted = true
90 /* PreP02 */
91   and TheActor.rnctAuthenticated.vpIsLogged = true
92 }
93 preF{
94 /* PreF01 */
95 true
96 }
97 postF{
98   let TheSystem: ctState in
99   let TheactAuthenticated:actAuthenticated in
100  let AptStringMessageForTheactAuthenticated: ptString in
101
102  self.rnActor.rnSystem = TheSystem
103  and self.rnActor = TheactAuthenticated
104
105 /* PostF01 */
106 AptStringMessageForTheactAuthenticated.eq('You are logged out ! Good Bye ...')
107   and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
108 }
109 postP{

```

```

110 let TheSystem: ctState in
111 let TheactAuthenticated:actAuthenticated in
112
113 self.rnActor.rnSystem = TheSystem
114 and self.rnActor = TheactAuthenticated.asSet
115 /* PostP01 */
116 TheactAuthenticated.rnctAuthenticated@post.vpIsLogged = false
117 }
118 prolog{"src/Operations/Environment/OUT/outactAuthenticated-oeLogout.pl"}
119 }
120 }
121 }
```

Listing C.15: Messir Spec. file environment-actAuthenticated.msr.

C.16 File ./src-gen/messir-spec/operations/environment/environment-actComCompany.msr

```

1 // Do not add/remove lines because code is inserted in slides
2
3 package icrash.operations.environment.actComCompany{
4
5 import lu.uni.lassy.messir.libraries.primitives
6 import lu.uni.lassy.messir.libraries.calendar
7 import lu.uni.lassy.messir.libraries.math
8
9 import icrash.concepts.primarytypes.datatypes
10 import icrash.concepts.primarytypes.classes
11 import icrash.concepts.secondarytypes.datatypes
12
13 import icrash.environment
14
15 Operation Model {
16
17 operation: actComCompany.outactComCompany.oeAlert(
18 AetKind:etHumanKind,
19 AdtMyDate:dtDate,
20 AdtTime:dtTime,
21 AdtPhoneNumber:dtPhoneNumber,
22 AdtGPSLocation:dtGPSLocation,
23 AdtComment:dtComment
24 ):ptBoolean{
25
26 preP{
27 let TheSystem: ctState in
28 self.rnActor.rnSystem = TheSystem
29
30 /* PreP01 */
31 and TheSystem.vpStarted = true
32 }
33 preF{
34 let TheSystem: ctState in
35 self.rnActor.rnSystem = TheSystem
36
37 /* PreF01 */
38 and (TheSystem.clock.date.gt(AdtDate)
39 or (TheSystem.clock.date.eq(AdtDate)
40 and TheSystem.clock.time.gt(AdtTime)
41 )
42 )
43 }
44 postF{
45 let TheSystem: ctState in
46
47 let ActHuman:ctHuman in
48 let TheactComCompany:actComCompany in
49 let ActAlert:ctAlert in
50 let AAlertInstant:dtDateAndTime in
```

```

51 let AetAlertStatus:etAlertStatus in
52 let ActAlertNearBy:ctAlert in
53 let ActCrisis:ctCrisis in
54 let AdtCrisisID:dtCrisisID in
55 let AetCrisisType:etCrisisType in
56 let AetCrisisStatus:etCrisisStatus in
57 let ACrisisInstant:dtDateAndTime in
58 let ACrisisdtComment:dtComment in
59 let AptStringMessage:ptString in
60 let AdtSMS:dtSMS in
61 let AdtAlertID:dtAlertID in
62
63 self.rnActor.rnSystem = TheSystem
64 and self.rnActor = TheactComCompany
65 /* PostF01 */
66 TheSystem.nextValueForAlertID=PrenextValueForAlertID
67 and PrenextValueForAlertID.add(1) = PostnextValueForAlertID
68 and TheSystem@post.nextValueForAlertID = PostnextValueForAlertID
69
70 /* PostF02 */
71 and AAlertInstant.date=AdtDate
72 and AAlertInstant.time=AdtTime
73
74 and AetAlertStatus=pending
75
76 and TheSystem.nextValueForAlertID.todtString().eq(AdtAlertID)
77
78 and ActAlert.init(AdtAlertID,
79     AetAlertStatus,
80     AdtGPSLocation,
81     AAlertInstant,
82     AdtComment)
83
84 /* PostF03 */
85 and TheSystem.rnctAlert.select(location.isNearTo(AdtGPSLocation)) = ColctAlertsNearBy
86 and if (ColctAlertsNearBy->size()=0)
87 then (TheSystem.nextValueForCrisisID = PrenextValueForCrisisID
88     and PrenextValueForCrisisID.add(1) = PostnextValueForCrisisID
89     and TheSystem@post.nextValueForCrisisID = PostnextValueForCrisisID
90     and TheSystem.nextValueForCrisisID.todtString().eq(AdtCrisisID)
91     and AdtCrisisType = small
92     and AetCrisisStatus = pending
93     and ACrisisInstant= AAlertInstant
94     and ACrisisdtComment = 'no reporting yet defined'
95     and ActCrisis.init( AdtCrisisID,
96         AdtCrisisType,
97         AetCrisisStatus,
98         AdtGPSLocation,
99         ACrisisInstant,
100        ACrisisdtComment)
101    )
102 else (ColctAlertsNearBy.rnTheCrisis->msrAny(true) = ActCrisis)
103 endif
104
105 /* PostF04 */
106 and ActAlert@post.rnTheCrisis = ActCrisis
107
108 /* PostF05 */
109 and TheSystem.rnctHuman->select(id.eq(AdtPhoneNumber)) = HumanColl
110
111 and HumanColl->select(kind.etEq(AetHumanKind)) = HumanCol2
112 and if (HumanCol2->msrIsEmpty)
113 then (ActHuman.init(AdtPhoneNumber,AetHumanKind)
114     and ActHuman@post.rnactComCompany = TheactComCompany
115    )
116 else (HumanCol2->any(true) = ActHuman)
117 endif
118
119 and ActHuman.rnSignaled->msrIncluding(ActAlert) = ColAlerts
120

```

```

121 and ActHuman@post.rnSignaled = ColAlerts
122
123 /* PostF06 */
124 AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
125 and TheactComCompany.rnInterfaceIN^ieSmsSend(AdtPhoneNumber,AdtSMS)
126 }
127 /* Post Protocol:*/
128 /* PostP01 */
129 postP{true}
130
131 prolog{"src/Operations/Environment/OUT/outactComCompany-oeAlert.pl"}
132 }
133 }
134 }
```

Listing C.16: Messir Spec. file environment-actComCompany.msr.

C.17 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeCloseCrisis.msr

```

1 package icrash.operations.environment.actCoordinator.oeCloseCrisis {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeCloseCrisis(AdtCrisisID:dtCrisisID):ptBoolean{
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeCloseCrisis.pl"}
14 }
15 }
16 }
```

Listing C.17: Messir Spec. file environment-actCoordinator-oeCloseCrisis.msr.

C.18 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeGetAlertsSet.msr

```

1 package icrash.operations.environment.actCoordinator.oeGetAlertsSet {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.datatypes
9 import icrash.environment
10
11 Operation Model {
12
13 operation: actCoordinator.outactCoordinator.oeGetAlertsSet(AetAlertStatus:etAlertStatus):ptBoolean{
14 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeGetAlertsSet.pl"}
15 }
16 }
17 }
```

Listing C.18: Messir Spec. file environment-actCoordinator-oeGetAlertsSet.msr.

C.19 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeGetCrisisSet.msr

```

1 package icrash.operations.environment.actCoordinator.oeGetCrisisSet {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeGetCrisisSet(AetCrisisStatus:etCrisisStatus) :ptBoolean
13 {
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeGetCrisisSet.pl"}
14 }
15 }
16 }
```

Listing C.19: Messir Spec. file environment-actCoordinator-oeGetCrisisSet.msr.

C.20 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeInvalidateAlert.msr

```

1 package icrash.operations.environment.actCoordinator.oeInvalidateAlert {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeInvalidateAlert(AdtAlertID:dtAlertID) :ptBoolean{
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeInvalidateAlert.pl"}
14 }
15 }
16 }
```

Listing C.20: Messir Spec. file environment-actCoordinator-oeInvalidateAlert.msr.

C.21 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeReportOnCrisis.msr

```

1 package icrash.operations.environment.actCoordinator.oeReportOnCrisis {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeReportOnCrisis(AdtCrisisID:dtCrisisID, AdtComment:
13 dtComment) :ptBoolean{
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeReportOnCrisis.pl"}
14 }
15 }
16 }
17 }
```

Listing C.21: Messir Spec. file environment-actCoordinator-oeReportOnCrisis.msr.

C.22 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeSetCrisisHandler.msr

```

1 package icrash.operations.environment.actCoordinator.oeSetCrisisHandler {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.datatypes
9 import icrash.concepts.primarytypes.classes
10 import icrash.concepts.secondarytypes.datatypes
11 import icrash.environment
12
13 Operation Model {
14
15 operation: actCoordinator.outactCoordinator.oeSetCrisisHandler(AdtCrisisID:dtCrisisID):ptBoolean{
16 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeSetCrisisHandler.pl"}
17 }
18
19 }
20 }
```

Listing C.22: Messir Spec. file environment-actCoordinator-oeSetCrisisHandler.msr.

C.23 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeSetCrisisStatus.msr

```

1 package icrash.operations.environment.actCoordinator.oeSetCrisisStatus {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeSetCrisisStatus(AdtCrisisID:dtCrisisID,
    AetCrisisStatus:etCrisisStatus):ptBoolean{
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeSetCrisisStatus.pl"}
14 }
15
16 }
17 }
```

Listing C.23: Messir Spec. file environment-actCoordinator-oeSetCrisisStatus.msr.

C.24 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeSetCrisisType.msr

```

1 package icrash.operations.environment.actCoordinator.oeSetCrisisType {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11 }
```

```

12 operation: actCoordinator.outactCoordinator.oeSetCrisisType(AdtCrisisID:dtCrisisID, AetCrisisType:
    etCrisisType):ptBoolean{
13 prolog {"src/Operations/Environment/OUT/outactCoordinator-oeSetCrisisType.pl"}
14 }
15
16 }
17 }
```

Listing C.24: Messir Spec. file environment-actCoordinator-oeSetCrisisType.msr.

C.25 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeValidateAlert.msr

```

1 package icrash.operations.environment.actCoordinator.oeValidateAlert {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeValidateAlert(AdtAlertID:dtAlertID):ptBoolean{
13 prolog {"src/Operations/Environment/OUT/outactCoordinator-oeValidateAlert.pl"}
14 }
15
16 }
17 }
```

Listing C.25: Messir Spec. file environment-actCoordinator-oeValidateAlert.msr.

C.26 File ./src-gen/messir-spec/operations/environment/environment-actMsrCreator-init.msr

```

1 package icrash.operations.icrash.environment.actMsrCreator.init {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import icrash.environment
5
6 Operation Model {
7
8 operation: actMsrCreator.init():ptBoolean{}
9 // generic operation provided by the simulator
10 }
11 }
```

Listing C.26: Messir Spec. file environment-actMsrCreator-init.msr.

C.27 File ./src-gen/messir-spec/operations/environment/environment-actMsrCreator-oeCreateSystemAndEnvironment.msr

```

1 package icrash.operations.environment.actMsrCreator.oeCreateSystemAndEnvironment{
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.calendar
6
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 import icrash.concepts.secondarytypes.datatypes
10 import icrash.concepts.secondarytypes.classes
11 import icrash.environment
```

```

12
13 Operation Model {
14
15 operation: actMsrCreator.outactMsrCreator.oeCreateSystemAndEnvironment(AqtyComCompanies:ptInteger):
16     ptBoolean
17 {preP{true}
18 preF{true}
19 postF{
20     let TheSystem: ctState in
21     let AactMsrCreator: actMsrCreator in
22     let AactAdministrator: actAdministrator in
23     let AnextValueForAlertID: dtInteger in
24     let AnextValueForCrisisID: dtInteger in
25     let Aclock: dtDateAndTime in
26     let AcrisisReminderPeriod: dtSecond in
27     let AmaxCrisisReminderPeriod: dtSecond in
28     let AvpStarted: ptBoolean in
29
30     /* PostF01 -- MUST ALWAYS BE MADE FIRST -- */
31     AnextValueForAlertID.value.eq(1)
32     and AnextValueForCrisisID.value.eq(1)
33     and Aclock.date.year.value = 1970
34     and Aclock.date.month.value = 01
35     and Aclock.date.day.value = 01
36     and Aclock.time.hour.value = 00
37     and Aclock.time.minute.value = 00
38     and Aclock.time.second.value = 00
39
40     and AcrisisReminderPeriod.value.eq(300)
41     and AmaxCrisisReminderPeriod.value.eq(1200)
42     and AvpStarted = true
43     and TheSystem.init(AnextValueForAlertID,
44                         AnextValueForCrisisID,
45                         Aclock,
46                         AcrisisReminderPeriod,
47                         AmaxCrisisReminderPeriod,
48                         Aclock,
49                         AvpStarted
50                     )
51     /* PostF02*/
52     and AactMsrCreator.init()
53     /* PostF03 */
54     and let AactComCompanyCol: Bag(actComCompany) in
55     AactComCompanyCol->size() = AqtyComCompanies
56     AactComCompanyCol-> forAll(init())
57     /* PostF04*/
58     and AactAdministrator.init()
59     /* PostF05*/
60     and let AactActivator:actActivator in
61     AactActivator.init()
62     /* PostF06 */
63     and let ActAdministrator:ctAdministrator in
64     let AdtLogin:dtLogin in
65     let AdtPassword:dtPassword in
66     AdtLogin.value.eq('icrashadmin')
67     and AdtPassword.value.eq('7WXC1359')
68     and ActAdministrator.init(AdtLogin,AdtPassword)
69     /* PostF07*/
70     and ActAdministrator@post.rnactAuthenticated = AactAdministrator}
71     postP{true}
72 prolog{ "src/Operations/Environment/OUT/outactMsrCreator-oeCreateSystemAndEnvironment.pl"}
73
74 }
75 }
76
77 }

```

Listing C.27: Messir Spec. file environment-actMsrCreator-oeCreateSystemAndEnvironment.msr.

C.28 File ./src-gen/messir-spec/environment/environment.msr

```

1 package icrash.environment{
2
3 import icrash.concepts.primarytypes.datatypes
4 import icrash.concepts.primarytypes.classes
5 import icrash.concepts.secondarytypes.datatypes
6 import lu.uni.lassy.messir.libraries.primitives
7 import lu.uni.lassy.messir.libraries.math
8 import lu.uni.lassy.messir.libraries.calendar
9
10 Environment Model {
11
12 actor actMsrCreator role rnactMsrCreator cardinality [1..1] {
13
14 operation init():ptBoolean
15
16 input interface inactMsrCreator {
17 }
18 output interface outactMsrCreator {
19     operation oeCreateSystemAndEnvironment(AqtyComCompanies:ptInteger ):ptBoolean
20 }
21 }
22
23 actor actAdministrator role rnactAdministrator cardinality [1..1]
24     extends actAuthenticated {
25
26 operation init():ptBoolean
27
28 output interface outactAdministrator{
29
30     operation oeAddCoordinator(
31         AdtCoordinatorID:dtCoordinatorID ,
32         AdtLogin:dtLogin ,
33         AdtPassword:dtPassword ):ptBoolean
34
35     operation oeDeleteCoordinator(
36         AdtCoordinatorID:dtCoordinatorID ):ptBoolean
37
38     operation oeAddPointOfInterest(
39         AetCategory:etCategory,
40         AdtGPSLocation:dtGPSLocation,
41         AdtDescription:dtDescription) :ptBoolean
42
43     operation oeDeletePointOfInterest(
44         AdtPointOfInterestID:dtPointOfInterestID) : ptBoolean
45
46     operation oeEditPointOfInterest(
47         AdtPointsOfInterestID:dtPointOfInterestID,
48         AetCategory:etCategory,
49         AdtGPSLocation:dtGPSLocation,
50         AdtDescription:dtDescription) :ptBoolean
51
52     operation oeRankDownCoordinator(AdtCoordinatorID:dtCoordinatorID):ptBoolean
53
54     operation oeSelectCategories(AetCategory:etCategory): ptBoolean //List
55
56     operation oeClosestToALocation(AdtGPSLocation:dtGPSLocation) : ptBoolean //List
57 }
58
59 input interface inactAdministrator{
60
61     operation ieCoordinatorAdded():ptBoolean
62     operation ieCoordinatorDeleted():ptBoolean
63     operation iePointOfInterestAdded():ptBoolean
64     operation iePointOfInterestDeleted():ptBoolean
65     operation iePointOfInterestEdited():ptBoolean
66     operation ieRankEdited():ptBoolean
67     operation ieMessage2(AMessage:ptString):ptBoolean
68     operation ieCategorySelected(ACategory:etCategory):ptBoolean

```

```

69      }
70  }
71
72 actor actCoordinator
73   role rnactCoordinator
74   cardinality [0..*]
75   extends actAuthenticated{
76
77   operation init():ptBoolean
78
79   output interface outactCoordinator{
80     operation oeInvalidateAlert(AdtAlertID:dtAlertID ):ptBoolean
81     operation oeCloseCrisis(AdtCrisisID:dtCrisisID ):ptBoolean
82     operation oeGetAlertsSet(AetAlertStatus:etAlertStatus ):ptBoolean
83     operation oeGetCrisisSet(AetCrisisStatus:etCrisisStatus ):ptBoolean
84     operation oeSetCrisisHandler(AdtCrisisID:dtCrisisID ):ptBoolean
85     operation oeReportOnCrisis(
86       AdtCrisisID:dtCrisisID ,
87       AdtComment:dtComment
88     ):ptBoolean
89     operation oeSetCrisisStatus(
90       AdtCrisisID:dtCrisisID ,
91       AetCrisisStatus:etCrisisStatus
92     ):ptBoolean
93     operation oeSetCrisisType(
94       AdtCrisisID:dtCrisisID ,
95       AetCrisisType:etCrisisType
96     ):ptBoolean
97     operation oeValidateAlert(AdtAlertID:dtAlertID ):ptBoolean
98   }
99
100  input interface inactCoordinator{
101    operation ieSendAnAlert(ActAlert:ctAlert ):ptBoolean
102    operation ieSendACrisis(ActCrisis:ctCrisis ):ptBoolean
103  }
104 }
105
106 actor actComCompany role rnactComCompany cardinality [0..*]{
107
108   operation init():ptBoolean
109
110   output interface outactComCompany{
111     operation oeAlert(
112       AetHumanKind:etHumanKind ,
113       AdtDate:dtDate ,
114       AdtTime:dtTime ,
115       AdtPhoneNumber:dtPhoneNumber ,
116       AdtGPSLocation:dtGPSLocation ,
117       AdtComment:dtComment
118     ):ptBoolean
119   }
120
121   input interface inactComCompany{
122     operation ieSmsSend(AdtPhoneNumber:dtPhoneNumber ,
123       AdtSMS:dtSMS
124     ):ptBoolean
125   }
126 }
127
128 actor actAuthenticated role rnactAuthenticated cardinality [0..*]{
129
130   operation init():ptBoolean
131
132   output interface outactAuthenticated{
133     operation oeLogin(AdtLogin:dtLogin , AdtPassword:dtPassword ):ptBoolean
134     operation oeLogout():ptBoolean
135     operation oeResetPassword(AdtLogin:dtLogin ):ptBoolean
136     operation oeFillCaptcha(AdtCaptcha:dtCaptcha):ptBoolean
137   }
138 }
```

```

139 input interface inactAuthenticated{
140   operation ieMessage(AMessage:ptString):ptBoolean
141 }
142 }
143
144 actor actActivator[proactive] role rnactActivator cardinality [1..1]{
145
146   operation init():ptBoolean
147
148   output interface outactActivator{
149     proactive operation oeSollicitateCrisisHandling():ptBoolean
150     proactive operation oeSetClock(AcurrentClock:dtDateAndTime ):ptBoolean
151   }
152
153   input interface inactActivator{
154   }
155 }
156 }

```

Listing C.28: Messir Spec. file environment.msr.

C.29 File [./src-gen/messir-spec/concepts/primarytypes-associations.msr](#)

```

1 package icrash.concepts.primarytypes.associations {
2
3 import icrash.concepts.primarytypes.datatypes
4 import icrash.concepts.primarytypes.classes
5 import icrash.environment
6 import lu.uni.lassy.messir.libraries.primitives
7
8 Concept Model {
9
10   Primary Types{
11
12   // Internal
13
14   association assctAlertctCrisis
15     ctAlert(rnAlerts)[1...*]
16     ctCrisis (rnTheCrisis)[1..1]
17
18   association assctAlertctHuman
19     ctAlert(rnSignaled)[1...*]
20     ctHuman (rnSignaler)[1..1]
21
22   association assctCrisisctCoordinator
23     ctCrisis(rnHandled)[0...*]
24     ctCoordinator(rnHandler)[0..1]
25
26   // With Actors
27
28   association assctHumanactComCompany
29     ctHuman(rnctHuman)[0...*]
30     actComCompany(rnactComCompany)[1..1]
31
32   association assctCoordinatoractCoordinator
33     ctCoordinator(rnctCoordinator)[1..1]
34     actCoordinator(rnactCoordinator)[1..1]
35
36   association assctAuthenticatedactAuthenticated
37     ctAuthenticated(rnctAuthenticated)[1..1]
38     actAuthenticated(rnactAuthenticated)[1..1]
39
40   association assctPointOfInterestactAdministrator
41     actAdministrator(rnactAdministrator)[1..1]
42     ctPointOfInterest(rnctPointOfInterest)[0...*]
43   }
44 }

```

45 }

Listing C.29: Messir Spec. file primarytypes-associations.msr.

C.30 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctAdministrator.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctAdministrator{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 import icrash.concepts.primarytypes.datatypes
6 import icrash.concepts.primarytypes.classes
7
8 Operation Model {
9
10 operation: icrash.concepts.primarytypes.classes.ctAdministrator.init(
11   Alogin:dtLogin ,
12   Apwd:dtPassword
13   ):ptBoolean{
14   postF{
15     if
16     (
17       let Self:ctAdministrator in
18       /* Post F01 */
19       Self.login(Alogin)
20     and Self.pwd = Apwd
21     and Self.vpIsLogged = false
22
23     /* Post F02 */
24     and (Self.oclIsNew and self = Self)
25   )
26   then (result = true)
27   else (result = false)
28 endif
29 }
30 prolog{ "src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctAdministrator-init.pl"
31 }
32 }
33 }
```

Listing C.30: Messir Spec. file primarytypes-classes-ctAdministrator.msr.

C.31 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctAlert.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctAlert{
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.calendar
5
6 import icrash.concepts.primarytypes.datatypes
7 import icrash.concepts.primarytypes.classes
8
9 import icrash.environment
10
11 Operation Model {
12
13 operation: icrash.concepts.primarytypes.classes.ctAlert.init(Aid:dtAlertID , Astatus:etAlertStatus ,
14   Alocation:dtGPSLocation , Ainstant:dtDateAndTime , Acomment:dtComment
15   ):ptBoolean{
16   postF{
17     if
18     (
19       /* Post F01 */
20       let Self:ctAlert in
```

```

20 Self.id = Aid
21 and Self.status = Astatus
22 and Self.location = Alocation
23 and Self.instant = Ainstant
24 and Self.comment = Acomment
25 /* Post F02 */
26 and (Self.oclIsNew and self = Self)
27 )
28 then (result = true)
29 else (result = false)
30 endif
31 }
32 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctAlert-init.pl"}
33 }
34
35 operation: icrash.concepts.primarytypes.classes.ctAlert.isSentToCoordinator(AactCoordinator:
    actCoordinator ):ptBoolean
36 {
37 postF{
38 if
39 (
40 /* Post F01 */
41 AactCoordinator.rnInterfaceIN.ieSendAnAlert (self)
42 )
43 then (result = true)
44 else (result = false)
45 endif
46 }
47 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctAlert-isSentToCoordinator.
    pl"}
48
49 }
50 }
51 }

```

Listing C.31: Messir Spec. file primarytypes-classes-ctAlert.msr.

C.32 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctAuthenticated.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctAuthenticated {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import icrash.concepts.primarytypes.datatypes
5 import icrash.concepts.primarytypes.classes
6
7 Operation Model {
8
9 operation: icrash.concepts.primarytypes.classes.ctAuthenticated.init (Alogin:dtLogin, Apwd:dtPassword
    , Amail:dtMail):ptBoolean{
10 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctAuthenticated-init.pl"}
11 }
12 }
13
14 }

```

Listing C.32: Messir Spec. file primarytypes-classes-ctAuthenticated.msr.

C.33 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctCoordinator.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctCoordinator.init {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import icrash.concepts.primarytypes.datatypes
5 import icrash.concepts.primarytypes.classes

```

```

6
7 Operation Model {
8
9 operation: icrash.concepts.primarytypes.classes.ctCoordinator.init(Aid:dtCoordinatorID, Alogin:
10   dtLogin, Apwd:dtPassword):ptBoolean
11 {
12 if
13 (
14 /* Post F01 */
15 let Self:ctCoordinator in
16 Self.id = Aid
17 and Self.login = Alogin
18 and Self.pwd = Apwd
19 and Self.vpIsLogged = false
20 /* Post F02 */
21 and (Self.oclIsNew and self = Self)
22 )
23 then (result = true)
24 else (result = false)
25 endif}
26 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCoordinator-init.pl"}
27 }
28 }
29 }
```

Listing C.33: Messir Spec. file primarytypes-classes-ctCoordinator.msr.

C.34 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctCrisis.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctCrisis {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.calendar
6
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 import icrash.concepts.secondarytypes.datatypes
10 import icrash.concepts.secondarytypes.classes
11 import lu.uni.lassy.messir.libraries.primitives
12
13 import icrash.environment
14
15 Operation Model {
16 //-----
17 operation: icrash.concepts.primarytypes.classes.ctCrisis.init(
18   Aid:dtCrisisID,
19   Atype:etCrisisType,
20   Astatus:etCrisisStatus,
21   Alocation:dtGPSLocation,
22   Ainstant:dtDateAndTime,
23   Acomment:dtComment
24   ):ptBoolean{
25 postF{
26 if
27 (
28 /* Post F01 */
29 let Self:ctCrisis in
30 Self.id = Aid
31 and Self.type = Atype
32 and Self.status = Astatus
33 and Self.location = Alocation
34 and Self.instant = Ainstant
35 and Self.comment = Acomment
36 /* Post F02 */
37 and (Self.oclIsNew and self = Self)
```

```

38 )
39 then (result = true)
40 else (result = false)
41 endif}
42 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-init.pl"}
43 //-----
44 operation: icrash.concepts.primarytypes.classes.ctCrisis.handlingDelayPassed():ptBoolean
45 {
46 postF{
47 let TheSystem:ctState in
48 let CurrentClockSecondsQty:dtInteger in
49 let vpLastReminderSecondsQty:dtInteger in
50 let CrisisReminderPeriod:dtSecond in
51 if
52 ( /* Post F01 */
53 self.rnSystem = TheSystem
54 and self.status = pending
55 and TheSystem.clock.toSecondsQty() = CurrentClockSecondsQty
56 and TheSystem.vpLastReminder.toSecondsQty() = vpLastReminderSecondsQty
57 and TheSystem.crisisReminderPeriod = CrisisReminderPeriod
58 and CurrentClockSecondsQty.sub(vpLastReminderSecondsQty).gt(CrisisReminderPeriod) = true
59 )
60 then (result = true)
61 else (result = false)
62 endif
63 }
64 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-handlingDelayPassed
.pl"}
65 //-----
66 operation: icrash.concepts.primarytypes.classes.ctCrisis.maxHandlingDelayPassed():ptBoolean
67 {
68 postF{
69 let TheSystem:ctState in
70 let CurrentClockSecondsQty:dtInteger in
71 let CrisisInstantSecondsQty:dtInteger in
72 let MaxCrisisReminderPeriod:dtSecond in
73 if
74 ( /* Post F01 */
75 self.rnSystem = TheSystem
76 and self.status = pending
77 and TheSystem.clock.toSecondsQty() = CurrentClockSecondsQty
78 and Self.instant.toSecondsQty() = CrisisInstantSecondsQty
79 and TheSystem.maxCrisisReminderPeriod = MaxCrisisReminderPeriod
80 and CurrentClockSecondsQty.sub(CrisisInstantSecondsQty)
81 .gt(MaxCrisisReminderPeriod)
82 )
83 then (result = true)
84 else (result = false)
85 endif
86 }
87 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-
maxHandlingDelayPassed.pl"}
88 //-----
89 operation: icrash.concepts.primarytypes.classes.ctCrisis.isSentToCoordinator(AactCoordinator:
actCoordinator):ptBoolean
90 {
91 postF{
92 if
93 (
94 /* Post F01 */
95 AactCoordinator.rnInterfaceIN.ieSendACrisis(self)
96 )
97 then (result = true)
98 else (result = false)
99 endif}
100 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-isSentToCoordinator
.pl" }
101 //-----
102 operation: icrash.concepts.primarytypes.classes.ctCrisis.isAllocatedIfPossible():ptBoolean
103 {

```

```

104 postF{
105 if (
106 /* Post F01 */
107 self.maxHandlingDelayPassed()
108 and
109 if (TheSystem.rnactCoordinator->msrIsEmpty = false)
110 then (
111 /* Post F02 */
112 TheSystem.rnactCoordinator->msrAny(true) = TheCoordinatorActor
113 and TheCoordinatorActor.rnctCoordinator = TheCoordinator
114 and self@post.rnHandler = TheCoordinator
115 and self@post.status = handled
116 and self.id.value = TheCrisisIDptString
117 and 'You are now considered as handling the crisis having ID: '
118 .ptStringConcat(TheCrisisIDptString) = TheMessage
119 and TheCoordinatorActor.rnInterfaceIN^ieMessage(TheMessage)
120 )
121 else ( /* Post F03 */
122 TheSystem.rnactAdministrator
123 ->forAll(rnInterfaceIN.ieMessage('Please add new coordinators to handle pending crisis !'))
124 )
125 endif
126 )
127 then (result = true)
128 else (result = false)
129 endif
130 }
131 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-
    isAllocatedIfPossible.pl"}
132 }
133 }
134 }
```

Listing C.34: Messir Spec. file primarytypes-classes-ctCrisis.msr.

C.35 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctHuman.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctHuman.init {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import icrash.concepts.primarytypes.datatypes
5
6 import icrash.concepts.primarytypes.classes
7
8 Operation Model {
9
10 operation: icrash.concepts.primarytypes.classes.ctHuman.init(Aid:dtPhoneNumber, Akind:etHumanKind):
    ptBoolean
11 {
12 postF{
13 if
14 (
15 /* Post F01 */
16 let Self:ctHuman in
17
18 Self.id = Aid
19 and Self.kind = Akind
20
21 /* Post F02 */
22 and (Self.oclIsNew and self = Self)
23 )
24 then (result = true)
25 else (result = false)
26 endif
27 }
28 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctHuman-init.pl"}
29 }
```

```

30 operation: icrash.concepts.primarytypes.classes.ctHuman.isAcknowledged():ptBoolean{
31 prolog {"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctHuman-isAcknowledged.pl"}
32 }
33 }
34 }
```

Listing C.35: Messir Spec. file primarytypes-classes-ctHuman.msr.

C.36 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctPointOfInterest-init.msr

```

1 package icrash.concepts.primarytypes.classes.operations.classes.ctPointOfInterest.init {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9
10 Operation Model {
11
12   operation: icrash.concepts.primarytypes.classes.ctPointOfInterest.init(Aid:dtPointOfInterestID,
13                           Atype:etCategory,
14                           Alocation:dtGPSLocation,
15                           Adescription:dtDescription
16   ):ptBoolean{
17     // include below the specification information (pre, post or ocl or prolog)
18   postF{
19     if
20     (
21       let Self:ctPointOfInterest in
22       Self.id = Aid
23       and Self.type = Atype
24       and Self.location = Alocation
25       and Self.comment = Acomment
26
27       and (Self.oclIsNew and self = Self)
28     )
29     then (result = true)
30     else (result = false)
31     endif
32   }
33 }
34 }
```

Listing C.36: Messir Spec. file primarytypes-classes-ctPointOfInterest-init.msr.

C.37 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctState.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctState{
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.calendar
5 import lu.uni.lassy.messir.libraries.math
6
7 import icrash.concepts.primarytypes.classes
8
9 Operation Model {
10
11   operation: icrash.concepts.primarytypes.classes.ctState.init(
12     AnextValueForPointOfInterestID: dtInteger,
13     AnextValueForAlertID: dtInteger,
14     AnextValueForCrisisID: dtInteger ,
15     dtClock:dtDateAndTime,
```

```

16 AcrisisReminderPeriod: dtSecond,
17 AmaxCrisisReminderPeriod: dtSecond ,
18 AvpLastReminder: dtDateAndTime ,
19 AvpStarted:ptBoolean ):ptBoolean{
20 postF{
21 if
22 (
23 /* Post F01 */
24 let Self:ctState in
25
26 Self.nextValueForAlertID = AnextValueForAlertID
27 and Self.nextValueForPointOfInterestID = AnextValueForPointOfInterestID
28 and Self.nextValueForCrisisID = AnextValueForCrisisID
29 and Self.clock = Aclock
30 and Self.crisisReminderPeriod = AcrisisReminderPeriod
31 and Self.maxCrisisReminderPeriod = AmaxCrisisReminderPeriod
32 and Self.vpLastReminder = AvpLastReminder
33 and Self.vpStarted = AvpStarted
34
35 and (Self.oclIsNew and self = Self)
36 )
37 then (result = true)
38 else (result = false)
39 endif
40 }
41 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctState-init.pl" }
42 }
43 }
44 }
```

Listing C.37: Messir Spec. file primarytypes-classes-ctState.msr.

C.38 File ./src-gen/messir-spec/concepts/primarytypes-classes.msr

```

1 package icrash.concepts.primarytypes.classes {
2
3 import icrash.concepts.primarytypes.datatypes
4 import icrash.environment
5 import lu.uni.lassy.messir.libraries.primitives
6 import lu.uni.lassy.messir.libraries.math
7 import lu.uni.lassy.messir.libraries.calendar
8
9 Concept Model {
10
11 Primary Types{
12
13 state class ctState {
14   attribute nextValueForAlertID:dtInteger
15   attribute nextValueForCrisisID:dtInteger
16   attribute nextValueForCaptcha: dtCaptcha
17   attribute nextValueForPointOfInterestID:dtInteger
18   attribute clock:dtDateAndTime
19   attribute crisisReminderPeriod:dtSecond
20   attribute maxCrisisReminderPeriod:dtSecond
21   attribute vpLastReminder:dtDateAndTime
22   attribute vpStarted:ptBoolean
23
24 operation init( AnextValueForAlertID:dtInteger,
25   AnextValueForCrisisID:dtInteger,
26   AnextValueForPointOfInterestID: dtInteger,
27   Aclock:dtDateAndTime,
28   AcrisisReminderPeriod:dtSecond ,
29   AmaxCrisisReminderPeriod:dtSecond ,
30   AvpLastReminder:dtDateAndTime ,
31   AvpStarted:ptBoolean ): ptBoolean
32 }
33
34 class ctAlert role rnctAlert cardinality [0...*]{
35   attribute id:dtAlertID
```

```

36   attribute status: etAlertStatus
37   attribute location:dtGPSLocation
38   attribute instant:dtDateAndTime
39   attribute comment:dtComment
40
41   operation init(    Aid:dtAlertID ,
42     Astatus:etAlertStatus ,
43     Alocation:dtGPSLocation ,
44     Ainstant:dtDateAndTime ,
45     Acomment:dtComment ):ptBoolean
46   operation isSentToCoordinator(AactCoordinator:actCoordinator ):ptBoolean
47
48 }
49
50 class ctCrisis role rnctCrisis cardinality [0..*]{
51   attribute id:dtCrisisID
52   attribute type:etCrisisType
53   attribute status: etCrisisStatus
54   attribute location:dtGPSLocation
55   attribute instant:dtDateAndTime
56   attribute comment:dtComment
57
58   operation init(
59     Aid:dtCrisisID ,
60     Atype:etCrisisType ,
61     Astatus:etCrisisStatus ,
62     Alocation:dtGPSLocation ,
63     Ainstant:dtDateAndTime ,
64     Acomment:dtComment ):ptBoolean
65
66   operation handlingDelayPassed():ptBoolean
67   operation maxHandlingDelayPassed():ptBoolean
68   operation isSentToCoordinator(AactCoordinator:actCoordinator ):ptBoolean
69   operation isAllocatedIfPossible():ptBoolean
70 }
71
72 class ctHuman role rnctHuman cardinality [0..*]{
73   attribute id:dtPhoneNumber
74   attribute kind:etHumanKind
75
76   operation init(
77     Aid:dtPhoneNumber ,
78     Akind:etHumanKind ):ptBoolean
79   operation isAcknowledged():ptBoolean
80 }
81
82 class ctPointOfInterest role rnctPointOfInterest cardinality [0..*] {
83   attribute id:dtPointOfInterestID
84   attribute type:etCategory
85   attribute location:dtGPSLocation
86   attribute description:dtDescription
87
88   operation init(
89     Aid:dtPointOfInterestID,
90     Atype:etCategory,
91     Alocation:dtGPSLocation,
92     Adescription:dtDescription) : ptBoolean
93 }
94
95 class ctAuthenticated
96   role rnctAuthenticated
97   cardinality [0..*]{
98
99   attribute login:dtLogin
100  attribute pwd: dtPassword
101  attribute mail: dtMail
102  attribute nbrfails: dtInteger
103  attribute vpIsLogged:ptBoolean
104
105  operation init(

```

```

106     Alogin:dtLogin ,
107     Apwd:dtPassword,
108     Amail:dtMail ):ptBoolean
109 }
110
111 class ctCoordinator
112   role rnctCoordinator
113   cardinality [0...*]
114 {
115
116   attribute id:dtCoordinatorID
117   attribute expRank:etExperienceRank
118   attribute expPoints:dtInteger
119
120   operation init(
121     Aid:dtCoordinatorID ,
122     Alogin:dtLogin ,
123     Apwd:dtPassword ):ptBoolean
124 }
125
126 class ctAdministrator
127   role rnctAdministrator
128   cardinality [1..1]
129 {
130
131   operation init(
132     Alogin:dtLogin ,
133     Apwd:dtPassword ):ptBoolean
134 }
135 }
136 }
137 }
```

Listing C.38: Messir Spec. file primarytypes-classes.msr.

C.39 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatYPES/primarytypes-datatypeS-dtAlertID.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtAlertID{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtAlertID.is():ptBoolean{
8
9     postF{
10       let TheResult: ptBoolean in
11       ( if
12         ( AdtValue.value.length().gt(0)
13           and AdtValue.value.length().leq(20)
14         )
15         then (TheResult = true)
16         else (TheResult = false)
17       endif
18       result = TheResult
19     ) }
20   prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtAlertID-is.pl"}
21 }
22 }
23 }
```

Listing C.39: Messir Spec. file primarytypes-datatypeS-dtAlertID.msr.

C.40 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatYPES/primarytypes-datatypeS-dtComment.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtComment{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtComment.is():ptBoolean{
8
9     postF{
10       let TheResult: ptBoolean in
11       ( if
12         ( MaxLength = 160
13           and AdtValue.value.length().leq(MaxLength)
14         )
15       then (TheResult = true)
16       else (TheResult = false)
17     endif
18     result = TheResult
19   }
20 }
21 prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtComment-is.pl"}
22 }
23 }
24 }
```

Listing C.40: Messir Spec. file primarytypes-datatypes-dtComment.msr.

C.41 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-dtCoordinatorID.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtCoordinatorID{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6   operation: icrash.concepts.primarytypes.datatypes.dtCoordinatorID.is():ptBoolean{
7
8     postF{
9       let TheResult: ptBoolean in
10      ( if
11        ( AdtValue.value.length().gt(0)
12          and AdtValue.value.length().leq(5)
13        )
14      then (TheResult = true)
15      else (TheResult = false)
16    endif
17    result = TheResult
18  }
19 }
20 prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtCoordinatorID-is.pl"}
21 }
22 }
23 }
```

Listing C.41: Messir Spec. file primarytypes-datatypes-dtCoordinatorID.msr.

C.42 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-dtCrisisID.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtCrisisID{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
```

```

7  operation: icrash.concepts.primarytypes.datatypes.dtCrisisID.is():ptBoolean{
8
9    postF{
10      let TheResult: ptBoolean in
11      (if
12        (AdtValue.value.length().gt(0)
13        and AdtValue.value.length().leq(10)
14      )
15      then (TheResult = true)
16      else (TheResult = false)
17      endif
18      result = TheResult
19    )
20  }
21  prolog"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtCrisisID-is.pl"
22 }
23 }
24 }
```

Listing C.42: Messir Spec. file primarytypes-datatatypes-dtCrisisID.msr.

C.43 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatatypes-dtDescription-is.msr

```

1 package icrash.concepts.primarytypes.datatypes.operations.datatypes.dtDescription.is {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 Operation Model {
9
10   operation: icrash.concepts.primarytypes.datatypes.dtDescription.is():ptBoolean{
11     // include below the specification information (pre,post or ocl or prolog)
12     postF{
13
14       let TheResult: ptBoolean in
15       (if
16         (MaxLength = 280
17         and AdtValue.value.length().leq(MaxLength)
18       )
19       then (TheResult = true)
20       else (TheResult = false)
21       endif
22       result = TheResult
23     )
24
25   }
26
27 }
28 }
29 }
```

Listing C.43: Messir Spec. file primarytypes-datatatypes-dtDescription-is.msr.

C.44 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatatypes-dtExpPoints-is.msr

```

1 package icrash.concepts.primarytypes.datatypes.operations.datatypes.dtExpPoints.is {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
```

```

8 Operation Model {
9
10 operation: icrash.concepts.primarytypes.datatypes.dtExpPoints.is():ptBoolean{
11 // include below the specification information (pre,post or ocl or prolog)
12
13 postF{
14     let TheResult: ptBoolean in
15     ( if
16     ( self.value.geq(0)
17     and self.value.leq(+120)
18     )
19     then (TheResult = true)
20     else (TheResult = false)
21     endif
22     result = TheResult
23   )
24 }
25
26 }
27 }
28 }
```

Listing C.44: Messir Spec. file primarytypes-datatatypes-dtExpPoints-is.msr.

C.45 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatatypes-dtGPSLocation-DistanceTo.msr

```

1 package icrash.concepts.primarytypes.datatypes.operations.datatypes.dtgpslocation.DistanceTo {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 Operation Model {
10
11 operation: icrash.concepts.primarytypes.datatypes.dtgpslocation.DistanceTo(AGPSLocation:
12 dtGPSLocation):ptReal{
13 // include below the specification information (pre,post or ocl or prolog)
14 postF{
15     let Result :ptReal in
16     let EarthRadius : dtReal = 6371000 in
17     let Rlat1 : dtReal in let Rlatia : dtReal in
18     let Rlong1 : dtReal in let Rlongla : dtReal in
19     let Deltalat : dtReal in let Deltalong : dtReal in
20     let a1: dtReal in let a2:dtReal in
21     let a3: dtReal in let a : dtReal in
22     let c1: dtReal in let c: dtReal in
23
24     and Rlat1 = self.latitude.toRad()
25     and Rlatia = adtValue.latitude.toRad()
26     and Rlong1 = self.longitude.toRad()
27     and Rlongla = adtValue.longitude.toRad()
28     and Deltalat = Rlat1.sub(Rlatia)
29     and Deltalong = Rlongla.sub(Rlong1)
30     and a1 = Deltalat.div(2).sin().power(2)
31     and a2 = Rlat1.cos().mult(Rlatia.cos())
32     and a3 = Deltalong.div(2).sin().power(2)
33     and a4 = a1.add(a2.mult(a3))
34     and c1 = a4.sub(1).power(2)
35     and c = atan(a4.power(2),c1).mult(2)
36     and Result = EarthRadius.mult(c).asptReal()
37   }
38 }
```

39 }

Listing C.45: Messir Spec. file primarytypes-datatatypes-dtGPSLocation-DistanceTo.msr.

C.46 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatatypes-dtGPSLocation.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtGPSLocation{
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5
6 import icrash.concepts.primarytypes.datatypes
7 import icrash.concepts.primarytypes.classes
8 import icrash.concepts.secondarytypes.datatypes
9 import icrash.concepts.secondarytypes.classes
10
11 Operation Model {
12
13     operation: icrash.concepts.primarytypes.datatypes.dtGPSLocation.is():ptBoolean{
14         postF{
15             let TheResult: ptBoolean in
16             ( if
17                 ( AdtValue.latitude.is()
18                     and AdtValue.longitude.is
19                 )
20                 then (TheResult = true)
21                 else (TheResult = false)
22             endif
23             result = TheResult
24         )
25     }
26     prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtGPSLocation-is.pl"}
27 }
28
29     operation: icrash.concepts.primarytypes.datatypes.dtGPSLocation.isNearTo(aGPSLocation:
30         dtGPSLocation):ptBoolean{
31         postF{
32             let TheResult: ptBoolean in true
33             let EarthRadius: dtReal in
34             let MaxDistance: dtReal in
35             let ComparedLatitude: dtLatitude in
36             let ComparedLongitude: dtLongitude in
37             let R1: dtReal in let R1a: dtReal in
38             let R2: dtReal in let R2a: dtReal in
39
40             ( if
41                 ( EarthRadius.value = 6371
42                   and MaxDistance.value = 100
43
44                   and AdtValue.latitude = ComparedLatitude
45                   and AdtValue.longitude = ComparedLongitude
46                   and Self.latitude.sin() = R1a
47                   and AdtValue.latitude.sin().mul(R1a) = R1
48                   and Self.latitude.cos() = R2a
49                   and AdtValue.latitude.cos().mul(R2a) = R2
50
51                   and AdtValue.longitude = ComparedLongitude
52                   and Self.longitude.sub(ComparedLongitude).cos().mul(R2)
53                     .add(R1).acos().mul(EarthRadius).sub(MaxDistance)
54                     .value.leq(0)
55             )
56             then (TheResult = true)
57             else (TheResult = false)
58         endif
59         result = TheResult
60     }
61 }
```

```

61  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtGPSLocation-isNearTo
       .pl"}
62 }
63 operation: icrash.concepts.primarytypes.datatypes.dtLatitude.is():ptBoolean{
64 postF{
65   let TheResult: ptBoolean in
66   ( if
67     ( AdtValue.value.geq(-90.0)
68     and AdtValue.value.leq(+90.0)
69   )
70   then (TheResult = true)
71   else (TheResult = false)
72   endif
73   result = TheResult
74 }
75 prolog{ "src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtLatitude-is.pl"}
76 }
77 operation: icrash.concepts.primarytypes.datatypes.dtLongitude.is():ptBoolean{
78 postF{
79   let TheResult: ptBoolean in
80   ( if
81     ( AdtValue.value.geq(-180.0)
82     and AdtValue.value.leq(+180.0)
83   )
84   then (TheResult = true)
85   else (TheResult = false)
86   endif
87   result = TheResult
88 }
89 prolog{ "src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtLongitude-is.pl"}
90 }
91 }
92 }

```

Listing C.46: Messir Spec. file primarytypes-datatatypes-dtGPSLocation.msr.

C.47 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatatypes/primarytypes-datatatypes-dtLogin.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtLogin{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7 operation: icrash.concepts.primarytypes.datatypes.dtLogin.is():ptBoolean{
8 postF{
9   let TheResult: ptBoolean in
10  let MaxLength: ptInteger in
11  ( if
12    ( MaxLength = 20
13    and AdtValue.value.length().leq(MaxLength)
14  )
15  then (TheResult = true)
16  else (TheResult = false)
17  endif
18  result = TheResult
19 }
20 }
21 prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtLogin-is.pl"}
22 }
23 }
24 }

```

Listing C.47: Messir Spec. file primarytypes-datatatypes-dtLogin.msr.

C.48 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-dtPassword.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtPassword{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtPassword.is():ptBoolean{
8     postF{
9       let TheResult: ptBoolean in
10      let MinLength: ptInteger in
11      ( if
12        ( MinLength = 6
13          and AdtValue.value.length().geq(MinLength)
14        )
15        then (TheResult = true)
16        else (TheResult = false)
17      endif
18      result = TheResult
19    )
20  }
21  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtPassword-is.pl"}
22 }
23 }
24 }
```

Listing C.48: Messir Spec. file primarytypes-datatypes-dtPassword.msr.

C.49 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-dtPhoneNumber.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtPhoneNumber{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtPhoneNumber.is():ptBoolean{
8
9     postF{
10       let TheResult: ptBoolean in
11       ( if
12         ( AdtValue.value.length().gt(4)
13           and AdtValue.value.length().leq(30)
14         )
15         then (TheResult = true)
16         else (TheResult = false)
17       endif
18       result = TheResult
19     )
20  }
21  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtPhoneNumber-is.pl"}
22 }
23 }
24 }
```

Listing C.49: Messir Spec. file primarytypes-datatypes-dtPhoneNumber.msr.

C.50 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-dtPointOfInterestID-is.msr

```
1 package icrash.concepts.primarytypes.datatypes.operations.datatypes.dtPointOfInterestID.is {
```

```

2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 Operation Model {
9
10 operation: icrash.concepts.primarytypes.datatypes.dtPointOfInterestID.is():ptBoolean{
11 // include below the specification information (pre,post or ocl or prolog)
12 postF{
13 let TheResult: ptBoolean in
14 ( if
15 ( AdtValue.value.length().gt(0)
16 and AdtValue.value.length().leq(30)
17 )
18 then (TheResult = true)
19 else (TheResult = false)
20 endif
21 result = TheResult
22 )
23 }
24 }
25 }

```

Listing C.50: Messir Spec. file primarytypes-datatype-dtPointOfInterestID-is.msr.

C.51 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatype-dtPointOfInterestID-is.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.etAlertStatus{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7 operation: icrash.concepts.primarytypes.datatypes.etAlertStatus.is():ptBoolean{
8 postF{
9 let TheResult: ptBoolean in
10 ( if
11 ( self = pending
12 or self = valid
13 or self = invalid
14 )
15 then (TheResult = true)
16 else (TheResult = false)
17 endif
18 result = TheResult
19 )
20 }
21 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesDatatypes-etAlertStatus-is.pl"}
22 }
23 }
24 }

```

Listing C.51: Messir Spec. file primarytypes-datatype-etAlertStatus.msr.

C.52 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatype-dtCategory-is.msr

```

1 package icrash.concepts.primarytypes.datatypes.operations.datatypes.etCategory.is {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar

```

```

7
8 Operation Model {
9
10 operation: icrash.concepts.primarytypes.datatypes.etCategory.is():ptBoolean{
11 // include below the specification information (pre,post or ocl or prolog)
12 postF{
13     let TheResult: ptBoolean in
14     ( if
15         ( self = Hospital
16         or self = Police station
17         or self = Garage
18         or self = Parking
19         or self = Insurance Office
20         or self = Fire station
21     )
22     then (TheResult = true)
23     else (TheResult = false)
24     endif
25     result = TheResult
26   )
27 }
28 }
29 }
30 }
```

Listing C.52: Messir Spec. file primarytypes-datatypes-etCategory-is.msr.

C.53 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-etCrisisStatus.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.etCrisisStatus{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7 operation: icrash.concepts.primarytypes.datatypes.etCrisisStatus.is():ptBoolean{
8 postF{
9     let TheResult: ptBoolean in
10    ( if
11        ( self = pending
12        or self = handled
13        or self = solved
14        or self = closed
15    )
16    then (TheResult = true)
17    else (TheResult = false)
18    endif
19    result = TheResult
20  )
21 }
22 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesDatatypes-etCrisisStatus-is.pl"}
23 }
24 }
25 }
```

Listing C.53: Messir Spec. file primarytypes-datatypes-etCrisisStatus.msr.

C.54 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-etCrisisType.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.etCrisisType{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
```

```

6
7 operation: icrash.concepts.primarytypes.datatypes.etCrisisType.is():ptBoolean{
8 postF{
9   let TheResult: ptBoolean in
10  (if
11    (self = small
12    or self = medium
13    or self = huge
14  )
15  then (TheResult = true)
16  else (TheResult = false)
17  endif
18  result = TheResult
19  )
20  }
21 prolog"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesDatatypes-etCrisisType-is.pl"
22 }
23 }
24 }
```

Listing C.54: Messir Spec. file primarytypes-datatatypes-etCrisisType.msr.

C.55 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-etExperienceRank-is.msr

```

1 package icrash.concepts.primarytypes.datatypes.operations.datatype.etExperienceRank.is {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 Operation Model {
9
10 operation: icrash.concepts.primarytypes.datatypes.etExperienceRank.is():ptBoolean{
11 // include below the specification information (pre,post or ocl or prolog)
12
13 postF{
14   let TheResult: ptBoolean in
15   (if
16     (self = Novice
17     or self = Intermediate
18     or self = Expert
19   )
20   then (TheResult = true)
21   else (TheResult = false)
22   endif
23   result = TheResult
24  )
25  }
26
27 }
28 }
29 }
```

Listing C.55: Messir Spec. file primarytypes-datatatypes-etExperienceRank-is.msr.

C.56 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-etHumanKind.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.etHumanKind{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
```

```

7  operation: icrash.concepts.primarytypes.datatypes.ethumankind.is():ptBoolean{
8    postF{
9      let TheResult: ptBoolean in
10     (if
11       (self = witness
12       or self = victim
13       or self = anonymous
14     )
15     then (TheResult = true)
16     else (TheResult = false)
17     endif
18     result = TheResult
19   )
20 prolog"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesDatatypes-etHumanKind-is.pl"
21 }
22 }
23 }
```

Listing C.56: Messir Spec. file primarytypes-datatatypes-etHumanKind.msr.

C.57 File [./src-gen/messir-spec/concepts/primarytypes-datatypes.msr](#)

```

1 package icrash.concepts.primarytypes.datatypes {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.string
5 import lu.uni.lassy.messir.libraries.math
6 import lu.uni.lassy.messir.libraries.calendar
7
8 Concept Model {
9
10   Primary Types {
11     datatype dtPointOfInterestID extends dtString {
12       operation is():ptBoolean
13     }
14     datatype dtAlertID extends dtString {
15       operation is():ptBoolean
16     }
17     datatype dtCrisisID extends dtString {
18       operation is():ptBoolean
19     }
20     datatype dtLogin extends dtString {
21       operation is():ptBoolean
22     }
23     datatype dtPassword extends dtString {
24       operation is():ptBoolean
25       external operation generatePassword():dtPassword
26     }
27     datatype dtMail extends dtString {
28       operation is():ptBoolean
29     }
30     datatype dtCaptcha extends dtString {
31       operation is():ptBoolean
32       external operation generateCaptcha():dtCaptcha
33     }
34     datatype dtCoordinatorID extends dtString {
35       operation is():ptBoolean
36     }
37     datatype dtPhoneNumber extends dtString {
38       operation is():ptBoolean
39     }
40     datatype dtComment extends dtString {
41       operation is():ptBoolean
42     }
43     datatype dtDescription extends dtString {
44       operation is():ptBoolean
45     }
}
```

```

46  datatype dtLatitude extends dtReal {
47    operation is():ptBoolean
48  }
49  datatype dtLongitude extends dtReal {
50    operation is():ptBoolean
51  }
52  datatype dtGPSLocation {
53    attribute latitude: dtLatitude
54    attribute longitude: dtLongitude
55    operation is():ptBoolean
56    operation isNearTo(AGPSLocation:dtGPSLocation ):ptBoolean
57    operation DistanceTo(AGPSLocation:dtGPSLocation) : ptReal
58  }
59  datatype dtExpPoints extends dtInteger{
60    operation is():ptBoolean
61  }
62
63  enum etCrisisStatus {
64    constants["pending", "handled", "solved","closed"]
65    operation is():ptBoolean
66  }
67  enum etAlertStatus {
68    constants["pending", "valid", "invalid"]
69    operation is():ptBoolean
70  }
71  enum etCrisisType {
72    constants["small", "medium", "huge"]
73    operation is():ptBoolean
74  }
75  enum etHumanKind {
76    constants["witness", "victim", "anonymous"]
77    operation is():ptBoolean
78  }
79  enum etCategory {
80    constants["Hospital","Police station","Garage","Parking","Insurance Office","Fire station" ]
81    operation is():ptBoolean
82  }
83  enum etExperienceRank {
84    constants["novice", "intermediate", "expert"]
85    operation is():ptBoolean
86  }
87 }
88 }
89 }
```

Listing C.57: Messir Spec. file primarytypes-datatatypes.msr.

C.58 File ./src-gen/messir-spec/concepts/secondarytypes-associations.msr

```

1 package icrash.concepts.secondarytypes.associations {
2
3 Concept Model {
4
5   Secondary Types{
6
7   }
8 }
9 }
```

Listing C.58: Messir Spec. file secondarytypes-associations.msr.

C.59 File ./src-gen/messir-spec/concepts/secondarytypes-classes.msr

```
1 package icrash.concepts.secondarytypes.classes {
```

```

2
3 Concept Model {
4
5 Secondary Types{
6
7 }
8 }
9 }
```

Listing C.59: Messir Spec. file secondarytypes-classes.msr.

C.60 File**./src-gen/messir-spec/concepts/secondarytypes-**
datatypes.msr

```

1 package icrash.concepts.secondarytypes.datatypes {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.string
5
6 import icrash.concepts.primarytypes.datatypes
7
8 Concept Model {
9
10 Secondary Types {
11
12 datatype dtSMS {
13     attribute value: ptString
14     operation is():ptBoolean
15 }
16 }
17 }
18 }
```

Listing C.60: Messir Spec. file secondarytypes-datatypes.msr.

C.61 File**./src-gen/messir-spec/usecases/subfunctions-usecases.msr**

```

1 package icrash.usecases.subfunctions {
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 import icrash.concepts.primarytypes.datatypes
6 import icrash.concepts.primarytypes.classes
7 import icrash.concepts.secondarytypes.datatypes
8 import lu.uni.lassy.messir.libraries.primitives
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.calendar
11
12 import icrash.environment
13
14 Use Case Model {
15
16 //-----
17 use case system subfunction oeAddCoordinator(AdtCoordinatorID:dtCoordinatorID, AdtLogin:dtLogin,
18     AdtPassword:dtPassword) {
19     actor actAdministrator[primary,active]
20     returned messages {
21         ieCoordinatorAdded() returned to actAdministrator
22     }
23 //-----
24 use case system subfunction oeAlert(
25     AetKind:etHumanKind,
26     AdtMyDate:dtDate,
27     AdtTime:dtTime,
28     AdtPhoneNumber:dtPhoneNumber,
29     AdtGPSLocation:dtGPSLocation,
```

```

30             AdtComment:dtComment) {
31     actor actComCompany[primary,active]
32     returned messages {
33         ieSmsSend(AdtPhoneNumber,AdtSMS) returned to actComCompany
34     }
35 }
36 /**
37 use case system subfunction oeInvalidateAlert(AdtAlertID:dtAlertID) {
38     actor actCoordinator[primary,active]
39     actor actComCompany[secondary,passive]
40     returned messages {
41         ieMessage(AMessage) returned to actCoordinator
42     }
43 }
44 /**
45 use case system subfunction oeCloseCrisis(AdtCrisisID:dtCrisisID) {
46     actor actCoordinator[primary,active]
47     returned messages {
48         ieMessage(AMessage) returned to actCoordinator
49     }
50 /**
51 use case system subfunction oeCreateSystemAndEnvironment(AqtyComCompanies:ptInteger) {
52     actor actMsrCreator[primary,active]
53 }
54 /**
55 use case system subfunction oeDeleteCoordinator(AdtCoordinatorID:dtCoordinatorID) {
56     actor actAdministrator[primary,active]
57     returned messages {
58         ieCoordinatorDeleted() returned to actAdministrator
59     }
60 }
61 /**
62 use case system subfunction oeGetAlertsSet(AetAlertStatus:etAlertStatus) {
63     actor actCoordinator[primary,active]
64     returned messages {
65         ieSendAnAlert(ActAlert) returned to actCoordinator
66     }
67 }
68 /**
69 use case system subfunction oeGetCrisisSet(AetCrisisStatus:etCrisisStatus) {
70     actor actCoordinator[primary,active]
71     returned messages {
72         ieSendACrisis(ActCrisis) returned to actCoordinator
73     }
74 }
75 /**
76 use case system subfunction oeSetCrisisHandler(AdtCrisisID:dtCrisisID) {
77     actor actCoordinator[primary,active]
78     actor actCoordinator[secondary,passive]
79     actor actComCompany[secondary,passive,multiple]
80     returned messages {
81         ieMessage(AMessage)
82         returned to actCoordinator
83         ieSendAnAlert(ActAlert)
84         returned to actCoordinator
85         ieSmsSend(AdtPhoneNumber,AdtSMS)
86         returned to actComCompany
87     }
88 }
89 /**
90 use case system subfunction oeLogin(AdtLogin:dtLogin , AdtPassword:dtPassword) {
91     actor actAuthenticated[primary,active]
92     returned messages {
93         ieMessage(AMessage) returned to actAuthenticated
94     }
95 }
96 /**
97 use case system subfunction oeLogout() {
98     actor actAuthenticated[primary,active]
99     returned messages {

```

```

100     ieMessage(AMessage) returned to actAuthenticated
101   }
102 }
103 //-
104 use case system subfunction oeReportOnCrisis(AdtCrisisID:dtCrisisID,AdtComment:dtComment) {
105   actor actCoordinator[primary,active]
106   returned messages {
107     ieMessage(AMessage) returned to actCoordinator
108   }
109 }
110 //-
111 use case system subfunction oeSetClock(AcurrentClock:dtDateAndTime) {
112   actor actActivator[primary,proactive]
113 }
114 //-
115 use case system subfunction oeSetCrisisStatus(AdtCrisisID:dtCrisisID ,AetCrisisStatus:
116   etCrisisStatus) {
117   actor actCoordinator[primary,active]
118   returned messages {
119     ieMessage(AMessage) returned to actCoordinator
120   }
121 //}
122 use case system subfunction oeSolicitCrisisHandling() {
123   actor actActivator[primary,proactive]
124   actor actCoordinator[secondary,passive,multiple]
125   actor actAdministrator[secondary,passive]
126   returned messages {
127     ieMessage(AMessage) returned to actCoordinator
128     //ieMessage(AMessage) returned to actAdministrator
129   }
130 }
131 //
132 use case system subfunction oeValidateAlert(AdtAlertID:dtAlertID) {
133   actor actCoordinator[primary,active]
134   returned messages {
135     ieMessage(AMessage) returned to actCoordinator
136   }
137 }
138 //-
139 use case system subfunction oeResetPassword(AdtMail:dtMail) {
140   actor actAuthenticated[primary,active]
141   actor actAdministrator[secondary,passive]
142   returned messages {
143     ieMessage(AMessage) returned to actAuthenticated
144     ieMessage2(BMessage) returned to actAdministrator
145   }
146 }
147 use case system subfunction oeFillCaptcha(AdtString:ptString) {
148   actor actAuthenticated[primary,active]
149   returned messages {
150     ieMessage(AMessage) returned to actAuthenticated
151   }
152 }
153 //-
154 use case system subfunction oeAddPointOfInterest(
155   AdtCategory:etCategory,
156   AdtGPSLocation:dtGPSLocation,
157   AdtDescription:dtDescription)
158   {
159   actor actAdministrator[primary, active]
160   returned messages {
161     iePointOfInterestAdded() returned to actAdministrator
162   }
163 }
164 //
165 }
166 //-
167 use case system subfunction oeDeletePointOfInterest(AdtPointOfInterestID:dtPointOfInterestID)
168 {

```

```

169 actor actAdministrator[primary, active]
170 returned messages {
171   iePointOfInterestDeleted() returned to actAdministrator
172 }
173 }
174 //-----
175 use case system subfunction oeEditPointOfInterest(AdtPointOfInterestID:dtPointOfInterestID,
176           AdtCategory:etCategory,
177           AdtGPSLocation:dtGPSLocation,
178           AdtDescription:dtDescription) {
179 actor actAdministrator[primary, active]
180 returned messages {
181   iePointOfInterestEdited() returned to actAdministrator
182 }
183 }
184 //-----
185 use case system subfunction oeRankDownCoordinator(AdtCoordinatorID:dtCoordinatorID) {
186
187 actor actAdministrator[primary, active]
188 returned messages {
189   ieRankEdited() returned to actAdministrator
190 }
191 }
192 //-----
193 use case system subfunction oeSelectCategories(AdtCategory:etCategory) {
194 actor actAdministrator[primary, active]
195 returned messages{
196   ieCategorySelected(AdtCategory) returned to actAdministrator
197 }
198 }
199 use case system subfunction oeClosestToALocation(aDtGPSLocation:dtGPSLocation) {
200 actor actAdministrator[primary, active]
201
202 }
203
204 use case system subfunction oeSetCrisisType() {
205 actor actCoordinator[primary, active]
206 returned messages {
207   ieMessage(AMessage) returned to actCoordinator
208 }
209 }
210 }
211 }

```

Listing C.61: Messir Spec. file subfunctions-usecases.msr.

C.62 File ./src-gen/messir-spec/test/tc-testcase01.msr

```

1 package lu.uni.lassy.excalibur.examples.icrash.tests.testcase01 {
2
3 import lu.uni.lassy.messir.libraries.string
4 import lu.uni.lassy.messir.libraries.primitives
5 import lu.uni.lassy.messir.libraries.math
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.associations
9 import icrash.concepts.primarytypes.classes
10 import icrash.concepts.primarytypes.datatypes
11 import icrash.concepts.secondarytypes.datatypes
12 import icrash.environment
13
14 Test Model{
15   test case testcase01 order 01 {
16   //-----
17   test step ts01oeCreateSystemAndEnvironment order 01 {
18     variables{
19       Creator:actMsrCreator
20       AqtyComCompanies: ptInteger
21     }

```

```

22   constraints{
23     AqtyComCompanies = 4
24   }
25   test message{
26     out:Creator sends to system actMsrCreator.outactMsrCreator.oeCreateSystemAndEnvironment(
27     AqtyComCompanies)
28   }
29   oracle{
30     constraints{
31       true
32     }
33     prolog{"src/Tests/system/01/system-sim-01-01-oeCreateSystemAndEnvironment.pl"}
34   }
35 //-----
36 test step ts02oeSetClock order 02{
37   variables{
38     TheActor:actActivator
39     ACurrentClock:dtDateAndTime
40   }
41   constraints{
42     TheActor=TheSystem.rnactActivator->any2(true)
43
44     ACurrentClock.date.year.value = 2017
45     ACurrentClock.date.month.value = 11
46     ACurrentClock.date.day.value = 24
47     ACurrentClock.time.hour.value = 15
48     ACurrentClock.time.minute.value = 20
49     ACurrentClock.time.second.value = 00
50   }
51   test message{
52     out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
53   }
54   oracle{
55     constraints{
56       true
57     }
58   }
59 }
60 //-----
61
62 test step ts03oeLogin order 03{
63   variables{
64     TheActor : actAdministrator
65     AdtLogin:dtLogin
66     AdtPassword:dtPassword
67   }
68   constraints{
69     TheActor=TheSystem.rnactAdministrator->any2(true)
70     AdtLogin.value.eq('icrashadmin')
71     AdtPassword.value.eq('7WXC1359')
72   }
73   test message{
74     out:TheActor sends to system actAdministrator.outactAdministrator.oeLogin(AdtLogin,AdtPassword)
75   }
76   oracle{
77     variables{
78       AMESSAGE:ptString
79     }
80     constraints{
81       AMESSAGE = 'You are logged ! Welcome ...'
82       TheActor.inactAdministrator.ieMessage(AMESSAGE)
83     }
84   }
85 }
86 //-----
87 test step ts04oeAddCoordinator order 04{
88   variables{
89     TheActor : actAdministrator
90     AdtCoordinatorID : dtCoordinatorID

```

```

91     AdtLogin:dtLogin
92     AdtPassword:dtPassword
93   }
94   constraints{
95     TheActor = TheSystem.rnactAdministrator->any2(true)
96     AdtCoordinatorID.value.eq('1')
97     AdtLogin.value.eq('steve')
98     AdtPassword.value.eq('pwdMessirExcalibur2017')
99   }
100  test message{
101    out:TheActor
102    sends to system actAdministrator.outactAdministrator.oeAddCoordinator
103      (AdtCoordinatorID,
104       AdtLogin,
105       AdtPassword)
106  }
107  oracle{
108    constraints{
109      TheActor.inactAdministrator.ieCoordinatorAdded()
110    }
111  }
112 }

113 //-----  

114 test step ts05oeLogout order 05{
115   variables{
116     TheActor : actAdministrator
117   }
118   constraints{
119     TheActor = TheSystem.rnactAdministrator->any2(true)
120   }
121   test message{
122     out:TheActor sends to system actAdministrator.outactAdministrator.oeLogout()
123   }
124   oracle{
125     variables{
126       AMessage:ptString
127     }
128     constraints{
129       AMessage = 'You are logged out ! Good Bye ...'
130       TheActor.inactAdministrator.ieMessage(AMessage)
131     }
132   }
133 }

134 //-----  

135 test step ts06oeSetClock02 order 06{
136   variables{
137     TheActor:actActivator
138     ACurrentClock:dtDateAndTime
139   }
140   constraints{
141     TheActor=TheSystem.rnactActivator->any2(true)
142     ACurrentClock.date.year.value = 2017
143     ACurrentClock.date.month.value = 11
144     ACurrentClock.date.day.value = 26
145     ACurrentClock.time.hour.value = 10
146     ACurrentClock.time.minute.value = 15
147     ACurrentClock.time.second.value = 00
148   }
149   test message{
150     out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
151   }
152   oracle{
153     constraints{
154       true
155     }
156   }
157 }

158 //-----  

159 test step ts07oeAlert1 order 07{
160   variables{

```

```

161     TheActor : actComCompany
162     AetHumanKind:etHumanKind
163     AdtDate:dtDate
164     AdtTime:dtTime
165     AdtPhoneNumber:dtPhoneNumber
166     AdtGPSLocation:dtGPSLocation
167     AdtComment:dtComment
168 }
169 constraints{
170     TheActor = TheSystem.rnactComCompany->any2(true)
171     AetHumanKind = witness
172     AdtDate.year.value = 2017
173     AdtDate.month.value = 11
174     AdtDate.day.value = 26
175     AdtTime.hour.value = 10
176     AdtTime.minute.value = 10
177     AdtTime.second.value = 16
178     AdtPhoneNumber.value = '+3524666445252'
179     AdtGPSLocation.latitude.value = 49.627675
180     AdtGPSLocation.longitude.value = 6.159590
181     AdtComment.value = '3 cars involved in an accident.'
182 }
183 test message{
184     out:TheActor
185     sends to system actComCompany.outactComCompany.oeAlert( AetHumanKind,
186         AdtDate,
187         AdtTime,
188         AdtPhoneNumber,
189         AdtGPSLocation,
190         AdtComment)
191 }
192 oracle{
193     variables{
194         AdtSMS:dtSMS
195     }
196     constraints{
197         AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
198         TheActor.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
199     }
200 }
201 }
202 //-----
203 test step ts08oeSetClock03 order 08{
204     variables{
205         TheActor:actActivator
206         ACurrentClock:dtDateAndTime
207     }
208     constraints{
209         TheActor=TheSystem.rnactActivator->any2(true)
210         ACurrentClock.date.year.value = 2017
211         ACurrentClock.date.month.value = 11
212         ACurrentClock.date.day.value = 26
213         ACurrentClock.time.hour.value = 10
214         ACurrentClock.time.minute.value = 30
215         ACurrentClock.time.second.value = 00
216     }
217     test message{
218         out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
219     }
220     oracle{
221         constraints{
222             true
223         }
224     }
225 }
226 //-----
227 test step ts09oeSollicitateCrisisHandling order 09{
228     variables{
229         TheActor : actActivator
230     }

```

```

231   constraints{
232     TheActor = TheSystem.rnactActivator->any2(true)
233   }
234   test message{
235     out:TheActor sends to system actActivator.outactActivator.oeSollicitateCrisisHandling()
236   }
237   oracle{
238     variables{
239       TheAdministrator:actAdministrator
240       TheCoordinator:actCoordinator
241       AMessagForCrisisHandlers:ptString
242     }
243     constraints{
244       TheAdministrator = TheSystem.rnactAdministrator->any2(true)
245       TheCoordinator = TheSystem.rnactCoordinator->any2(true)
246       AMessagForCrisisHandlers = 'There are alerts pending since more than the defined delay. Please
REACT !'
247
248       TheAdministrator.inactAdministrator.ieMessage(AMessagForCrisisHandlers)
249       TheCoordinator.inactAdministrator.ieMessage(AMessagForCrisisHandlers)
250
251 /* this oracle should be written like this (not currently possible due to grammar limitations:
252
253   oracle{
254     variables{
255       TheAdministrator:actAdministrator
256       AMessagForCrisisHandlers:ptString
257     }
258     constraints{
259       AMessagForCrisisHandlers = 'There are alerts pending since more than the defined delay. Please
REACT !'
260       TheAdministrator = TheSystem.rnactAdministrator->any2(true)
261
262       TheSystem.rnactCoordinator->forAll(TheCoordinator:actCoordinator | TheCoordinator.
actAuthenticated.inactAuthenticated.ieMessage(AMessage))
263
264 */
265   }
266 }
267 }
268 //-----
269 test step ts10oeLogin02 order 10{
270   variables{
271     TheActor : actCoordinator
272     AdtLogin:dtLogin
273     AdtPassword:dtPassword
274   }
275   constraints{
276     TheActor = TheSystem.rnactCoordinator->select(a | a.rnctCoordinator.login.value.eq('steve'))->
any2(true)
277     AdtLogin.value.eq('steve')
278     AdtPassword.value.eq('pwdMessirExcalibur2017')
279   }
280   test message{
281     out:TheActor sends to system actAuthenticated.outactAuthenticated.oeLogin(AdtLogin,AdtPassword)
282   }
283   oracle{
284     variables{
285       AMessag:ptString
286     }
287     constraints{
288       AMessag = 'You are logged ! Welcome ...'
289       TheActor.inactAuthenticated.ieMessage(AMessag)
290     }
291   }
292 }
293 //-----
294 test step ts11oeGetCrisisSet order 11{
295   variables{
296     TheActor : actCoordinator

```

```

297     AetCrisisStatus : etCrisisStatus
298   }
299   constraints{
300     TheActor=TheSystem.rnactCoordinator
301     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
302     ->any2(true)
303     AetCrisisStatus = pending
304   }
305   test message{
306     out:TheActor sends to system actCoordinator.outactCoordinator.oeGetCrisisSet(AetCrisisStatus)
307   }
308   oracle{
309   //TODO - make consistent with test step implementation by adding Prolog code for input messages
310   variables{
311     ActCrisis:ctCrisis
312   }
313   constraints{
314     TheActor.inactCoordinator.ieSendACrisis(ActCrisis)
315   }
316   }
317   }
318 //-----
319 test step ts12oeSetCrisisHandler order 12{
320   variables{
321     TheActor : actCoordinator
322     AdtCrisisID : dtCrisisID
323   }
324   constraints{
325     TheActor=TheSystem.rnactCoordinator
326     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
327     ->any2(true)
328     //and AdtCrisisID.value= '1'
329   }
330   test message{
331     out:TheActor sends to system actCoordinator.outactCoordinator.oeSetCrisisHandler(AdtCrisisID)
332   }
333   oracle{
334   variables{
335     AMessag:ptString
336     AdtPhoneNumber:dtPhoneNumber
337     AdtSMS:dtSMS
338     ActAlert:ctAlert
339
340     TheComCompany: actComCompany
341     TheCoordinator:actCoordinator
342   }
343   constraints{
344     AMessag = 'You are now considered as handling the crisis !'
345     AdtSMS.value = 'The handling of your alert by our services is in progress !'
346     TheComCompany.inactComCompany.iesmsSend(AdtPhoneNumber,AdtSMS)
347     TheCoordinator.inactCoordinator.ieSendAnAlert(ActAlert)
348     TheActor.inactAuthenticated.ieMessage(AMessag)
349   }
350   }
351   }
352 //-----
353 test step ts13oeSetClock04 order 13{
354   variables{
355     TheActor:actActivator
356     ACurrentClock:dtDateAndTime
357   }
358   constraints{
359     TheActor=TheSystem.rnactActivator->any2(true)
360     ACurrentClock.date.year.value = 2017
361     ACurrentClock.date.month.value = 11
362     ACurrentClock.date.day.value = 26
363     ACurrentClock.time.hour.value = 10
364     ACurrentClock.time.minute.value = 45
365     ACurrentClock.time.second.value = 00
366   }

```

```

367  test message{
368      out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
369  }
370  oracle{
371      constraints{
372          true
373      }
374  }
375  }
376 //-----
377 test step ts14oeValidateAlert order 14{
378     variables{
379         TheActor : actCoordinator
380         AdtAlertID : dtAlertID
381     }
382     constraints{
383         TheActor=TheSystem.rnactCoordinator
384         ->select(a | a.rnctCoordinator.login.value.eq('steve'))
385         ->any2(true)
386         //and AdtAlertID.value= '1'
387     }
388     test message{
389         out:TheActor sends to system actCoordinator.outactCoordinator.oeValidateAlert(AdtAlertID)
390     }
391     oracle{
392         variables{
393             AMessage:ptString
394         }
395         constraints{
396             AMessage = 'The Alert is now declared as valid !'
397             TheActor.actAuthenticated.inactAuthenticated.ieMessage(AMessage)
398         }
399     }
400 }
401 //-----
402 test step ts15oeAlert2 order 15{
403     variables{
404         TheActor : actComCompany
405         AetHumanKind:etHumanKind
406         AdtDate:dtDate
407         AdtTime:dtTime
408         AdtPhoneNumber:dtPhoneNumber
409         AdtGPSLocation:dtGPSLocation
410         AdtComment:dtComment
411     }
412     constraints{
413         TheActor = TheSystem.rnactComCompany->any2(true)
414         AetHumanKind = witness
415         AdtDate.year.value = 2017
416         AdtDate.month.value = 11
417         AdtDate.day.value = 26
418         AdtTime.hour.value = 10
419         AdtTime.minute.value = 20
420         AdtTime.second.value = 00
421         AdtPhoneNumber.value = '+3524666445000'
422         AdtGPSLocation.latitude.value = 49.627095
423         AdtGPSLocation.longitude.value = 6.160251
424         AdtComment.value = 'A car crash just happened.'
425     }
426     test message{
427         out:TheActor
428         sends to system actComCompany.outactComCompany.oeAlert( AetHumanKind,
429                         AdtDate,
430                         AdtTime,
431                         AdtPhoneNumber,
432                         AdtGPSLocation,
433                         AdtComment)
434     }
435     oracle{
436         variables{

```

```

437     AdtSMS:dtSMS
438   }
439   constraints{
440     AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
441     TheActor.actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
442   }
443 }
444 }
445 //-
446 test step ts16oeSetClock05 order 16{
447   variables{
448     TheActor:actActivator
449     ACurrentClock:dtDateAndTime
450   }
451   constraints{
452     TheActor=TheSystem.rnactActivator->any2(true)
453     ACurrentClock.date.year.value = 2017
454     ACurrentClock.date.month.value = 11
455     ACurrentClock.date.day.value = 26
456     ACurrentClock.time.hour.value = 12
457     ACurrentClock.time.minute.value = 45
458     ACurrentClock.time.second.value = 00
459   }
460   test message{
461     out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
462   }
463   oracle{
464     constraints{
465       true
466     }
467   }
468 }
469 //-
470 test step ts17oeSetCrisisStatus order 17{
471   variables{
472     TheActor : actCoordinator
473     AdtCrisisID : dtCrisisID
474     AetCrisisStatus : etCrisisStatus
475   }
476   constraints{
477     TheActor=TheSystem.rnactCoordinator
478     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
479     ->any2(true)
480     //and AdtCrisisID.value= '1'
481     //and AetCrisisStatus = solved
482   }
483   test message{
484     out:TheActor sends to system actCoordinator.outactCoordinator.oeSetCrisisStatus(AdtCrisisID,
485     AetCrisisStatus)
486   }
487   oracle{
488     variables{
489       AMesssage:ptString
490     }
491     constraints{
492       AMesssage = 'The crisis status has been updated !'
493       TheActor.inactAuthenticated.ieMessage(AMesssage)
494     }
495   }
496 //-
497 test step ts18oeReportOnCrisis order 18{
498   variables{
499     TheActor : actCoordinator
500     AdtCrisisID : dtCrisisID
501     AdtComment : dtComment
502   }
503   constraints{
504     TheActor=TheSystem.rnactCoordinator
505     ->select(a | a.rnctCoordinator.login.value.eq('steve'))

```

```

506     ->any2(true)
507     //and AdtCrisisID.value= '1'
508     //and AdtComment.value = '3 victims sent to hospital, 2 cars evacuated and 4 rescue unit
mobilized'
509   }
510   test message{
511     out:TheActor sends to system actCoordinator.outactCoordinator.oeReportOnCrisis(AdtCrisisID,
AdtComment)
512   }
513   oracle{
514     variables{
515       AMessage:ptString
516     }
517     constraints{
518       AMessage = 'The crisis comment has been updated !'
519       TheActor.inactAuthenticated.ieMessage(AMessage)
520     }
521   }
522 }
523 /-----
524 test step ts19oeCloseCrisis order 19{
525   variables{
526     TheActor : actCoordinator
527     AdtCrisisID : dtCrisisID
528   }
529   constraints{
530     TheActor=TheSystem.rnactCoordinator
531     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
532     ->any2(true)
533     //and AdtCrisisID.value= '1'
534   }
535   test message{
536     out:TheActor sends to system actCoordinator.outactCoordinator.oeCloseCrisis(AdtCrisisID)
537   }
538   oracle{
539     variables {
540       AMessage:ptString
541     }
542     constraints{
543       AMessage = 'The crisis is now closed !'
544       TheActor.inactAuthenticated.ieMessage(AMessage)
545     }
546   }
547 }
548 }
549 }
550 }

```

Listing C.62: Messir Spec. file tc-testcase01.msr.

C.63 File ./src-gen/messir-spec/test/tci-testcase01-instance01.msr

```

1 package lu.uni.lassy.excalibur.examples.icrash.tests.testcase01.instance01 {
2
3 import lu.uni.lassy.messir.libraries.string
4 import lu.uni.lassy.messir.libraries.primitives
5 import lu.uni.lassy.messir.libraries.math
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.associations
9 import icrash.concepts.primarytypes.classes
10 import icrash.concepts.primarytypes.datatypes
11 import lu.uni.lassy.excalibur.examples.icrash.tests.testcase01
12 import icrash.environment
13
14 Test Model {
15   test case instance instance01:testcase01{
16   /-
17   test step instance tsi01:testcase01.ts01oeCreateSystemAndEnvironment{

```

```

18  variables {
19    theCreator:testcase01.ts01oeCreateSystemAndEnvironment.Creator = "theCreator"
20    AqtyComCompanies : testcase01.ts01oeCreateSystemAndEnvironment.AqtyComCompanies="4"
21  }
22  oracle {
23    satisfaction = "true"
24  }
25  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
26  }
27 //-----
28 test step instance tsi02: testcase01.ts02oeSetClock{
29  variables {
30    theClock:testcase01.ts02oeSetClock.TheActor = "theClock"
31    ACurrentClock : testcase01.ts02oeSetClock.ACurrentClock= "2017:11:24 - 03:20:00"
32  }
33  oracle {
34    satisfaction = "true"
35  }
36  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
37  }
38 //-----
39 test step instance tsi03: testcase01.ts03oeLogin{
40  variables {
41    bill:testcase01.ts03oeLogin.TheActor="bill"
42    AdtLogin : testcase01.ts03oeLogin.AdtLogin= "icrashadmin"
43    AdtPassword : testcase01.ts03oeLogin.AdtPassword= "7WXC1359"
44  }
45  oracle {
46    satisfaction = "true"
47    received message {
48      AMesssage : testcase01.ts03oeLogin.AMessage= 'You are logged ! Welcome ...'
49      tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
50    }
51  }
52  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
53  }
54 //-----
55 test step instance tsi04: testcase01.ts04oeAddCoordinator{
56  variables {
57    reuse tsi03.bill as testcase01.ts04oeAddCoordinator.TheActor
58    AdtCoordinatorID : testcase01.ts04oeAddCoordinator.AdtCoordinatorID = "1"
59    AdtLogin : testcase01.ts04oeAddCoordinator.AdtLogin= "steve"
60    AdtPassword : testcase01.ts04oeAddCoordinator.AdtPassword = "pwdMessirExcalibur2017"
61  }
62  oracle {
63    satisfaction = "true"
64    received message {
65      tsi03.bill received from system actAdministrator.inactAdministrator.ieCoordinatorAdded()
66    }
67  }
68  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
69  }
70 //-----
71 test step instance tsi05: testcase01.ts05oeLogout{
72  variables {
73    reuse tsi03.bill as testcase01.ts05oeLogout.TheActor
74  }
75  oracle {
76    satisfaction = "true"
77    received message {
78      AMesssage : testcase01.ts05oeLogout.AMessage= 'You are logged out ! Good Bye ...'
79      tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
80    }
81  }
82  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
83  }
84 //-----
85 test step instance tsi06: testcase01.ts06oeSetClock02{
86  variables {
87    reuse tsi02.theClock as testcase01.ts06oeSetClock02.TheActor

```

```

88     ACurrentClock : testcase01.ts06oeSetClock02.ACurrentClock= "2017:11:26 - 10:15:00"
89 }
90 oracle {
91     satisfaction = "true"
92 }
93 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
94 }
95 //-----
96 test step instance tsi07: testcase01.ts07oeAlert1{
97     variables {
98         tango:testcase01.ts07oeAlert1.TheActor ="tango"
99         AetHumanKind : testcase01.ts07oeAlert1.AetHumanKind = "witness"
100        AdtDate : testcase01.ts07oeAlert1.AdtDate = "2017:11:26"
101        AdtTime : testcase01.ts07oeAlert1.AdtTime = "10:10:16"
102        AdtPhoneNumber : testcase01.ts07oeAlert1.AdtPhoneNumber = "+3524666445252"
103        AdtGPSLocation : testcase01.ts07oeAlert1.AdtGPSLocation = "49.627675:6.159590"
104        AdtComment : testcase01.ts07oeAlert1.AdtComment = "3 cars involved in an accident."
105    }
106 oracle {
107     satisfaction = "true"
108     received message {
109         AdtSMS : testcase01.ts07oeAlert1.AdtSMS= 'Your alert has been registered. We will handle it and
keep you informed'
110         tsi07.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
111     }
112 }
113 }
114 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
115 }
116
117 //-----
118 test step instance tsi08: testcase01.ts08oeSetClock03{
119     variables {
120         reuse tsi02.theClock as testcase01.ts08oeSetClock03.ACurrentClock
121         ACurrentClock : testcase01.ts08oeSetClock03.ACurrentClock = "2017:11:26 - 10:30:00"
122     }
123 oracle {
124     satisfaction = "true"
125 }
126 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
127 }
128 //-----
129 test step instance tsi09: testcase01.ts09oeSollicitateCrisisHandling{
130     variables {
131         reuse tsi02.theClock as testcase01.ts09oeSollicitateCrisisHandling.TheActor
132         reuse tsi03.bill as testcase01.ts09oeSollicitateCrisisHandling.TheAdministrator
133     }
134 oracle {
135     satisfaction = "true"
136     received message {
137         steve:testcase01.ts09oeSollicitateCrisisHandling.TheCoordinator ="steve"
138         AMessageForCrisisHandlers : testcase01.ts09oeSollicitateCrisisHandling.
AMessageForCrisisHandlers= 'There are alerts pending since more than the defined delay. Please
REACT !'
139
140         tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(
AMessageForCrisisHandlers)
141         tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(
AMessageForCrisisHandlers)
142     }
143 }
144 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
145 }
146
147 //-----
148 test step instance tsi10: testcase01.ts10oeLogin02{
149     variables {
150         reuse tsi09.steve as testcase01.ts10oeLogin02.TheActor
151         AdtLogin : testcase01.ts10oeLogin02.AdtLogin = "steve"
152         AdtPassword : testcase01.ts10oeLogin02.AdtPassword= "pwdMessirExcalibur2017"

```

```

153    }
154  oracle {
155    satisfaction = "true"
156    received message {
157      AMessage : testcase01.ts10oeLogin02.AMessage= 'You are logged ! Welcome ...'
158      tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
159    }
160  }
161 }
162 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
163 }
164 //-----
165 test step instance tsill: testcase01.ts11oeGetCrisisSet{
166 variables {
167   reuse tsi09.steve as testcase01.ts11oeGetCrisisSet.TheActor
168   AdtCrisisStatus : testcase01.ts11oeGetCrisisSet.AetCrisisStatus = "pending"
169 }
170 oracle {
171   satisfaction = "true"
172   received message {
173     ActCrisis : testcase01.ts11oeGetCrisisSet.ActCrisis= "crisis with ID 1 details"
174     tsi09.steve received from system actCoordinator.inactCoordinator.ieSendACrisis(ActCrisis)
175   }
176 }
177 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
178 }
179 //-----
180 test step instance tsil2: testcase01.ts12oeSetCrisisHandler{
181 variables {
182   reuse tsi09.steve as testcase01.ts12oeSetCrisisHandler.TheActor
183   AdtCrisisID : testcase01.ts12oeSetCrisisHandler.AdtCrisisID = "1"
184
185   reuse tsi07.tango as testcase01.ts12oeSetCrisisHandler.TheComCompany
186
187 }
188 oracle {
189   satisfaction = "true"
190   received message {
191     AMessage : testcase01.ts12oeSetCrisisHandler.AMessage= 'You are now considered as handling the
crisis !'
192     AdtSMS : testcase01.ts12oeSetCrisisHandler.AdtSMS= 'The handling of your alert by our services
is in progress !'
193     AdtPhoneNumber : testcase01.ts12oeSetCrisisHandler.AdtPhoneNumber= "+3524666445252"
194
195     tsi07.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
196     tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
197
198   }
199 }
200 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
201 }
202 //-----
203 test step instance tsil3: testcase01.ts13oeSetClock04{
204 variables {
205   reuse tsi02.theClock as testcase01.ts13oeSetClock04.TheActor
206   ACurrentClock : testcase01.ts13oeSetClock04.ACurrentClock = "2017:11:26 - 10:45:00"
207 }
208 oracle {
209   satisfaction = "true"
210 }
211 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
212 }
213 //-----
214 test step instance tsil4: testcase01.ts14oeValidateAlert{
215 variables {
216   reuse tsi09.steve as testcase01.ts14oeValidateAlert.TheActor
217   AdtAlertID : testcase01.ts14oeValidateAlert.AdtAlertID = "1"
218 }
219 oracle {
220   satisfaction = "true"

```

```

221 received message {
222   AMessage : testcase01.ts14oeValidateAlert.AMessage= 'The Alert is now declared as valid !'
223   tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
224
225 }
226 }
227 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
228 }
229 //-----
230 test step instance tsil5: testcase01.ts15oeAlert2{
231   variables {
232     reuse tsi07.tango as testcase01.ts15oeAlert2.TheActor
233     AetHumanKind : testcase01.ts15oeAlert2.AetHumanKind ="witness"
234     AdtDate : testcase01.ts15oeAlert2.AdtDate= "2017:11:26"
235     AdtTime : testcase01.ts15oeAlert2.AdtTime= "10:20:00"
236     AdtPhoneNumber : testcase01.ts15oeAlert2.AdtPhoneNumber= "+3524666445000"
237     AdtGPSLocation : testcase01.ts15oeAlert2.AdtGPSLocation= "49.627095:6.160251"
238     AdtComment : testcase01.ts15oeAlert2.AdtComment= "A car crash just happened."
239   }
240   message {
241     tsi07.tango sent to system testcase01.ts15oeAlert2.out : actComCompany.outactComCompany.oeAlert(
242       AetHumanKind,AdtDate,AdtTime,AdtPhoneNumber,AdtGPSLocation,AdtComment)
243   }
244   oracle {
245     satisfaction = "true"
246     received message {
247       AdtSMS : testcase01.ts15oeAlert2.AdtSMS= 'Your alert has been registered. We will handle it and
248         keep you informed'
249       tsi07.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
250     }
251   }
252   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
253 }
254 //-----
255 test step instance tsil6: testcase01.ts16oeSetClock05{
256   variables {
257     reuse tsi02.theClock as testcase01.ts16oeSetClock05.TheActor
258     ACurrentClock : testcase01.ts16oeSetClock05.ACurrentClock = "2017:11:26 - 12:45:00"
259   }
260   oracle {
261     satisfaction = "true"
262     received message {
263     }
264   }
265 }
266 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
267 }
268 //-----
269 test step instance tsil7: testcase01.ts17oeSetCrisisStatus{
270   variables {
271     reuse tsi09.steve as testcase01.ts17oeSetCrisisStatus.TheActor
272     AdtCrisisID : testcase01.ts17oeSetCrisisStatus.AdtCrisisID = "1"
273     AetCrisisStatus : testcase01.ts17oeSetCrisisStatus.AetCrisisStatus= "solved"
274   }
275   oracle {
276     satisfaction = "true"
277     received message {
278       AMessage : testcase01.ts17oeSetCrisisStatus.AMessage= "The crisis status has been updated !"
279       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
280     }
281   }
282   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
283 }
284 //-----
285 test step instance tsil8: testcase01.ts18oeReportOnCrisis{
286   variables {
287     reuse tsi09.steve as testcase01.ts18oeReportOnCrisis.TheActor
288     AdtCrisisID : testcase01.ts18oeReportOnCrisis.AdtCrisisID = "1"

```

```

289     AdtComment : testcase01.ts18oeReportOnCrisis.AdtComment= "3 victims sent to hospital, 2 cars
290     evacuated and 4 rescue unit mobilized"
291   }
292   oracle {
293     satisfaction = "true"
294     received message {
295       AMesssage : testcase01.ts18oeReportOnCrisis.AMessage= 'The crisis comment has been updated !'
296       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
297     }
298   }
299   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
300 }
301 //-
302 test step instance tsi19: testcase01.ts19oeCloseCrisis{
303   variables {
304     reuse tsi09.steve as testcase01.ts19oeCloseCrisis.TheActor
305     AdtCrisisID : testcase01.ts19oeCloseCrisis.AdtCrisisID = "1"
306   }
307   oracle {
308     satisfaction = "true"
309     received message {
310       AMesssage : testcase01.ts19oeCloseCrisis.AMessage= 'The crisis is now closed !'
311     }
312     tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
313   }
314 }
315 }
316 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
317 }
318 }
319 }
320 //-
321 //-
322 //-
323 test case instance instance01Part01:testcase01{
324 //-
325   test step instance tsi01: testcase01.ts01oeCreateSystemAndEnvironment{
326     variables {
327       theCreator: testcase01.ts01oeCreateSystemAndEnvironment.Creator = "theCreator"
328       AqtyComCompanies : testcase01.ts01oeCreateSystemAndEnvironment.AqtyComCompanies="4"
329     }
330     oracle {
331       satisfaction = "true"
332     }
333     test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
334   }
335 //-
336   test step instance tsi02: testcase01.ts02oeSetClock{
337     variables {
338       theClock: testcase01.ts02oeSetClock.TheActor = "theClock"
339       ACurrentClock : testcase01.ts02oeSetClock.ACurrentClock= "2017:11:24 - 03:20:00"
340     }
341     oracle {
342       satisfaction = "true"
343     }
344     test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
345   }
346 //-
347   test step instance tsi03: testcase01.ts03oeLogin{
348     variables {
349       bill: testcase01.ts03oeLogin.TheActor="bill"
350       AdtLogin : testcase01.ts03oeLogin.AdtLogin= "icrashadmin"
351       AdtPassword : testcase01.ts03oeLogin.AdtPassword= "7WXC1359"
352     }
353     oracle {
354       satisfaction = "true"
355       received message {
356         AMesssage : testcase01.ts03oeLogin.AMessage= 'You are logged ! Welcome ...'
357         tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)

```

```

358     }
359   }
360   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
361 }
362 //-----
363 test step instance tsi04: testcase01.ts04oeAddCoordinator{
364   variables {
365     reuse tsi03.bill as testcase01.ts04oeAddCoordinator.TheActor
366     AdtCoordinatorID : testcase01.ts04oeAddCoordinator.AdtCoordinatorID = "1"
367     AdtLogin :testcase01.ts04oeAddCoordinator.AdtLogin= "steve"
368     AdtPassword : testcase01.ts04oeAddCoordinator.AdtPassword = "pwdMessirExcalibur2017"
369   }
370   oracle {
371     satisfaction = "true"
372     received message {
373       tsi03.bill received from system actAdministrator.inactAdministrator.ieCoordinatorAdded()
374     }
375   }
376   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
377 }
378 //-----
379 test step instance tsi05: testcase01.ts05oeLogout{
380   variables {
381     reuse tsi03.bill as testcase01.ts05oeLogout.TheActor
382   }
383   oracle {
384     satisfaction = "true"
385     received message {
386       AMesssage : testcase01.ts05oeLogout.AMessage= 'You are logged out ! Good Bye ...'
387       tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(AMesssage)
388     }
389   }
390   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
391 }
392 //-----
393 test step instance tsi06: testcase01.ts06oeSetClock02{
394   variables {
395     reuse tsi02.theClock as testcase01.ts06oeSetClock02.TheActor
396     ACurrentClock : testcase01.ts06oeSetClock02.ACurrentClock= "2017:11:26 - 10:15:00"
397   }
398   oracle {
399     satisfaction = "true"
400   }
401   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
402 }
403 //-----
404 test step instance tsi07: testcase01.ts07oeAlert1{
405   variables {
406     tango:testcase01.ts07oeAlert1.TheActor ="tango"
407     AetHumanKind : testcase01.ts07oeAlert1.AetHumanKind = "witness"
408     AdtDate : testcase01.ts07oeAlert1.AdtDate = "2017:11:26"
409     AdtTime : testcase01.ts07oeAlert1.AdtTime = "10:10:16"
410     AdtPhoneNumber : testcase01.ts07oeAlert1.AdtPhoneNumber = "+3524666445252"
411     AdtGPSLocation : testcase01.ts07oeAlert1.AdtGPSLocation = "49.627675:6.159590"
412     AdtComment : testcase01.ts07oeAlert1.AdtComment = "3 cars involved in an accident."
413   }
414   oracle {
415     satisfaction = "true"
416     received message {
417       AdtSMS : testcase01.ts07oeAlert1.AdtSMS= 'Your alert has been registered. We will handle it and keep you informed'
418       tsi07.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
419     }
420   }
421 }
422   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
423 }
424 //-----
425 test step instance tsi08: testcase01.ts08oeSetClock03{

```

```

427  variables {
428    reuse tsi02.theClock as testcase01.ts08oeSetClock03.ACurrrentClock
429    ACurrentClock : testcase01.ts08oeSetClock03.ACurrrentClock = "2017:11:26 - 10:30:00"
430  }
431  oracle {
432    satisfaction = "true"
433  }
434  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
435  }
436 //-----
437 test step instance tsi09: testcase01.ts09oeSollicitateCrisisHandling{
438  variables {
439    reuse tsi02.theClock as testcase01.ts09oeSollicitateCrisisHandling.TheActor
440    reuse tsi03.bill as testcase01.ts09oeSollicitateCrisisHandling.TheAdministrator
441  }
442  oracle {
443    satisfaction = "true"
444    received message {
445      steve:testcase01.ts09oeSollicitateCrisisHandling.TheCoordinator ="steve"
446      AMessageForCrisisHandlers : testcase01.ts09oeSollicitateCrisisHandling.
447      AMessageForCrisisHandlers= 'There are alerts pending since more than the defined delay. Please
448      REACT !'
449      tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(
450      AMessageForCrisisHandlers)
451      tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(
452      AMessageForCrisisHandlers)
453    }
454  }
455
456 //-----
457 //-----
458 //-----
459 test case instance instance01Part02: testcase01{
460
461  test step instance tsi10: testcase01.ts10oeLogin02{
462  variables {
463    steve : testcase01.ts10oeLogin02.TheActor
464    AdtLogin : testcase01.ts10oeLogin02.AdtLogin = "steve"
465    AdtPassword : testcase01.ts10oeLogin02.AdtPassword= "pwdMessirExcalibur2017"
466  }
467  oracle {
468    satisfaction = "true"
469    received message {
470      AMessage : testcase01.ts10oeLogin02.AMessage= 'You are logged ! Welcome ...'
471      steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
472    }
473  }
474  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
475  }
476
477 //-----
478 test step instance ts111: testcase01.ts11oeGetCrisisSet{
479  variables {
480    reuse tsi10.steve as testcase01.ts11oeGetCrisisSet.TheActor
481    AetCrisisStatus : testcase01.ts11oeGetCrisisSet.AetCrisisStatus = "pending"
482  }
483  oracle {
484    satisfaction = "true"
485    received message {
486      ActCrisis : testcase01.ts11oeGetCrisisSet.ActCrisis= "crisis with ID 1 details"
487      tsi10.steve received from system actCoordinator.inactCoordinator.ieSendACrisis(ActCrisis)
488    }
489  }
490  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
491  }
492 //-----

```

```

493 test step instance ts112: testcase01.ts12oeSetCrisisHandler{
494   variables {
495     reuse ts10.steve as testcase01.ts12oeSetCrisisHandler.TheActor
496     AdtCrisisID : testcase01.ts12oeSetCrisisHandler.AdtCrisisID = "1"
497   }
498   oracle {
499     satisfaction = "true"
500     received message {
501       tango : testcase01.ts12oeSetCrisisHandler.TheComCompany
502       AMessage : testcase01.ts12oeSetCrisisHandler.AMessage= 'You are now considered as handling the
503       crisis !'
504       AdtSMS : testcase01.ts12oeSetCrisisHandler.AdtSMS= 'The handling of your alert by our services
505       is in progress !'
506       AdtPhoneNumber : testcase01.ts12oeSetCrisisHandler.AdtPhoneNumber= "+3524666445252"
507
508       tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
509       ts10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
510     }
511   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
512 }
513 //-----
514 test step instance ts113: testcase01.ts13oeSetClock04{
515   variables {
516     theClock : testcase01.ts13oeSetClock04.TheActor
517     ACurrentClock : testcase01.ts13oeSetClock04.ACurrentClock = "2017:11:26 - 10:45:00"
518   }
519   oracle {
520     satisfaction = "true"
521   }
522   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
523 }
524 //-----
525 test step instance ts114: testcase01.ts14oeValidateAlert{
526   variables {
527     reuse ts10.steve as testcase01.ts14oeValidateAlert.TheActor
528     AdtAlertID : testcase01.ts14oeValidateAlert.AdtAlertID = "1"
529   }
530   oracle {
531     satisfaction = "true"
532     received message {
533       AMessage : testcase01.ts14oeValidateAlert.AMessage= 'The Alert is now declared as valid !'
534       ts10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
535     }
536   }
537 }
538   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
539 }
540 //-----
541 test step instance ts115: testcase01.ts15oeAlert2{
542   variables {
543     reuse ts12.tango as testcase01.ts15oeAlert2.TheActor
544     AetHumanKind : testcase01.ts15oeAlert2.AetHumanKind ="witness"
545     AdtDate : testcase01.ts15oeAlert2.AdtDate= "2017:11:26"
546     AdtTime : testcase01.ts15oeAlert2.AdtTime= "10:20:00"
547     AdtPhoneNumber : testcase01.ts15oeAlert2.AdtPhoneNumber= "+3524666445000"
548     AdtGPSLocation : testcase01.ts15oeAlert2.AdtGPSLocation= "49.627095:6.160251"
549     AdtComment : testcase01.ts15oeAlert2.AdtComment= "A car crash just happened."
550   }
551   message {
552     ts12.tango sent to system testcase01.ts15oeAlert2.out : actComCompany.outactComCompany.oeAlert(
553       AetHumanKind,AdtDate,AdtTime,AdtPhoneNumber,AdtGPSLocation,AdtComment)
554   }
555   oracle {
556     satisfaction = "true"
557     received message {
558       AdtSMS : testcase01.ts15oeAlert2.AdtSMS= 'Your alert has been registered. We will handle it and
559       keep you informed'

```

```

559     tsi12.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
560
561     }
562   }
563   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
564 }
565 //-----
566 test step instance tsi16: testcase01.ts16oeSetClock05{
567   variables {
568     reuse tsi13.theClock as testcase01.ts16oeSetClock05.TheActor
569     ACurrentClock : testcase01.ts16oeSetClock05.ACurrentClock = "2017:11:26 - 12:45:00"
570   }
571   oracle {
572     satisfaction = "true"
573     received message {
574
575     }
576   }
577   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
578 }
579 //-----
580 test step instance tsi17: testcase01.ts17oeSetCrisisStatus{
581   variables {
582     reuse tsi10.steve as testcase01.ts17oeSetCrisisStatus.TheActor
583     AdtCrisisID : testcase01.ts17oeSetCrisisStatus.AdtCrisisID = "1"
584     AetCrisisStatus : testcase01.ts17oeSetCrisisStatus.AetCrisisStatus= "solved"
585   }
586   oracle {
587     satisfaction = "true"
588     received message {
589       AMessage : testcase01.ts17oeSetCrisisStatus.AMessage= "The crisis status has been updated !"
590       tsi10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
591     }
592   }
593   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
594 }
595 //-----
596 test step instance tsi18: testcase01.ts18oeReportOnCrisis{
597   variables {
598     reuse tsi10.steve as testcase01.ts18oeReportOnCrisis.TheActor
599     AdtCrisisID : testcase01.ts18oeReportOnCrisis.AdtCrisisID = "1"
600     AdtComment : testcase01.ts18oeReportOnCrisis.AdtComment= "3 victims sent to hospital, 2 cars
601     evacuated and 4 rescue unit mobilized"
602   }
603   oracle {
604     satisfaction = "true"
605     received message {
606       AMessage : testcase01.ts18oeReportOnCrisis.AMessage= 'The crisis comment has been updated !'
607       tsi10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
608     }
609   }
610   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
611 }
612 //-----
613 test step instance tsi19: testcase01.ts19oeCloseCrisis{
614   variables {
615     reuse tsi10.steve as testcase01.ts19oeCloseCrisis.TheActor
616     AdtCrisisID : testcase01.ts19oeCloseCrisis.AdtCrisisID = "1"
617   }
618   oracle {
619     satisfaction = "true"
620     received message {
621       AMessage : testcase01.ts19oeCloseCrisis.AMessage= 'The crisis is now closed !'
622       tsi10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
623     }
624   }
625 }
626 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}

```

```

628     }
629
630   }
631 }
632
633 }
```

Listing C.63: Messir Spec. file tci-testcase01-instance01.msr.

C.64 File ./.src-gen/messir-spec/usecases/usecase-suDeployAndRun.msr

```

1 package icrash.usecases.suDeployAndRun {
2   import icrash.concepts.primarytypes.datatypes
3   import icrash.environment
4   import icrash.usecases.suGlobalCrisisHandling
5   import icrash.usecases.ugAdministrateTheSystem
6   import icrash.usecases.subfunctions
7
8   Use Case Model {
9     use case system summary suDeployAndRun() {
10       actor actAdministrator[primary,active]
11       actor actMsrCreator[secondary,active]
12       actor actCoordinator[secondary,active,multiple]
13       actor actActivator[secondary,proactive]
14       actor actComCompany[secondary,active]
15
16       reuse oeCreateSystemAndEnvironment[1..1]
17       reuse ugAdministrateTheSystem[1...*]
18       reuse suGlobalCrisisHandling[1...*]
19       reuse oeSetClock[1...*]
20       reuse oeSollicitateCrisisHandling[0...*]
21       reuse oeAlert[1...*]
22
23       step a: actMsrCreator executes oeCreateSystemAndEnvironment
24       step b: actAdministrator executes ugAdministrateTheSystem
25       step c: actComCompany executes oeAlert
26       step d: actActivator executes oeSetClock
27       step ^e: actActivator executes oeSollicitateCrisisHandling
28       step f: actCoordinator executes suGlobalCrisisHandling
29
30       ordering constraint
31         "step (a) must be always the first step."
32       ordering constraint
33         "step (f) can be executed by different actCoordinator actors."
34       ordering constraint
35         "if (e) then previously (d)."
36     }
37   //-----
38   //-----
39   //-----
40   use case instance uciSimpleAndComplete : suDeployAndRun {
41     actors {
42       theCreator : actMsrCreator
43       theClock : actActivator
44       bill : actAdministrator
45       tango : actComCompany
46       steve : actCoordinator
47     }
48     use case steps {
49   //-----
50     theCreator
51     executed instanceof subfunction
52     oeCreateSystemAndEnvironment("4"){}
53   //-----
54     theClock
55     executed instanceof subfunction
56     oeSetClock("2017:11:24 - 03:20:00"){}
```

```

57 //-----
58     bill
59     executed instanceof subfunction
60         oeLogin("icrashadmin","7WXC1359"){
61             ieMessage('You are logged ! Welcome ...') returned to bill
62         }
63 //-----
64     bill
65     executed instanceof subfunction
66         oeAddCoordinator("1","steve","pwdMessirExcalibur2017"){
67             ieCoordinatorAddedreturned returned to bill
68         }
69 //-----
70     bill
71     executed instanceof subfunction
72         oeLogout{
73             ieMessage('You are logged out ! Good Bye ...') returned to bill
74         }
75 //-----
76     theClock
77     executed instanceof subfunction
78         oeSetClock("2017:11:26 - 10:15:00"){}
79 //-----
80     tango
81     executed instanceof subfunction
82         oeAlert("witness","2017:11:26","10:10:16","+3524666445252",
83             "49.627675:6.159590","3 cars involved in an accident."){
84             ieSmsSend("+3524666445252","Your alert has been registered. We will handle it and keep you
informed") returned to tango
85         }
86 //-----
87     theClock
88     executed instanceof subfunction
89         oeSetClock("2017:11:26 - 10:30:00"){}
90 //-----
91     theClock
92     executed instanceof subfunction
93         oeSollicitateCrisisHandling{
94             ieMessage("There are alerts pending since more than the defined delay. Please REACT !")
95             returned to bill
96             ieMessage("There are alerts pending since more than the defined delay. Please REACT !")
97             returned to steve
98         }
99 //-----
100    steve
101    executed instanceof subfunction
102        oeLogin("steve","pwdMessirExcalibur2017"){
103            ieMessage('You are logged ! Welcome ...') returned to steve
104        }
105 //-----
106    steve
107    executed instanceof subfunction
108        oeGetCrisisSet("pending"){
109            ieSendACrisis("crisis with ID 1 details") returned to steve
110        }
111 //-----
112    steve
113    executed instanceof subfunction
114        oeSetCrisisHandler("1"){
115            ieSmsSend("+3524666445252","The handling of your alert by our services is in progress !")
116            returned to tango
117            ieMessage("You are now considered as handling the crisis !")
118            returned to steve
119        }
120 //-----
121    theClock
122    executed instanceof subfunction
123        oeSetClock("2017:11:26 - 10:45:00"){}
124 //-----
125    steve

```

```

126  executed instanceof subfunction
127    oeValidateAlert("1"){
128      ieMessage('The Alert is now declared as valid !')
129      returned to steve
130    }
131 /**
132   tango
133  executed instanceof subfunction
134    oeAlert("witness","2017:11:26","10:20:00","+3524666445000",
135      "49.627095:6.160251","A car crash just happened.")
136    ieSmsSend("+3524666445000","Your alert has been registered. We will handle it and keep you
informed") returned to tango
137  }
138 /**
139   theClock
140  executed instanceof subfunction
141    oeSetClock("2017:11:26 - 12:45:00){}
142 /**
143   steve
144  executed instanceof subfunction
145    oeSetCrisisStatus("1","solved"){
146      ieMessage('The crisis status has been updated !')
147      returned to steve
148    }
149 /**
150   steve
151  executed instanceof subfunction
152    oeReportOnCrisis("1","3 victims sent to hospital, 2 cars evacuated and 4 rescue unit
mobilized"){
153      ieMessage('The crisis comment has been updated !')
154      returned to steve
155    }
156 /**
157   steve
158  executed instanceof subfunction
159    oeCloseCrisis("1"){
160      ieMessage('The crisis is now closed !')
161      returned to steve
162    }
163
164  }
165 }
166 /**
167 /**
168 /**
169 use case instance uciSimpleAndCompletePart01 : suDeployAndRun{
170
171  actors {
172    theCreator : actMsrCreator
173    theClock : actActivator
174    bill : actAdministrator
175    tango : actComCompany
176    steve : actCoordinator
177  }
178  use case steps {
179 /**
180    theCreator
181  executed instanceof subfunction
182    oeCreateSystemAndEnvironment("4){}
183 /**
184    theClock
185  executed instanceof subfunction
186    oeSetClock("2017:11:24 - 03:20:00){}
187 /**
188    bill
189  executed instanceof subfunction
190    oeLogin("icrashadmin","7WXC1359"){
191      ieMessage('You are logged ! Welcome ...') returned to bill
192    }
193 /**

```

```

194    bill
195    executed instanceof subfunction
196      oeAddCoordinator("1","steve","pwdMessirExcalibur2017"){
197        ieCoordinatorAddedreturned returned to bill
198      }
199 //-----
200    bill
201    executed instanceof subfunction
202      oeLogout{
203        ieMessage('You are logged out ! Good Bye ...') returned to bill
204      }
205 //-----
206    theClock
207    executed instanceof subfunction
208      oeSetClock("2017:11:26 - 10:15:00") {}
209 //-----
210    tango
211    executed instanceof subfunction
212      oeAlert("witness","2017:11:26","10:10:16","+3524666445252",
213        "49.627675:6.159590","3 cars involved in an accident."){
214        ieSmsSend("+3524666445252","Your alert has been registered. We will handle it and keep you
informed") returned to tango
215      }
216 //-----
217    theClock
218    executed instanceof subfunction
219      oeSetClock("2017:11:26 - 10:30:00") {}
220 //-----
221    theClock
222    executed instanceof subfunction
223      oeSollicitateCrisisHandling{
224        ieMessage("There are alerts pending since more than the defined delay. Please REACT !")
225        returned to bill
226        ieMessage("There are alerts pending since more than the defined delay. Please REACT !")
227        returned to steve
228      }
229    }
230  }
231 //-----
232 //-----
233 //-----
234  use case instance uciSimpleAndCompletePart02 : suDeployAndRun{
235    actors {
236      theCreator : actMsrCreator
237      theClock : actActivator
238      bill : actAdministrator
239      tango : actComCompany
240      steve : actCoordinator
241    }
242    use case steps {
243
244 //-----
245      steve
246      executed instanceof subfunction
247        oeLogin("steve","pwdMessirExcalibur2017"){
248          ieMessage('You are logged ! Welcome ...') returned to steve
249        }
250 //-----
251      steve
252      executed instanceof subfunction
253        oeGetCrisisSet("pending"){
254          ieSendACrisis("crisis with ID 1 details") returned to steve
255        }
256 //-----
257      steve
258      executed instanceof subfunction
259        oeSetCrisisHandler("1"){
260          ieSmsSend("+3524666445252","The handling of your alert by our services is in progress !")
261          returned to tango
262          ieMessage("You are now considered as handling the crisis !")

```

```

263     returned to steve
264 }
265 //-----
266 theClock
267 executed instanceof subfunction
268 oeSetClock("2017:11:26 - 10:45:00"){}
269 //-----
270 steve
271 executed instanceof subfunction
272 oeValidateAlert("1"){
273     ieMessage('The Alert is now declared as valid !')
274     returned to steve
275 }
276 //-----
277 tango
278 executed instanceof subfunction
279 oeAlert("witness","2017:11:26", "10:20:00", "+3524666445000",
280         "49.627095:6.160251", "A car crash just happened."){
281     ieSmsSend("+3524666445000", "Your alert has been registered. We will handle it and keep you
informed") returned to tango
282 }
283 //-----
284 theClock
285 executed instanceof subfunction
286 oeSetClock("2017:11:26 - 12:45:00"){}
287 //-----
288 steve
289 executed instanceof subfunction
290 oeSetCrisisStatus("1", "solved"){
291     ieMessage('The crisis status has been updated !')
292     returned to steve
293 }
294 //-----
295 steve
296 executed instanceof subfunction
297 oeReportOnCrisis("1", "3 victims sent to hospital, 2 cars evacuated and 4 rescue unit
mobilized"){
298     ieMessage('The crisis comment has been updated !')
299     returned to steve
300 }
301 //-----
302 steve
303 executed instanceof subfunction
304 oeCloseCrisis("1"){
305     ieMessage('The crisis is now closed !')
306     returned to steve
307 }
308
309 }
310 }
311 }
312 }

```

Listing C.64: Messir Spec. file usecase-suDeployAndRun.msr.

C.65 File [./src-gen/messir-spec/usecases/usecase-suGlobalCrisisHandling.msr](#)

```

1 package icrash.usecases.suGlobalCrisisHandling {
2 import lu.uni.lassy.messir.libraries.primitives
3 import icrash.environment
4 import icrash.usecases.subfunctions
5 import icrash.usecases.ugSecurelyUseSystem
6 import icrash.usecases.ugManageCrisis
7 import icrash.usecases.ugMonitor
8
9 Use Case Model {
10 use case system summary

```

```

11  suGlobalCrisisHandling() {
12    actor actCoordinator[primary,active]
13
14    reuse ugSecurelyUseSystem[1...*]
15    reuse ugMonitor[1...*]
16    reuse ugManageCrisis[1...*]
17
18    step a: actCoordinator
19      executes ugSecurelyUseSystem
20    step b: actCoordinator
21      executes ugMonitor
22    step c: actCoordinator
23      executes ugManageCrisis
24
25  ordering constraint
26    "steps (a) (b) and (c) executions are interleaved
27    (steps (b) and (c) have their protocol constrained by steps of (a))."
28  ordering constraint
29    "steps (a) (b) and (c) can be executed multiple times."
30 }
31 }}

```

Listing C.65: Messir Spec. file usecase-suGlobalCrisisHandling.msr.

C.66 File

./src-gen/messir-spec/usecases/usecase-ugAdministrateTheSystem.msr

```

1 package icrash.usecases.ugAdministrateTheSystem {
2
3   import icrash.environment
4   import icrash.usecases.ugSecurelyUseSystem
5   import icrash.usecases.subfunctions
6
7   Use Case Model {
8
9     use case system usergoal
10    ugAdministrateTheSystem() {
11      actor actAdministrator[primary,active]
12
13      reuse ugSecurelyUseSystem[1...*]
14      reuse oeAddCoordinator[1...*]
15      reuse oeDeleteCoordinator[0...*]
16      reuse oeRankDownCoordinator[0...*]
17      reuse oeAddPointOfInterest[1...*]
18      reuse oeEditPointOfInterest[0...*]
19      reuse oeDeletePointOfInterest[0...*]
20
21      step a: actAdministrator
22        executes ugSecurelyUseSystem
23      step b: actAdministrator
24        executes oeAddPointofInterest
25      step c : actAdministrator
26        executes oeEditPointOfInterest
27      step d : actAdministrator
28        executes oeDeletePointOfInterest
29      step e: actAdministrator
30        executes oeAddCoordinator
31      step f: actAdministrator
32        executes oeDeleteCoordinator
33      step g: actAdministrator
34        executes oeRankDownCoordinator
35
36  ordering constraint
37    "steps (a) (b) (c) (d) (e) (f) and (g) executions are interleaved
38    (steps (b) (c) (d) (e) (f) and (g) have their protocol constrained
39    by steps of (a))."
40  ordering constraint
41    "steps (a) (b) (c) (d) (e) (f) (g) can be executed multiple times."

```

```

42 }
43 }
44 }
```

Listing C.66: Messir Spec. file usecase-ugAdministateTheSystem.msr.

C.67 File ./.src-gen/messir-spec/usecases/usecase-ugManageCrisis.msr

```

1 package icrash.usecases.ugManageCrisis {
2
3 import icrash.environment
4 import icrash.usecases.subfunctions
5
6 Use Case Model {
7
8 use case system usergoal ugManageCrisis() {
9   actor actCoordinator[primary, active]
10
11 reuse oeValidateAlert[0...*]
12 reuse oeSetCrisisStatus[0...*]
13 reuse oeSetCrisisHandler[0...*]
14 reuse oeReportOnCrisis[0...*]
15 reuse oeCloseCrisis[0...*]
16 reuse oeInvalidateAlert[0...*]
17
18 step a: actCoordinator executes oeValidateAlert
19 step b: actCoordinator executes oeSetCrisisStatus
20 step c: actCoordinator executes oeSetCrisisHandler
21 step d: actCoordinator executes oeReportOnCrisis
22 step f: actCoordinator executes oeCloseCrisis
23 step g: actCoordinator executes oeInvalidateAlert
24
25 ordering constraint "managing a crisis is doing one of the indicated use cases."
26
27 }
28
29 }
30 }
```

Listing C.67: Messir Spec. file usecase-ugManageCrisis.msr.

C.68 File ./.src-gen/messir-spec/usecases/usecase-ugMonitor.msr

```

1 package icrash.usecases.ugMonitor {
2
3 import icrash.environment
4 import icrash.usecases.subfunctions
5
6 Use Case Model {
7 use case system usergoal ugMonitor() {
8   actor icrash.environment.actCoordinator[primary,active]
9
10 reuse oeGetCrisisSet[0...*]
11 reuse oeGetAlertsSet[0...*]
12
13 step a: icrash.environment.actCoordinator executes oeGetAlertsSet
14 step b: icrash.environment.actCoordinator executes oeGetCrisisSet
15 }
16 }
17 }
```

Listing C.68: Messir Spec. file usecase-ugMonitor.msr.

C.69 File [./src-gen/messir-spec/usecases/usecase-ugSecurelyUseSystem.msr](#)

```

1 package icrash.usecases.ugSecurelyUseSystem {
2
3 import icrash.environment
4 import icrash.usecases.subfunctions
5
6 Use Case Model {
7
8 use case system usergoal
9 ugSecurelyUseSystem() {
10
11 actor actAuthenticated[primary,active]
12 actor actAdministrator[secondary]
13
14 reuse oeLogin[1..*]
15 reuse oeFillCaptcha[0..*]
16 reuse oeResetPassword[0..1]
17 reuse oeLogout[1..1]
18
19 step a: actAuthenticated
20   executes oeLogin
21 step b: actAuthenticated
22   executes oeFillCaptcha
23 step c: actAuthenticated
24   executes oeResetPassword
25 step d: actAuthenticated
26   executes oeLogout
27
28 ordering constraint
29 "step (a) or step (c) is always the first one.
30 step (a) must always precede step (d).
31 step (b) is only needed when step (a) fails 3 times in a row.
32 step (d) is always the last step"
33
34 }
35 }
36 }
```

Listing C.69: Messir Spec. file usecase-ugSecurelyUseSystem.msr.

C.70 File [./src-gen/messir-spec/usecases/usecaseinstance-ugAdministateTheSystem-uciugAdministateTheSystem.msr](#)

```

1 package usecases.uciugAdministateTheSystem {
2 import icrash.usecases.ugAdministateTheSystem
3 import icrash.usecases.ugSecurelyUseSystem
4 import icrash.concepts.primarytypes.datatypes
5 import icrash.environment
6 import icrash.usecases.ugAdministateTheSystem
7 import icrash.usecases.subfunctions
8
9 Use Case Model {
10
11 use case instance uciugAdministateTheSystem : ugAdministateTheSystem{
12   actors {
13
14     jorge:actAdministrator
15
16   }
17   use case steps {
18     jorge executed usecases.uciugSecurelyUseSystem.uciugSecurelyUseSystem()
19     jorge executed instanceof subfunction oeAddCoordinator("coordID1", "steve", "abcdefg") {
20       ieCoordinatorAdded() returned to jorge
21     }
22     jorge executed instanceof subfunction oeRankDownCoordinator("coordID1") {
```

```

23     ieRankEdited() returned to jorge
24 }
25
26 }
27
28 }
29
30 }
31 }
```

Listing C.70: Messir Spec. file
usecaseinstance-ugAdministrateTheSystem-uciugAdministrateTheSystem.msr.

C.71 File ./src-gen/messir-spec/usecases/usecaseinstance-ugAdministrateTheSystem-uciugAdministrateTheSystemPointOfInterest.msr

```

1 package usecases.uciugAdministrateTheSystemPointOfInterest {
2   import icrash.usecases.ugAdministrateTheSystem
3   import icrash.usecases.subfunctions
4
5   Use Case Model {
6
7     use case instance uciugAdministrateTheSystemPointOfInterest : ugAdministrateTheSystem{
8       actors {
9         bill:icrash.environment.actAdministrator
10      }
11     use case steps {
12 //-
13       bill
14       executed instanceof subfunction
15         oeLogin("icrashadmin","7WXC1359"){
16           ieMessage('You are logged ! Welcome ...') returned to bill
17         }
18 //-----
19       bill
20       executed instanceof subfunction
21         oeAddPointOfInterest("Police station","55.65448:1.548648","Police station: open from 8:30
until 17:30"){
22           iePointOfInterestAdded returned to bill
23         }
24 //-----
25       bill
26       executed instanceof subfunction
27         oeEditPointOfInterest("1","Police station : open from 9:00 until 17:00"){
28           iePointOfInterestEdited returned to bill
29         }
30 //-----
31       bill
32       executed instanceof subfunction
33         oeDeletePointOfInterest("1"){
34           iePointOfInterestDeleted returned to bill
35         }
36 //-----
37       bill
38       executed instanceof subfunction
39         oeLogout{
40           ieMessage('You are logged out ! Good Bye ...') returned to bill
41         }
42     }
43
44   }
45 }
46 }
```

Listing C.71: Messir Spec. file
usecaseinstance-ugAdministrateTheSystem-uciugAdministrateTheSystemPointOfInterest.msr.

C.72 File ./src-gen/messir-spec/usecases/usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystem.msr

```

1 package usecases.uciugSecurelyUseSystem {
2   import icrash.usecases.ugSecurelyUseSystem
3   import icrash.usecases.ugSecurelyUseSystem
4   import icrash.concepts.primarytypes.datatypes
5   import icrash.environment
6   import icrash.usecases.suGlobalCrisisHandling
7   import icrash.usecases.ugAdministrateTheSystem
8   import icrash.usecases.subfunctions
9
10  Use Case Model {
11
12 //-----
13  use case instance uciugSecurelyUseSystem : ugSecurelyUseSystem {
14    actors {
15      bill:actAuthenticated
16    }
17    use case steps {
18 //-----
19    bill
20    executed instanceof subfunction
21      oeLogin("icrashadmin","7WXC1359"){
22        ieMessage('You are logged ! Welcome ...') returned to bill
23      }
24 //-----
25    bill
26    executed instanceof subfunction
27      oeLogout{
28        ieMessage('You are logged out ! Good Bye ...') returned to bill
29      }
30    }
31  }
32 }
33 }
```

Listing C.72: Messir Spec. file usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystem.msr.

C.73 File ./src-gen/messir-spec/usecases/usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemFailLogin.msr

```

1 package usecases.uciugSecurelyUseSystemFailLogin {
2   import icrash.usecases.ugSecurelyUseSystem
3   import icrash.concepts.primarytypes.datatypes
4   import icrash.environment
5   import icrash.usecases.subfunctions
6
7 Use Case Model {
8
9  use case instance uciugSecurelyUseSystemFailLogin : ugSecurelyUseSystem{
10    actors {
11      Theuser:actAuthenticated
12    }
13    use case steps {
14 //-----
15    Theuser
16    executed instanceof subfunction
17      oeLogin("failed","login") {
18        ieMessage('Your password is not correct. Wrong attempts : 1') returned to Theuser
19      }
20 //-----
21    Theuser
22    executed instanceof subfunction
23      oeLogin("failed","login") {
24        ieMessage('Your password is not correct. Wrong attempts : 2') returned to Theuser
25      }
26 }
```

C.74. FILE /.../USECASEINSTANCE-UGSECURELYUSESYSTEM-UCIUGSECURELYUSESYSTEMFAILLOGING

```

26 // -----
27     Theuser
28     executed instanceof subfunction
29         oeLogin("failed","login") {
30             ieMessage('Your password is not correct. Wrong attempts : 3.') returned to Theuser
31             ieMessage('You need to fill out a captcha to be able to login now. You can also do a password
32                 reset.') returned to Theuser
33     }
34 // -----
35     Theuser
36     executed instanceof subfunction
37         oeFillCaptcha("wrong captcha") {
38             ieMessage('Your captcha is not correct. Try again.') returned to Theuser
39     }
40 // -----
41     Theuser
42     executed instanceof subfunction
43         oeFillCaptcha("successful captcha") {
44             ieMessage('Your captcha is correct. You may try to login again.') returned to Theuser
45     }
46 // -----
47     Theuser
48     executed instanceof subfunction
49         oeLogin("Theuser","7WXC1359") {
50             ieMessage('You are logged ! Welcome ...') returned to Theuser
51     }
52 // -----
53     Theuser
54     executed instanceof subfunction
55         oeLogout{
56             ieMessage('You are logged out ! Good Bye ...') returned to Theuser
57         }
58     }
59 }
60 }
```

Listing C.73: Messir Spec. file
usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemFailLogin.msr.

C.74 File ./src-gen/messir-spec/usecases/usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemFailLoginResetPassword.ms

```

1 package usecases.uciugSecurelyUseSystemFailLoginResetPassword {
2     import icrash.usecases.ugSecurelyUseSystem
3     import icrash.concepts.primarytypes.datatypes
4     import icrash.environment
5     import icrash.usecases.subfunctions
6
7     Use Case Model {
8
9         use case instance uciugSecurelyUseSystemFailLoginResetPassword : ugSecurelyUseSystem{
10            actors {
11                Theuser:actAuthenticated
12                Theadmin:actAdministrator
13            }
14            use case steps {
15        }
16            Theuser
17            executed instanceof subfunction
18                oeLogin("failed","login") {
19                    ieMessage('Your password is not correct. Wrong attempts : 1') returned to Theuser
20                }
21        }
22            Theuser
23            executed instanceof subfunction
24                oeLogin("failed","login") {
25                    ieMessage('Your password is not correct. Wrong attempts : 2') returned to Theuser
26        }
27    }
28}
```

```

26      }
27 //-----
28 Theuser
29 executed instanceof subfunction
30   oeLogin("failed","login") {
31 ieMessage('Your password is not correct. Wrong attempts : 3.') returned to Theuser
32 ieMessage('You need to fill out a captcha to be able to login now. You can also do a password
            reset.') returned to Theuser
33   }
34 //-----
35 Theuser
36 executed instanceof subfunction
37   oeResetPassword("Theuser") {
38 ieMessage('Your password has been reset. Check your mails to be able to reconnect') returned to
            Theuser
39 ieMessage2('The password of "Theuser" has been reset ') returned to Theadmin
40   }
41 //-----
42 Theuser
43 executed instanceof subfunction
44   oeLogin("Theuser","NewPassword"){
45     ieMessage('You are logged ! Welcome ...') returned to Theuser
46   }
47 //-----
48 Theuser
49 executed instanceof subfunction
50   oeLogout{
51     ieMessage('You are logged out ! Good Bye ...') returned to Theuser
52   }
53   }
54   }
55   }
56 }
```

Listing C.74: Messir Spec. file
usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemFailLoginResetPassword.msr.

C.75 File ./src-gen/messir-spec/usecases/usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemWithDirectResetPassword.msr

```

1 package usecases.uciugSecurelyUseSystemWithDirectResetPassword {
2 import icrash.usecases.ugSecurelyUseSystem
3 import icrash.concepts.primarytypes.datatypes
4 import icrash.environment
5 import icrash.usecases.suGlobalCrisisHandling
6 import icrash.usecases.ugAdministrateTheSystem
7 import icrash.usecases.subfunctions
8
9 Use Case Model {
10
11 use case instance uciugSecurelyUseSystemWithDirectResetPassword : ugSecurelyUseSystem{
12   actors {
13     Theuser:actAuthenticated
14     Theadmin:actAdministrator
15
16   }
17   use case steps {
18 //-
19   Theuser
20   executed instanceof subfunction
21     oeResetPassword("Theuser"){
22       ieMessage('Your password has been reset. Check your mails to be able to reconnect') returned
23       to Theuser
24       ieMessage2('The password of the user : "Theuser" has been reset.') returned to Theadmin
25     }
26 //-
27   Theuser
```

```
28     executed instanceof subfunction
29         oeLogin("Theuser","7WXC1359") {
30             ieMessage('You are logged ! Welcome ...') returned to Theuser
31         }
32 // -----
33     Theuser
34     executed instanceof subfunction
35         oeLogout{
36             ieMessage('You are logged out ! Good Bye ...') returned to Theuser
37         }
38
39     }
40 }
41 }
42 }
```

Listing C.75: Messir Spec. file
usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystemWithDirectResetPassword.msr.

Appendix D

Listing of the Prolog Files Referenced in the Operation Model Specification

D.1

File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactActivatorSetClock.pl

```
1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactActivator,
7    oeSetClock,
8    [preProtocol,Self,
9     AcurrentClock
10    ],
11    []):-!
12/* Pre Protocol:*/
13/* PreP01 */
14 msrVar(ctState,TheSystem),
15 msrVar(ptBoolean,AvpStarted),
16
17 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
18
19 msrNav([Self],[rnActor,rnSystem,vpStarted],[AvpStarted]),
20 AvpStarted = [ptBoolean,true],
21
22 msrNav([TheSystem],
23     [clock,lt,[AcurrentClock]],
24     [[ptBoolean,true]]))
25 .
26
27msrop(outactActivator,
28    oeSetClock,
29    [preFunctional,Self,
30     AcurrentClock
31    ],
32    []):-!
33/* Pre Functional:*/
34/* PreF01 */
35true.
36
37msrop(outactActivator,
38    oeSetClock,
39    [post,Self,
40     AcurrentClock
41    ],
42    []):-!
43
```

```

44 msrVar(ctState,TheSystem),
45
46 /* Post Functional:*/
47
48 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
49
50 /* PostF01 */
51 msrNav([TheSystem],
52     [msmAtPost,clock],
53     [AcurrentClock]),
54
55 /* Post Protocol:*/
56 /* PostP01 */
57 true
58 .

```

Listing D.1: Prolog file outactActivator-oeSetClock.pl.

D.2 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactActivator-oeSollicitateCrisisHandling.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6
7msrop(outactActivator,
8    oeSollicitateCrisisHandling,
9    [preProtocol,Self
10   ],
11   []):-!
12/* Pre Protocol:*/
13 msrVar(ctState,TheSystem),
14 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
15
16 msrVarCol(ctCrisis,_,ColctCrisisToHandle),
17
18/* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23/* PreP02 */
24 msrNav([TheSystem],
25     [rnctCrisis,msrSelect,
26      handlingDelayPassed,[]]
27   ],
28   ColctCrisisToHandle),
29
30 msrNav(ColctCrisisToHandle,
31     [msrSize,geq,[[ptInteger,1]]],
32     [[ptBoolean,true]]),
33.
34
35msrop(outactActivator,
36    oeSollicitateCrisisHandling,
37    [preFunctional,Self
38   ],
39   []):-!
40/* Pre Functional:*/
41/* PreF01 */
42true.
43
44msrop(outactActivator,
45    oeSollicitateCrisisHandling,
46    [post,Self
47   ],

```

```

48      []):-  

49  

50 msrVar(ctState,TheSystem),  

51 msrVar(dtComment,AMessageForCrisisHandlers),  

52 msrVar(dtDateAndTime, TheClock),  

53 msrVarCol(ctCrisis,_,ColctCrisisToAllocateIfPossible),  

54  

55/* Post Functional:*/  

56 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

57  

58 /* PostF01 */  

59 msrNav([TheSystem],  

60     [rnctCrisis,msrSelect,  

61      maxHandlingDelayPassed, []  

62    ],  

63    ColctCrisisToAllocateIfPossible),  

64  

65msrNav(ColctCrisisToAllocateIfPossible,  

66     [msrForAll,isAllocatedIfPossible,[],  

67     [[ptBoolean,true]]],  

68  

69 /* PostF02 */  

70 msrNav([TheSystem],  

71     [rnctCrisis,msrSelect,  

72      handlingDelayPassed, []  

73    ],  

74    ColctCrisisToHandle),  

75  

76 msrNav(ColctCrisisToHandle,  

77     [msrColSubtract,[ColctCrisisToAllocateIfPossible]  

78   ],  

79    ColctCrisisToRemind),  

80  

81 (msrNav(ColctCrisisToRemind,  

82     [msrSize,geq,[[ptInteger,1]]],  

83     [[ptBoolean,true]])  

84 -> (msrNav([AMessageForCrisisHandlers],  

85     [value],  

86     [[ptString,'There are alerts pending since more than the defined delay. Please REACT !']] ),  

87  

88 msrNav([TheSystem],  

89     [rnactAdministrator,rnInterfaceIN,  

90      ieMessage, [AMessageForCrisisHandlers]  

91    ],  

92    [[ptBoolean,true]]),  

93  

94 msrNav([TheSystem],  

95     [rnactCoordinator,msrForAll,rnInterfaceIN,  

96      ieMessage, [AMessageForCrisisHandlers]  

97    ],  

98    [[ptBoolean,true]]))  

99 )  

100 ; true  

101 ),  

102  

103/* Post Protocol:*/  

104/* PostP01 */  

105 msrNav([TheSystem],  

106     [clock],  

107     [TheClock]),  

108  

109 msrNav([TheSystem],  

110     [msmAtPost,vpLastReminder],  

111     [TheClock])  

112 .

```

Listing D.2: Prolog file outactActivator-oeSollicitateCrisisHandling.pl.

D.3 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactAdm oeAddCoordinator.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5%-----%
6msrop(outactAdministrator,
7    oeAddCoordinator,
8    [preProtocol,Self,
9     AdtCoordinatorID,
10    AdtLogin,
11    AdtPassword
12    ],
13    []):-!
14/* Pre Protocol:*/
15 msrVar(ctState,TheSystem),
16 msrVar(actAdministrator,TheActor),
17 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
18 msrNav([Self],[rnActor],[TheActor]),
19 .
20/* PreP01 */
21 msrNav([TheSystem],
22     [vpStarted],
23     [[ptBoolean,true]]),
24 .
25/* PreP02 */
26 msrNav([TheActor],
27     [rnctAuthenticated,vpIsLogged],
28     [[ptBoolean,true]]),
29 .
30 .
31 .
32msrop(outactAdministrator,
33    oeAddCoordinator,
34    [preFunctional,Self,
35     AdtCoordinatorID,
36     AdtLogin,
37     AdtPassword
38    ],
39    []):-!
40/* Pre Functional:*/
41 msrVar(ctState,TheSystem),
42 msrVar(actAdministrator,TheActor),
43 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
44 msrNav([Self],[rnActor],[TheActor]),
45/* PreF01 */
46 msrNav([TheSystem],
47     [rnctCoordinator,
48      msrSelect,id,eq,[AdtCoordinatorID]],
49     ColctCoordinators),
50 msrNav(ColctCoordinators,
51     [msrIsEmpty],
52     [[ptBoolean,true]]),
53 .
54 .
55msrop(outactAdministrator,
56    oeAddCoordinator,
57    [post,Self,
58     AdtCoordinatorID,
59     AdtLogin,
60     AdtPassword
61    ],
62    []):-!
63 .
64/* Post Functional:*/
65 msrVar(ctState,TheSystem),
66 msrVar(actAdministrator,TheActor),

```

```

67 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
68 msrNav([Self],[rnActor],[TheActor]),
69
70 msrVar(actCoordinator,TheactCoordinator),
71 msrVar(ctCoordinator,ThectCoordinator),
72
73 /* PostF01 */
74 msrNav([TheactCoordinator],
75     [init,[]],
76     [[ptBoolean,true]]),
77
78 /* PostF02 */
79 msrNav([ThectCoordinator],
80     [init,[AdtCoordinatorID,AdtLogin,AdtPassword]],
81     [[ptBoolean,true]]),
82
83 /* PostF03 */
84 msrNav([TheactCoordinator],
85     [msmAtPost,rnctCoordinator],
86     [ThectCoordinator]),
87
88 /* PostF04 */
89 msrNav([ThectCoordinator],
90     [msmAtPost,rnactAuthenticated],
91     [TheactCoordinator]),
92
93 /* PostF05 */
94 msrNav([TheActor],
95     [rnInterfaceIN,
96     ieCoordinatorAdded,[]],
97     [[ptBoolean,true]]),
98
99 /* Post Protocol:*/
100 /* PostP01 */
101 true
102 .

```

Listing D.3: Prolog file outactAdministrator-oeAddCoordinator.pl.

D.4 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactAdministrator-oeDeleteCoordinator.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactAdministrator,
7    oeDeleteCoordinator,
8    [preProtocol,Self,
9     AdtCoordinatorID
10    ],
11    []):-
12/* Pre Protocol:*/
13 msrVar(ctState,TheSystem),
14 msrVar(actAdministrator,TheActor),
15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
16 msrNav([Self],[rnActor],[TheActor]),
17
18/* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23 msrNav([TheActor],
24     [rnctAuthenticated,vpIsLogged],
25     [[ptBoolean,true]]))
26.

```

```

27
28msrop(outactAdministrator,
29    oeDeleteCoordinator,
30    [preFunctional,Self,
31     AdtCoordinatorID
32    ],
33    []):-!
34/* Pre Functional:*/
35 msrVar(ctState,TheSystem),
36 msrVar(actAdministrator,TheActor),
37 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
38 msrNav([Self],[rnActor],[TheActor]),
39
40/* PreF01 */
41 msrNav([TheSystem],
42     [rnctCoordinator,
43      msrSelect,id,eq,[AdtCoordinatorID]],
44     ColctCoordinators),
45
46 msrNav(ColctCoordinators,
47     [msrSize,eq,[[ptInteger,1]]],
48     [[ptBoolean,true]]).
49
50msrop(outactAdministrator,
51    oeDeleteCoordinator,
52    [post,Self,
53     AdtCoordinatorID
54    ],
55    []):-!
56
57/* Post Functional:*/
58 msrVar(ctState,TheSystem),
59 msrVar(actAdministrator,TheActor),
60 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
61 msrNav([Self],[rnActor],[TheActor]),
62
63/* PostF01 */
64 msrNav([TheSystem],
65     [rnctCoordinator,
66      msrSelect,id,eq,[AdtCoordinatorID]],
67     [ThectCoordinator]),
68
69 msrNav([ThectCoordinator],
70     [rnactCoordinator,msrForAll,msrIsKilled],
71     [[ptBoolean,true]]),
72
73 msrNav([ThectCoordinator],
74     [msrIsKilled],
75     [[ptBoolean,true]]),
76
77 /* PostF02 */
78 msrNav([TheActor],
79     [rnInterfaceIN,
80      ieCoordinatorDeleted,[]]
81    ],
82    [[ptBoolean,true]]),
83
84 /* Post Protocol:*/
85/* PostP01 */
86 true
87 .

```

Listing D.4: Prolog file outactAdministrator-oeDeleteCoordinator.pl.

D.5 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactAdministrator-oeLogin.pl

%%%%%%%%%%%%%

```

2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5%
6msrop(outactAuthenticated,
7    oeLogin,
8    [preProtocol,Self,
9     AdtLogin,
10    AdtPassword
11    ],
12    []):-.
13/* Pre Protocol:*/
14 msrVar(ctState,TheSystem),
15 msrVar(actAuthenticated,TheactAuthenticated),
16 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
17 msrNav([Self],[rnActor],[TheactAuthenticated]),
18 .
19 /* PreP01 */
20 msrNav([TheSystem],
21     [vpStarted],
22     [[ptBoolean,true]]),
23 .
24 msrNav([TheactAuthenticated],
25     [rnctAuthenticated,vpisLogged],
26     [[ptBoolean,false]])
27 .
28
29msrop(outactAuthenticated,
30    oeLogin,
31    [preFunctional,Self,
32     AdtLogin,
33     AdtPassword
34     ],
35    []):-.
36/* Pre Functional:*/
37/* PreF01 */
38true
39.
40
41msrop(outactAuthenticated,
42    oeLogin,
43    [post,Self,
44     AdtLogin,
45     AdtPassword
46     ],
47    []):-.
48
49 msrVar(ctState,TheSystem),
50 msrVar(actAuthenticated,TheactAuthenticated),
51 .
52 msrVar(ptString,AptStringMessageForTheactAuthenticated),
53 msrVar(ptString,AptStringMessageForTheactAdministrator),
54 .
55/* Post Functional:*/
56
57 msrNav([Self],[rnActor],[TheactAuthenticated]),
58 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
59 .
60/* PostF01 */
61
62 ( (msrNav([TheactAuthenticated],
63            [rnctAuthenticated,pwd],
64            [AdtPassword]),
65   msrNav([TheactAuthenticated],
66            [rnctAuthenticated,login],
67            [AdtLogin])
68 )
69 -> ( msrNav([AptStringMessageForTheactAuthenticated],
70              [eq,[[ptString,'You are logged ! Welcome ...']]],
71              [[ptBoolean,true]]),

```

```

72     msrNav([TheactAuthenticated],
73         [rnInterfaceIN,
74          ieMessage, [AptStringMessageForTheactAuthenticated]],
75          [[ptBoolean,true]])
76    )
77 ; ( msrNav([AptStringMessageForTheactAuthenticated],
78         [eq,[[ptString,'Wrong identification information ! Please try again ...']]],,
79         [[ptBoolean,true]]),
80     msrNav([TheactAuthenticated],
81         [rnInterfaceIN,
82          ieMessage, [AptStringMessageForTheactAuthenticated]],
83          [[ptBoolean,true]]),
84
85     msrNav([AptStringMessageForTheactAdministrator],
86         [eq,[[ptString,'Intrusion tentative !']]],,
87         [[ptBoolean,true]]),
88     msrNav([TheSystem],
89         [rnactAdministrator,rnInterfaceIN,
90          ieMessage, [AptStringMessageForTheactAdministrator]],
91          [[ptBoolean,true]])
92    )
93 ),
94
95 /* Post Protocol:*/
96/* PostP01 */
97 ( (msrNav([TheactAuthenticated],
98     [rnctAuthenticated,pwd],
99     [AdtPassword]),
100    msrNav([TheactAuthenticated],
101        [rnctAuthenticated,login],
102        [AdtLogin])
103   )
104 -> (msrNav([TheactAuthenticated],
105     [rnctAuthenticated,msmAtPost,vpIsLogged],
106     [[ptBoolean,true]])
107   )
108 ; true
109 )
110 .

```

Listing D.5: Prolog file outactAuthenticated-oeLogin.pl.

D.6 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactAuthenticated-oeLogout.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactAuthenticated,
7    oeLogout,
8    [preProtocol,Self
9     ],
10    []):- 
11/* Pre Protocol:*/
12 msrVar(ctState,TheSystem),
13 msrVar(actAuthenticated,TheActor),
14 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
15 msrNav([Self],[rnActor],[TheActor]),
16
17/* PreP01 */
18 msrNav([TheSystem],
19     [vpStarted],
20     [[ptBoolean,true]]),
21
22 msrNav([TheActor],
23     [rnctAuthenticated,vpIsLogged],

```

```

24     [[ptBoolean,true]]) )
25 .
26
27msrop(outactAuthenticated,
28     oeLogout,
29     [preFunctional,Self
30     ],
31     []):- 
32/* Pre Functional:*/
33/* PreF01 */
34true
35.
36
37msrop(outactAuthenticated,
38     oeLogout,
39     [post,Self
40     ],
41     []):- 
42
43 msrVar(ctState,TheSystem),
44 msrVar(actAuthenticated,TheactAuthenticated),
45
46 msrVar(ptString,AptStringMessageForTheactAuthenticated),
47
48/* Post Functional:*/
49 msrNav([Self],[rnActor],[TheactAuthenticated]),
50 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
51
52/* PostF01 */
53 msrNav([AptStringMessageForTheactAuthenticated],
54     [eq,[[ptString,'You are logged out ! Good Bye ...']]], 
55     [[ptBoolean,true]]),
56 msrNav([TheactAuthenticated],
57     [rnInterfaceIN,
58      ieMessage,[AptStringMessageForTheactAuthenticated]],
59     [[ptBoolean,true]]),
60
61 /* Post Protocol:*/
62/* PostP01 */
63msrNav([TheactAuthenticated],
64     [rnctAuthenticated,msmAtPost,vpIsLogged],
65     [[ptBoolean,false]])
66.

```

Listing D.6: Prolog file outactAuthenticated-oeLogout.pl.

D.7 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactComCoeAlert.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6nico(A):-
7 trace,
8 write('here'),
9 write('\n').
10
11msrop(outactComCompany,
12     oeAlert,
13     [preProtocol,Self,
14      AetHumanKind,
15      AdtDate,
16      AdtTime,
17      AdtPhoneNumber,
18      AdtGPSLocation,
19      AdtComment

```

```

20      ],
21      []):-  

22 /* Pre Protocol:-/  

23 msrVar(ctState,TheSystem),  

24 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

25 /* PreP01 */  

26 msrNav([TheSystem],  

27     [vpStarted],  

28     [[ptBoolean,true]]))  

29 .  

30  

31 msrop(outactComCompany,  

32     oeAlert,  

33     [preFunctional,Self,  

34     AetHumanKind,  

35     AdtDate,  

36     AdtTime,  

37     AdtPhoneNumber,  

38     AdtGPSLocation,  

39     AdtComment  

40     ],  

41     []):-  

42 /* Pre Functional:-/  

43 /* PreF01 */  

44 msrVar(ctState,TheSystem),  

45 msrNav([Self],  

46     [msmAtPre,rnActor,rnSystem],  

47     [TheSystem]),  

48  

49 ( msrNav([TheSystem],[clock,date,gt,[AdtDate]],[[ptBoolean,true]]))  

50 ; (msrNav([TheSystem],[clock,date,eq,[AdtDate]],[[ptBoolean,true]]))  

51 , msrNav([TheSystem],[clock,time,gt,[AdtTime]],[[ptBoolean,true]]))  

52 )  

53 )  

54 .  

55  

56 msrop(outactComCompany,  

57     oeAlert,  

58     [post,Self,  

59     AetHumanKind,  

60     AdtDate,  

61     AdtTime,  

62     AdtPhoneNumber,  

63     AdtGPSLocation,  

64     AdtComment  

65     ],  

66     []):-  

67  

68 msrVar(ctState,TheSystem),  

69 msrVar(ctHuman,ActHuman),  

70 msrVar(actComCompany,TheactComCompany),  

71 msrVar(ctAlert,ActAlert),  

72 msrVar(dtDateAndTime,AAlertInstant),  

73 msrVar(etAlertStatus,AetAlertStatus),  

74% msrVar(ctAlert,ActAlertNearBy),  

75 msrVar(ctCrisis,ActCrisis),  

76 msrVar(dtCrisisID,AdtCrisisID),  

77% msrVar(etCrisisType,AetCrisisType),  

78 msrVar(etCrisisStatus,AetCrisisStatus),  

79 msrVar(dtDateAndTime,ACrisisInstant),  

80 msrVar(dtComment,ACrisisdtComment),  

81% msrVar(ptString,AptStringMessage),  

82 msrVar(dtSMS,AdtSMS),  

83 msrVar(dtAlertID,AdtAlertID),  

84  

85% msrVar(ptInteger,TheNextptIntegerValue),  

86% msrVar(ptInteger,UpdatedNextptIntegerValue),  

87% msrVar(inactComCompany,TheComCompanyIN),  

88% msrVar(dtComment,TheCommentStored),  

89% msrVar(dtString,TheCommentStoreddtString),

```

```

90
91/* Post Functional:*/
92
93 msrNav([Self], [rnActor], [TheactComCompany]),
94 msrNav([Self], [rnActor, rnSystem], [TheSystem]),
95
96/* PostF01 */
97 msrNav([TheSystem],
98     [nextValueForAlertID],
99     [PrenextValueForAlertID]),
100 msrNav([PrenextValueForAlertID],
101     [add, [[dtInteger, [[value, [ptInteger, 1]]], []]], [PostnextValueForAlertID]),
102     [PostnextValueForAlertID]),
103 msrNav([TheSystem],
104     [msmAtPost, nextValueForAlertID],
105     [PostnextValueForAlertID]),
106
107 /* PostF02 */
108 msrNav([AAlerInstant], [date], [AdtDate]),
109 msrNav([AAlerInstant], [time], [AdtTime]),
110
111 msrNav([AetAlertStatus],
112     [], [etAlertStatus,pending]),
113
114 msrNav([TheSystem],
115     [nextValueForAlertID,
116      todString, [], eq, [AdtAlertID]],
117     [[ptBoolean,true])),
118
119
120 msrNav([ActAlert],
121     [init, [AdtAlertID,
122             AetAlertStatus,
123             AdtGPSLocation,
124             AAlerInstant,
125             AdtComment]],,
126     [[ptBoolean,true])),
127
128 /* PostF03 */
129 msrNav([TheSystem],
130     [rnctAlert,
131      msrSelect,location,isNearTo,[AdtGPSLocation]],
132     ColctAlertsNearBy),
133
134 ( (msrNav(ColctAlertsNearBy,
135     [msrIsEmpty,
136     [[ptBoolean,true]])
137   )
138 -> (
139   msrNav([TheSystem],
140     [nextValueForCrisisID,
141     [PrenextValueForCrisisID]),
142   msrNav([PrenextValueForCrisisID],
143     [add, [[dtInteger, [[value, [ptInteger, 1]]], []]], [PostnextValueForCrisisID]),
144     [PostnextValueForCrisisID]),
145   msrNav([TheSystem],
146     [msmAtPost, nextValueForCrisisID],
147     [PostnextValueForCrisisID]),
148
149   msrNav([TheSystem],
150     [nextValueForCrisisID,
151      todString, [], eq, [AdtCrisisID]],
152     [[ptBoolean,true])),
153
154   msrNav([AdtCrisisType],[],[[etCrisisType,small]]),
155   msrNav([AetCrisisStatus],[],[[etCrisisStatus,pending]]),
156   msrNav([ACrisisInstant],[],[AAlerInstant]),
157   msrNav([ACrisisdtComment],
158     [value],
159     [[ptString, 'no reporting yet defined']])),

```

```

160   msrNav([ActCrisis],[init,[AdtCrisisID,
161             AdtCrisisType,
162             AetCrisisStatus,
163             AdtGPSLocation,
164             ACrisisInstant,
165             ACrisisdtComment]],,
166             [[ptBoolean,true]]),
167
168   )
169 ; (
170   msrNav(ColctAlertsNearBy,
171             [rnTheCrisis,msrAny,msrTrue],
172             [ActCrisis])
173   ),
174 ),
175
176 /* PostF04 */
177
178 msrNav([ActAlert],
179         [msmAtPost,rnTheCrisis],
180         [ActCrisis]),
181
182 /* PostF05 */
183
184 msrNav([TheSystem],
185         [rnctHuman,
186           msrSelect,id,eq,[AdtPhoneNumber]],
187         HumanColl),
188
189 msrNav(HumanColl,
190         [msrSelect,kind,etEq,[AetHumanKind]],
191         HumanCol2),
192
193 (msrNav(HumanCol2,[msrIsEmpty],[[ptBoolean,true]]))
194 -> (msrNav([ActHuman],
195             [init,[AdtPhoneNumber,AetHumanKind]],
196             [[ptBoolean,true]]),
197   msrNav([ActHuman],
198             [msmAtPost,rnactComCompany],
199             [TheactComCompany])
200   )
201 ; msrNav(HumanCol2,
202             [msrAny],
203             [ActHuman])
204 ),
205
206msrNav([ActHuman],
207         [rnSignaled,msrIncluding,[ActAlert]],
208         ColAlerts),
209
210msrNav([ActHuman],
211         [msmAtPost,rnSignaled],
212         ColAlerts),
213
214/* PostF06 */
215msrNav([AdtSMS],
216         [value],
217         [[ptString,'Your alert has been registered. We will handle it and keep you informed']])),
218msrNav([TheactComCompany],
219         [rnInterfaceIN,
220           ieSmsSend,[AdtPhoneNumber,
221                         AdtSMS]],[[ptBoolean,true]]),
222
223/*
224
225 */
226
227 /* Post Protocol:*/
228 /* PostP01 */
229 true

```

230 .

Listing D.7: Prolog file outactComCompany-oeAlert.pl.

D.8 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoord oeCloseCrisis.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeCloseCrisis,
8    [preProtocol,Self,
9     AdtCrisisID
10    ],
11   []):-!
12/* Pre Protocol:*/
13 msrVar(ctState,TheSystem),
14 msrVar(actCoordinator,TheActor),
15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
16 msrNav([Self],[rnActor],[TheActor]),
17 .
18/* PreP01 */
19 msrNav([TheSystem],
20        [vpStarted],
21        [[ptBoolean,true]]),
22 .
23/* PreP02 */
24 msrNav([TheActor],
25        [rnctAuthenticated,vpIsLogged],
26        [[ptBoolean,true]]),
27 .
28
29msrop(outactCoordinator,
30    oeCloseCrisis,
31    [preFunctional,Self,
32     AdtCrisisID
33    ],
34   []):-!
35/* Pre Functional:*/
36 msrVar(ctState,TheSystem),
37 msrVar(actCoordinator,TheActor),
38 .
39 msrVar(dtCrisisID,AdtCrisisID),
40 .
41 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
42 msrNav([Self],[rnActor],[TheActor]),
43 .
44/* PreF01 */
45 msrNav([TheSystem],
46        [rnctCrisis,
47         msrSelect,
48         id,eq,[AdtCrisisID]
49       ],
50       ColCrisis),
51 .
52 msrNav(ColCrisis,
53        [msrSize,eq,[[ptInteger,1]]],
54        [[ptBoolean,true]]),
55 .
56
57msrop(outactCoordinator,
58    oeCloseCrisis,
59    [post,Self,
60     AdtCrisisID
61    ],

```

```

62      []):-  

63  

64 /* Post Functional: */  

65 msrVar(ctState,TheSystem),  

66 msrVar(actCoordinator,TheActor),  

67  

68 msrVar(ctCrisis,TheCrisis),  

69 msrVar(dtCrisisID,AdtCrisisID),  

70  

71 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

72 msrNav([Self],[rnActor],[TheActor]),  

73  

74 /* PostF01 */  

75 msrNav([TheSystem],  

76     [rnctCrisis,  

77      msrSelect,  

78      id,eq,[AdtCrisisID]],  

79      [TheCrisis]),  

80  

81 msrNav([TheCrisis],  

82     [msmAtPost,status],  

83     [[etCrisisStatus,closed]]),  

84  

85 /* PostF02 */  

86 msrNav([TheCrisis],  

87     [msmAtPost,rnHandler],  

88     []),  

89  

90 /* PostF03 */  

91 msrNav([TheCrisis],  

92     [rnAlerts,msrForAll,msrIsKilled],  

93     [[ptBoolean,true]]),  

94  

95 /* PostF04 */  

96 msrNav([TheActor],  

97     [rnInterfaceIN,  

98      ieMessage,[[ptString,'The crisis is now closed !']]  

99      ],  

100     [[ptBoolean,true]]),  

101  

102 /* Post Protocol: */  

103 /* PostP01 */  

104 true  

105 .

```

Listing D.8: Prolog file outactCoordinator-oeCloseCrisis.pl.

D.9 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeGetAlertsSet.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */  

3:- multifile msrop/4.  

4%%%%%%%%%%%%%%%
5-----  

6msrop(outactCoordinator,  

7    oeGetAlertsSet,  

8    [preProtocol,Self,  

9     AetAlertStatus  

10    ],  

11    []):-  

12/* Pre Protocol: */  

13 msrVar(ctState,TheSystem),  

14 msrVar(actCoordinator,TheActor),  

15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

16 msrNav([Self],[rnActor],[TheActor]),  

17  

18/* PreP01 */

```

```

19 msrNav([TheSystem],
20   [vpStarted],
21   [[ptBoolean,true]]),
22 .
23 msrNav([TheActor],
24   [rnctAuthenticated,vpIsLogged],
25   [[ptBoolean,true]])
26 .
27
28 msrop(outactCoordinator,
29   oeGetAlertsSet,
30   [preFunctional,Self,
31   AetAlertStatus
32   ],
33   []):-!
34 /* Pre Functional:*/
35 /* PreF01 */
36 true
37 .
38
39 msrop(outactCoordinator,
40   oeGetAlertsSet,
41   [post,Self,
42   AetAlertStatus
43   ],
44   []):-!
45
46 /* Post Functional:*/
47 msrVar(ctState,TheSystem),
48 msrVar(actCoordinator,TheActor),
49 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
50 msrNav([Self],[rnActor],[TheActor]),
51
52 /* PostF01 */
53 msrNav([TheSystem],
54   [rnctAlert,
55   msrSelect,
56   status,etEq,[AetAlertStatus]],
57   ColAlertSet),
58
59 msrNav(ColAlertSet,
60   [msrForAll,isSentToCoordinator,[TheActor]],
61   [[ptBoolean,true]]),
62
63 /* Post Protocol:*/
64 /* PostP01 */
65 true
66 .

```

Listing D.9: Prolog file outactCoordinator-oeGetAlertsSet.pl.

D.10 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeGetCrisisSet.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7   oeGetCrisisSet,
8   [preProtocol,Self,
9   AetCrisisStatus
10  ],
11  []):-!
12/* Pre Protocol:*/
13 msrVar(ctState,TheSystem),
14 msrVar(actCoordinator,TheActor),

```

```

15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
16 msrNav([Self],[rnActor],[TheActor]),
17
18/* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23 msrNav([TheActor],
24     [rnctAuthenticated,vpIsLogged],
25     [[ptBoolean,true]])
26.
27
28msrop(outactCoordinator,
29 oeGetCrisisSet,
30 [preFunctional,Self,
31 AetCrisisStatus
32 ],
33 []):-!
34/* Pre Functional:*/
35/* PreF01 */
36true
37.
38
39msrop(outactCoordinator,
40 oeGetCrisisSet,
41 [post,Self,
42 AetCrisisStatus
43 ],
44 []):-!
45
46/* Post Functional:*/
47 msrVar(ctState,TheSystem),
48 msrVar(actCoordinator,TheActor),
49 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
50 msrNav([Self],[rnActor],[TheActor]),
51
52/* PostF01 */
53 msrNav([TheSystem],
54     [rnctCrisis,
55      msrSelect,
56      status,etEq,[AetCrisisStatus]],
57     ColCrisisSet),
58
59 msrNav(ColCrisisSet,
60     [msrForAll,isSentToCoordinator,[TheActor]],
61     [[ptBoolean,true]]),
62
63 /* Post Protocol:*/
64/* PostP01 */
65 true
66 .

```

Listing D.10: Prolog file outactCoordinator-oeGetCrisisSet.pl.

D.11 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeInvalidateAlert.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeInvalidateAlert,
8    [preProtocol,Self,
9     AdtAlertID
10    ],

```

```

11  []):-  

12 /* Pre Protocol:*/  

13 msrVar(ctState,TheSystem),  

14 msrVar(actCoordinator,TheActor),  

15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

16 msrNav([Self],[rnActor],[TheActor]),  

17  

18 /* PreP01 */  

19 msrNav([TheSystem],  

20     [vpStarted],  

21     [[ptBoolean,true]]),  

22  

23 /* PreP02 */  

24 msrNav([TheActor],  

25     [rnctAuthenticated,vpIsLogged],  

26     [[ptBoolean,true]]))  

27.  

28  

29 msrop(outactCoordinator,  

30     oeInvalidateAlert,  

31     [preFunctional,Self,  

32      AdtAlertID  

33      ],  

34      []):-  

35 /* Pre Functional:*/  

36 msrVar(ctState,TheSystem),  

37 msrVar(actCoordinator,TheActor),  

38  

39 msrVar(dtAlertID,AdtAlertID),  

40  

41 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

42 msrNav([Self],[rnActor],[TheActor]),  

43  

44 /* PreF01 */  

45 msrNav([TheSystem],  

46     [rnctAlert,  

47      msrSelect,  

48      id,eq,[AdtAlertID]  

49      ],  

50      ColAlert),  

51  

52 msrNav(ColAlert,  

53     [msrSize,eq,[[ptInteger,1]]],  

54     [[ptBoolean,true]]))  

55 .  

56  

57 msrop(outactCoordinator,  

58     oeInvalidateAlert,  

59     [post,Self,  

60      AdtAlertID  

61      ],  

62      []):-  

63  

64 /* Post Functional:*/  

65 msrVar(ctState,TheSystem),  

66 msrVar(actCoordinator,TheActor),  

67  

68 msrVar(ctAlert,TheAlert),  

69 msrVar(dtAlertID,AdtAlertID),  

70  

71 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

72 msrNav([Self],[rnActor],[TheActor]),  

73  

74 /* PostF01 */  

75 msrNav([TheSystem],  

76     [rnctAlert,  

77      msrSelect,  

78      id,eq,[AdtAlertID]],  

79      [TheAlert]),  

80

```

```

81 msrNav([TheAlert],
82     [msmAtPost,status],
83     [[etAlertStatus,invalid]]),
84
85 /* PostF02 */
86 msrNav([TheActor],
87     [rnInterfaceIN,
88     ieMessage,[[ptString,'The alert is now declared as invalid !']],
89     ],
90     [[ptBoolean,true]]),
91
92 /* Post Protocol:*/
93 /* PostP01 */
94 true
95 .

```

Listing D.11: Prolog file outactCoordinator-oeInvalidateAlert.pl.

D.12 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeReportOnCrisis.pl

```

1%-----%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%-----%
5-----%
6msrop(outactCoordinator,
7    oeReportOnCrisis,
8    [preProtocol,Self,
9     AdtCrisisID,
10    AdtComment
11    ],
12    []):-!
13/* Pre Protocol:*/
14 msrVar(ctState,TheSystem),
15 msrVar(actCoordinator,TheActor),
16 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
17 msrNav([Self],[rnActor],[TheActor]),
18
19/* PreP01 */
20 msrNav([TheSystem],
21     [vpStarted],
22     [[ptBoolean,true]]),
23
24 msrNav([TheActor],
25     [rnctAuthenticated,vpIsLogged],
26     [[ptBoolean,true]]))
27.
28
29msrop(outactCoordinator,
30    oeReportOnCrisis,
31    [preFunctional,Self,
32     AdtCrisisID,
33     AdtComment
34     ],
35    []):-!
36/* Pre Functional:*/
37 msrVar(ctState,TheSystem),
38 msrVar(actCoordinator,TheActor),
39
40 msrVar(dtCrisisID,AdtCrisisID),
41
42 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
43 msrNav([Self],[rnActor],[TheActor]),
44
45/* PreF01 */
46 msrNav([TheSystem],
47     [rnctCrisis,

```

```

48     msrSelect,
49     id,eq,[AdtCrisisID]
50   ],
51   ColCrisis),
52
53 msrNav(ColCrisis,
54   [msrSize,eq,[[ptInteger,1]]],
55   [[ptBoolean,true]])
56 .
57
58msrop(outactCoordinator,
59   oeReportOnCrisis,
60   [post,Self,
61   AdtCrisisID,
62   AdtComment
63   ],
64   []):-!
65
66/* Post Functional:*/
67 msrVar(ctState,TheSystem),
68 msrVar(actCoordinator,TheActor),
69
70 msrVar(ctCrisis,TheCrisis),
71 msrVar(dtCrisisID,AdtCrisisID),
72 msrVar(dtComment,AdtComment),
73
74 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
75 msrNav([Self],[rnActor],[TheActor]),
76
77/* PostF01 */
78 msrNav([TheSystem],
79   [rnctCrisis,
80    msrSelect,
81    id,eq,[AdtCrisisID]],
82   [TheCrisis]),
83
84 msrNav([TheCrisis],
85   [msmAtPost,comment],
86   [AdtComment]),
87
88 msrNav([TheActor],
89   [rnInterfaceIN,
90   ieMessage,[[ptString,'The crisis comment has been updated !']]
91   ],
92   [[ptBoolean,true]]),
93
94/* Post Protocol:*/
95/* PostP01 */
96 true
97 .

```

Listing D.12: Prolog file outactCoordinator-oeReportOnCrisis.pl.

D.13 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeSetCrisisHandler.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7   oeSetCrisisHandler,
8   [preProtocol,Self,
9   AdtCrisisID
10  ],
11  []):-!
12/* Pre Protocol:*/

```

```

13 msrVar(ctState,TheSystem),
14 msrVar(actCoordinator,TheActor),
15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
16 msrNav([Self],[rnActor],[TheActor]),
17
18 /* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23 msrNav([TheActor],
24     [rnctAuthenticated,vpIsLogged],
25     [[ptBoolean,true]]))
26.
27
28msrop(outactCoordinator,
29 oeSetCrisisHandler,
30 [preFunctional,Self,
31 AdtCrisisID
32 ],
33 []):-!
34 /* Pre Functional:*/
35 msrVar(ctState,TheSystem),
36 msrVar(actCoordinator,TheActor),
37
38 msrVar(dtCrisisID,AdtCrisisID),
39
40 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
41 msrNav([Self],[rnActor],[TheActor]),
42
43 /* PreF01 */
44 msrNav([TheSystem],
45     [rnctCrisis,
46      msrSelect,
47      id,eq,[AdtCrisisID]
48 ],
49     ColCrisis),
50
51 msrNav(ColCrisis,
52     [msrSize,eq,[[ptInteger,1]]],
53     [[ptBoolean,true]]))
54 .
55
56msrop(outactCoordinator,
57 oeSetCrisisHandler,
58 [post,Self,
59 AdtCrisisID
60 ],
61 []):-!
62
63 /* Post Functional:*/
64 msrVar(ctState,TheSystem),
65 msrVar(actCoordinator,TheActor),
66 msrVar(ctCoordinator,TheCoordinator),
67 msrVar(ctCoordinator,TheCurrentHandler),
68
69 msrVar(ctCrisis,TheCrisis),
70 msrVar(dtCrisisID,AdtCrisisID),
71
72 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
73 msrNav([Self],[rnActor],[TheActor]),
74
75 /* PostF01 */
76 msrNav([TheSystem],
77     [rnctCrisis,
78      msrSelect,
79      id,eq,[AdtCrisisID]],
80     [TheCrisis]),
81
82 msrNav([TheCrisis],

```

```

83     [msmAtPost,status],
84     [[etCrisisStatus,handled]]),
85
86 msrNav([TheActor],
87     [rnctCoordinator],
88     [TheCoordinator]),
89 msrNav([TheCrisis],
90     [msmAtPost,rnHandler],
91     [TheCoordinator]),
92
93 msrNav([TheActor],
94     [rnInterfaceIN,
95      ieMessage,[[ptString,'You are now considered as handling the crisis !']],
96      ],
97      [[ptBoolean,true]]),
98
99 /* PostF02 */
100 msrNav([TheCrisis],
101     [rnAlerts,msrForAll,isSentToCoordinator,[TheActor]],
102     [[ptBoolean,true]]),
103
104 /* PostF03 */
105 ( msrNav([TheCrisis],
106     [rnHandler,msrSize,eq,[[ptInteger,1]]],
107     [[ptBoolean,true]]))
108 -> (msrNav([TheCrisis],
109     [rnHandler],
110     [TheCurrentHandler]),
111     msrNav([TheCurrentHandler],
112     [rnactCoordinator,rnInterfaceIN,
113      ieMessage,[[ptString,'One of the crisis you were handling is now handled by one of your
114      colleagues!']]],
115      [[ptBoolean,true]]))
116 )
117 ; true
118 ),
119
120 /* PostF04 */
121 msrNav([TheCrisis],
122     [rnAlerts,rnSignaler,msrForAll,isAcknowledged,[],,
123     [[ptBoolean,true]]),
124
125 /* Post Protocol:*/
126/* PostP01 */
127 true
128 .

```

Listing D.13: Prolog file outactCoordinator-oeSetCrisisHandler.pl.

D.14 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeSetCrisisStatus.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeSetCrisisStatus,
8    [preProtocol,Self,
9     AdtCrisisID,
10    AetCrisisStatus
11    ],
12    []):-!
13/* Pre Protocol:*/
14 msrVar(ctState,TheSystem),
15 msrVar(actCoordinator,TheActor),

```

```

16 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
17 msrNav([Self],[rnActor],[TheActor]),
18
19 /* PreP01 */
20 msrNav([TheSystem],
21     [vpStarted],
22     [[ptBoolean,true]]),
23
24 msrNav([TheActor],
25     [rnctAuthenticated,vpIsLogged],
26     [[ptBoolean,true]])
27.
28
29msrop(outactCoordinator,
30 oeSetCrisisStatus,
31 [preFunctional,Self,
32 AdtCrisisID,
33 AetCrisisStatus
34 ],
35 []):-!
36 /* Pre Functional:*/
37 msrVar(ctState,TheSystem),
38 msrVar(actCoordinator,TheActor),
39
40 msrVar(dtCrisisID,AdtCrisisID),
41
42 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
43 msrNav([Self],[rnActor],[TheActor]),
44
45 /* PreF01 */
46 msrNav([TheSystem],
47     [rnctCrisis,
48      msrSelect,
49      id,eq,[AdtCrisisID]
50 ],
51 ColCrisis),
52
53 msrNav(ColCrisis,
54     [msrSize,eq,[[ptInteger,1]]],
55     [[ptBoolean,true]]))
56 .
57
58msrop(outactCoordinator,
59 oeSetCrisisStatus,
60 [post,Self,
61 AdtCrisisID,
62 AetCrisisStatus
63 ],
64 []):-!
65
66 /* Post Functional:*/
67 msrVar(ctState,TheSystem),
68 msrVar(actCoordinator,TheActor),
69
70 msrVar(ctCrisis,TheCrisis),
71 msrVar(dtCrisisID,AdtCrisisID),
72 msrVar(etCrisisStatus,AetCrisisStatus),
73
74 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
75 msrNav([Self],[rnActor],[TheActor]),
76
77 /* PostF01 */
78 msrNav([TheSystem],
79     [rnctCrisis,
80      msrSelect,
81      id,eq,[AdtCrisisID]],
82     [TheCrisis]),
83
84 msrNav([TheCrisis],
85     [msmAtPost,status],

```

```

86     [AetCrisisStatus]),
87
88 msrNav([TheActor],
89     [rnInterfaceIN,
90     ieMessage,[[ptString,'The crisis status has been updated !']])
91 ],
92 [[ptBoolean,true]]),
93
94 /* Post Protocol:*/
95 /* PostP01 */
96 true
97 .

```

Listing D.14: Prolog file outactCoordinator-oeSetCrisisStatus.pl.

D.15 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeSetCrisisType.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeSetCrisisType,
8    [preProtocol,Self,
9     AdtCrisisID,
10    AetCrisisType
11    ],
12    []):-!
13/* Pre Protocol:*/
14 msrVar(ctState,TheSystem),
15 msrVar(actCoordinator,TheActor),
16 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
17 msrNav([Self],[rnActor],[TheActor]),
18
19/* PreP01 */
20 msrNav([TheSystem],
21     [vpStarted],
22     [[ptBoolean,true]]),
23
24 msrNav([TheActor],
25     [rnctAuthenticated,vpiIsLogged],
26     [[ptBoolean,true]]))
27.
28
29msrop(outactCoordinator,
30    oeSetCrisisType,
31    [preFunctional,Self,
32     AdtCrisisID,
33     AetCrisisType
34     ],
35     []):-!
36/* Pre Functional:*/
37 msrVar(ctState,TheSystem),
38 msrVar(actCoordinator,TheActor),
39
40 msrVar(dtCrisisID,AdtCrisisID),
41
42 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
43 msrNav([Self],[rnActor],[TheActor]),
44
45/* PreF01 */
46 msrNav([TheSystem],
47     [rnctCrisis,
48      msrSelect,
49      id,eq,[AdtCrisisID]
50     ],

```

```

51     ColCrisis),
52
53 msrNav(ColCrisis,
54     [msrSize, eq, [[ptInteger, 1]]], 
55     [[ptBoolean, true]])
56 .
57
58 msrop(outactCoordinator,
59     oeSetCrisisType,
60     [post, Self,
61      AdtCrisisID,
62      AetCrisisType
63     ],
64     []):-!
65
66 /* Post Functional:*/
67 msrVar(ctState, TheSystem),
68 msrVar(actCoordinator, TheActor),
69
70 msrVar(ctCrisis, TheCrisis),
71 msrVar(dtCrisisID, AdtCrisisID),
72 msrVar(etCrisisType, AetCrisisType),
73
74 msrNav([Self], [rnActor, rnSystem], [TheSystem]),
75 msrNav([Self], [rnActor], [TheActor]),
76
77 /* PostF01 */
78 msrNav([TheSystem],
79     [rnctCrisis,
80      msrSelect,
81      id, eq, [AdtCrisisID]],
82     [TheCrisis]),
83
84 msrNav([TheCrisis],
85     [msmAtPost, type],
86     [AetCrisisType]),
87
88 msrNav([TheActor],
89     [rnInterfaceIN,
90      ieMessage, [[ptString, 'The crisis type has been updated !']]
91     ],
92     [[ptBoolean, true]]),
93
94 /* Post Protocol:*/
95 /* PostP01 */
96 true
97 .

```

Listing D.15: Prolog file outactCoordinator-oeSetCrisisType.pl.

D.16 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeValidateAlert.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeValidateAlert,
8    [preProtocol, Self,
9     AdtAlertID
10    ],
11    []):-!
12/* Pre Protocol:*/
13 msrVar(ctState, TheSystem),
14 msrVar(actCoordinator, TheActor),
15 msrNav([Self], [rnActor, rnSystem], [TheSystem]),

```

```

16 msrNav([Self], [rnActor], [TheActor]),
17
18/* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23 msrNav([TheActor],
24     [rnctAuthenticated,vpiIsLogged],
25     [[ptBoolean,true]])
26.
27
28msrop(outactCoordinator,
29    oeValidateAlert,
30    [prefunctional,Self,
31     AdtAlertID
32     ],
33     []):-!
34/* Pre Functional:*/
35 msrVar(ctState,TheSystem),
36 msrVar(actCoordinator,TheActor),
37
38 msrVar(dtAlertID,AdtAlertID),
39
40 msrNav([Self], [rnActor,rnSystem],[TheSystem]),
41 msrNav([Self], [rnActor], [TheActor]),
42
43/* PreF01 */
44 msrNav([TheSystem],
45     [rnctAlert,
46      msrSelect,
47      id,eq,[AdtAlertID]
48      ],
49     ColAlerts),
50
51 msrNav(ColAlerts,
52     [msrSize,eq,[[ptInteger,1]]],
53     [[ptBoolean,true]]))
54 .
55
56msrop(outactCoordinator,
57    oeValidateAlert,
58    [post,Self,
59     AdtAlertID
60     ],
61     []):-!
62
63/* Post Functional:*/
64 msrVar(ctState,TheSystem),
65 msrVar(actCoordinator,TheActor),
66
67 msrVar(ctAlert,TheAlert),
68 msrVar(dtAlertID,AdtAlertID),
69
70 msrNav([Self], [rnActor,rnSystem],[TheSystem]),
71 msrNav([Self], [rnActor], [TheActor]),
72
73/* PostF01 */
74 msrNav([TheSystem],
75     [rnctAlert,
76      msrSelect,
77      id,eq,[AdtAlertID]],
78     [TheAlert]),
79
80 msrNav([TheAlert],
81     [msmAtPost,status],
82     [[etAlertStatus,valid]]),
83
84 msrNav([TheActor],
85     [rnInterfaceIN,

```

```

86      ieMessage, [[ptString, 'The Alert is now declared as valid !']])
87      ],
88      [[ptBoolean,true])),
89
90 /* Post Protocol:*/
91/* PostP01 */
92true
93 .

```

Listing D.16: Prolog file outactCoordinator-oeValidateAlert.pl.

D.17 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactMsrCreator-oeCreateSystemAndEnvironment.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5/*
6*****
7MSRCreatorActor
8*****
9
10/** createSystemAndEnvironment ***/
11
12msrop(outactMsrCreator,
13    oeCreateSystemAndEnvironment,
14    [preFunctional,_Self,_AqtyComCompanies],
15    []):-!
16 true.
17
18msrop(outactMsrCreator,
19    oeCreateSystemAndEnvironment,
20    [preProtocol,_Self,_AqtyComCompanies],
21    []):-!
22 true.
23
24msrop(outactMsrCreator,
25    oeCreateSystemAndEnvironment,
26    [post,_Self,AqtyComCompanies],
27    []):-!
28
29 msrVar(ctState,TheSystem),
30 msrVar(actMsrCreator,AactMsrCreator),
31 msrVar(actAdministrator,AactAdministrator),
32
33 msrVar(dtInteger, AnextValueForAlertID),
34 msrVar(dtInteger, AnextValueForCrisisID),
35 msrVar(dtDateAndTime, Aclock),
36 msrVar(dtSecond, AcrisisReminderPeriod),
37 msrVar(dtSecond, AmaxCrisisReminderPeriod),
38 msrVar(ptBoolean, AvpStarted),
39
40 /* PostF01 -- MUST ALWAYS BE MADE FIRST -- */
41 msrNav([AnextValueForAlertID],
42     [value,eq,[[ptInteger,1]]],
43     [[ptBoolean,true]]),
44
45 msrNav([AnextValueForCrisisID],
46     [value,eq,[[ptInteger,1]]],
47     [[ptBoolean,true]]),
48
49msrNav([Aclock],
50     [date,year,value],
51     [[ptInteger,1970]]),
52msrNav([Aclock],
53     [date,month,value],
54     [[ptInteger,01]]),

```

```

55msrNav ([Aclock],
56    [date,day,value],
57    [[ptInteger,01]]),
58
59msrNav ([Aclock],
60    [time,hour,value],
61    [[ptInteger,00]]),
62msrNav ([Aclock],
63    [time,minute,value],
64    [[ptInteger,00]]),
65msrNav ([Aclock],
66    [time,second,value],
67    [[ptInteger,00]]),
68
69 msrNav ([AcrisisReminderPeriod],
70    [value,eq,[[ptInteger,300]]],
71    [[ptBoolean,true]]),
72
73 msrNav ([AmaxCrisisReminderPeriod],
74    [value,eq,[[ptInteger,1200]]],
75    [[ptBoolean,true]]),
76
77 msrNav ([AvpStarted],
78    [],
79    [[ptBoolean,true]]),
80
81 msrNav ([TheSystem],
82    [init, [AnextValueForAlertID,
83        AnextValueForCrisisID,
84        Aclock,
85        AcrisisReminderPeriod,
86        AmaxCrisisReminderPeriod,
87        Aclock,
88        AvpStarted]
89    ],
90    [[ptBoolean,true]]),
91
92/* PostF02*/
93 msrNav ([AactMsrCreator],
94    [init, []],
95    [[ptBoolean,true]]),
96
97 /* PostF03 */
98 msrVarCol(actComCompany,AqtyComCompanies,AactComCompanyCol),
99
100 msrNav (AactComCompanyCol,
101    [msrForAll,init,[]],
102    [[ptBoolean,true]]),
103
104 /* PostF04*/
105 msrNav ([AactAdministrator],
106    [init, []],
107    [[ptBoolean,true]]),
108
109 /* PostF05*/
110 msrVar(actActivator,AactActivator),
111 msrNav ([AactActivator],
112    [init, []],
113    [[ptBoolean,true]]),
114
115/* PostF06 */
116 msrVar(ctAdministrator,ActAdministrator),
117 msrVar(dtLogin,AdtLogin),
118 msrVar(dtPassword,AdtPassword),
119
120 msrNav ([AdtLogin],
121    [value,eq,[[ptString,'icrashadmin']]],
122    [[ptBoolean,true]]),
123
124 msrNav ([AdtPassword],

```

```

125      [value,eq,[[ptString,'7WXC1359']]],  

126      [[ptBoolean,true]]),  

127  

128 msrNav([ActAdministrator],  

129     [init,[AdtLogin,AdtPassword]],  

130     [[ptBoolean,true]]),  

131  

132 /* PostF07 */  

133 msrNav([ActAdministrator],  

134     [msmAtPost,rnactAuthenticated],  

135     [AactAdministrator]),  

136  

137 /* Post Protocol:*/  

138 /* PostP01 */  

139 true  

140 .

```

Listing D.17: Prolog file outactMsrCreator-oeCreateSystemAndEnvironment.pl.

D.18 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClass-ctAdministrator-init.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */  

3:- multifile msrop/4.  

4%%%%%%%%%%%%%%%
5  

6msrop(ctAdministrator,init,[Self,  

7          Alogin,  

8          Apwd],  

9          Result):-  

10 (  

11msrVar(ctAdministrator,Self),  

12  

13/* Post F01 */  

14msrNav([Self],[login],[Alogin]),  

15msrNav([Self],[pwd],[Apwd]),  

16msrNav([Self],[vpIsLogged],[[ptBoolean,false]]),  

17  

18/* Post F02 */  

19 msrNav([Self],[msrIsNew],[Self])  

20)  

21-> Result = [ptBoolean,true]  

22; Result = [ptBoolean,false]  

23.

```

Listing D.18: Prolog file PrimaryTypesClasses-ctAdministrator-init.pl.

D.19 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClass-ctAlert-init.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */  

3:- multifile msrop/4.  

4%%%%%%%%%%%%%%%
5  

6msrop(ctAlert,init,[Self,  

7          Aid,  

8          Astatus,  

9          Alocation,  

10         Ainstant,  

11         Acomment],  

12         Result):-  

13  

14/* Post F01 */  

15 (

```

```

16msrVar(ctAlert,Self) ,
17
18msrNav([Self],[id],[Aid]),
19msrNav([Self],[status],[Astatus]),
20msrNav([Self],[location],[Alocation]),
21msrNav([Self],[instant],[Ainstant]),
22msrNav([Self],[comment],[Acomment]),
23
24/* Post F02 */
25 msrNav([Self],[msrIsNew], [Self])
26)
27-> Result = [ptBoolean,true]
28; Result = [ptBoolean,false]
29.

```

Listing D.19: Prolog file PrimaryTypesClasses-ctAlert-init.pl.

D.20 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctAlert-isSentToCoordinator.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctAlert,isSentToCoordinator,[Self,AactCoordinator],
7      Result):-
8
9/* Post F01 */
10(
11 msrNav([AactCoordinator],
12        [rnInterfaceIN,ieSendAnAlert,[Self] ],
13        [[ptBoolean,true]])
14)
15-> Result = [ptBoolean,true]
16; Result = [ptBoolean,false]
17.

```

Listing D.20: Prolog file PrimaryTypesClasses-ctAlert-isSentToCoordinator.pl.

D.21 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctAuthenticated-init.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctAuthenticated,init,[Self,
7          Alogin,
8          Apwd],
9      Result):-
10
11/* Post F01 */
12(
13msrVar(ctAuthenticated,Self),
14
15msrNav([Self],[login],[Alogin]),
16msrNav([Self],[pwd],[Apwd]),
17msrNav([Self],[vpIsLogged],[[ptBoolean,false]]),
18
19/* Post F02 */
20 msrNav([Self],[msrIsNew], [Self])
21)
22-> Result = [ptBoolean,true]
23; Result = [ptBoolean,false]

```

24.

Listing D.21: Prolog file PrimaryTypesClasses-ctAuthenticated-init.pl.

D.22 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCoordinator-init.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%%
5
6msrop(ctCoordinator,init,[Self,
7      Aid,
8      Alogin,
9      Apwd],
10     Result):-
11
12/* Post F01 */
13(
14msrVar(ctCoordinator,Self),
15
16msrNav([Self],[id],[Aid]),
17msrNav([Self],[login],[Alogin]),
18msrNav([Self],[pwd],[Apwd]),
19msrNav([Self],[vpIsLogged],[[ptBoolean,false]]),
20
21/* Post F02 */
22 msrNav([Self],[msrIsNew],[Self])
23)
24-> Result = [ptBoolean,true]
25; Result = [ptBoolean,false]
26.

```

Listing D.22: Prolog file PrimaryTypesClasses-ctCoordinator-init.pl.

D.23 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCrisis-handlingDelayPassed.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%%
5
6msrop(ctCrisis,handlingDelayPassed,[Self],
7     Result):-
8
9/* Post F01 */
10(
11 msrVar(ctState,TheSystem),
12 msrVar(dtInteger,CurrentClockSecondsQty),
13 msrVar(dtInteger,LastReminderSecondsQty),
14 msrVar(dtSecond,CrisisReminderPeriod),
15
16 msrNav([Self],[rnSystem],[TheSystem]),
17
18 msrNav([Self],
19      [status],
20      [[etCrisisStatus,pending]]),
21
22 msrNav([TheSystem],
23      [clock,toSecondsQty,[],],
24      [CurrentClockSecondsQty]),
25
26 msrNav([TheSystem],
27      [vpLastReminder,toSecondsQty,[]],

```

```

28     [LastReminderSecondsQty]),
29
30 msrNav([TheSystem],
31     [crisisReminderPeriod],
32     [CrisisReminderPeriod]),
33
34 msrNav([CurrentClockSecondsQty],
35     [sub, [LastReminderSecondsQty],
36         gt, [CrisisReminderPeriod]
37     ],
38     [[ptBoolean,true]])
39
40)
41-> Result = [ptBoolean,true]
42; Result = [ptBoolean,false]
43.

```

Listing D.23: Prolog file PrimaryTypesClasses-ctCrisis-handlingDelayPassed.pl.

D.24 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCrisis-init.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctCrisis,init,[Self,
7    Aid,
8    Atype,
9    Astatus,
10   Alocation,
11   Ainstant,
12   Acomment],
13   Result):-
14
15/* Post F01 */
16(
17msrVar(ctCrisis,Self),
18
19msrNav([Self],[id],[Aid]),
20msrNav([Self],[type],[Atype]),
21msrNav([Self],[status],[Astatus]),
22msrNav([Self],[location],[Alocation]),
23msrNav([Self],[instant],[Ainstant]),
24msrNav([Self],[comment],[Acomment]),
25
26/* Post F02 */
27 msrNav([Self],[msrIsNew],[Self])
28)
29-> Result = [ptBoolean,true]
30; Result = [ptBoolean,false]
31.

```

Listing D.24: Prolog file PrimaryTypesClasses-ctCrisis-init.pl.

D.25 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCrisis-isAllocatedIfPossible.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctCrisis,isAllocatedIfPossible,[Self],
7   Result):-

```

```

8(
9 msrVar(ctState,TheSystem),
10 msrNav([Self],[rnSystem],[TheSystem]),
11
12 msrVar(actCoordinator,TheCoordinatorActor),
13 msrVar(ctCoordinator,TheCoordinator),
14 msrVar(ptString,TheMessage),
15 msrVar(ptString,TheCrisisIDptString),
16
17 (
18 /* Post F01 */
19 msrNav([Self],
20 [maxHandlingDelayPassed,[]],
21 [[ptBoolean,true]]),
22
23 ( msrNav([TheSystem],
24 [rnactCoordinator,msrIsEmpty],
25 [[ptBoolean,false]])
26 -> (
27 /* Post F02 */
28 msrNav([TheSystem],
29 [rnactCoordinator,msrAny,msrTrue],
30 [TheCoordinatorActor]),
31
32 msrNav([TheCoordinatorActor],
33 [rnctCoordinator],
34 [TheCoordinator]),
35
36 msrNav([Self],
37 [msmAtPost,rnHandler],
38 [TheCoordinator]),
39
40 msrNav([Self],
41 [msmAtPost,status],
42 [[etCrisisStatus,handled]]),
43
44 msrNav([Self],
45 [id,value],
46 [TheCrisisIDptString]),
47
48 msrNav([[ptString,'You are now considered as handling the crisis having ID: ']],
49 [ptStringConcat,[TheCrisisIDptString]],
50 [TheMessage]),
51
52 msrNav([TheCoordinatorActor],
53 [rnInterfaceIN,
54 ieMessage,[TheMessage]
55 ],
56 [[ptBoolean,true]])
57 )
58 ; /* Post F03 */
59 msrNav([TheSystem],
60 [rnactAdministrator,msrForAll,rnInterfaceIN,
61 ieMessage,[[ptString,'Please add new coordinators to handle pending crisis !']]],
62 [[ptBoolean,true]])
63 )
64 )
65 )
66)
67-> Result = [ptBoolean,true]
68; Result = [ptBoolean,false]
69.

```

Listing D.25: Prolog file PrimaryTypesClasses-ctCrisis-isAllocatedIfPossible.pl.

D.26 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClass-ctCrisis-isSentToCoordinator.pl

%%%%%%%%%%%%%

```

2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctCrisis,isSentToCoordinator,[Self,AactCoordinator],
7      Result):-_
8
9/* Post F01 */
10(
11 msrNav([AactCoordinator],
12         [rnInterfaceIN,ieSendACrisis,[Self]],[[ptBoolean,true]])
13)
14)
15-> Result = [ptBoolean,true]
16; Result = [ptBoolean,false]
17.

```

Listing D.26: Prolog file PrimaryTypesClasses-ctCrisis-isSentToCoordinator.pl.

D.27 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCrisis-maxHandlingDelayPassed.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctCrisis,maxHandlingDelayPassed,[Self],
7      Result):-_
8
9/* Post F01 */
10(
11 msrVar(ctState,TheSystem),
12 msrVar(dtInteger,CurrentClockSecondsQty),
13 msrVar(dtInteger,CrisisInstantSecondsQty),
14 msrVar(dtSecond,MaxCrisisReminderPeriod),
15
16 msrNav([Self], [rnSystem], [TheSystem]),
17
18 msrNav([Self],
19         [status],
20         [[etCrisisStatus,pending]]),
21
22 msrNav([TheSystem],
23         [clock,toSecondsQty,[]],
24         [CurrentClockSecondsQty]),
25
26 msrNav([Self],
27         [instant,toSecondsQty,[]],
28         [CrisisInstantSecondsQty]),
29
30 msrNav([TheSystem],
31         [maxCrisisReminderPeriod],
32         [MaxCrisisReminderPeriod]),
33
34 msrNav([CurrentClockSecondsQty],
35         [sub,[CrisisInstantSecondsQty],
36          gt, [MaxCrisisReminderPeriod]
37          ],
38         [[ptBoolean,true]]))
39
40)
41-> Result = [ptBoolean,true]
42; Result = [ptBoolean,false]
43.

```

Listing D.27: Prolog file PrimaryTypesClasses-ctCrisis-maxHandlingDelayPassed.pl.

D.28 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctHuman-init.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctHuman,init,[Self,
7          Aid,
8          Akind],
9      Result):-!
10
11/* Post F01 */
12(
13msrVar(ctHuman,Self),
14
15msrNav([Self],[id],[Aid]),
16msrNav([Self],[kind],[Akind]),
17
18/* Post F02 */
19 msrNav([Self],[msrIsNew],[Self])
20)
21-> Result = [ptBoolean,true]
22; Result = [ptBoolean,false]
23.
```

Listing D.28: Prolog file PrimaryTypesClasses-ctHuman-init.pl.

D.29 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctHuman-isAcknowledged.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctHuman,isAcknowledged,[Self],Result):-
7
8/* Post F01 */
9(msrVar(dtPhoneNumber,AdtPhoneNumber),
10 msrVar(dtSMS,AdtSMS),
11
12 msrNav([Self],
13         [id,eq,[AdtPhoneNumber]],
14         [[ptBoolean,true]]),
15 msrNav([AdtSMS],
16         [value,eq,[[ptString,'The handling of your alert by our services is in progress !']]],
17         [[ptBoolean,true]]),
18 msrNav([Self],
19         [rnactComCompany,rnInterfaceIN,ieSmsSend,[AdtPhoneNumber,AdtSMS]],
20         [[ptBoolean,true]]),
21)
22-> Result = [ptBoolean,true]
23; Result = [ptBoolean,false]
24.
```

Listing D.29: Prolog file PrimaryTypesClasses-ctHuman-isAcknowledged.pl.

D.30 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctState-init.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
```

```

4%%%%%%%%%%%%%%%
5
6msrop(ctState,init,[Self,
7      AnextValueForAlertID,
8      AnextValueForCrisisID,
9      Aclock,
10     AcrisisReminderPeriod,
11     AmaxCrisisReminderPeriod,
12     AvpLastReminder,
13     AvpStarted],
14   Result):-
15
16 /* Post F01 */
17(
18 msrVar(ctState,Self),
19
20 msrNav([Self],[nextValueForAlertID],[AnextValueForAlertID]),
21 msrNav([Self],[nextValueForCrisisID],[AnextValueForCrisisID]),
22 msrNav([Self],[clock],[Aclock]),
23 msrNav([Self],[crisisReminderPeriod],[AcrisisReminderPeriod]),
24 msrNav([Self],[maxCrisisReminderPeriod],[AmaxCrisisReminderPeriod]),
25 msrNav([Self],[vpLastReminder],[AvpLastReminder]),
26 msrNav([Self],[vpStarted],[AvpStarted]),
27
28 msrNav([Self],[msrIsNew],[Self])
29)
30-> Result = [ptBoolean,true]
31; Result = [ptBoolean,false]
32.

```

Listing D.30: Prolog file PrimaryTypesClasses-ctState-init.pl.

D.31 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDataty... dtAlertID-is.pl

```

1%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%
5
6msrop(dtAlertID,is,[AdtValue],Result):-
7% msd01
8msrVar(ptBoolean,TheResult),
9(
10 ( msrNav([AdtValue],
11   [value,length,[],gt,[[ptInteger,0]]],
12   [[ptBoolean,true]]),
13   msrNav([AdtValue],
14   [value,length,[],leq,[[ptInteger,20]]],
15   [[ptBoolean,true]])
16 )
17 -> (TheResult = [ptBoolean,true])
18 ; (TheResult = [ptBoolean,false])
19),
20TheResult = Result
21.
22
23/*
24| ?- X = [dtAlertID,[],[[dtString,[[value,[ptString,'0123456789']]]],[]]],,
25msrNav([X],[is,[],[Result]).
26
27X = [dtAlertID,[],[[dtString,[[value,[ptString,'0123456789']]]],[]]],,
28Result = [ptBoolean,true] ?
29
30yes
31
32| ?- X = [dtAlertID,[],[[dtString,[[value,[ptString,'012345678901234567890123456789']]]],[]]],,
33msrNav([X],[is,[],[Result]).
```

```

34
35X = [dtAlertID, [], [[dtString, [[value, [ptString, '012345678901234567890123456789']]]], []]],,
36Result = [ptBoolean, false] ?
37
38yes
39*/

```

Listing D.31: Prolog file PrimaryTypesDatatypes-dtAlertID-is.pl.

D.32 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtComment-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5%% dtComment
6
7msd01
8msrop(dtComment,is,[AdtValue],Result):-
9 msrVar(ptBoolean,TheResult),
10 msrVar(ptInteger,MaxLength),
11 (
12   (
13     (
14       MaxLength = [ptInteger,160],
15       msrNav([AdtValue],
16               [value,length,[],leg,[MaxLength]],
17               [[ptBoolean,true]])
18     )
19     -> TheResult = [ptBoolean,true]
20     ; TheResult = [ptBoolean,false]
21   )
22),
23 Result = TheResult
24.
25
26/*
27| ?- X = [dtComment,[],[[dtString,[[value,[ptString,'I broke my leg ! Please help ...']]],[[]]]],[],[Result]].
28msrNav([X],[is,[],[Result]]).
29X = [dtComment,[],[[dtString,[[value,[ptString,'I broke my leg ! Please help ...']]],[[]]]],[],[Result] = [ptBoolean,true] ?
30Result = [ptBoolean,true] ?
31yes
32
33| ?- X = [dtComment,[],[[dtString,[[value,[ptString,'I broke my leg when I was running with my dog
34      to go to the skate park because my friends called me on my mobile phone and told me that a skate
35      star was doing triple back flips.']]],[[]]]],[],[Result]].
36msrNav([X],[is,[],[Result]]).
37X = [dtComment,[],[[dtString,[[value,[ptString,'I broke my leg when I was running with my dog to go
38      to the skate park because my friends called me on my mobile phone and told me that a skate star
      was doing triple back flips.']]],[[]]]],[],[Result] = [ptBoolean,false] ?
39yes
38*/

```

Listing D.32: Prolog file PrimaryTypesDatatypes-dtComment-is.pl.

D.33 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtCoordinatorID-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(dtCoordinatorID,is,[AdtValue],Result):-

```

```

7% msd01
8 msrVar(ptBoolean,TheResult),
9(
10 ( msrNav([AdtValue],
11   [value,length,[],gt,[[ptInteger,0]]]),
12   [[ptBoolean,true]]),
13 msrNav([AdtValue],
14   [value,length,[],leq,[[ptInteger,5]]],
15   [[ptBoolean,true]])
16 )
17 -> (TheResult = [ptBoolean,true])
18 ; (TheResult = [ptBoolean,false])
19),
20 TheResult = Result
21.

```

Listing D.33: Prolog file PrimaryTypesDatatypes-dtCoordinatorID-is.pl.

D.34 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtCrisisID-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(dtCrisisID,is,[AdtValue],Result):-
7% msd01
8 msrVar(ptBoolean,TheResult),
9(
10 ( msrNav([AdtValue],
11   [value,length,[],gt,[[ptInteger,0]]]),
12   [[ptBoolean,true]]),
13 msrNav([AdtValue],
14   [value,length,[],leq,[[ptInteger,10]]],
15   [[ptBoolean,true]])
16 )
17 -> (TheResult = [ptBoolean,true])
18 ; (TheResult = [ptBoolean,false])
19),
20 TheResult = Result
21.
22/*
23| ?- X = [dtCrisisID,[],[[dtString,[[value,[ptString,'0123456789']]]],[]]],,
24msrNav([X],[is,[],[Result]]).
25X = [dtCrisisID,[],[[dtString,[[value,[ptString,'0123456789']]]],[]]],,
26Result = [ptBoolean,true] ?
27yes
28
29| ?- X = [dtCrisisID,[],[[dtString,[[value,[ptString,'0123456789a']]]],[]]],,
30msrNav([X],[is,[],[Result]]).
31X = [dtCrisisID,[],[[dtString,[[value,[ptString,'0123456789a']]]],[]]],,
32Result = [ptBoolean,false] ?
33yes
34*/

```

Listing D.34: Prolog file PrimaryTypesDatatypes-dtCrisisID-is.pl.

D.35 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtGPSLocation-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5

```

```

6%% dtPhoneNumber
7
8% msd01
9msrop(dtGPSLocation, is, [AdtValue], Result) :-
10msrVar(ptBoolean, TheResult),
11(
12(
13    msrNav([AdtValue],
14        [latitude, is, []],
15        [[ptBoolean, true]]),
16    msrNav([AdtValue],
17        [longitude, is, []],
18        [[ptBoolean, true]])
19)
20 -> TheResult = [ptBoolean, true]
21 ; TheResult = [ptBoolean, false]
22),
23
24 Result = TheResult
25.

```

Listing D.35: Prolog file PrimaryTypesDatatypes-dtGPSLocation-is.pl.

D.36 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtGPSLocation-isNearTo.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6%% dtGPSLocation
7
8msrop(dtGPSLocation, isNearTo, [Self, AdtValue], Result) :-
9msrVar(ptBoolean, TheResult),
10msrVar(dtReal, EarthRadius),
11msrVar(dtReal, MaxDistance),
12
13msrVar(dtLatitude, ComparedLatitude),
14msrVar(dtLongitude, ComparedLongitude),
15
16msrVar(dtReal, R1), msrVar(dtReal, R1a),
17msrVar(dtReal, R2), msrVar(dtReal, R2a),
18
19(
20(
21(
22    % msd01
23    msrNav([EarthRadius], [value], [[ptReal, 6371]]),
24    msrNav([MaxDistance], [value], [[ptReal, 100]]),
25
26    msrNav([AdtValue], [latitude], [ComparedLatitude]),
27    msrNav([AdtValue], [longitude], [ComparedLongitude]),
28
29    msrNav([Self], [latitude, sin, [], [R1a]]),
30    msrNav([AdtValue], [latitude, sin, [], mul, [R1a]], [R1]),
31
32    msrNav([Self], [latitude, cos, [], [R2a]]),
33    msrNav([AdtValue], [latitude, cos, [], mul, [R2a]], [R2]),
34
35    msrNav([AdtValue], [longitude], [ComparedLongitude]),
36    msrNav([Self], [longitude, sub, [ComparedLongitude], cos, [], mul, [R2],
37        add, [R1],
38        acos, [],
39        mul, [EarthRadius],
40        sub, [MaxDistance],
41        value, leq, [[ptReal, 0]]],
42        [[ptBoolean, true]])

```

```

43      )
44      -> TheResult = [ptBoolean,true]
45      ; TheResult = [ptBoolean,false]
46  )
47),
48 Result = TheResult
49.

```

Listing D.36: Prolog file PrimaryTypesDatatypes-dtGPSLocation-isNearTo.pl.

D.37 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtLatitude-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6% msd01
7msrop(dtLatitude,is,[AdtValue],Result):-%
8msrVar(ptBoolean,TheResult),
9(
10 ( msrNav([AdtValue],
11   [value,geq,[[ptReal,-90.0]]],
12   [[ptBoolean,true]]),
13  msrNav([AdtValue],
14   [value,leq,[[ptReal,+90.0]]],
15   [[ptBoolean,true]])
16 )
17 -> (TheResult = [ptBoolean,true])
18 ; (TheResult = [ptBoolean,false])
19),
20Result = TheResult
21.

```

Listing D.37: Prolog file PrimaryTypesDatatypes-dtLatitude-is.pl.

D.38 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtLogin-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5% dtComment
6
7%msd01
8msrop(dtLogin,is,[AdtValue],Result):-%
9 msrVar(ptBoolean,TheResult),
10 msrVar(ptInteger,MaxLength),
11 (
12  (
13    (
14      MaxLength = [ptInteger,20],
15      msrNav([AdtValue],
16        [value,length,[],leq,[MaxLength]],
17        [[ptBoolean,true]]))
18  )
19  -> TheResult = [ptBoolean,true]
20  ; TheResult = [ptBoolean,false]
21 )
22),
23 Result = TheResult
24.
25/*
26| ?- X = [dtLogin,[],[[dtString,[[value,[ptString,'01234567']]],[[]]]],
```

```

27msrNav([X],[is,[],[Result]).
28X = [dtLogin,[],[[dtString,[[value,[ptString,'01234567']]]],[],[],[],],
29Result = [ptBoolean,true] ?
30yes
31
32| ?- X = [dtLogin,[],[[dtString,[[value,[ptString,'01234567a']]]],[],[],[],],
33msrNav([X],[is,[],[Result]).
34X = [dtLogin,[],[[dtString,[[value,[ptString,'01234567a']]]],[],[],[],],
35Result = [ptBoolean,false] ?
36yes
37*/

```

Listing D.38: Prolog file PrimaryTypesDatatypes-dtLogin-is.pl.

D.39 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtLongitude-is.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%%
5
6%% dtPhoneNumber
7
8% msd01
9msrop(dtLongitude,is,[AdtValue],Result):-
10msrVar(ptBoolean,TheResult),
11(
12 ( msrNav([AdtValue],
13   [value,geq,[[ptReal,-180.0]]],
14   [[ptBoolean,true]]),
15 msrNav([AdtValue],
16   [value,leq,[[ptReal,+180.0]]],
17   [[ptBoolean,true]]))
18 )
19 -> (TheResult = [ptBoolean,true])
20 ; (TheResult = [ptBoolean,false])
21),
22
23 Result = TheResult
24.

```

Listing D.39: Prolog file PrimaryTypesDatatypes-dtLongitude-is.pl.

D.40 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtPassword-is.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%%
5%% dtComment
6
7%msd01
8msrop(dtPassword,is,[AdtValue],Result):-
9 msrVar(ptBoolean,TheResult),
10 msrVar(ptInteger,MinLength),
11 (
12 (
13   (
14     MinLength = [ptInteger,6],
15     msrNav([AdtValue],
16       [value,length,[],geq,[MinLength]],
17       [[ptBoolean,true]]))
18   )
19   -> TheResult = [ptBoolean,true]

```

```

20      ; TheResult = [ptBoolean, false]
21  )
22),
23 Result = TheResult
24.
25/*
26| ?- X = [dtPassword, [], [[dtString, [[value, [ptString, '012345']]]], []]], 
27msrNav([X], [is, []], [Result]).
28X = [dtPassword, [], [[dtString, [[value, [ptString, '012345']]]], []]], 
29Result = [ptBoolean, true] ?
30yes
31
32| ?- X = [dtPassword, [], [[dtString, [[value, [ptString, '01234']]]], []]], 
33msrNav([X], [is, []], [Result]).
34X = [dtPassword, [], [[dtString, [[value, [ptString, '01234']]]], []]], 
35Result = [ptBoolean, false] ?
36yes
37*/

```

Listing D.40: Prolog file PrimaryTypesDatatypes-dtPassword-is.pl.

D.41 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtPhoneNumber-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6%% dtPhoneNumber
7
8% msd01
9msrop(dtPhoneNumber,is,[AdtValue],Result):-
10msrVar(ptBoolean,TheResult),
11(
12  ( msrNav([AdtValue],
13    [value,length,[],gt,[[ptInteger,4]]],
14    [[ptBoolean,true]]),
15  msrNav([AdtValue],
16    [value,length,[],leq,[[ptInteger,30]]],
17    [[ptBoolean,true]])
18 )
19
20 -> TheResult = [ptBoolean,true]
21 ; TheResult = [ptBoolean,false]
22),
23 Result = TheResult
24.
25/*
26| ?- X = [dtPhoneNumber, [], [[dtString, [[value, [ptString, '(+352) 46 66 44 60 00']]]], []]], 
27msrNav([X], [is, []], [Result]).
28X = [dtPhoneNumber, [], [[dtString, [[value, [ptString, '(+352) 46 66 44 60 00']]]], []]], 
29Result = [ptBoolean, true] ?
30
31yes
32
33yes
34*/

```

Listing D.41: Prolog file PrimaryTypesDatatypes-dtPhoneNumber-is.pl.

D.42 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClassesAndAlertStatus-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */

```

```

3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6% etAlertStatus
7
8% msd01
9msrop(etAlertStatus,is,[AdtValue],Result) :-
10msrVar(ptBoolean,TheResult),
11(
12 (
13 member(AdtValue,[pending, valid, invalid])
14 )
15 -> TheResult = [ptBoolean,true]
16 ; TheResult = [ptBoolean,false]
17),
18 Result = TheResult
19.
```

Listing D.42: Prolog file PrimaryTypesDatatypes-etAlertStatus-is.pl.

D.43 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClassifications/etCrisisStatus-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6% etCrisisStatus
7
8% msd01
9msrop(etCrisisStatus,is,[AdtValue],Result) :-
10msrVar(ptBoolean,TheResult),
11(
12 (
13 member(AdtValue,[pending, handled, solved, closed])
14 )
15 -> TheResult = [ptBoolean,true]
16 ; TheResult = [ptBoolean,false]
17),
18 Result = TheResult
19.
```

Listing D.43: Prolog file PrimaryTypesDatatypes-etCrisisStatus-is.pl.

D.44 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClassifications/etCrisisType-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6% etCrisisType
7
8% msd01
9msrop(etCrisisType,is,[AdtValue],Result) :-
10msrVar(ptBoolean,TheResult),
11(
12 (
13 member(AdtValue,[small, medium, huge]))
14 )
15 -> TheResult = [ptBoolean,true]
16 ; TheResult = [ptBoolean,false]
17),
18 Result = TheResult
```

19.

Listing D.44: Prolog file PrimaryTypesDatatypes-etCrisisType-is.pl.

D.45 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses etHumanKind-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6%% etHumanKind
7
8% msd01
9msrop(etHumanKind,is,[AdtValue],Result) :-
10msrVar(ptBoolean,TheResult),
11(
12(
13    member(AdtValue,[witness,victim,anonymous])
14)
15 -> TheResult = [ptBoolean,true]
16 ; TheResult = [ptBoolean,false]
17),
18 Result = TheResult
19.

```

Listing D.45: Prolog file PrimaryTypesDatatypes-etHumanKind-is.pl.

D.46 File ./src-gen/prolog-ref-spec/Operations/Concepts/SecondaryTypesDatatypesdtSMS-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5%% dtComment
6
7%msd01
8msrop(dtSMS,is,[AdtValue],Result) :-
9 msrVar(ptBoolean,TheResult),
10 msrVar(ptInteger,MaxLength),
11(
12(
13(
14    MaxLength = [ptInteger,160],
15    msrNav([AdtValue],
16        [value,length,[],leq,[MaxLength]],
17        [[ptBoolean,true]]))
18)
19 -> TheResult = [ptBoolean,true]
20 ; TheResult = [ptBoolean,false]
21)
22),
23 Result = TheResult
24.

```

Listing D.46: Prolog file SecondaryTypesDatatypes-dtSMS-is.pl.

Glossary

<i>abstract actor</i> an actor that is not	22
<i>actor</i> An actor is a person, organization, or external system that plays a role in one or more interactions with the system	18
<i>direct actor</i> an actor that interacts directly with the system. It thus belongs to the environment.	22
<i>indirect actor</i> an actor that interacts indirectly with the system through a direct actor. It thus belongs the domain but not to the environment.	22
<i>system operation</i> a functionality of the system that can be triggered by a message sent by an actor belonging to the environment.	18

Bibliography

- [1] Guelfi, N.: Messir: A Scientific Method for the Software Engineer. to be published (2017)
- [2] Armour, F., Miller, G.: Advanced Use Case Modeling: Software Systems. Addison-Wesley (2001)
- [3] ISO/IEC: ISO/IEC 25010 - Systems and software engineering - Systems and software Quality Requirements and Evaluation (SQuaRE) - System and software quality models. (2011) ISO/IEC 13211-1.