
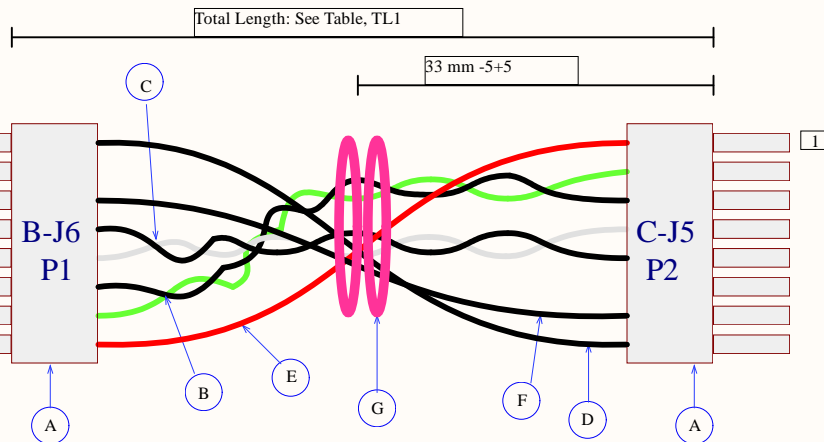


# 102566 Harness SA Data F

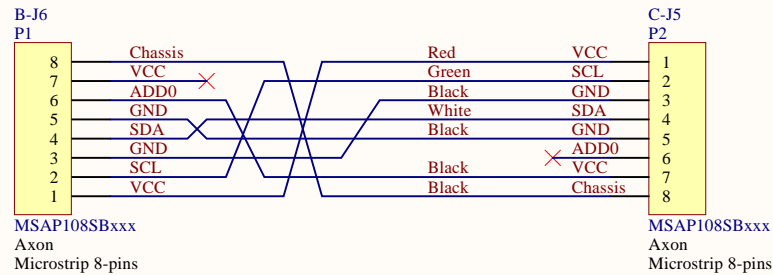

Wiring Chart				
P1	P2	Colour	Item	Signal
1	1	Red	E	VCC
2	2	Green	B	SCL
3	3	Black	B	GND
4	4	White	C	SDA
5	5	Black	C	GND
6	7	Black	F	ADD0 / VCC
8	8	Black	D	Chassis

Table			
Var.	IFS P/N	CL1 [mm]	TL1 [mm]
1	102566	N/A	65 -0+8

General tolerance:  $\pm 0.1$  mm,  $\pm 1^\circ$

Item	Quantity	Manufacturer P/N	Manufacturer	Comments	IFS ID
A	2	MSAP108SB	Axon Cables S.A.S	Microstrip 8-pin, female	103369
B	1	2xKT3007^BG	Axon Cables S.A.S	30 AWG FEP B/G Twist	103393
C	1	2xKT3007^BL	Axon Cables S.A.S	30 AWG FEP B/W Twist	103394
D	1	KT2419^B	Axon Cables S.A.S	24 AWG FEP Black	103382
E	1	KT3007^D	Axon Cables S.A.S	30 AWG FEP Red	103397
F	1	KT3007^B	Axon Cables S.A.S	30 AWG FEP Black	103392
G	1	To come	To come	Braided Polyester Lacing Tape, Type II	

ALL ARTICLES TO BE PRODUCED IN ACCORDANCE WITH:  
- IPC/WHMA-A-620C CLASS III  
- MANUFACTURER SPECIFIC RECOMMENDATIONS AND DESCRIPTIONS UNLESS OTHERWISE SPECIFIED

## 102566 Harness SA Data F

Confidential - DO NOT DISTRIBUTE  
Copyright © 2018 by GomSpace A/S  
Langagervej 6  
9220 Aalborg East  
Denmark

IFS document nr.: 1008460	GOMSPACE
Revision: 01	
Project: gs-hn-NanoHarness-SA_Data_F.PrjPcb	
Engineer: SRYT	
Date: 28-05-2018	
State of drawing: Preliminary	