
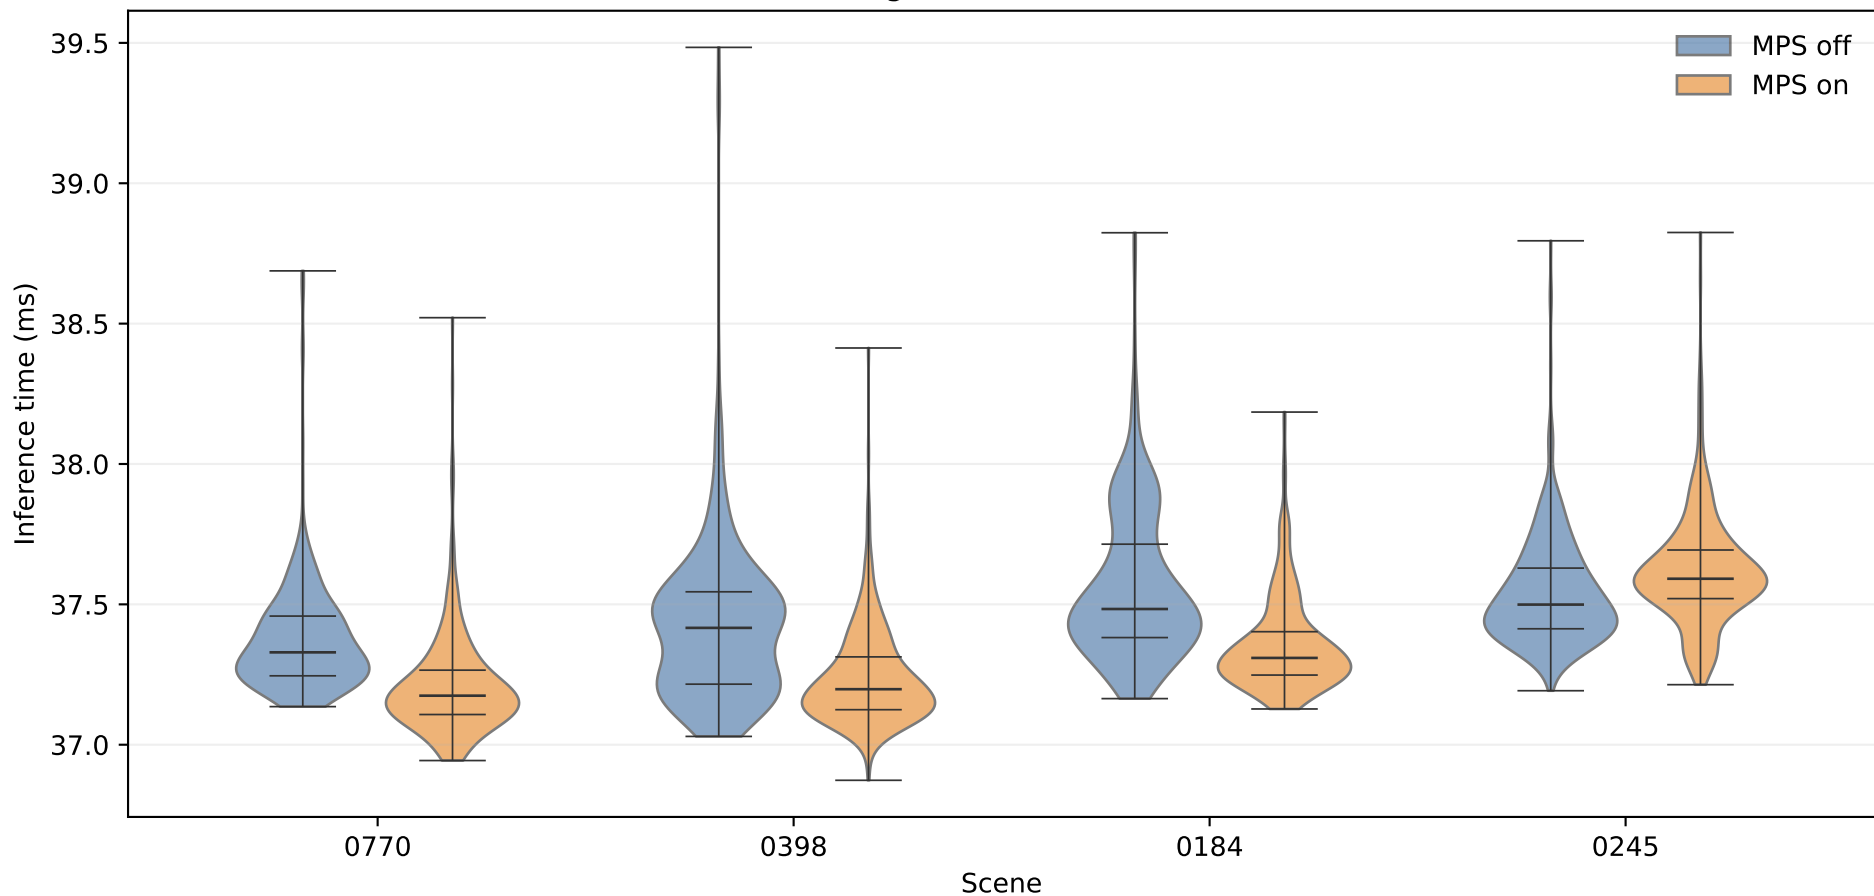


3dssd — single-model baseline ($\leq P99$)


Display: minimum-P99 per scene/mode (NumPy linear); upper tail omitted only from the plot.
One isolated execution per scene/mode. Bars: median, quartiles, min/max of displayed samples.

centerpoint — single-model baseline ($\leq P99$)

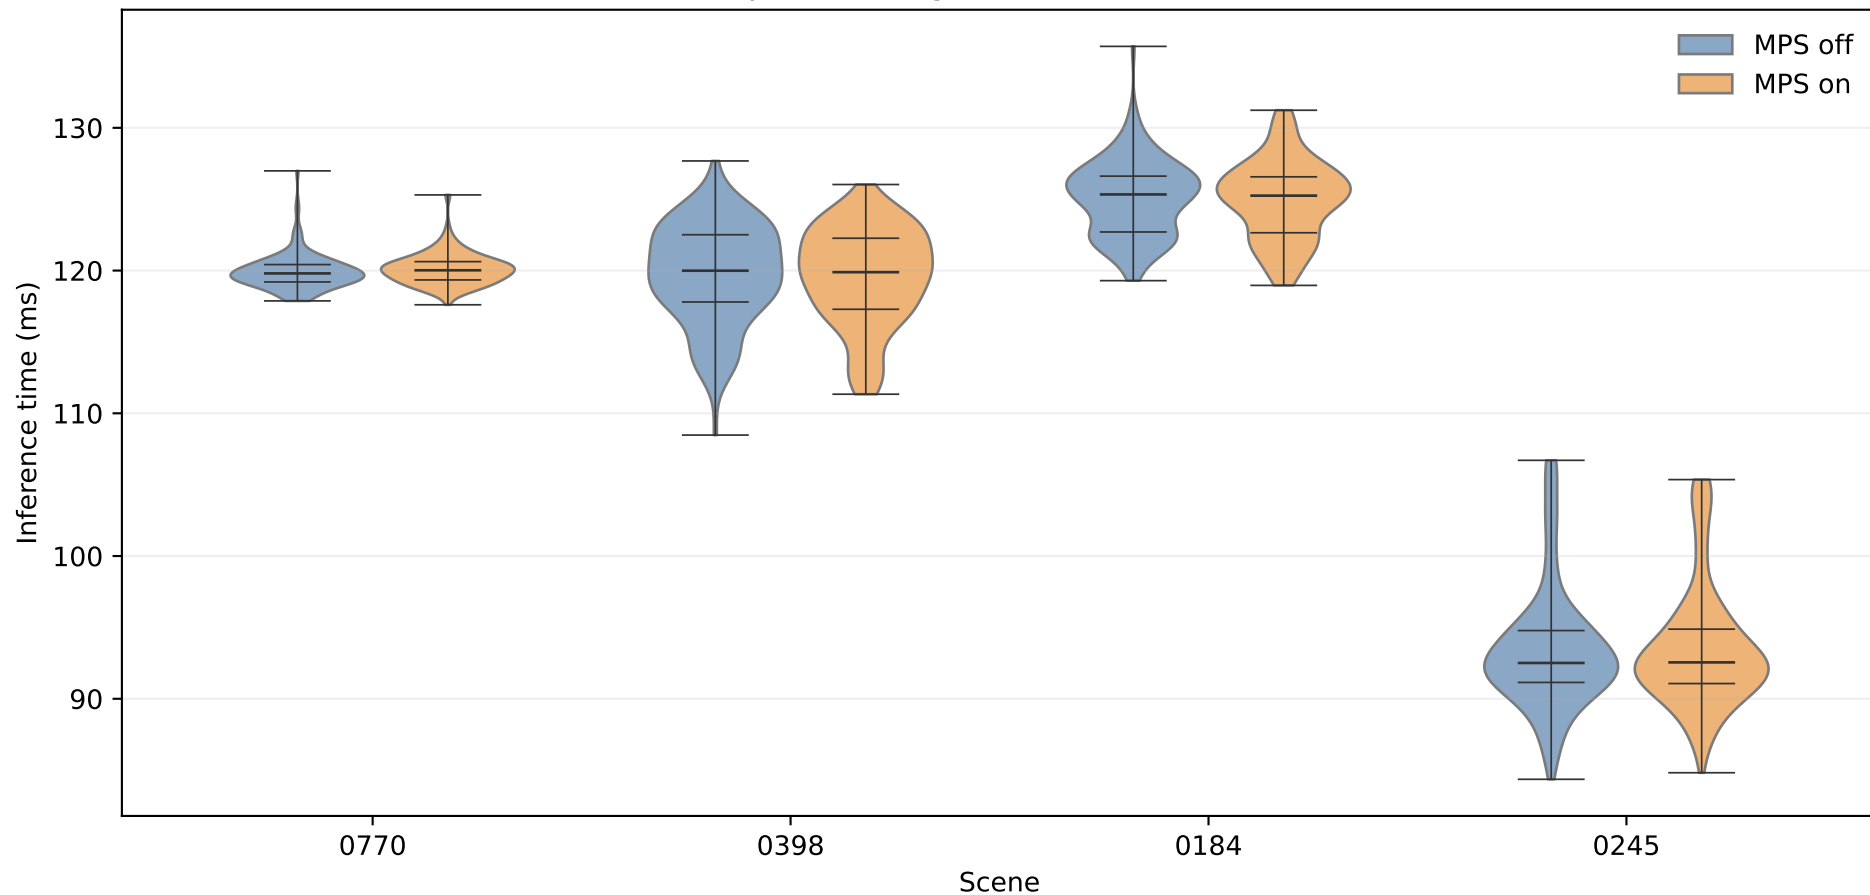


Display: minimum-P99 per scene/mode (NumPy linear); upper tail omitted only from the plot.
One isolated execution per scene/mode. Bars: median, quartiles, min/max of displayed samples.

dino — single-model baseline ($\leq P99$)

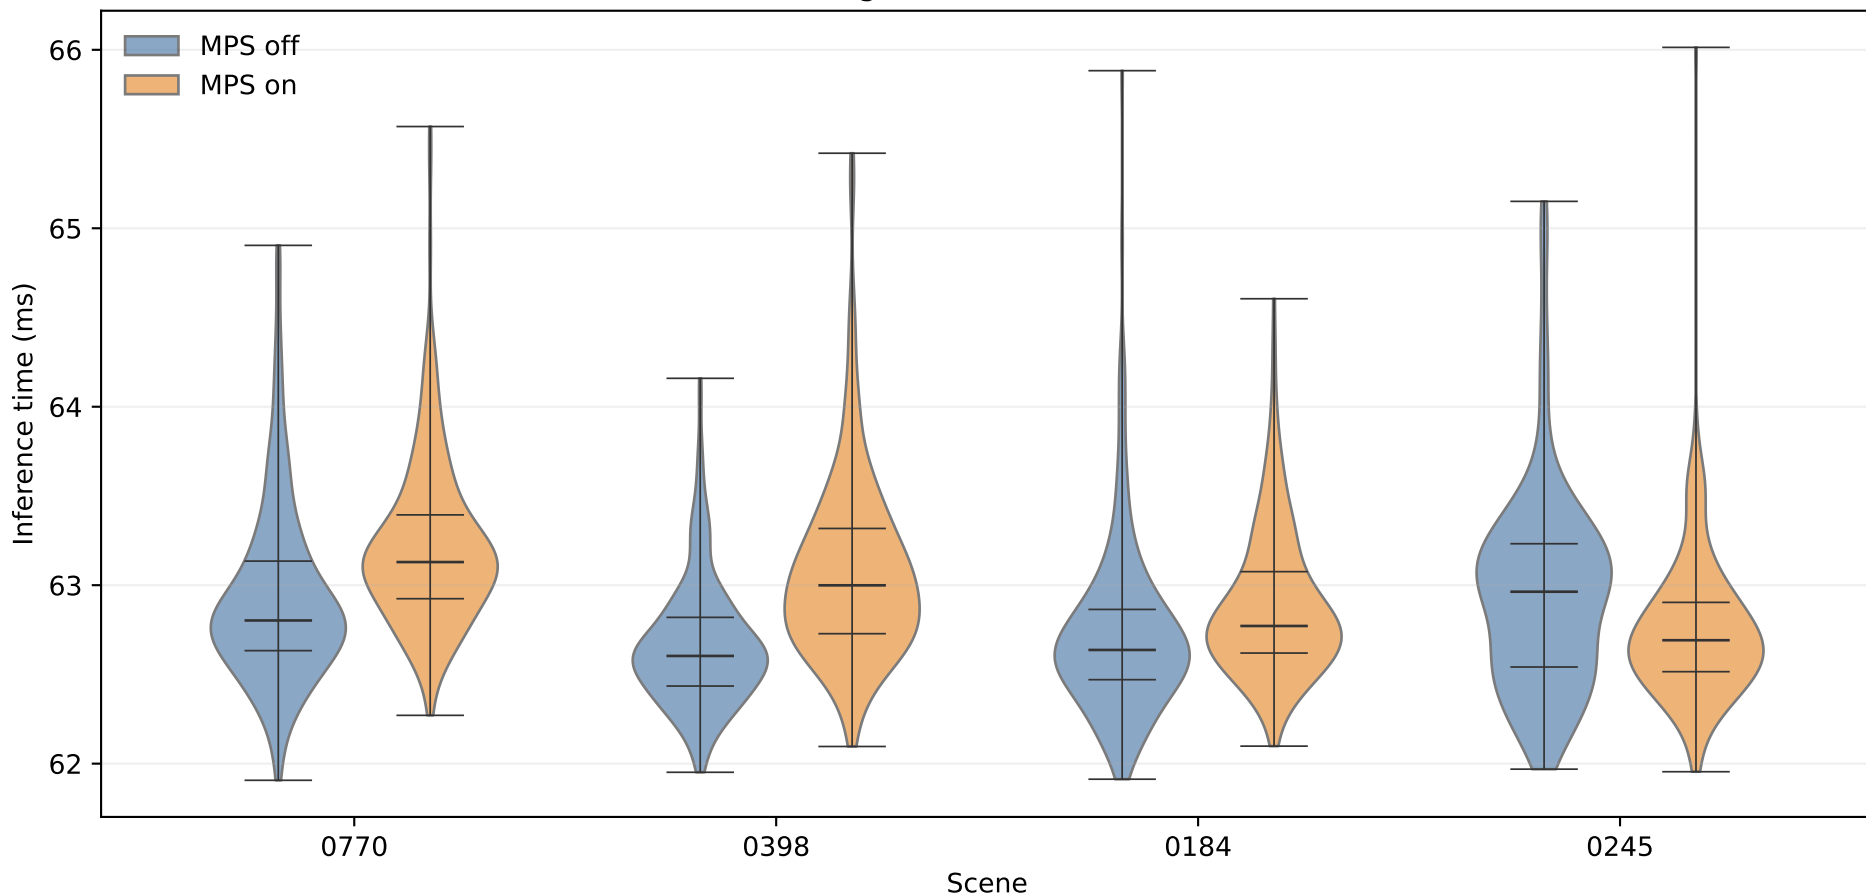


Display: minimum-P99 per scene/mode (NumPy linear); upper tail omitted only from the plot.
One isolated execution per scene/mode. Bars: median, quartiles, min/max of displayed samples.

mask-rcnn — single-model baseline ($\leq P99$)

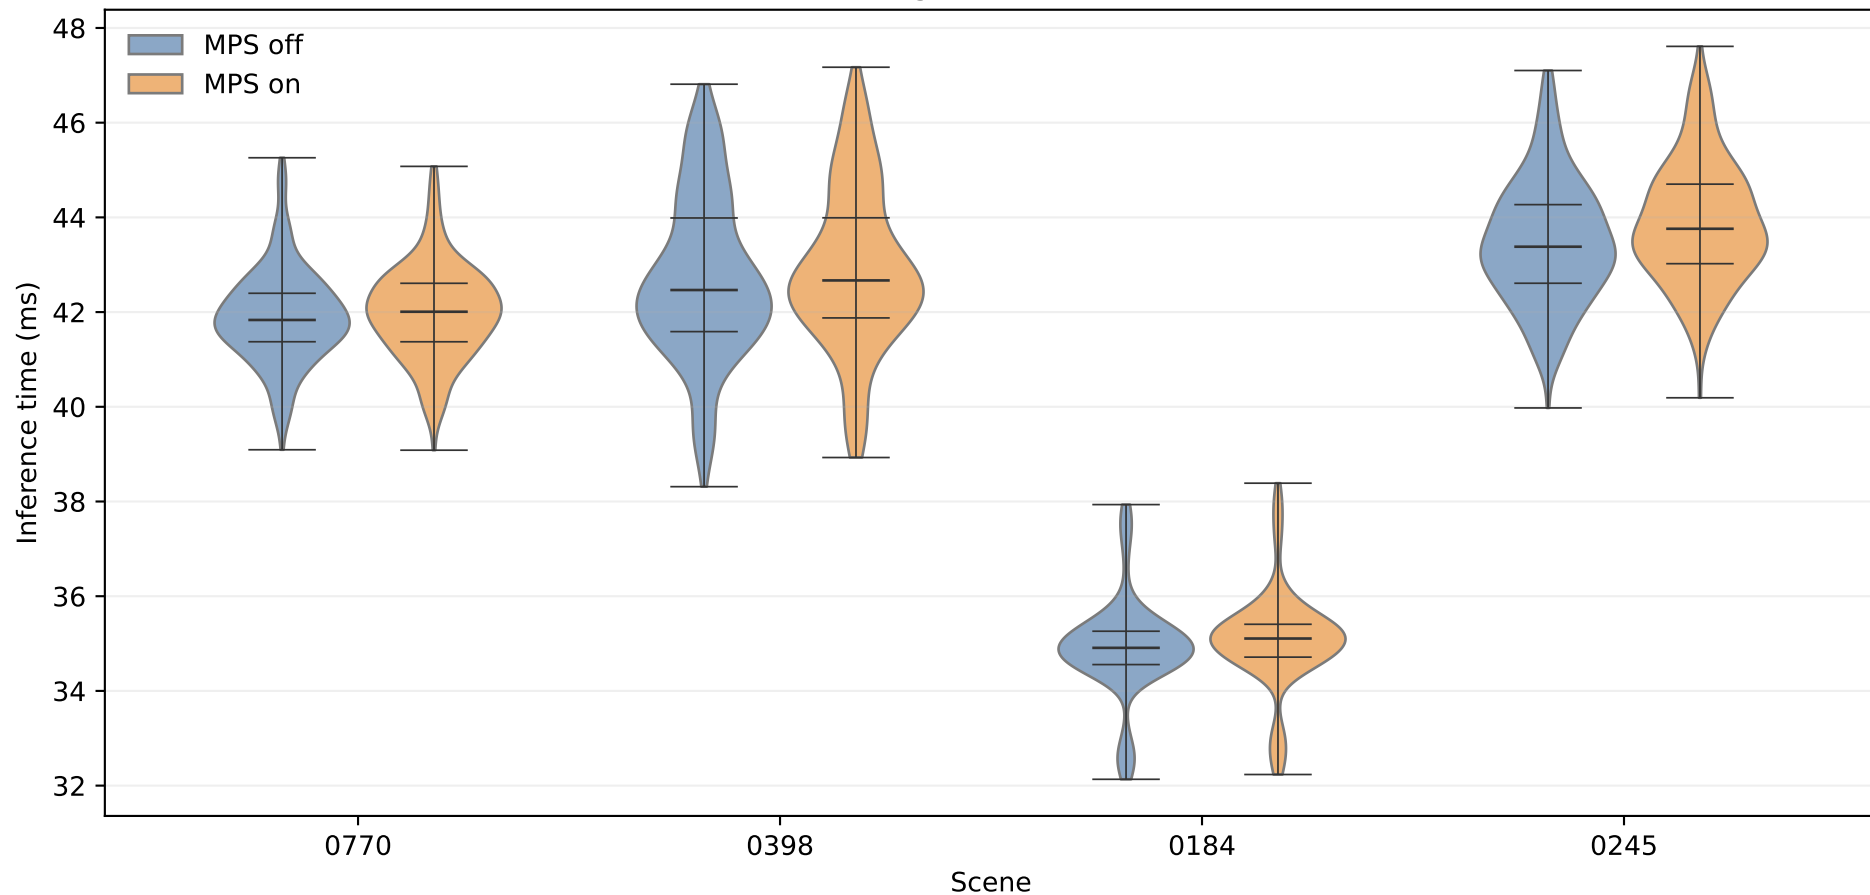


Display: minimum-P99 per scene/mode (NumPy linear); upper tail omitted only from the plot.
 One isolated execution per scene/mode. Bars: median, quartiles, min/max of displayed samples.

pointpillars — single-model baseline ($\leq P99$)

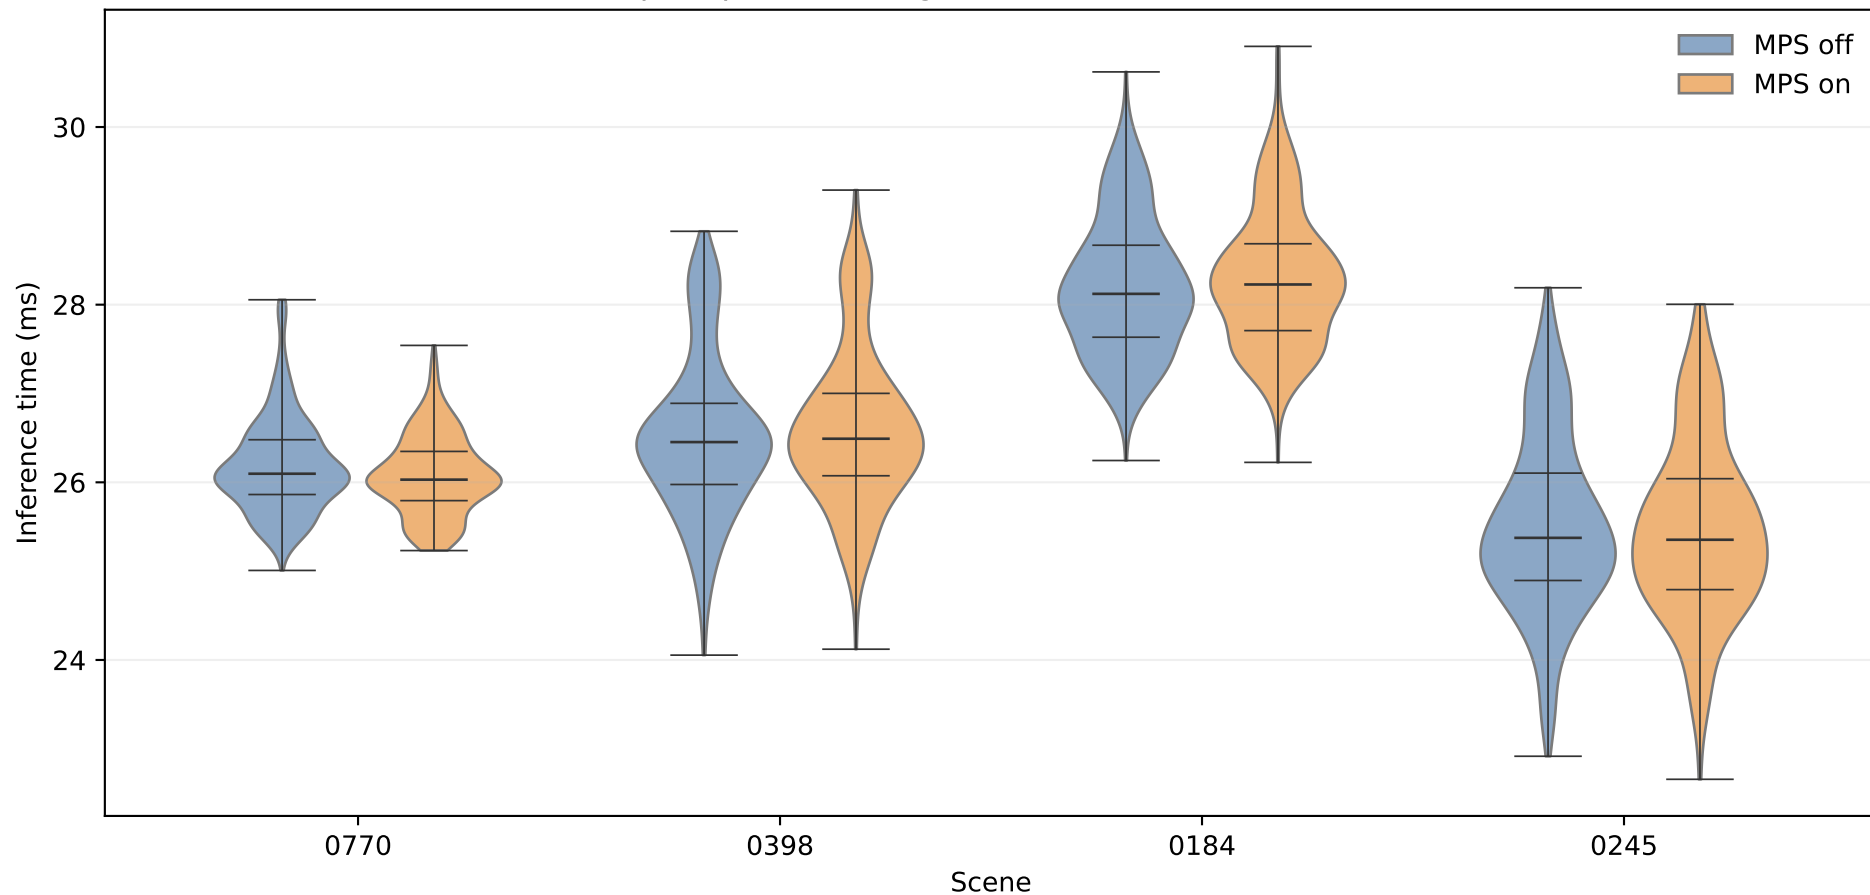


Display: minimum-P99 per scene/mode (NumPy linear); upper tail omitted only from the plot.
One isolated execution per scene/mode. Bars: median, quartiles, min/max of displayed samples.

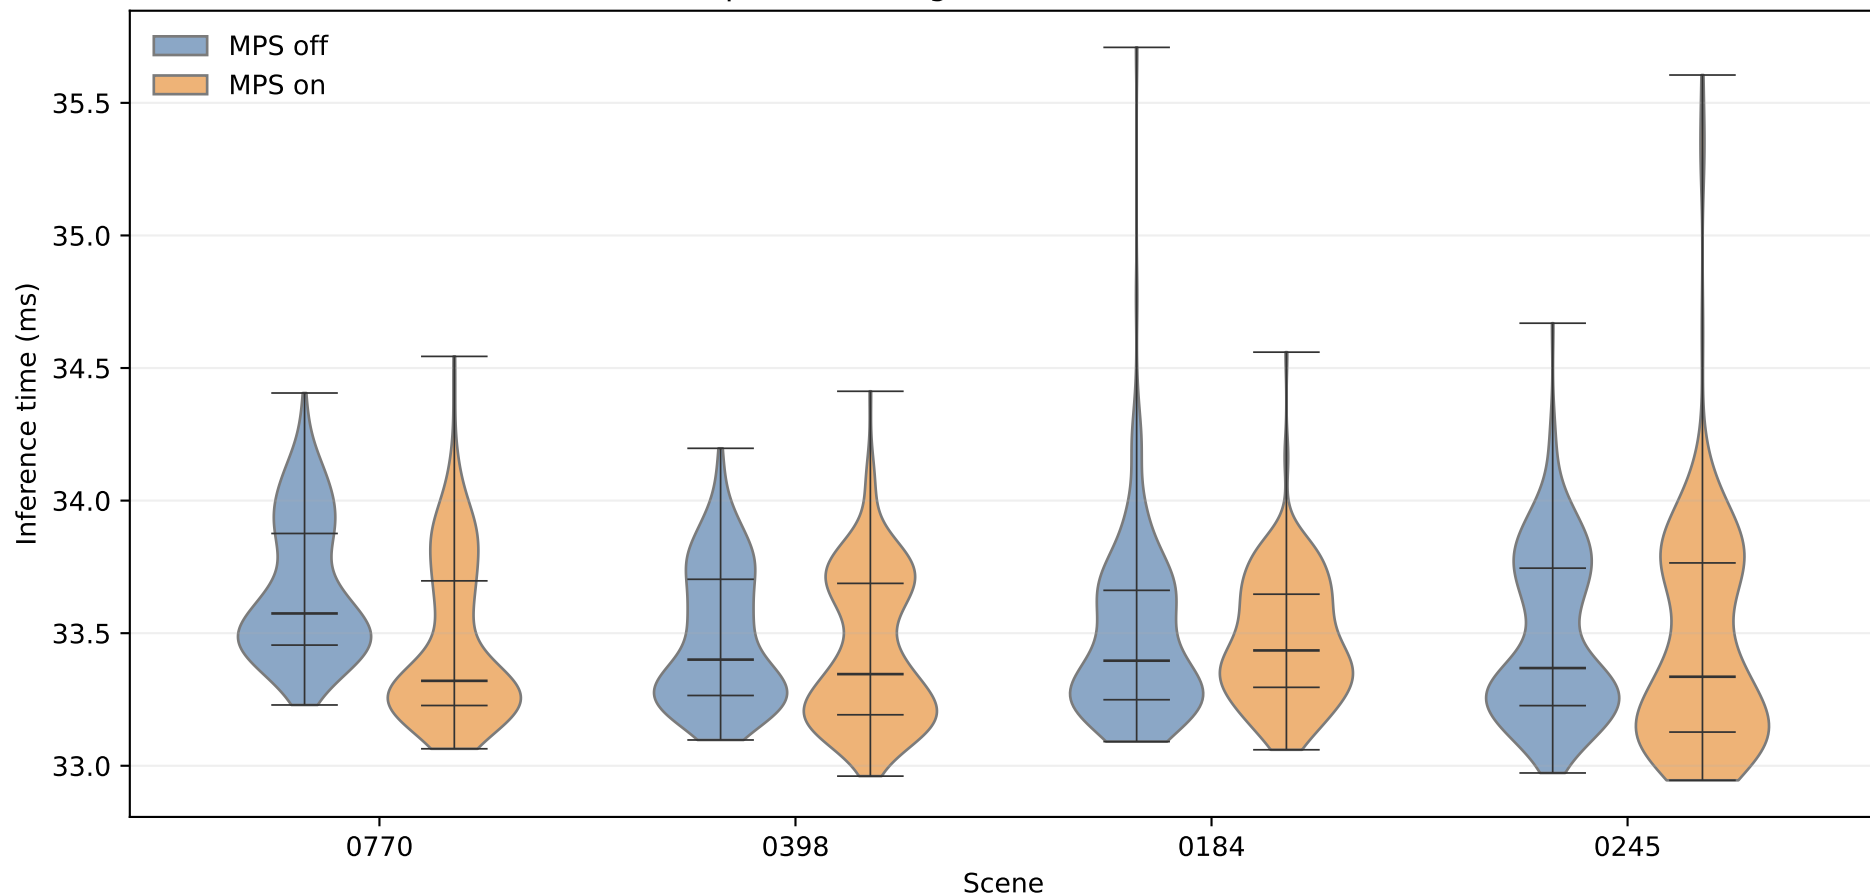vit-upernet — single-model baseline ($\leq P99$)

Display: minimum-P99 per scene/mode (NumPy linear); upper tail omitted only from the plot.
One isolated execution per scene/mode. Bars: median, quartiles, min/max of displayed samples.

yolov3 — single-model baseline ($\leq P99$)

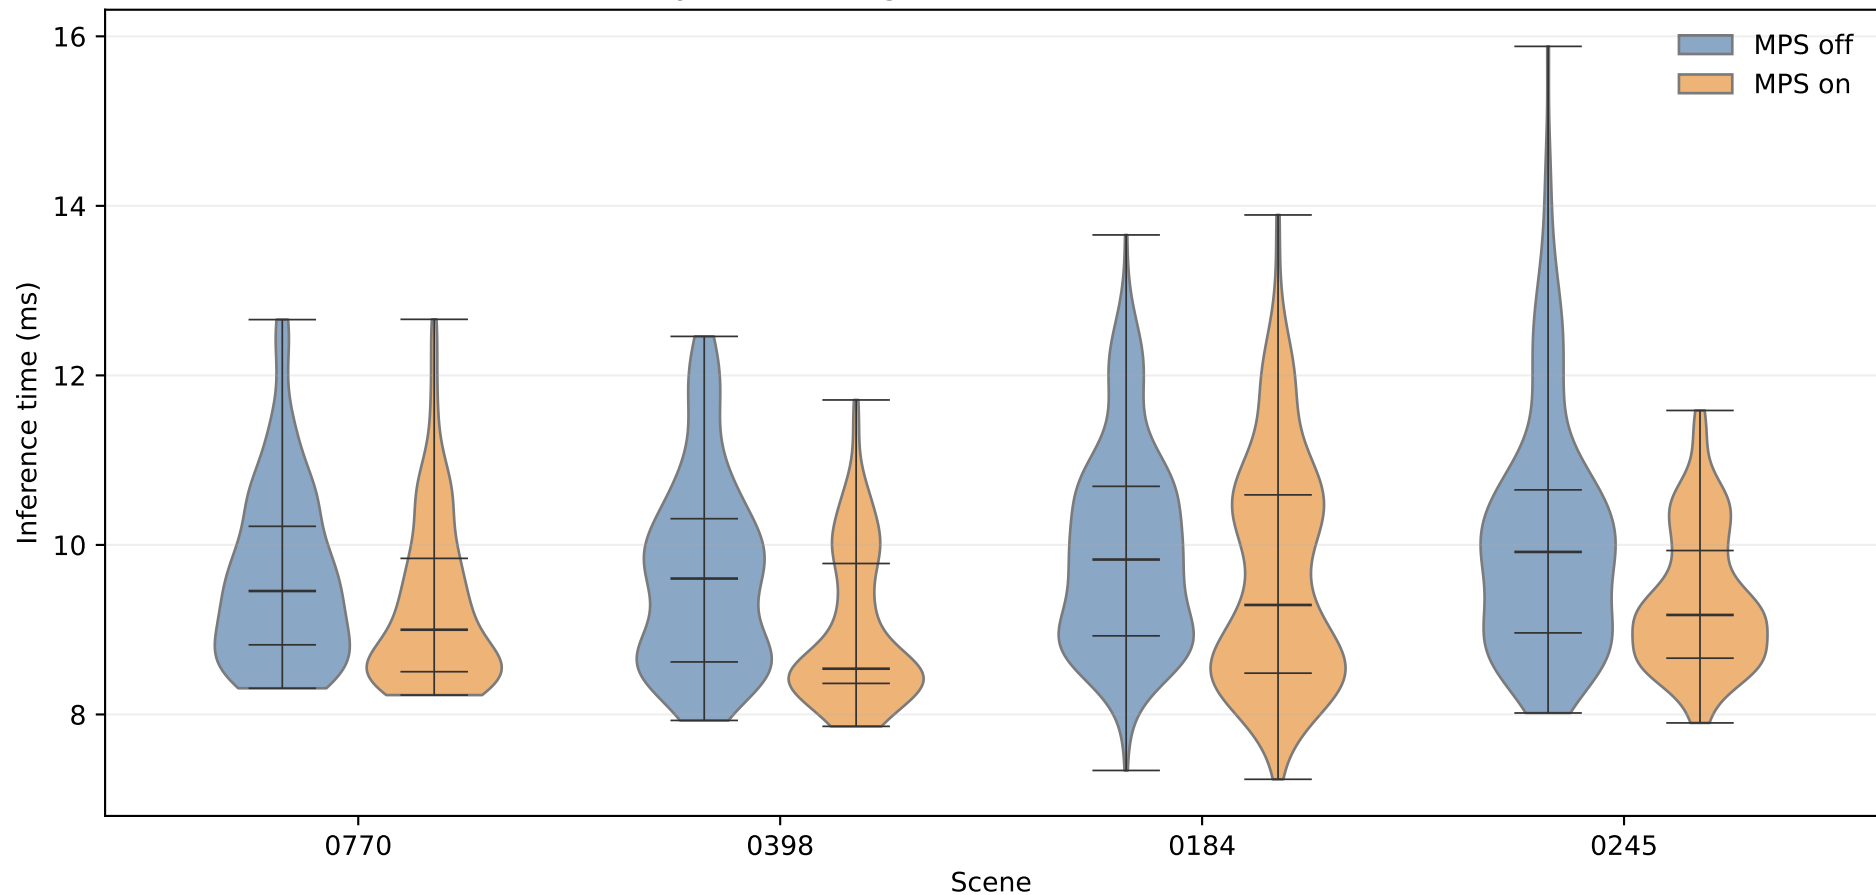

Display: minimum-P99 per scene/mode (NumPy linear); upper tail omitted only from the plot.
One isolated execution per scene/mode. Bars: median, quartiles, min/max of displayed samples.