






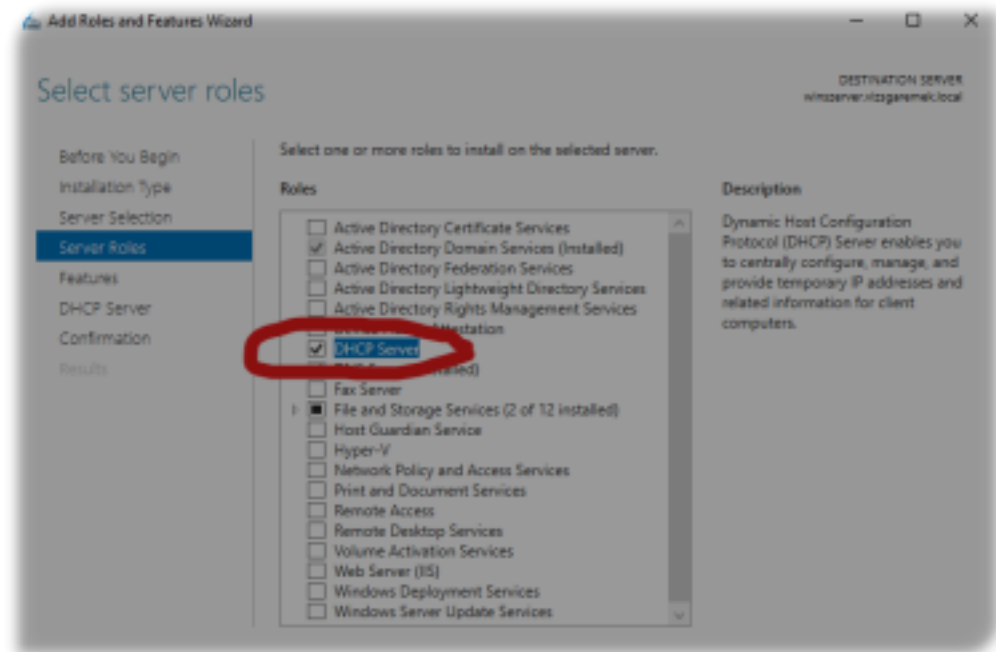

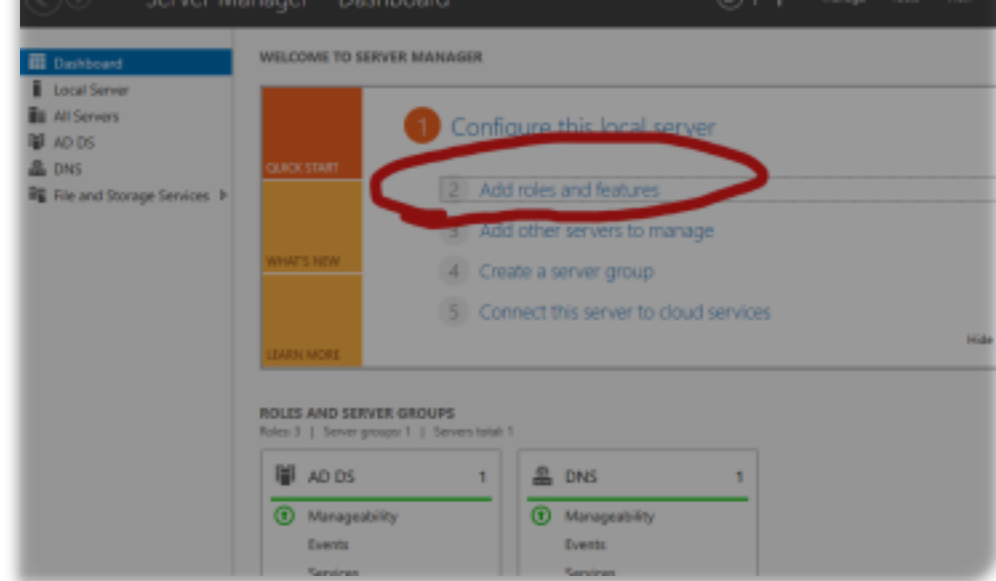

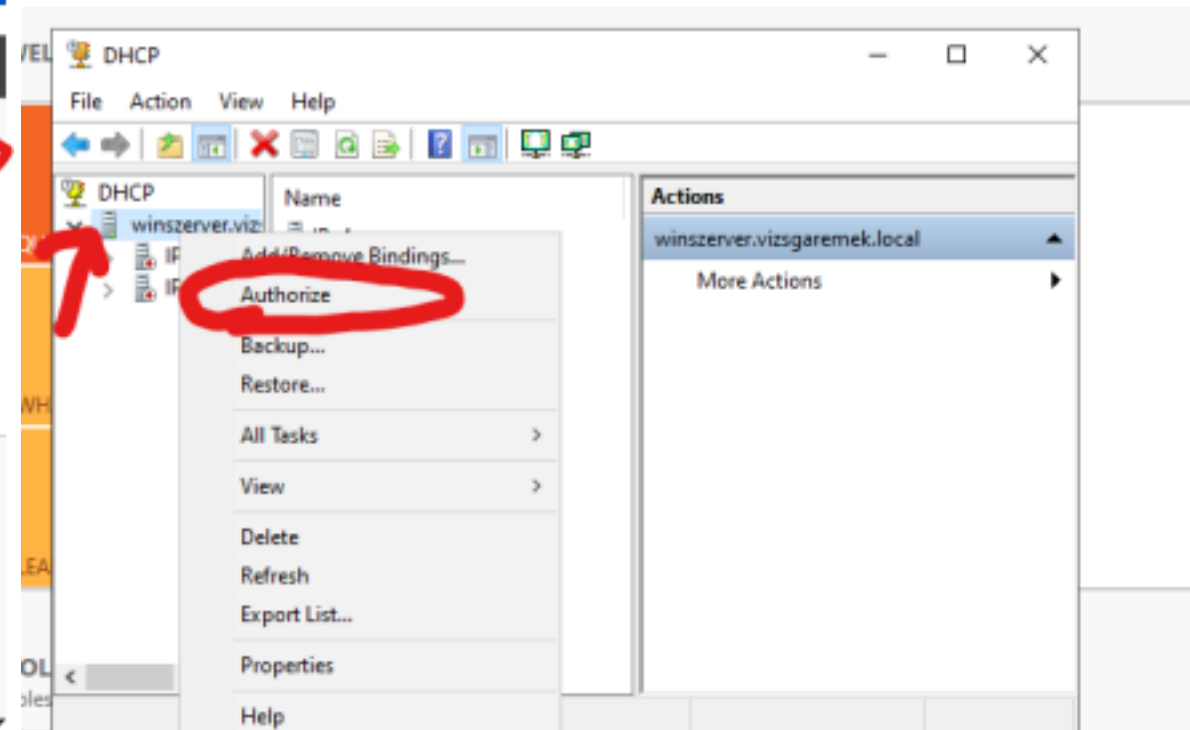

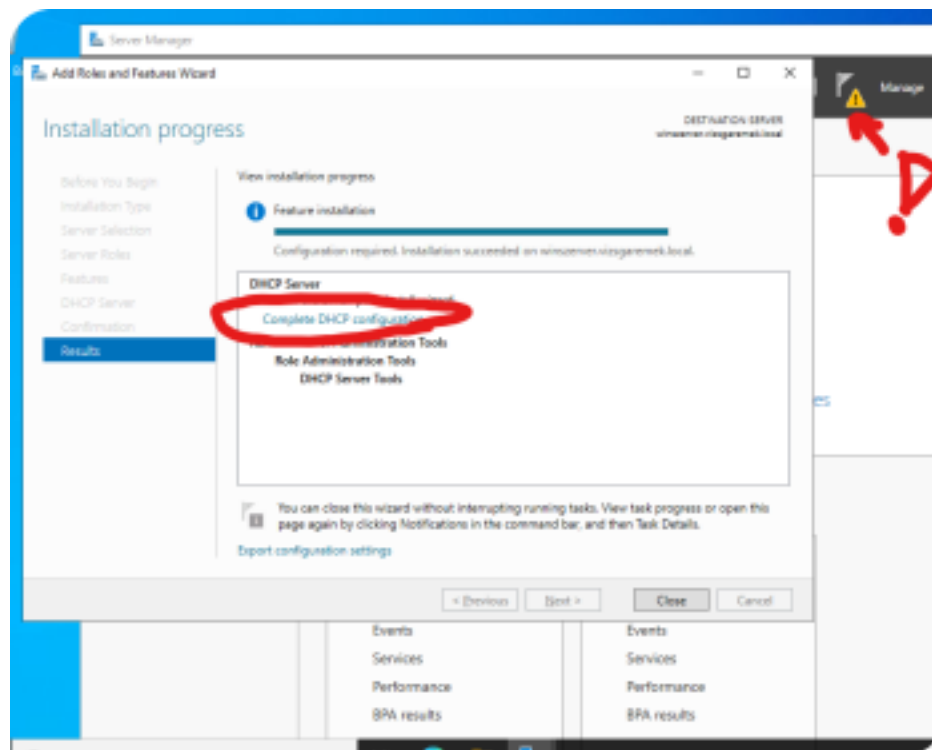

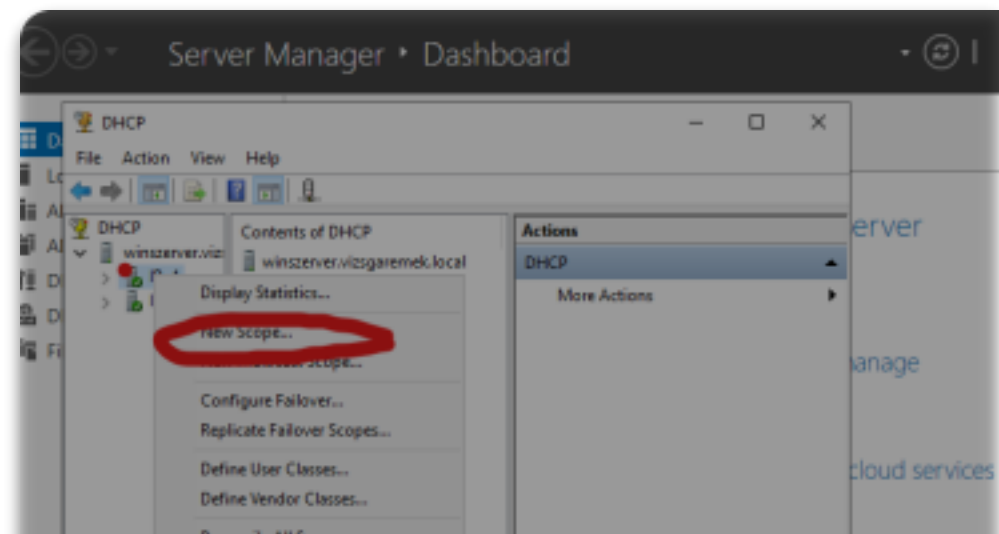

#### New Scope Wizard

##### Scope Name

You have to provide an identifying scope name. You also have the option of providing a description.



Type a name and description for this scope. This information helps you quickly identify how the scope is to be used on your network.

Name:

Description:

Configuration settings for DHCP Server

Enter the range of addresses that the scope distributes.

Start IP address: 192 . 168 . 1 . 10

End IP address: 192 . 168 . 1 . 109

Configuration settings that propagate to DHCP Client

Length: 24

Subnet mask: 255 . 255 . 255 . 0

START +  
+ MAX - 1  
LESS 2  
UT 0150  
SZ 4 M  
MA52K

< Back

Next >

Cancel

## New Scope Wizard

### Router (Default Gateway)


You can specify the routers, or default gateways, to be distributed by this scope.



To add an IP address for a router used by clients, enter the address below.

IP address:

|             |                                       |
|-------------|---------------------------------------|
|             | <input type="button" value="Add"/>    |
| 192.168.1.1 | <input type="button" value="Remove"/> |
|             | <input type="button" value="Up"/>     |



### Domain Name and DNS Servers

The Domain Name System (DNS) maps and translates domain names used by clients on your network.



You can specify the parent domain you want the client computers on your network to use for DNS name resolution.

Parent domain:

To configure scope clients to use DNS servers on your network, enter the IP addresses for those servers.

Server name:

IP address:

Add

Resolve

192.168.1.1

Remove