Continuous competitive retrieval | L=1, D=+1, S=2 | E1 -> E2 -> E4 -> E5

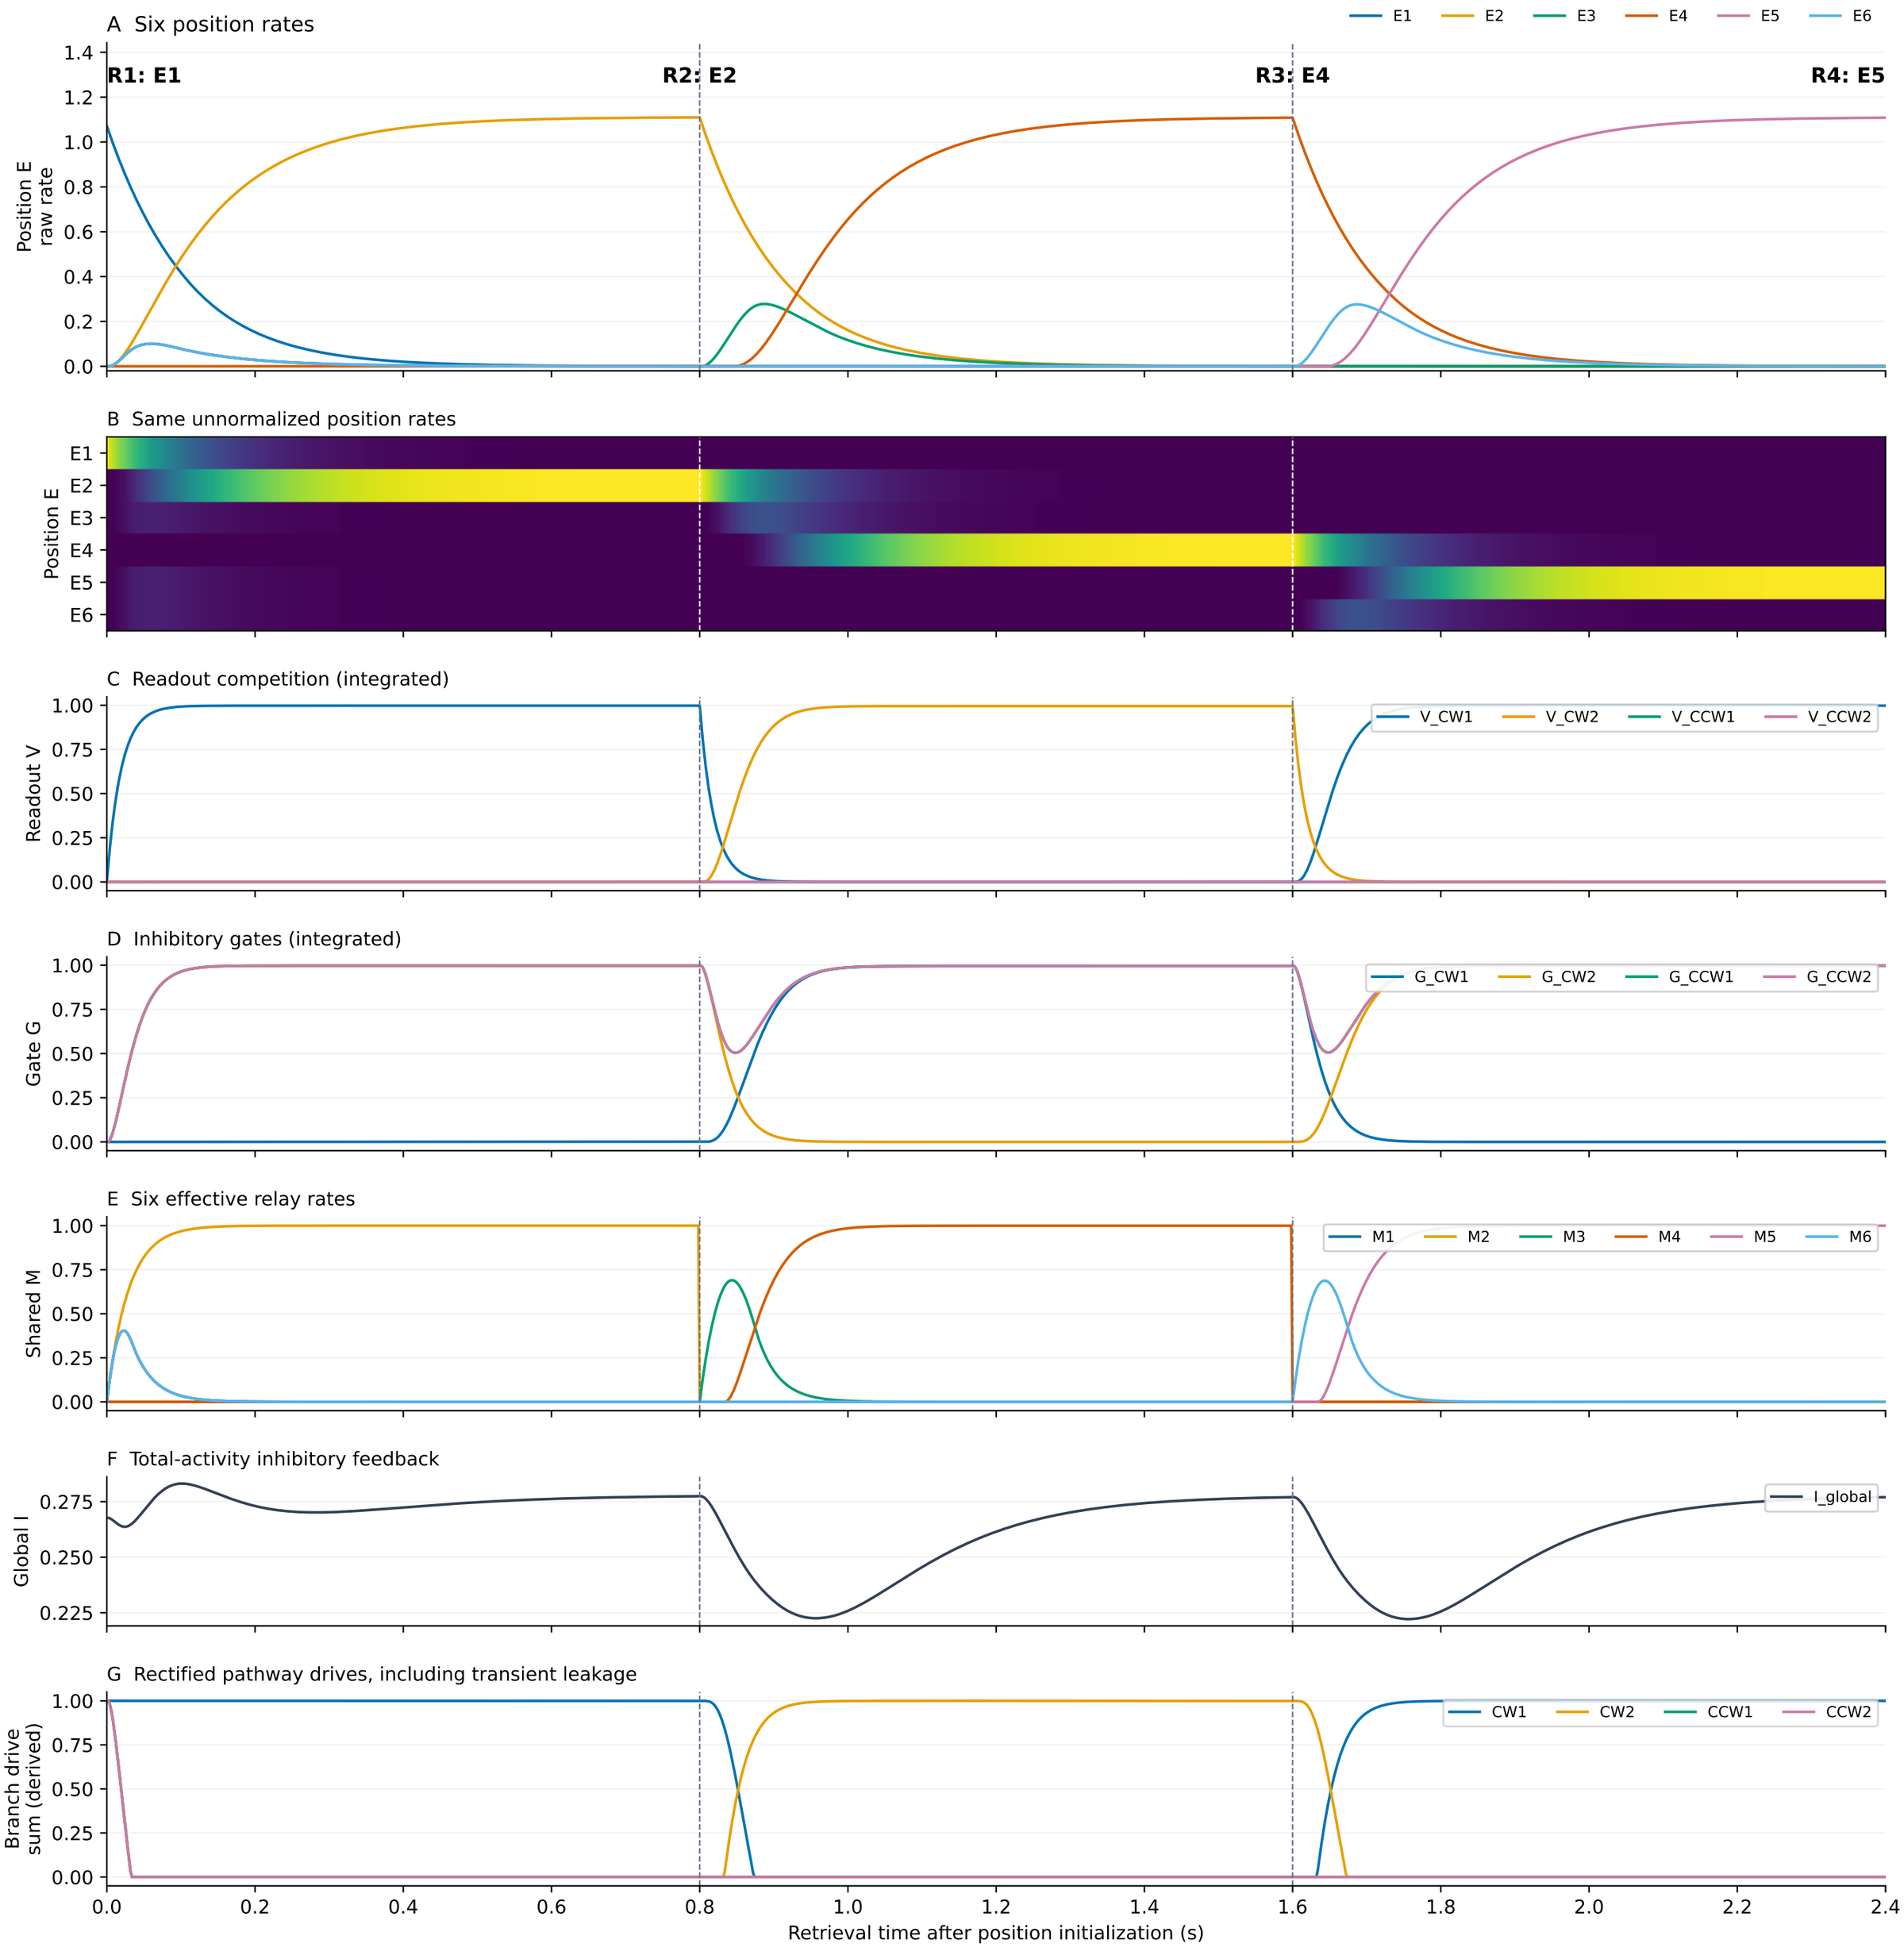

Raw, unsmoothed model rates. E/I/V/G continue; only M resets at dashed rank boundaries.
Panel G shows algebraic branch drives, not additional rate neurons. Initialization and held-encoding setup are excluded.