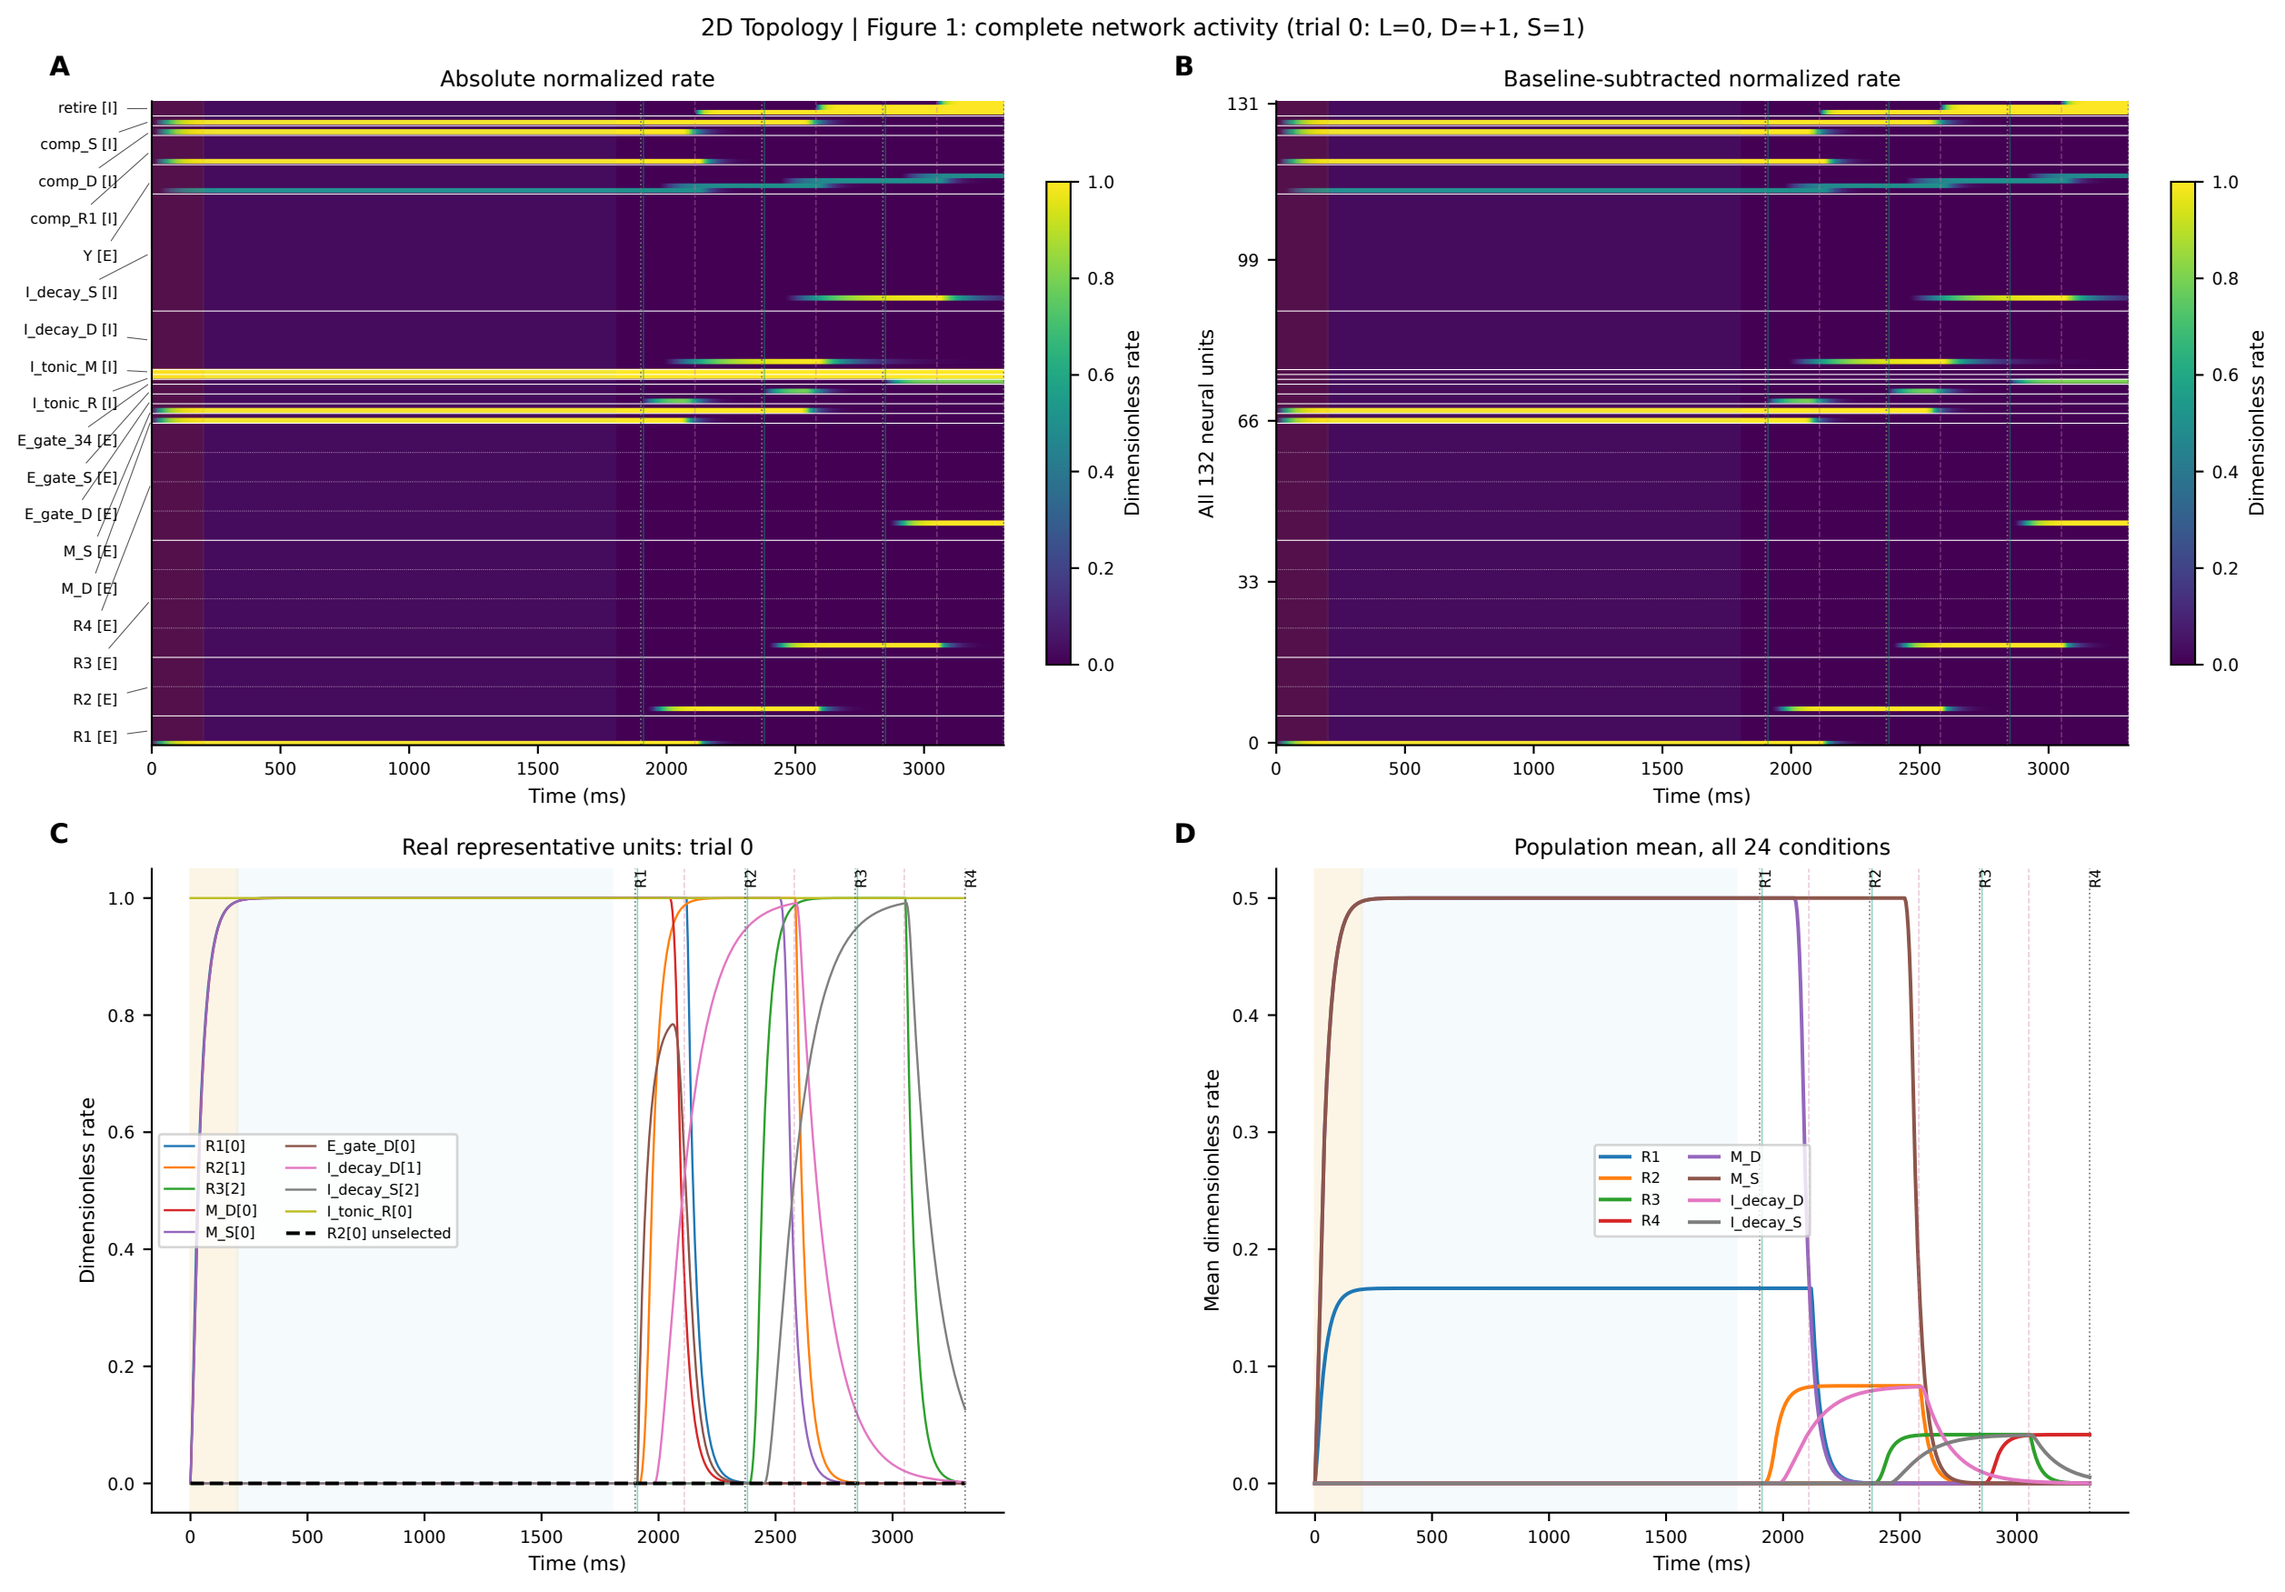
2D Topology | Figure 1: complete network activity (trial 0: L=0, D=+1, S=1)
A
Absolute normalized rate
retire [I]
comp_S [I]
comp_D [I]
comp_R1 [I]
Y [E]
I_decay_S [I]
I_decay_D [I]
I_tonic_M [I]
I_tonic_R [I]
E_gate_34 [E]
E_gate_S [E]
E_gate_D [E]
M_S [E]
M_D [E]
R4 [E]
R3 [E]
R2 [E]
R1 [E]
Time (ms)
Dimensionless rate
B
Baseline-subtracted normalized rate
All 132 neural units
Time (ms)
Dimensionless rate
C
Real representative units: trial 0
R1
R2
R3
R4
R1[0]
R2[1]
R3[2]
M_D[0]
M_S[0]
E_gate_D[0]
I_decay_D[1]
I_decay_S[2]
I_tonic_R[0]
R2[0] unselected
Dimensionless rate
Time (ms)
D
Population mean, all 24 conditions
R1
R2
R3
R4
M_D
M_S
I_decay_D
I_decay_S
Mean dimensionless rate
Time (ms)