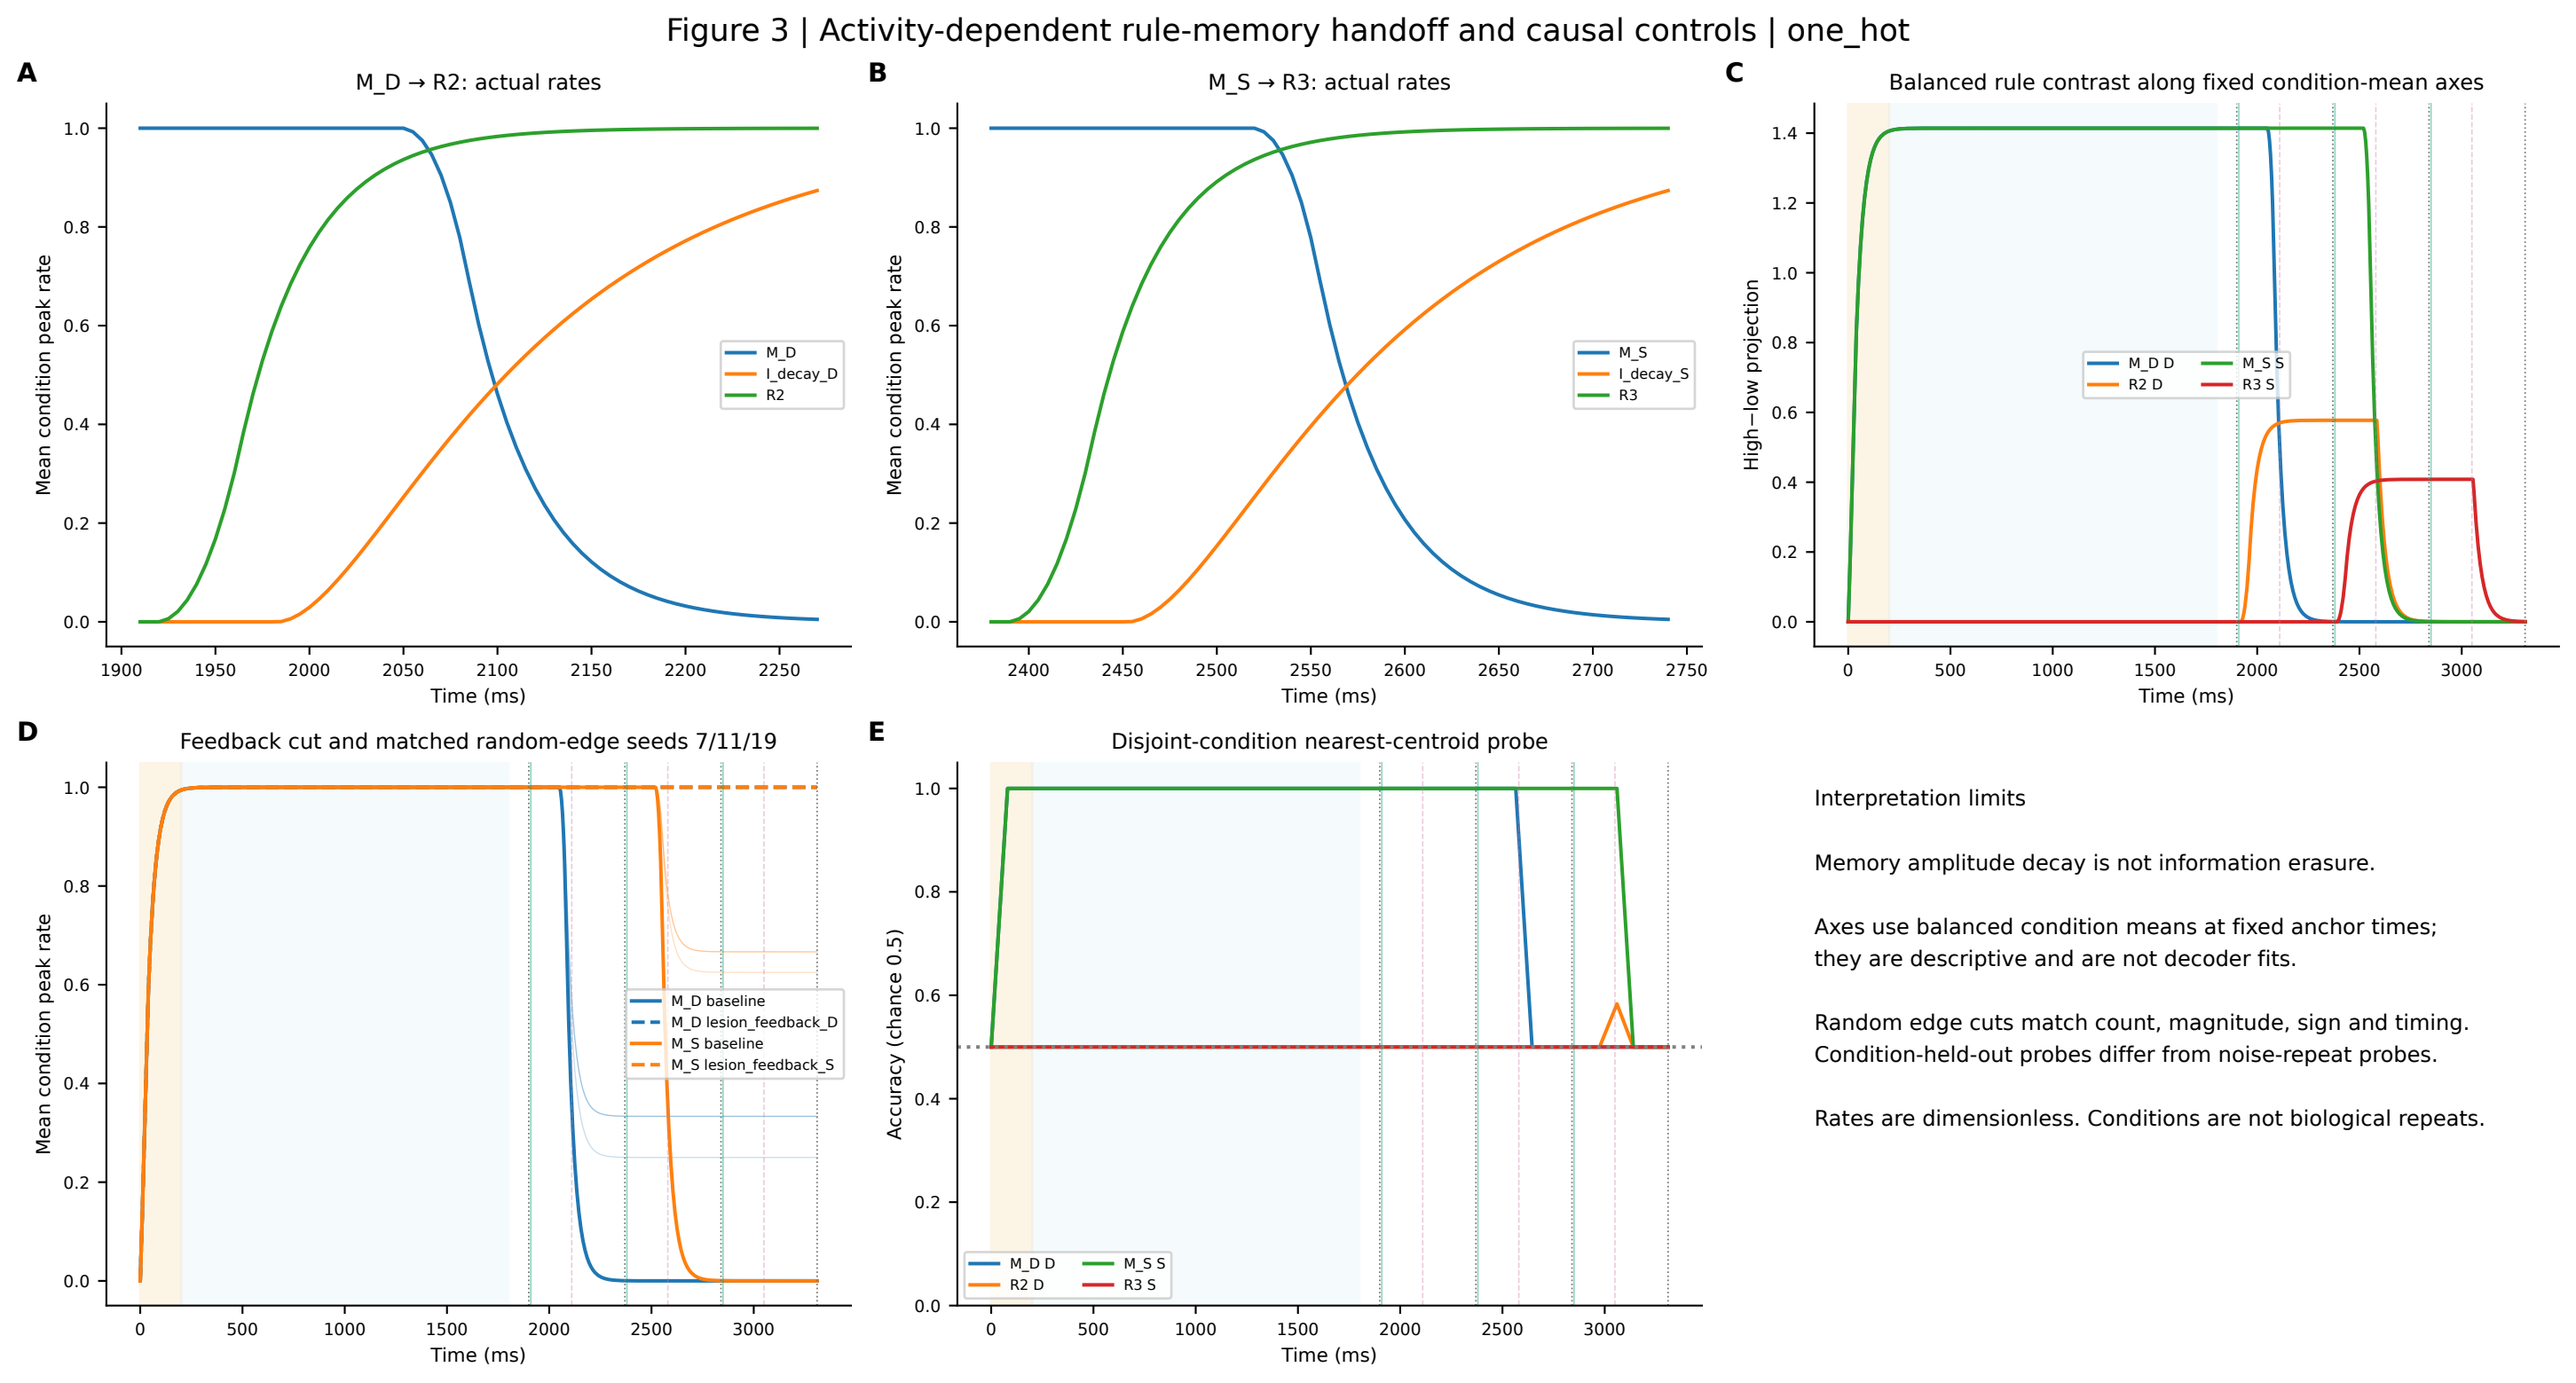
Figure 3 | Activity-dependent rule-memory handoff and causal controls | one_hot
A
M_D → R2: actual rates
Mean condition peak rate
Time (ms)
M_D
I_decay_D
R2
B
M_S → R3: actual rates
Mean condition peak rate
Time (ms)
M_S
I_decay_S
R3
C
Balanced rule contrast along fixed condition-mean axes
High−low projection
Time (ms)
M_D D
R2 D
M_S S
R3 S
D
Feedback cut and matched random-edge seeds 7/11/19
Mean condition peak rate
Time (ms)
M_D baseline
M_D lesion_feedback_D
M_S baseline
M_S lesion_feedback_S
E
Disjoint-condition nearest-centroid probe
Accuracy (chance 0.5)
Time (ms)
M_D D
R2 D
M_S S
R3 S
Interpretation limits
Memory amplitude decay is not information erasure.
Axes use balanced condition means at fixed anchor times; they are descriptive and are not decoder fits.
Random edge cuts match count, magnitude, sign and timing. Condition-held-out probes differ from noise-repeat probes.
Rates are dimensionless. Conditions are not biological repeats.