
Splitting across examples: better for tall input matrices A.



Splitting across features: better for wide matrices A.

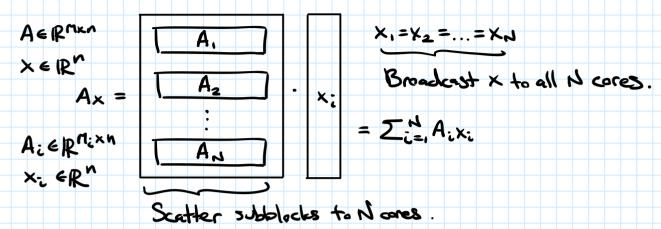