









Performance

Accessibility

Best Practices

SEO



Performance

Values are estimated and may vary. The performance score is calculated directly from these metrics. See calculator.



Current Employees Search 09/10/89 09/10/24 09/10/92 23/10/24 07/10/87 08/10/24

METRICS

First Contentful Paint

0.3 s

Total Blocking Time

70 ms

Speed Index

0.5 s

Largest Contentful Paint

0.6 s

Cumulative Layout Shift

0


View Treemap

Current Employee	Current Employees	Current Employees	Current Employees	Current Employees	Current Employees	Current Employees
Show 10 V entries	Show 10 × sentine	Show 10 × entries	Show 10 V entries	Show 10 × sentine	Show 10 V entries	Show 10 v entries
Next 11 Let 1 Sen 11 Mart 11 Sewi 11 City 11	Dr. Name 11 Name 11 of 11 Stat 11 Street [] City []	No. Name 11 Last 11 of 11 Stat 11 Street 11 City 11	Su Name 11 Name 11 of 11 Stat 11 Street [] City 11	s Name 11 Name 11 of 11 Stat 11 Street [] City [] S	Sta Name 11 Last 11 dies 11 diese 11 Start 11 Street 11 City 11 Sta	Next 11 Last 11 det 11 Stat 11 Street [] City 1
John Smith 23/9095 30/04/34 St Strength	A. John Snith 23/1095 30/08/34 St Smingham	A. John Snith 23/935 300834 St. Smingham	A. John Smith 23/9595 3009(3) SE Strongham	Al John Snith 23/1095 3008/34 St Smingham A	A. John Snith 23/5/95 30/08/24 St Smingham A.	John Smith 23/5095 NGOSCH ST Smith
Stelly Johnson MCGRO MCGCA ME De Andrews	AK Dreily Johnson MCGRO MCGDA SE Drei Anchorage	AK Drily Johnson MC0350 MC0254 MS Driv Androsque	AK Drafy Johnson MCGNO MCGCA MEDITO Anchorage	All Croft Johnson MCGSO MCGCA SECTIVE Anchorage A	AK Stelly Johnson MS/0350 MS/0334 St. Anchorage AK	Stelly Johnson MCGRO MCGD4 656 STM Ancho
Maked Dark Digitize Digitized 200 Market	A. Mished Davis Objects Objects (8	AL STATES DATA DEPOSE DETOS AND THE STATES OF THE STATES O	M. Michael Davis. 08/10/80 08/10/04 ^{MSS-Oak} Municipal	A Minhael Davis 08/10/80 08/10/04 (M. Markelle A	M. Michael Davis ORTOSTO ORTOSTO SE MICHAEL M.	Milder Dark Digital Digital States
Seen Stillane Objects 2019Q04 Stilling Works	KS Salah SHBarks DB/SQRS 28/SQSS SSTFEM Models	CS Steam Stiffares DB/10/ES 20/10/04 SE Works	CS Salah SHBaris GRYCRS ZGYCCH STFFEE Works	C Sean Stillane Objects Stillage Million C	CS SHAIN SHEARN DEPOSE ZIJINGO MITTON MINTO CS	Seen Millers DETORS 20/1004 St FFIRE WAR
David Briss Objects Spropts 234 Manager	s A. Cario Brain Objects Sprops 2M Controls Managamen	M. David Break DB/1099 Spropts 2M Coder to Managamery	A. Cario Brain 08/1088 15/1024 234 Manganery	A Caric Blass Objects Sprices 234 Mangariery A	M. Cario Brain Objects Sproch 256 Marganery M.	David Brain DETORN TUTODA 234 Marti
Jessica Miler GYTCHT GRYCOT SE Miles Mubble	AL Jessica Miler OTIDIET DETOCH SE MIGNE MAGNE	M. Jessica Miler DYDSST DS/TQD1 SST Miles Mulde	M. Jessica Miller GTTD/D7 GB/TQOX SS Magin Madde	AL JANSEN MON CYCER CRITICAL SET MADE A	M. Jessica Miler DTYDRY DRYDDY SET Miles McGie M.	Jesses Miles STORY SETON SET MADE
Daviel Teller 23/10/94 15/10(54 33 Taxcalor	A. Dariel Sales 23/9594 MiniSte 28 Sinch Taxoslosse	A. Dariel Teles 23/1094 15/1024 23 Taxabose	AL David Taylor 23/10/94 15/1054 TH Taxcaloces	Al Dariel Tejler 23/0094 15/0024 28 Dariel Taxosloces A	M. Dariel Tejler 23/16/94 15/10(34 SH Tellistone M.	Darlet Selar 25/5594 55/5594 SE Talco
Nather Adeson 16/031 00/034 10 An St Room	AL Nather Anderson MF0351 09703A 101 Apr 51 House	A. Nether Anderson 157031 017034 101 An St Hoover	AL Nather Anderson 16/1031 01/1034 101 Aut 51 Mooner	Al Nather Anderson 95/051 09/0534 101 April 1 House A	A. Nether Anteron 167031 01703A 101 An St Moore A.	Nather Adeson 16/031 01/034 10/Ash St Roo
Sophia Thomas 08/10/83 20/16/31 345 Welling Sultan	A. Saylia Tromes 08/10/83 22/90/91 (Mohal S Doher)	M. Septia Thomas 08/10/83 20/10/01 966 Dohan	A. Sapha Tromas 08/10/83 22/90/01 (Model 9 Dollar)	N Sophia Thomas 08/10/83 20/9/24 966 Dotter A	A. Saylia Treme 08/10/83 20/9/01 966 Dohn A.	Septia Treme 08/10/83 20/9/21 956-69 F

Show audits relevant to: All FCP LCP TBT



Expand view

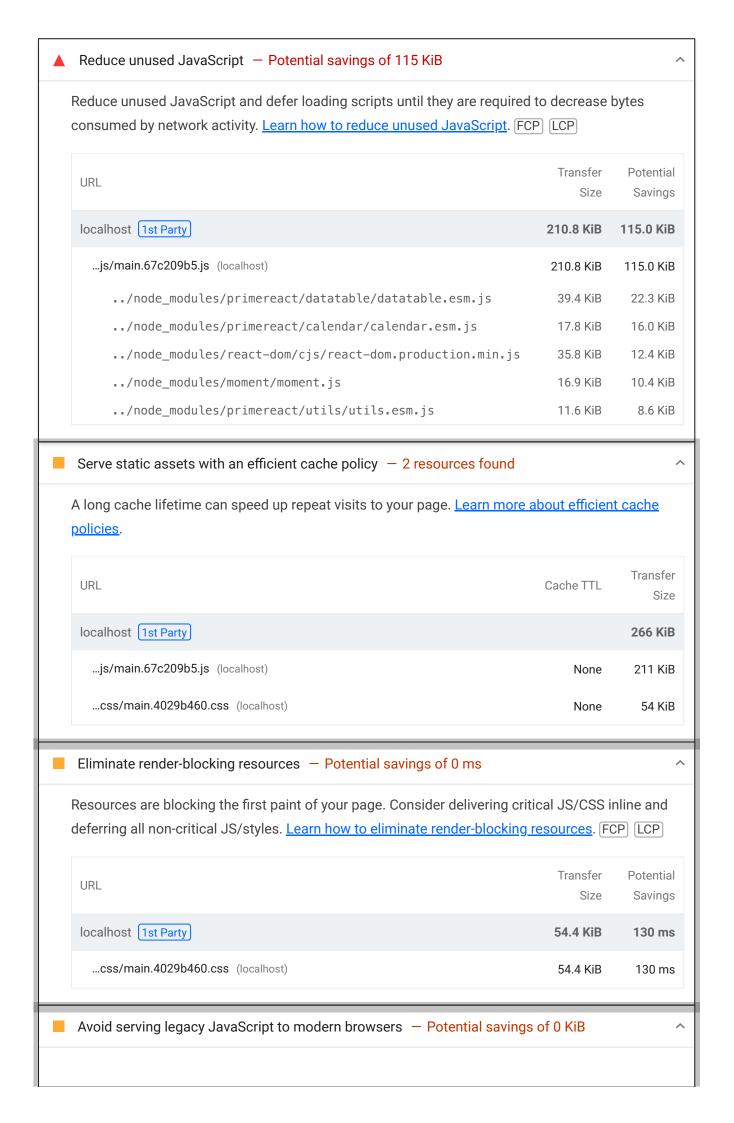

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. Learn how to use modern JavaScript FCP LCP

URL		Potential Savings
localhost 1st Party		0.1 KiB
js/main.67c209b5.js (localhost)		0.1 KiB
/node_modules/primereact/utils/utils.esm.js:1 18:24	@babel/plugin-transform- classes	

○ JavaScript execution time − 0.2 s


Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. <u>Learn how to reduce Javascript execution time</u>. TBT

URL	Total CPU Time	Script Evaluation	Script Parse
localhost 1st Party	344 ms	201 ms	14 ms
js/main.67c209b5.js (localhost)	225 ms	200 ms	13 ms
/employees (localhost)	119 ms	2 ms	0 ms

○ Minimizes main-thread work − 0.4 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. <u>Learn how to minimize main-thread work [TBT]</u>

Category	Time Spent
Script Evaluation	204 ms
Style & Layout	82 ms
Other	76 ms
Script Parsing & Compilation	14 ms
Parse HTML & CSS	12 ms
Garbage Collection	7 ms

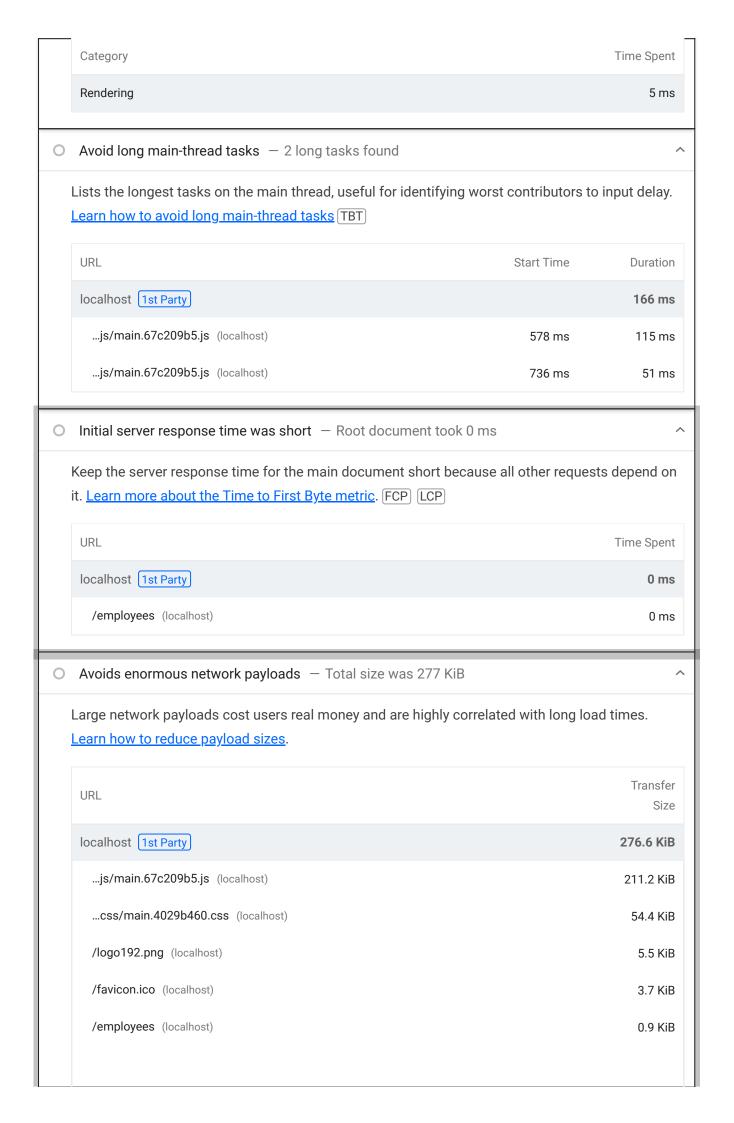


URL Transfer Size

/manifest.json (localhost) 0.8 KiB

O Avoids an excessive DOM size — 222 elements

A large DOM will increase memory usage, cause longer <u>style calculations</u>, and produce costly <u>layout reflows</u>. <u>Learn how to avoid an excessive DOM size</u>. [TBT]

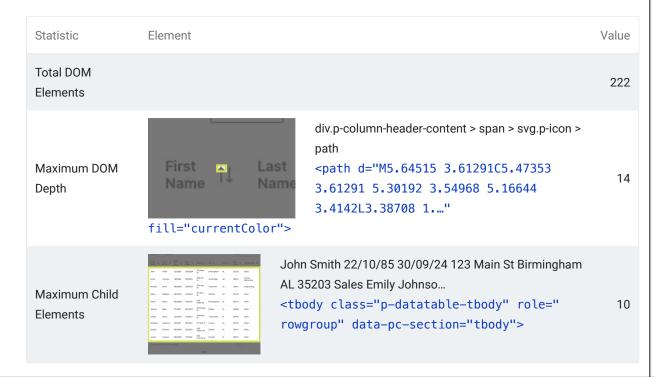

○ Avoid chaining critical requests - 1 chain found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. Learn how to avoid chaining critical requests.

Maximum critical path latency: 55.937 ms


Initial Navigation

/employees (localhost)

...css/main.4029b460.css (localhost) - 40.761 ms, 54.43 KiB

○ Largest Contentful Paint element − 560 ms

This is the largest contentful element painted within the viewport. <u>Learn more about the Largest</u> <u>Contentful Paint element [LCP]</u>

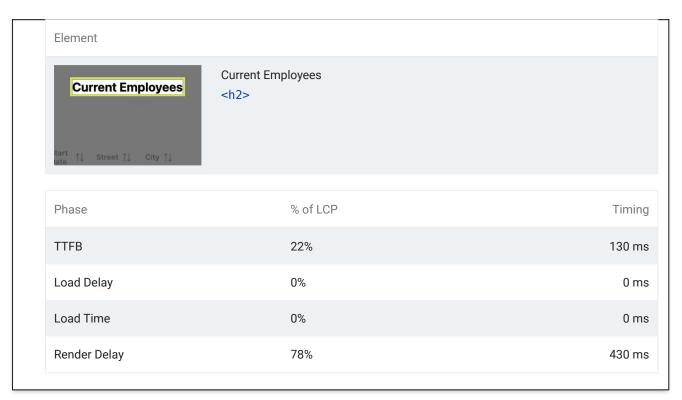


More information about the performance of your application. These numbers don't <u>directly affect</u> the Performance score.

Hide

PASSED AUDITS (26)

Properly size images
 Serve images that are appropriately-sized to save cellular data and improve load time. Learn how to size images. FCP LCP
 Defer offscreen images
 Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. Learn how to defer offscreen images. FCP LCP
 Minify CSS
 Minifying CSS files can reduce network payload sizes. Learn how to minify CSS. FCP LCP
 Minify JavaScript
 Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. FCP LCP

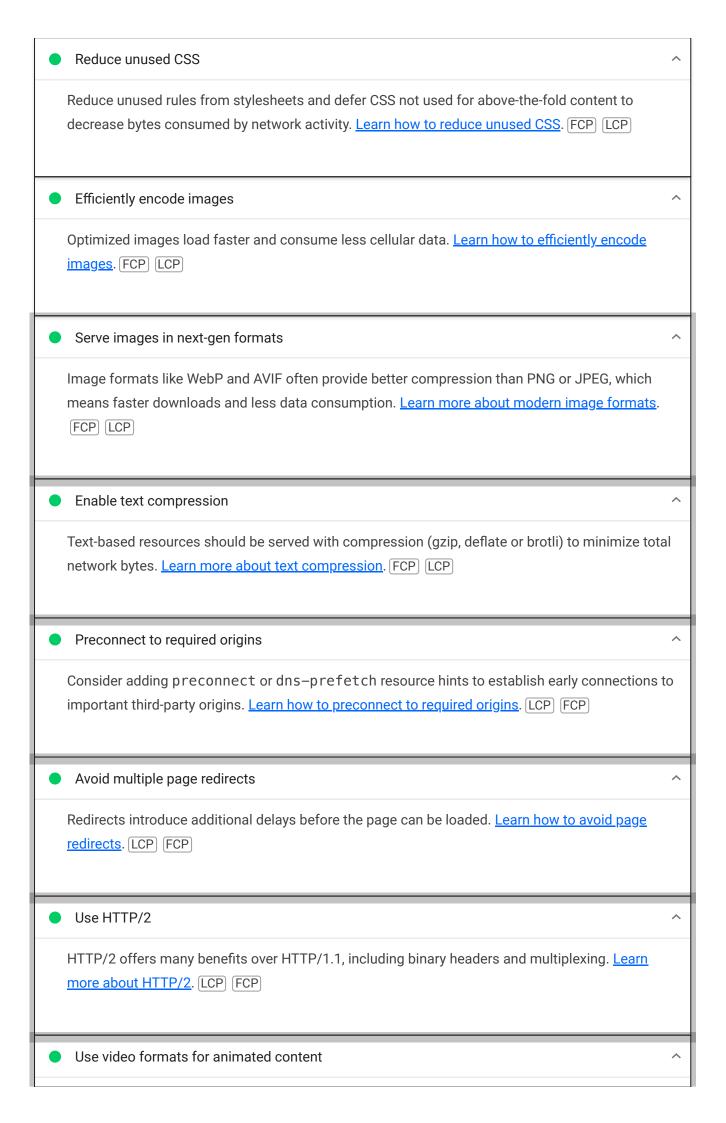

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. Learn more about efficient video formats FCP LCP
Remove duplicate modules in JavaScript bundles ^
Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP
O Preload Largest Contentful Paint image
If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. <u>Learn more about preloading LCP elements</u> . <u>LCP</u>
O User Timing marks and measures
Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <u>Learn more about User Timing marks</u> .
All text remains visible during webfont loads
Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. <u>Learn more about font-display</u> .
Minimize third-party usage
Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. Learn how to minimize third-party impact . TBT
Lazy load third-party resources with facades ^
Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. <u>Learn how to defer third-parties with a facade</u> . TBT
O Largest Contentful Paint image was not lazily loaded
Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. Learn more about optimal lazy loading. LCP


O Avoid large layout shifts	^
These are the largest layout shifts observed on the page. Each table item represents a single shift, and shows the element that shifted the most. Below each item are possible root causes led to the layout shift. Some of these layout shifts may not be included in the CLS metric value to windowing. Learn how to improve CLS CLS	that
Uses passive listeners to improve scrolling performance	^
Consider marking your touch and wheel event listeners as passive to improve your page's so performance. <u>Learn more about adopting passive event listeners</u> .	croll
<pre>Avoids document.write()</pre>	^
For users on slow connections, external scripts dynamically injected via document.write() delay page load by tens of seconds. Learn how to avoid document.write().) can
Avoid non-composited animations	^
Animations which are not composited can be janky and increase CLS. <u>Learn how to avoid non composited animations</u> CLS	<u>1-</u>
Image elements have explicit width and height	^
Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <u>L</u> how to set image dimensions CLS	<u>-earn</u>
Has a <meta name="viewport"/> tag with width or initial-scale	^
A <meta name="viewport"/> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag	- 1
Page didn't prevent back/forward cache restoration	^
Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. Learn more about the bfcache	



Accessibility

These checks highlight opportunities to <u>improve the accessibility of your web app</u>. Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so <u>manual testing</u> is also encouraged.

NAMES AND LABELS

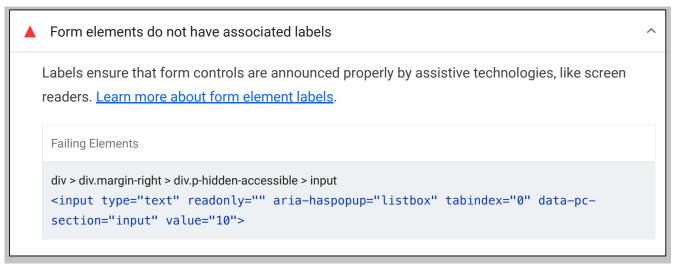

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

The page has a logical tab order

Hide

Interactive controls are keyboard focusable
 Custom interactive controls are keyboard focusable and display a focus indicator. Learn how to make custom controls focusable.
 Interactive elements indicate their purpose and state
 Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints.

offscreen. Learn more about logical tab ordering.
O Visual order on the page follows DOM order
DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more about DOM and visual ordering</u> .
O User focus is not accidentally trapped in a region
A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus traps.
O The user's focus is directed to new content added to the page
If new content, such as a dialog, is added to the page, the user's focus is directed to it. <u>Learn how</u> to direct focus to new content.
O HTML5 landmark elements are used to improve navigation
gane.
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements.</nav></main>
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the</nav></main>
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements.</nav></main>
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements. Offscreen content is hidden from assistive technology ^ Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide</nav></main>
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements. Offscreen content is hidden from assistive technology Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.</nav></main>
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements. Offscreen content is hidden from assistive technology Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content. Custom controls have associated labels Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn</nav></main>

These items address areas which an automated testing tool cannot cover. Learn more in our guide on <u>conducting an accessibility review</u>.

PASSED AUDITS (26)

[aria-*] attributes match their roles Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Learn how to match ARIA attributes to their roles. [aria-hidden="true"] is not present on the document <body> Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body. [role]s have all required [aria-*] attributes Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes. Elements with an ARIA [role] that require children to contain a specific [role] have all required children. Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements. [role]s are contained by their required parent element Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element. [aria-*] attributes have valid values Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes. [aria-*] attributes are valid and not misspelled Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes. Buttons have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn how to make buttons more accessible. [user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximumscale] attribute is not less than 5. Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag. button, link, and menuitem elements have accessible names When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible. ARIA attributes are used as specified for the element's role Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes. [aria-hidden="true"] elements do not contain focusable descendents Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements. Elements use only permitted ARIA attributes Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles. [role] values are valid ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles. Background and foreground colors have a sufficient contrast ratio

Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast.
Document has a <title> element ^</td></tr><tr><td>The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.</td></tr><tr><td><html> element has a [lang] attribute</td></tr><tr><td>If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.</td></tr><tr><td><html> element has a valid value for its [lang] attribute</td></tr><tr><td>Specifying a valid <u>BCP 47 language</u> helps screen readers announce text properly. <u>Learn how to use</u> the <u>lang attribute</u>.</td></tr><tr><td>Links have a discernible name ^</td></tr><tr><td>Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible.</td></tr><tr><td>No element has a [tabindex] value greater than 0 ^</td></tr><tr><td>A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. <u>Learn more about the tabindex attribute</u>.</td></tr><tr><td>Touch targets have sufficient size and spacing. ^</td></tr><tr><td>Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. <u>Learn more about touch targets</u>.</td></tr></tbody></table></title>

Cells in a element that use the [headers] attribute refer to table cells within the same table. Screen readers have features to make navigating tables easier. Ensuring cells using the [headers] attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the headers attribute. Heading elements appear in a sequentially-descending order Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order. Uses ARIA roles only on compatible elements Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIA roles. Deprecated ARIA roles were not used Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles. Tables have different content in the summary attribute and <caption>. The summary attribute should describe the table structure, while <caption> should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption. NOT APPLICABLE (30) Hide [accesskey] values are unique Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys.

Elements with role="dialog" or role="alertdialog" have accessible names.

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. <u>Learn how to make ARIA dialog elements more accessible</u> .	
 ARIA input fields have accessible names 	
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels.	
 ARIA meter elements have accessible names 	
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements.	
ARIA progressbar elements have accessible names	
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label progressbar elements.	
 Elements with the role=text attribute do not have focusable descendents. 	
Adding role=text around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. Learn more about the role=text attribute.	
ARIA toggle fields have accessible names	
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more about toggle fields</u> .	
 ARIA tooltip elements have accessible names 	
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name tooltip elements</u> .	
 ARIA treeitem elements have accessible names 	
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more about labeling treeitem elements</u> .	

The page contains a heading, skip link, or landmark region
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. <u>Learn more about bypass blocks</u> .
<pre><dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</pre></td></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly.</td></tr><tr><td>O Definition list items are wrapped in <dl> elements</td></tr><tr><td>Definition list items (<dt> and <dd>) must be wrapped in a parent <dl> element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly.</td></tr><tr><td>O ARIA IDs are unique</td></tr><tr><td>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <u>Learn how to fix duplicate ARIA IDs</u>.</td></tr><tr><td>O No form fields have multiple labels</td></tr><tr><td>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels.</td></tr><tr><td>O <frame> or <iframe> elements have a title</td></tr><tr><td>Screen reader users rely on frame titles to describe the contents of frames. <u>Learn more about frame titles</u>.</td></tr><tr><td><html> element has an [xml:lang] attribute with the same base language as the [lang] attribute.</td></tr><tr><td>If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. <u>Learn more about the lang attribute</u>.</td></tr><tr><td>O Image elements have [alt] attributes</td></tr><tr><td>Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. <u>Learn more about the alt attribute</u>.</td></tr><tr><td>Image elements do not have [alt] attributes that are redundant text.</td></tr><tr><td></td></tr></tbody></table></script></dd></dt></dl></pre>

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reade users, because the text will be read twice. Learn more about the alt attribute.	r
O Input buttons have discernible text.	^
Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. <u>Learn more about input buttons</u> .	
<pre><input type="image"/> elements have [alt] text</pre>	^
When an image is being used as an <input/> button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text.	
O Links are distinguishable without relying on color.	^
Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable.	
O Lists contain only elements and script supporting elements (<script> and <template>).</td><td>^</td></tr><tr><td>Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.</td><td></td></tr><tr><td>O List items () are contained within , or <menu> parent elements</td><td>^</td></tr><tr><td>Screen readers require list items () to be contained within a parent , or <menu> to be announced properly. Learn more about proper list structure.</td><td></td></tr><tr><td>The document does not use <meta http-equiv="refresh"></td><td>^</td></tr><tr><td>Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag.</td><td></td></tr><tr><td>O <object> elements have alternate text</td><td>^</td></tr><tr><td>Screen readers cannot translate non-text content. Adding alternate text to <object> elements helps screen readers convey meaning to users. Learn more about alt text for object elements.</td><td></td></tr><tr><td>O Select elements have associated label elements.</td><td>^</td></tr><tr><td>Form elements without effective labels can create frustrating experiences for screen reader users. <u>Learn more about the select element</u>.</td><td></td></tr></tbody></table></script>	




TRUST AND SAFETY

Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. <u>Learn how to use a CSP to prevent XSS</u>

Description	Directive	Severity
No CSP found in enforcement mode		High

GENERAL

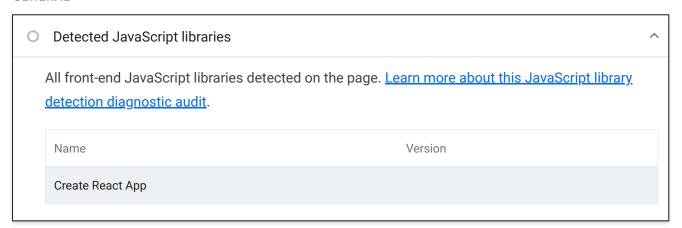

PASSED AUDITS (14)

Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding <u>mixed content</u>, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. <u>Learn more about HTTPS</u>.

Avoids deprecated APIs

Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs.

Avoids third-party cookies

Support for third-party cookies will be removed in a future version of Chrome. <u>Learn more about phasing out third-party cookies</u>.

Allows users to paste into input fields

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields.

Avoids requesting the geolocation permission on page load Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission. Avoids requesting the notification permission on page load Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications. Displays images with correct aspect ratio Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio. Serves images with appropriate resolution Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images. Has a <meta name="viewport"> tag with width or initial-scale A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag. Page has the HTML doctype Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration. Properly defines charset A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding. No browser errors logged to the console Errors logged to the console indicate unresolved problems. They can come from network request

failures and other browser concerns. Learn more about this errors in console diagnostic audit

No issues in the Issues panel in Chrome Devtools

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Page has valid source maps

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. <u>Learn more about source maps</u>.

URL Map URL

localhost 1st Party

...js/main.67c209b5.js (localhost) ...js/main.67c209b5.js.map (localhost)

NOT APPLICABLE (2) Hide

Redirects HTTP traffic to HTTPS

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. <u>Learn more</u>.

Document uses legible font sizes

Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to have >60% of page text ≥12px. <u>Learn more about legible font sizes</u>.

SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on Core Web Vitals. Learn more about Google Search Essentials.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

Structured data is valid



Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. Learn more about Structured Data.

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)

Page isn't blocked from indexing



Search engines are unable to include your pages in search results if they don't have permission to crawl them. <u>Learn more about crawler directives</u>.

Document has a <title> element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <u>Learn more about document titles</u>.

Document has a meta description



Meta descriptions may be included in search results to concisely summarize page content. <u>Learn</u> more about the meta description.

Page has successful HTTP status code



Pages with unsuccessful HTTP status codes may not be indexed properly. <u>Learn more about HTTP status codes</u>.

Links have descriptive text



Descriptive link text helps search engines understand your content. <u>Learn how to make links more accessible.</u>

Links are crawlable

Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable

robots.txt is valid

f your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt.

Document has a valid hreflang

hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about hreflang.

O Image elements have [alt] attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.

O Document has a valid rel=canonical

Canonical links suggest which URL to show in search results. Learn more about canonical links.

Captured at Oct 9, 2024, 10:00 AM

Emulated Desktop with Lighthouse

Single page session

12.1.0

Initial page load

Custom throttling

Using Chromium 128.0.0.0 with devtools