


Forward Pass Cache Map

Network architecture: {6, 4, 2, 1}. Two hidden tanh layers and one sigmoid output layer.

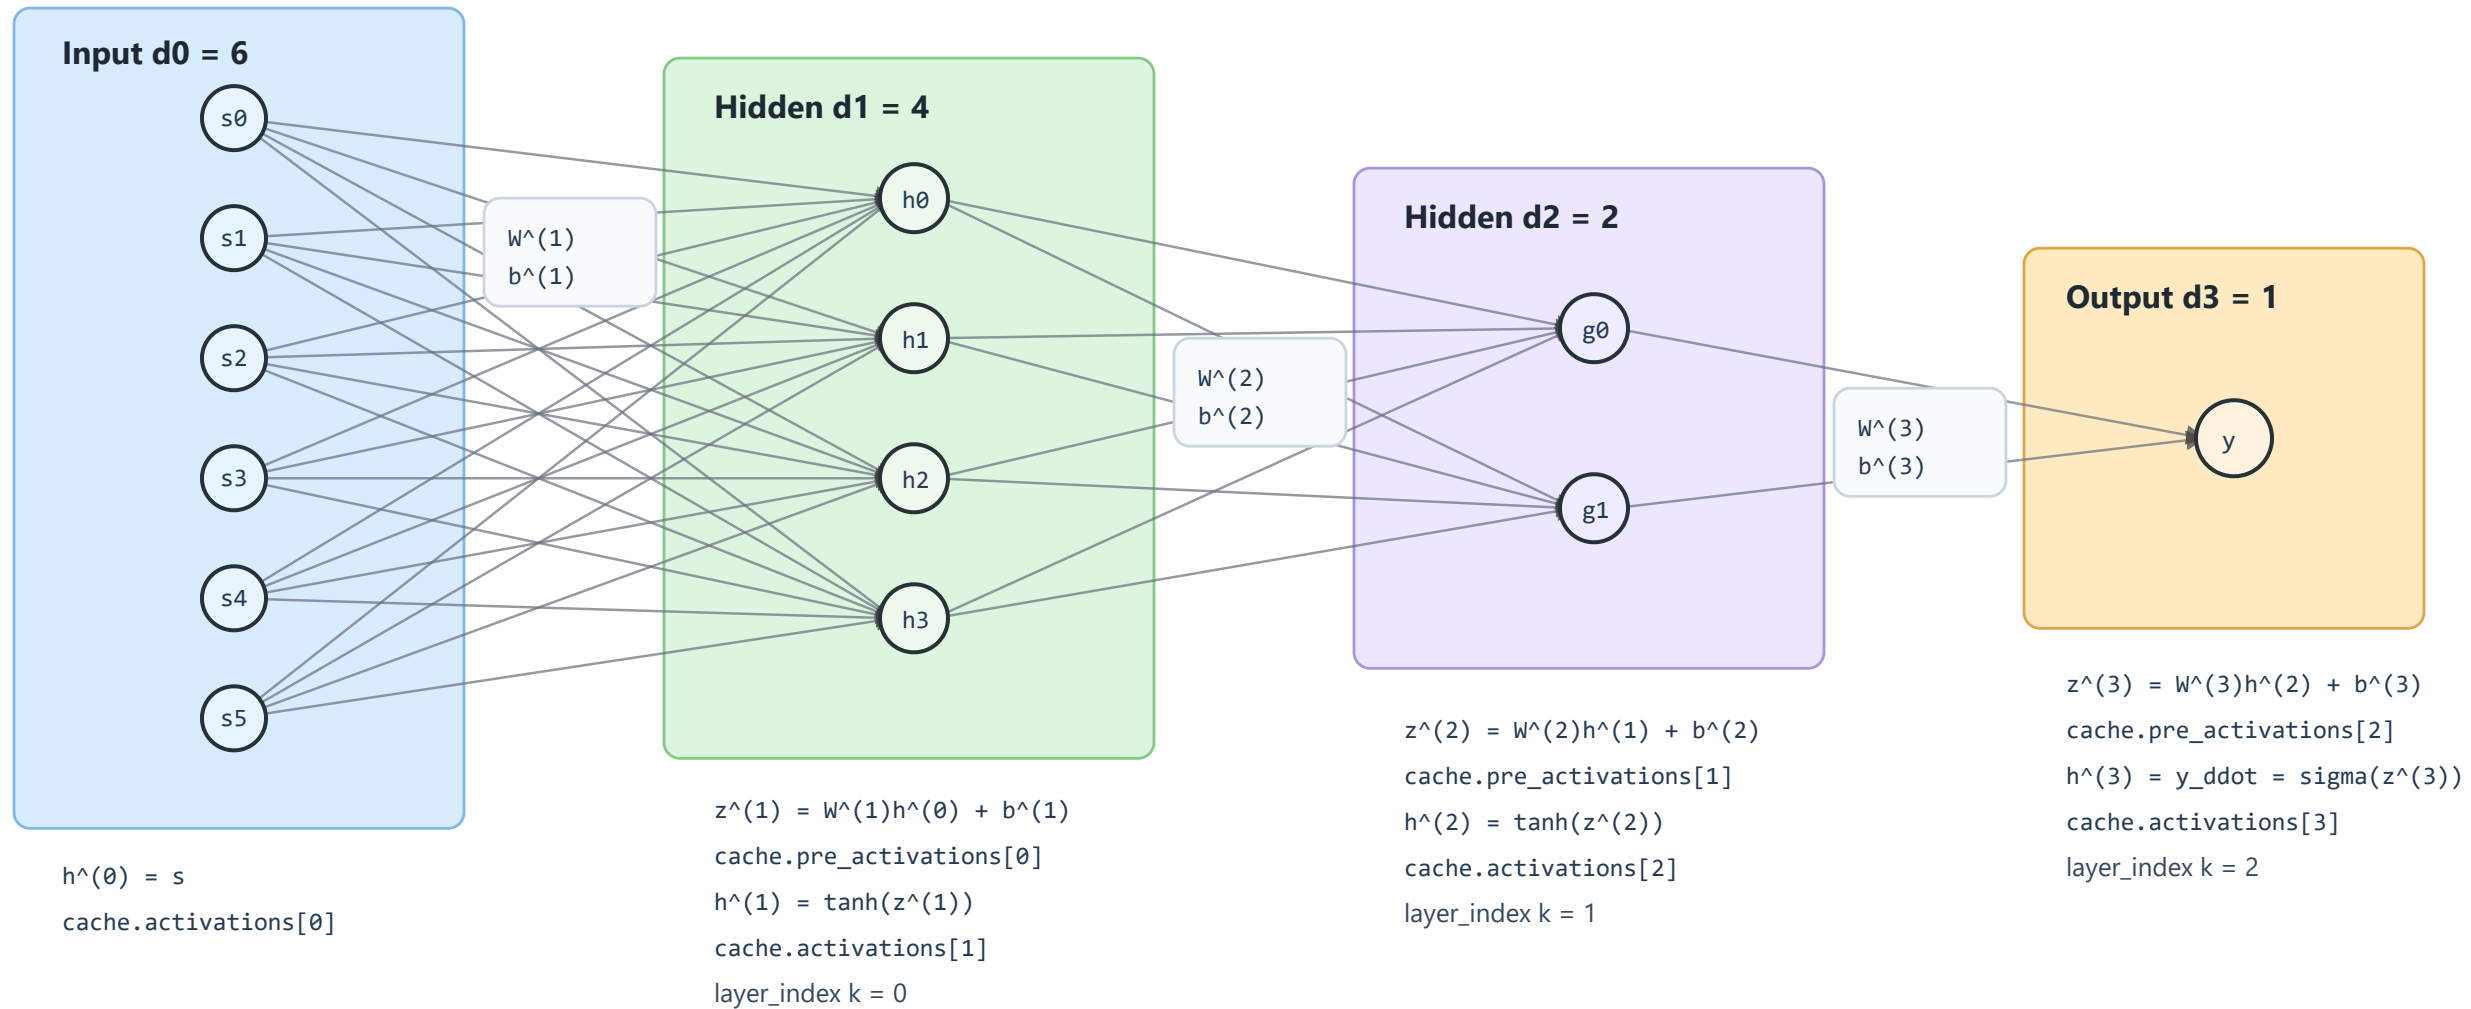

Forward-pass indexing convention

C++ layer_index k corresponds to mathematical layer ell = k + 1.

`previous_activation = cache.activations[k] =  $h^{\wedge}(k)$`

Inside layer k: `z_values[j] =  $z\_j^{\wedge}(k+1)$` , `a_values[j] =  $h\_j^{\wedge}(k+1)$`

`cache.pre_activations[k] =  $z^{\wedge}(k+1)$`

`cache.activations[k + 1] =  $h^{\wedge}(k+1)$`